chanhvinh.com

RoHS
AEC Qualified

Smart Highside High Current Power Switch

Reversave™

- Reverse battery protection by self turn on of power MOSFET


Features

- Overload protection
- Current limitation
- Short circuit protection
- Overtemperature protection
- Overvoltage protection (including load dump)
- Clamp of negative voltage at output
- Fast deenergizing of inductive loads [1]
- Low ohmic inverse current operation
- Diagnostic feedback with load current sense
- Open load detection via current sense
- Loss of V_{bb} protection[2]
- **E**lectro**s**tatic **d**ischarge (**ESD**) protection
- Green product (RoHS compliant)
- AEC qualified

Product Summary

Operating voltage	$V_{bb(on)}$	5.0 ... 34	V
On-state resistance	R_{ON}	6.0	mΩ
Noinal current	$I_{L(nom)}$	17	A
Load current (ISO)	$I_{L(ISO)}$	70	A
Short circuit current limitation	$I_{L(SC)}$	130	A
Current sense ratio	$I_L : I_{IS}$	14 000	

PG-TO220-7-4




Application

- Power switch with current sense diagnostic feedback for 12 V DC grounded loads
- Most suitable for loads with high inrush current like lamps and motors; all types of resistive and inductive loads
- Replaces electromechanical relays, fuses and discrete circuits

General Description

N channel vertical power FET with charge pump, current controlled input and diagnostic feedback with load current sense, integrated in Smart SIPMOS® chip on chip technology. Providing embedded protective functions.

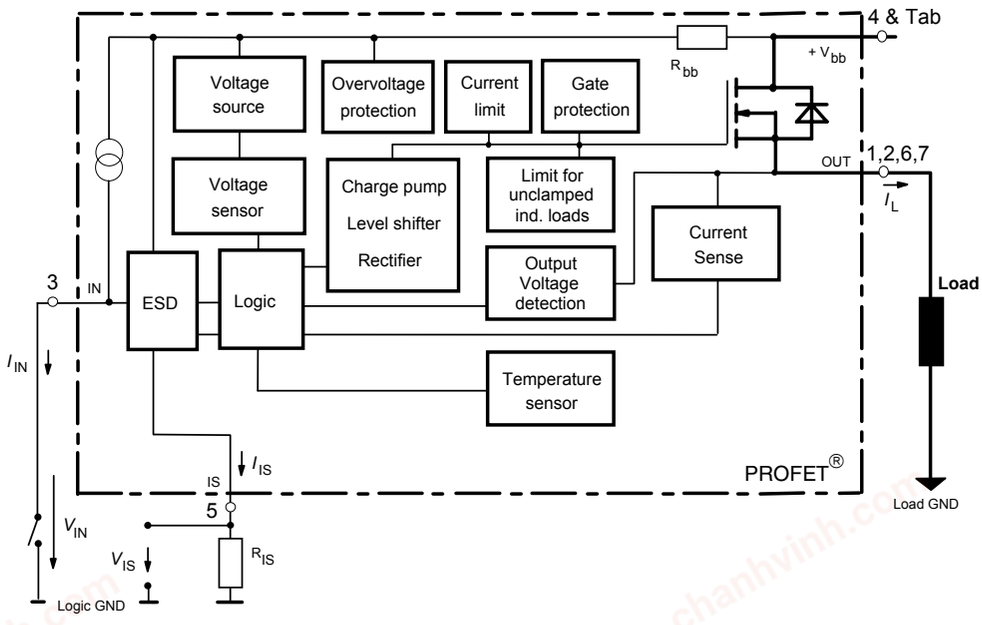

[1] With additional external diode.
[2] Additional external diode required for energized inductive loads (see page 8).

chanhvinh.com

Pin	Symbol		Function
1	OUT	O	Output to the load. The pins 1,2,6 and 7 must be shorted with each other especially in high current applications![3)]
2	OUT	O	Output to the load. The pins 1,2,6 and 7 must be shorted with each other especially in high current applications![3)]
3	IN	I	Input, activates the power switch in case of short to ground
4	Vbb	+	Positive power supply voltage, the tab is electrically connected to this pin. In high current applications the tab should be used for the V_{bb} connection instead of this pin[4)].
5	IS	S	Diagnostic feedback providing a sense current proportional to the load current; zero current on failure (see Truth Table on page 6)
6	OUT	O	Output to the load. The pins 1,2,6 and 7 must be shorted with each other especially in high current applications![3)]
7	OUT	O	Output to the load. The pins 1,2,6 and 7 must be shorted with each other especially in high current applications![3)]

Maximum Ratings at T_j = 25 °C unless otherwise specified

Parameter	Symbol	Values	Unit
Supply voltage (overvoltage protection see page 4)	V_{bb}	42	V
Supply voltage for short circuit protection, $T_{j,start}$ =-40 ...+150°C: (E_{AS} limitation see diagram on page 9)	V_{bb}	34	V
Load current (short circuit current, see page 5)	I_L	self-limited	A
Load dump protection $V_{LoadDump} = V_A + V_s$, V_A = 13.5 V R_I[5)] = 2 Ω, R_L = 0.54 Ω, t_d = 200 ms, IN, IS = open or grounded	$V_{Load\ dump}$[6)]	75	V
Operating temperature range Storage temperature range	T_j T_{stg}	-40 ...+150 -55 ...+150	°C
Power dissipation (DC), $T_C \leq 25$ °C	P_{tot}	170	W
Inductive load switch-off energy dissipation, single pulse V_{bb} = 12V, $T_{j,start}$ = 150°C, T_C = 150°C const., I_L = 20 A, Z_L = 7.5 mH, 0 Ω, (see diagrams on page 9)	E_{AS}	1.5	J
Electrostatic discharge capability (ESD) Human Body Model acc. MIL-STD883D, method 3015.7 and ESD assn. std. S5.1-1993, C = 100 pF, R = 1.5 kΩ	V_{ESD}	4	kV
Current through input pin (DC) Current through current sense status pin (DC) see internal circuit diagrams on page 7	I_{IN} I_{IS}	+15 , -250 +15 , -250	mA

3) Not shorting all outputs will considerably increase the on-state resistance, reduce the peak current capability and decrease the current sense accuracy

4) Otherwise add about 0.3 mΩ to the R_{ON} if the pin is used instead of the tab.

5) R_I = internal resistance of the load dump test pulse generator.

6) $V_{Load\ dump}$ is setup without the DUT connected to the generator per ISO 7637-1 and DIN 40839.

chanhvinh.com

Thermal Characteristics

Parameter and Conditions	Symbol	Values			Unit
		min	typ	max	
Thermal resistance chip - case:	R_{thJC} [7]	--	--	0.75	K/W
junction - ambient (free air):	R_{thJA}	--	60	--	
SMD version, device on PCB[8]:			33		

Electrical Characteristics

Parameter and Conditions at T_j = -40 ... +150 °C, V_{bb} = 12 V unless otherwise specified	Symbol	Values			Unit
		min	typ	max	
Load Switching Capabilities and Characteristics					
On-state resistance (Tab to pins 1,2,6,7)					
V_{IN} = 0, I_L = 20 A T_j = 25 °C:	R_{ON}	--	4.4	6.0	mΩ
T_j = 150 °C:			7.9	10.5	
V_{IN} = 0, I_L = 90 A T_j = 150 °C:			--	10.7	
V_{bb} = 6V[9], V_{IN} = 0, I_L = 20 A T_j = 150 °C:		--	10	17	
Nominal load current [10], (Tab to pins 1,2,6,7)					
ISO Proposal: V_{ON} = 0.5 V, T_C = 85°C, $T_j \leq$ 150°C [11]	$I_{L(ISO)}$	55	70	--	A
SMD [8]: T_A = 85 °C, $T_j \leq$ 150 °C $V_{ON} \leq$ 0.5 V	$I_{L(NOM)}$	13.6	17	--	
Maximum load current in resistive range (Tab to pins 1,2,6,7) V_{ON} = 1.8 V, T_C = 25 °C:	$I_{L(Max)}$	250	--	--	
see diagram on page 12 V_{ON} = 1.8 V, T_C = 150 °C:		150	--	--	A
Turn-on time[12] I_{IN} ⌐ to 90% V_{OUT}:	t_{on}	130	230	450	µs
Turn-off time I_{IN} ⌙ to 10% V_{OUT}:	t_{off}	90	130	210	
R_L = 1 Ω , T_j = -40...+150°C					
Slew rate on [12] (10 to 30% V_{OUT}) R_L = 1 Ω , T_J = 25 °C	dV/dt_{on}	0.1	0.25	0.6	V/µs
Slew rate off [12] (70 to 40% V_{OUT}) R_L = 1 Ω , T_J = 25 °C	$-dV/dt_{off}$	0.15	0.35	0.6	V/µs

[7] Thermal resistance R_{thCH} case to heatsink (about 0.5 ... 0.9 K/W with silicone paste) not included!

[8] Device on 50mm*50mm*1.5mm epoxy PCB FR4 with 6cm² (one layer, 70µm thick) copper area for V_{bb} connection. PCB is vertical without blown air.

[9] Decrease of V_{bb} below 10 V causes slowly a dynamic increase of R_{ON} to a higher value of $R_{ON(Static)}$. As long as $V_{bIN} > V_{bIN(u)\ max}$, R_{ON} increase is less than 10 % per second for T_J < 85 °C.

[10] not subject to production test, specified by design

[11] T_J is about 105°C under these conditions.

[12] See timing diagram on page 13.

chanhvinh.com

Parameter and Conditions at T_j = -40 ... +150 °C, V_{bb} = 12 V unless otherwise specified	Symbol	Values			Unit
		min	typ	max	
Inverse Load Current Operation					
On-state resistance (Pins 1,2,6,7 to pin 4) V_{bIN} = 12 V, I_L = - 20 A T_j = 25 °C: see page 9 T_j = 150 °C:	$R_{ON(inv)}$	--	4.4 7.9	6.0 10.5	mΩ
Nominal inverse load current (Pins 1,2,6,7 to Tab) V_{ON} = -0.5 V, T_C = 85 °C[11]	$I_{L(inv)}$	55	70	--	A
Drain-source diode voltage (V_{out} > V_{bb}) I_L = - 20 A, I_{IN} = 0, T_j = +150°C	$-V_{ON}$	--	0.6	--	V
Operating Parameters					
Operating voltage (V_{IN} = 0) [9, 13]	$V_{bb(on)}$	5.0	--	34	V
Undervoltage shutdown [14]	$V_{bIN(u)}$	1.5	3.0	4.5	V
Undervoltage start of charge pump see diagram page 14	$V_{bIN(ucp)}$	3.0	4.5	6.0	V
Overvoltage protection[15] T_j = -40°C: I_{bb} = 15 mA T_j = 25...+150°C:	$V_{bIN(Z)}$	60 62	-- 66	-- --	V
Standby current T_j = -40...+25°C: I_{IN} = 0 T_j = 150°C:	$I_{bb(off)}$	-- --	15 25	25 50	µA

[13] If the device is turned on before a V_{bb}-decrease, the operating voltage range is extended down to $V_{bIN(u)}$. For all voltages 0 ... 34 V the device is provides embedded protection functions against overtemperature and short circuit.

[14] $V_{bIN} = V_{bb} - V_{IN}$ see diagram on page 7. When V_{bIN} increases from less than $V_{bIN(u)}$ up to $V_{bIN(ucp)}$ = 5 V (typ.) the charge pump is not active and $V_{OUT} \approx V_{bb}$ - 3 V.

[15] See also $V_{ON(CL)}$ in circuit diagram on page 8.

chanhvinh.com

Parameter and Conditions at T_j = -40 ... +150 °C, V_{bb} = 12 V unless otherwise specified	Symbol	Values			Unit
		min	typ	max	
Protection Functions[16]					
Short circuit current limit (Tab to pins 1,2,6,7)[17]					
V_{ON} = 6 V T_c = -40°C:	$I_{L(SC)}$	--	110	--	A
T_c = 25°C:	$I_{L(SC)}$	45	130	180	
T_c = +150°C:	$I_{L(SC)}$	--	115	--	
Output clamp [18] I_L = 40 mA: (inductive load switch off) see diagram Ind. and overvolt. output clamp page 7	$-V_{OUT(CL)}$	14	17	20	V
Output clamp (inductive load switch off) at V_{OUT} = V_{bb} - $V_{ON(CL)}$ (e.g. overvoltage), I_L = 40 mA	$V_{ON(CL)}$	39	42	47	V
Thermal overload trip temperature	T_{jt}	150	--	--	°C
Thermal hysteresis	ΔT_{jt}	--	10	--	K
Reverse Battery					
Reverse battery voltage [19]	$-V_{bb}$	--	--	32	V
On-state resistance (Pins 1,2,6,7 to pin 4) T_j = 25 °C:	$R_{ON(rev)}$	--	5.4	7.0	mΩ
V_{bb} = -12V, V_{IN} = 0, I_L = -20 A, R_{IS} = 1 kΩ T_j = 150 °C:			8.9	12.3	
Integrated resistor in V_{bb} line	R_{bb}	--	120	--	Ω
Diagnostic Characteristics					
Current sense ratio, I_L = 90 A, T_j = -40°C:	k_{ILIS}	12 400	14 200	16 000	
static on-condition, T_j = 25°C:		12 000	13 700	15 400	
k_{ILIS} = I_L : I_{IS}, T_j = 150°C:		11 400	12 800	14 200	
V_{ON} < 1.5 V[20], I_L = 20 A, T_j = -40°C:		12 200	14 800	17 400	
V_{IS} < V_{OUT} - 5V, T_j = 25°C:		12 000	14 100	16 200	
V_{bIN} > 4.0 V T_j = 150°C:		11 500	13 200	15 000	
see diagram on page 11 I_L = 10 A, T_j = -40°C:		11 100	15 300	19 500	
T_j = 25°C:		11 500	14 500	17 500	
T_j = 150°C:		11 400	13 300	15 200	
I_L = 4 A, T_j = -40°C:		10 000	17 600	28 500	
T_j = 25°C:		11 000	15 600	22 000	
T_j = 150°C:		10 600	13 800	18 000	
I_{IS}=0 by I_{IN} =0 (e.g. during deenergizing of inductive loads):					

[16]) Integrated protection functions are designed to prevent IC destruction under fault conditions described in the data sheet. Fault conditions are considered as "outside" normal operating range. Protection functions are not designed for continuous repetitive operation.

[17]) Short circuit is a failure mode. The device is not designed to operate continuously into a short circuit. The lifetime will be reduced under such conditions.

[18]) This output clamp can be "switched off" by using an additional diode at the IS-Pin (see page 7). If the diode is used, V_{OUT} is clamped to V_{bb} - $V_{ON(CL)}$ at inductive load switch off.

[19]) The reverse load current through the intrinsic drain-source diode has to be limited by the connected load (as it is done with all polarity symmetric loads). Note that under off-conditions (I_{IN} = I_{IS} = 0) the power transistor is not activated. This results in raised power dissipation due to the higher voltage drop across the intrinsic drain-source diode. The temperature protection is not active during reverse current operation! Increasing reverse battery voltage capability is simply possible as described on page 8.

[20]) If V_{ON} is higher, the sense current is no longer proportional to the load current due to sense current saturation, see $I_{IS,lim}$.

chanhvinh.com

Parameter and Conditions at T_j = -40 ... +150 °C, V_{bb} = 12 V unless otherwise specified	Symbol	Values			Unit
		min	typ	max	
Sense current saturation	$I_{IS,lim}$	6.5	--	--	mA
Current sense leakage current I_{IN} = 0:	$I_{IS(LL)}$	--	--	0.5	µA
V_{IN} = 0, $I_L \leq$ 0:	$I_{IS(LH)}$	--	2	--	
Current sense overvoltage protection T_j = -40°C:	$V_{bIS(Z)}$	60	--	--	V
I_{bb} = 15 mA T_j = 25...+150°C:		62	66	--	
Current sense settling time[21]	$t_{s(IS)}$	--	--	500	µs
Input					
Input and operating current (see diagram page 12) IN grounded (V_{IN} = 0)	$I_{IN(on)}$	--	0.8	1.5	mA
Input current for turn-off[22]	$I_{IN(off)}$	--	--	80	µA

Truth Table

	Input current level	Output level	Current Sense I_{IS}	Remark
Normal operation	**L** **H**	**L** **H**	**0** **nominal**	**$=I_L / k_{ilis}$, up to $I_{IS}=I_{IS,lim}$**
Very high load current	**H**	**H**	**$I_{IS, lim}$**	**up to $V_{ON}=V_{ON(Fold back)}$ I_{IS} no longer proportional to I_L**
Current-limitation	**H**	**H**	**0**	**$V_{ON} > V_{ON(Fold back)}$**
Short circuit to GND	**L** **H**	**L** **L**	**0** **0**	
Over-temperature	**L** **H**	**L** **L**	**0** **0**	
Short circuit to V_{bb}	**L** **H**	**H** **H**	**0** **<nominal** [23]	
Open load	**L** **H**	**Z**[24] **H**	**0** **0**	
Negative output voltage clamp	**L**	**L**	**0**	
Inverse load current	**L** **H**	**H** **H**	**0** **0**	

L = "Low" Level
H = "High" Level
Overtemperature reset by cooling: $T_j < T_{jt}$ (see diagram on page 14)

[21] not subject to production test, specified by design


[22] We recommend the resistance between IN and GND to be less than 0.5 kΩ for turn-on and more than 500kΩ for turn-off. Consider that when the device is switched off (I_{IN} = 0) the voltage between IN and GND reaches almost V_{bb}.

[23] Low ohmic short to V_{bb} may reduce the output current I_L and can thus be detected via the sense current I_{IS}.

[24] Power Transistor "OFF", potential defined by external impedance.


chanhvinh.com

Terms

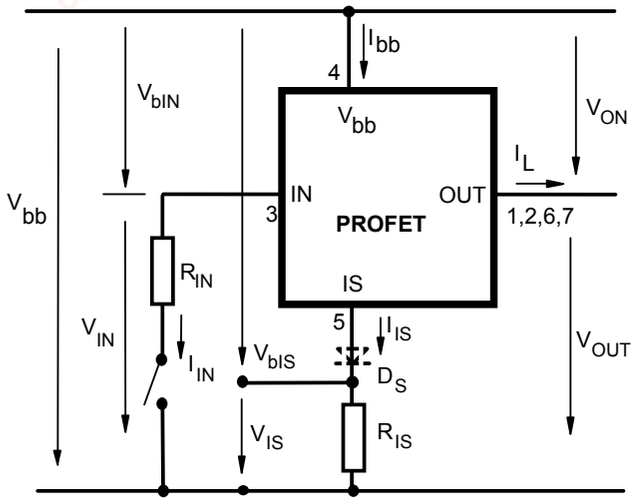


Two or more devices can easily be connected in parallel to increase load current capability.

Input circuit (ESD protection)

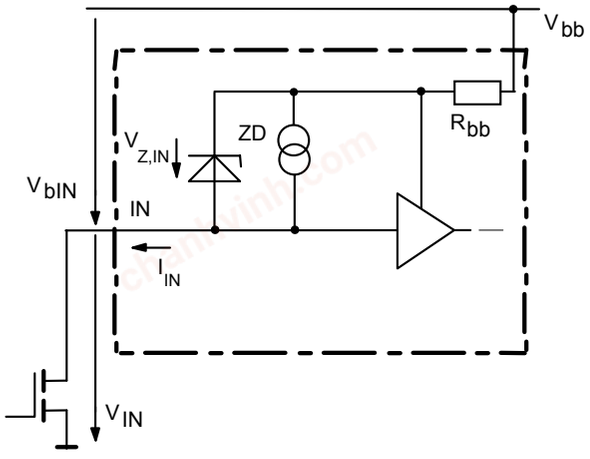

When the device is switched off (I_{IN} = 0) the voltage between IN and GND reaches almost V_{bb}. Use a mechanical switch, a bipolar or MOS transistor with appropriate breakdown voltage as driver.
$V_{Z,IN}$ = 66 V (typ).


Current sense status output

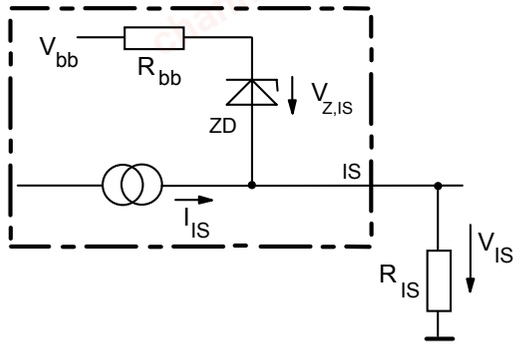

$V_{Z,IS}$ = 66 V (typ.), R_{IS} = 1 kΩ nominal (or 1 kΩ /n, if n devices are connected in parallel). $I_S = I_L/k_{ilis}$ can be driven only by the internal circuit as long as V_{out} - V_{IS} > 5 V. If you want measure load currents up to $I_{L(M)}$, R_{IS} should be less than $\frac{V_{bb} - 5\ V}{I_{L(M)} / K_{ilis}}$.

Note: For large values of R_{IS} the voltage V_{IS} can reach almost V_{bb}. See also overvoltage protection.
If you don't use the current sense output in your application, you can leave it open.


Inductive and overvoltage output clamp

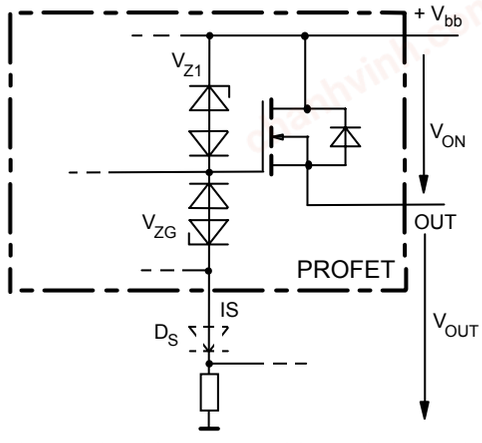

V_{ON} is clamped to $V_{ON(Cl)}$ = 42 V typ. At inductive load switch-off without D_S, V_{OUT} is clamped to $V_{OUT(CL)}$ = -19 V typ. via V_{ZG}. With D_S, V_{OUT} is clamped to V_{bb} - $V_{ON(CL)}$ via V_{Z1}. Using D_S gives faster deenergizing of the inductive load, but higher peak power dissipation in the PROFET. In case of a floating ground with a potential higher than 19V referring to the OUT – potential the device will switch on, if diode DS is not used.


chanhvinh.com

Overvoltage protection of logic part

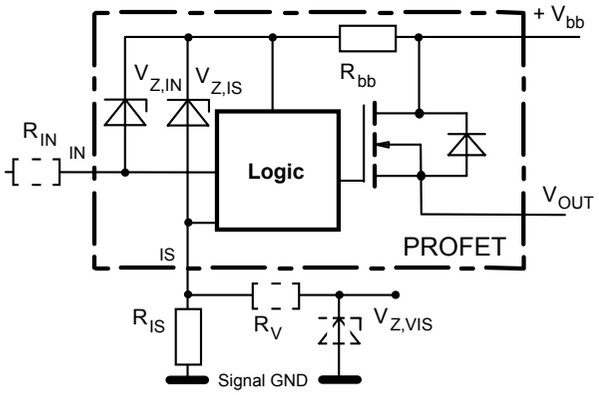

R_{bb} = 120 Ω typ., $V_{Z,IN}$ = $V_{Z,IS}$ = 66 V typ., R_{IS} = 1 kΩ nominal. Note that when overvoltage exceeds 71 V typ. a voltage above 5V can occur between IS and GND, if R_V, $V_{Z,VIS}$ are not used.

Reverse battery protection

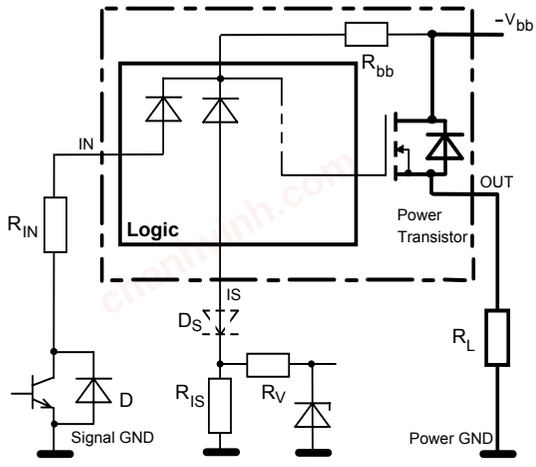


$R_V \geq 1\,k\Omega$, R_{IS} = 1 kΩ nominal. Add R_{IN} for reverse battery protection in applications with V_{bb} above 16 V[19]; recommended value: $\frac{1}{R_{IN}} + \frac{1}{R_{IS}} + \frac{1}{R_V} = \frac{0.1A}{|V_{bb}| - 12V}$ if D_S is not used (or $\frac{1}{R_{IN}} = \frac{0.1A}{|V_{bb}| - 12V}$ if D_S is used).

To minimize power dissipation at reverse battery operation, the summarized current into the IN and IS pin should be about 120mA. The current can be provided by using a small signal diode D in parallel to the input switch, by using a MOSFET input switch or by proper adjusting the current through R_{IS} and R_V.


V_{bb} disconnect with energized inductive load

Provide a current path with load current capability by using a diode, a Z-diode, or a varistor. (V_{ZL} < 72 V or V_{Zb} < 30 V if R_{IN}=0). For higher clamp voltages currents at IN and IS have to be limited to 250 mA.

Version a:

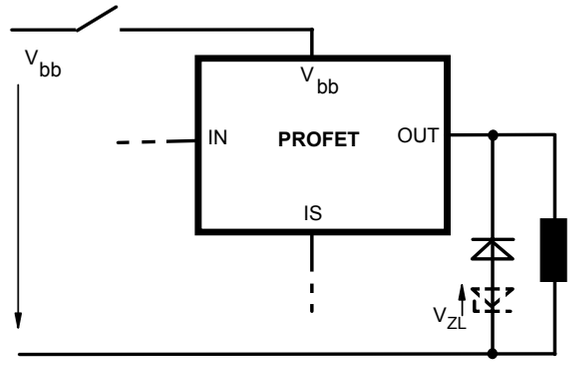


Version b:

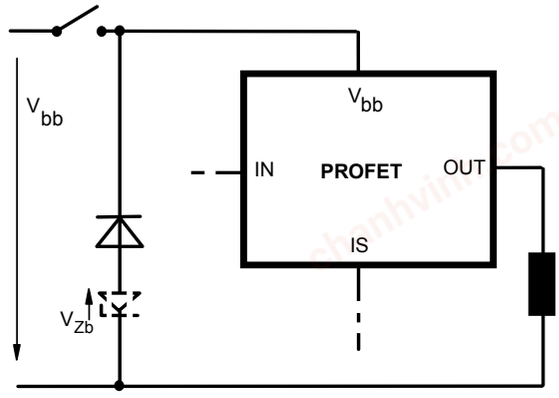


Note that there is no reverse battery protection when using a diode without additional Z-diode V_{ZL}, V_{Zb}.

Version c: Sometimes a neccessary voltage clamp is given by non inductive loads R_L connected to the same switch and eliminates the need of clamping circuit:

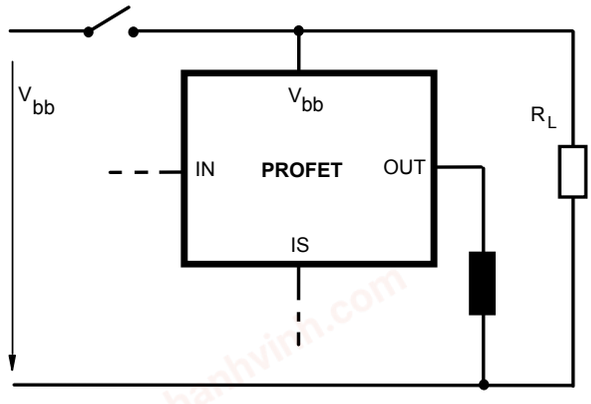

chanhvinh.com


Inverse load current operation

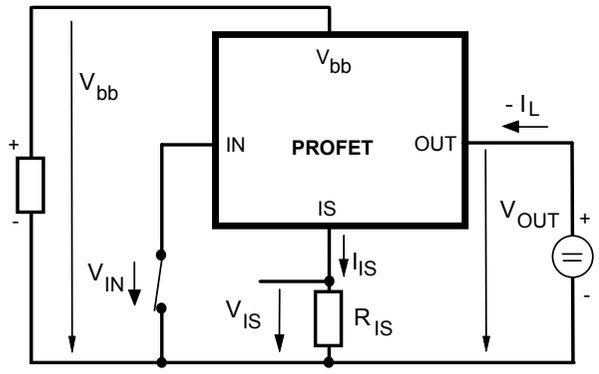

The device is specified for inverse load current operation (V_{OUT} > V_{bb} **> 0V**). The current sense feature is not available during this kind of operation (I_{IS} = 0). With I_{IN} = 0 (e.g. input open) only the intrinsic drain source diode is conducting resulting in considerably increased power dissipation. If the device is switched on (V_{IN} = 0), this power dissipation is decreased to the much lower value $R_{ON(INV)}$ * I^2 (specifications see page 4).

Note: *Temperature protection during inverse load current operation is not possible!*

Inductive load switch-off energy dissipation

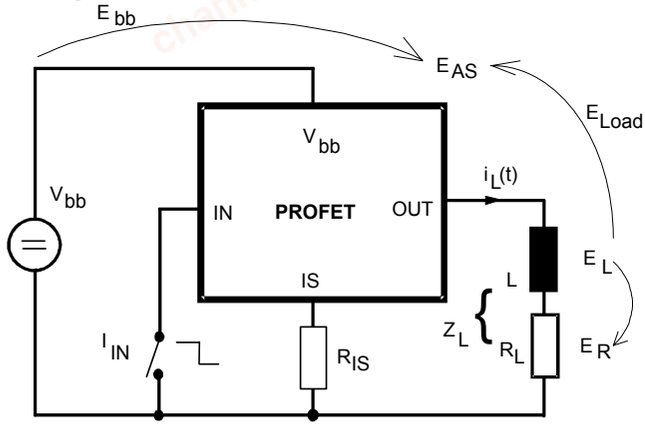

Energy stored in load inductance:

$$E_L = {}^1/_2 \cdot L \cdot I_L^2$$

While demagnetizing load inductance, the energy dissipated in PROFET is


$$E_{AS} = E_{bb} + E_L - E_R = \int V_{ON(CL)} \cdot i_L(t)\, dt,$$

with an approximate solution for $R_L > 0\,\Omega$:

$$E_{AS} = \frac{I_L \cdot L}{2 \cdot R_L} (V_{bb} + |V_{OUT(CL)}|) \; ln \; (1 + \frac{I_L \cdot R_L}{|V_{OUT(CL)}|})$$


Maximum allowable load inductance for a single switch off

$L = f(I_L)$; $T_{j,start}$ = 150°C, V_{bb} = 12 V, R_L = 0 Ω

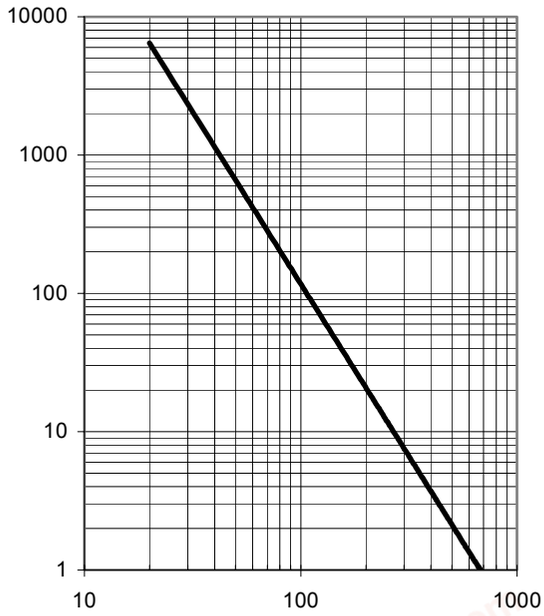

Externally adjustable current limit

If the device is conducting, the sense current can be used to reduce the short circuit current and allow higher lead inductance (see diagram above). The device will be turned off, if the threshold voltage of T2 is reached by I_s*R_{is}. After a delay time defined by R_V*C_V T1 will be reset. The device is turned on again, the short circuit current is defined by $I_{L(SC)}$.

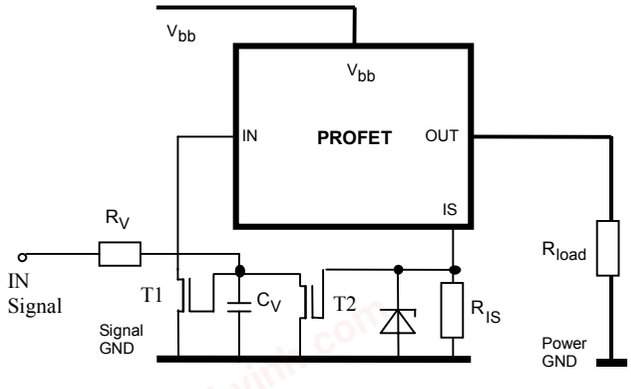

chanhvinh.com

Options Overview

Type	BTS50055-1TMC
Overtemperature protection with hysteresis T_j >150 °C, latch function[25)] T_j >150 °C, with auto-restart on cooling	 X X
Short circuit to GND protection with overtemperature shutdown switches off when V_{ON}>6 V typ. (when first turned on after approx. 180 µs)	 X
Overvoltage shutdown	-
Output negative voltage transient limit to V_{bb} - $V_{ON(CL)}$ to V_{OUT} = -19 V typ	 X X[26)]


[25)] Latch except when V_{bb} - V_{OUT} < $V_{ON(SC)}$ after shutdown. In most cases V_{OUT} = 0 V after shutdown (V_{OUT} ≠ 0 V only if forced externally). So the device remains latched unless V_{bb} < $V_{ON(SC)}$ (see page 5). No latch between turn on and $t_{d(SC)}$.

[26)] Can be "switched off" by using a diode D_S (see page 8) or leaving open the current sense output.

chanhvinh.com

Characteristics


Current sense versus load current:
$I_{IS} = f(I_L)$, T_J= -40 ... +150 °C

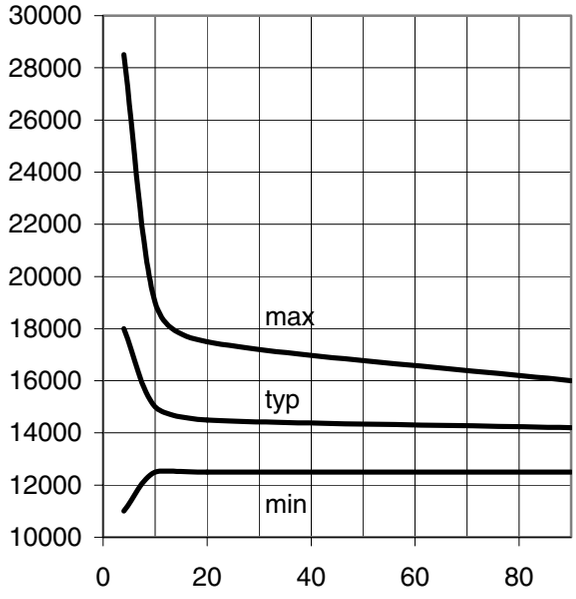

I_{IS} [mA]

I_L [A]


Current sense ratio:
$I_{IS} = f(I_L)$, T_J= 25 °C

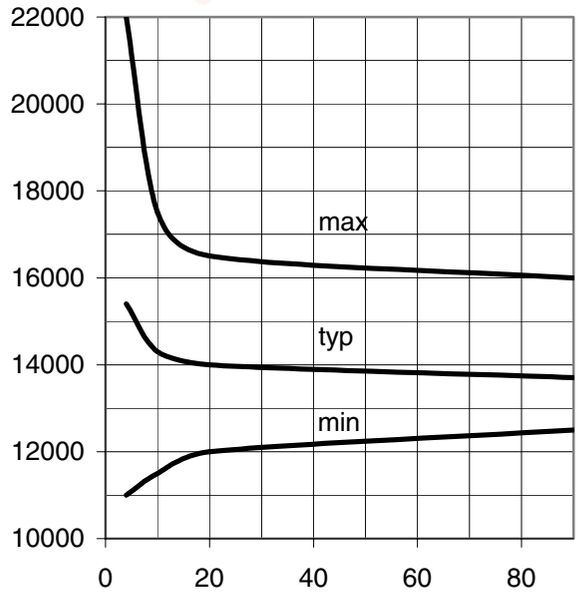

k_{ILIS}


I_L [A]

Current sense ratio:
$K_{ILIS} = f(I_L)$,T_J = -40°C
k_{ilis}

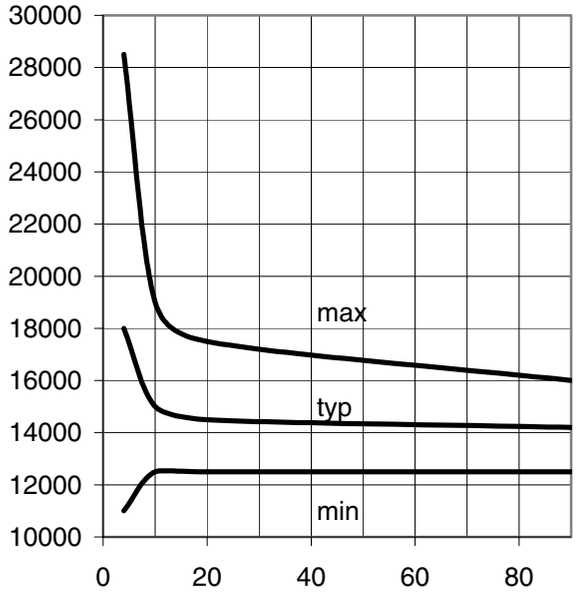

I_L [A]


Current sense ratio:
$K_{ILIS} = f(I_L)$,T_J = 150°C
k_{ilis}

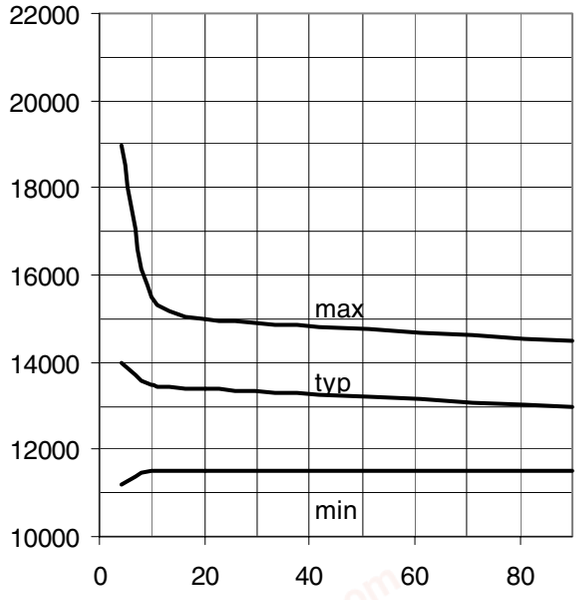


I_L [A]

chanhvinh.com


Typ. current limitation characteristic
$I_L = f(V_{ON}, T_j)$

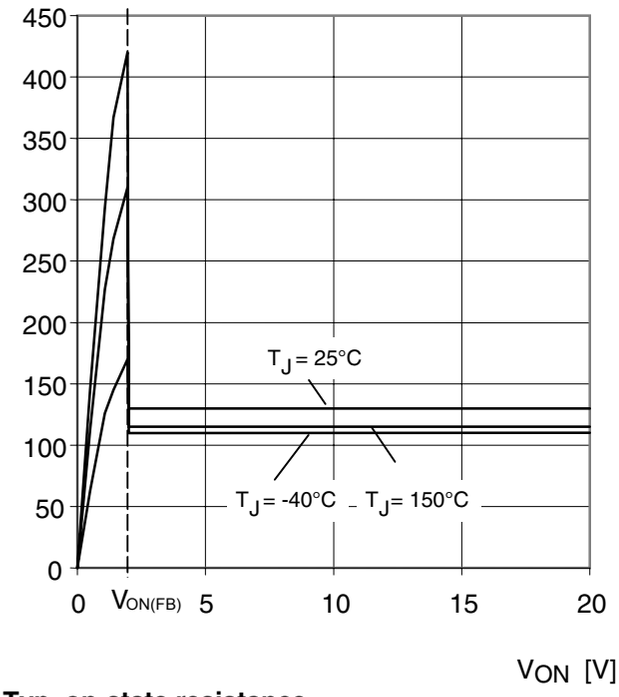

Typ. on-state resistance
$R_{ON} = f(V_{bb}, T_j)$; I_L = 20 A; V_{IN} = 0

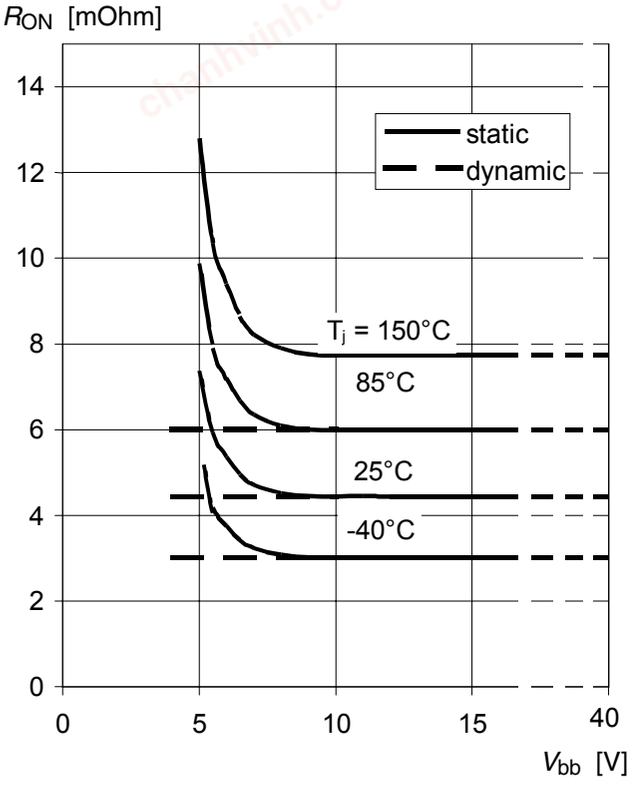


Typ. input current
$I_{IN} = f(V_{bIN})$, $V_{bIN} = V_{bb} - V_{IN}$

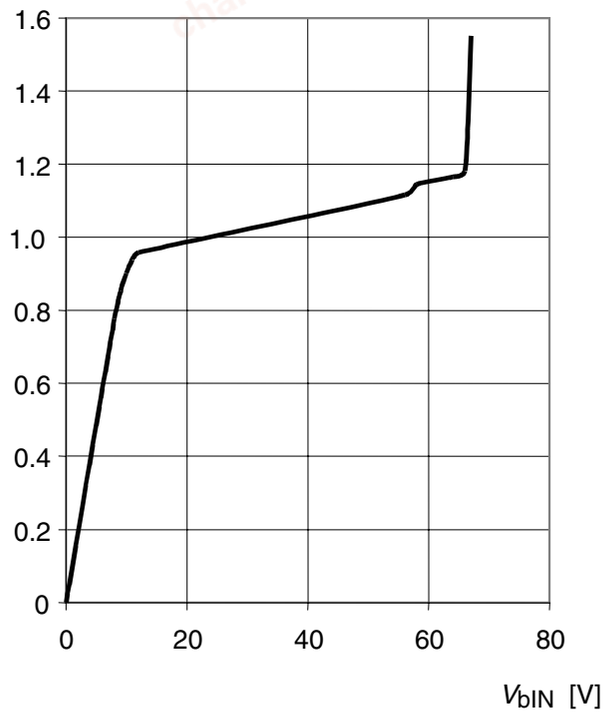

chanhvinh.com


Timing diagrams

Figure 1a: Switching a resistive load, change of load current in on-condition:

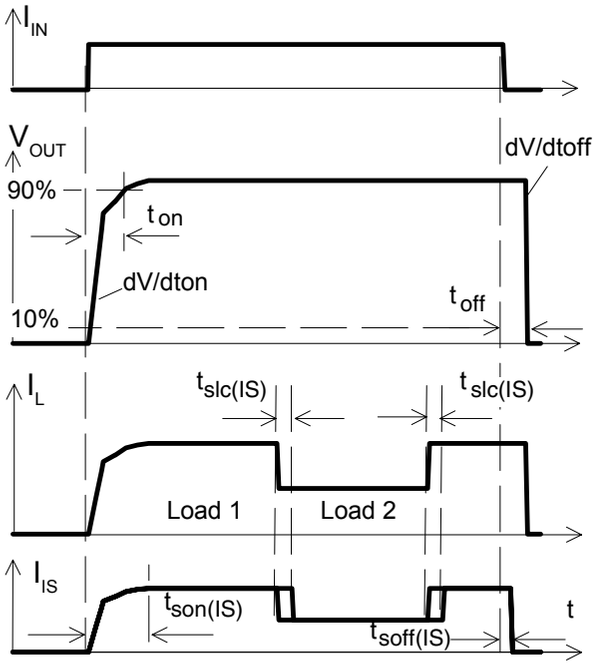

The sense signal is not valid during a settling time after turn-on/off and after change of load current.

Figure 2b: Switching motors and lamps:

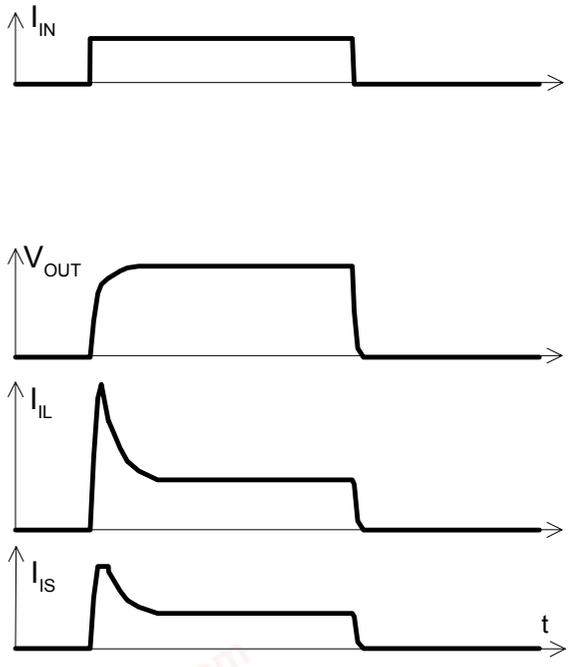

Sense current saturation can occur at very high inrush currents (see $I_{IS,lim}$ on page 6).

Figure 2c: Switching an inductive load:


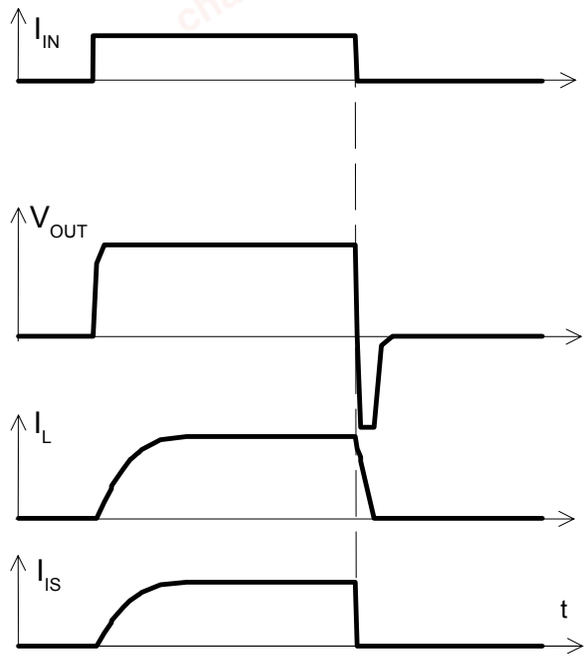


Figure 3d: Short circuit:
shut down by overtemperature detection with auto restart on cooling

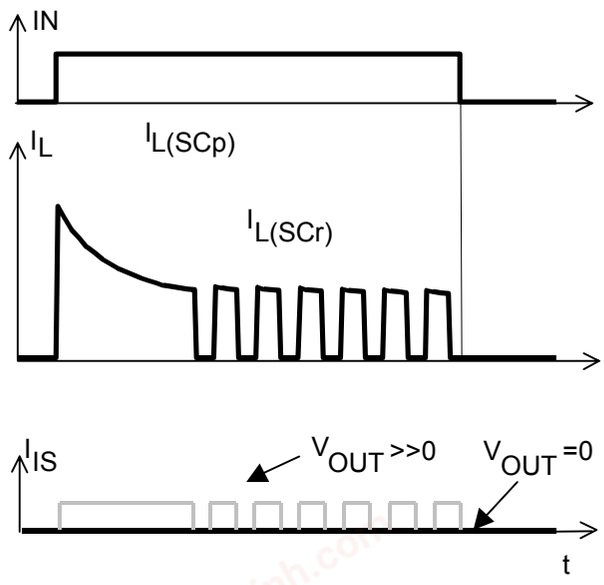

chanhvinh.com

Figure 4e: Overtemperature
Reset if $T_j < T_{jt}$


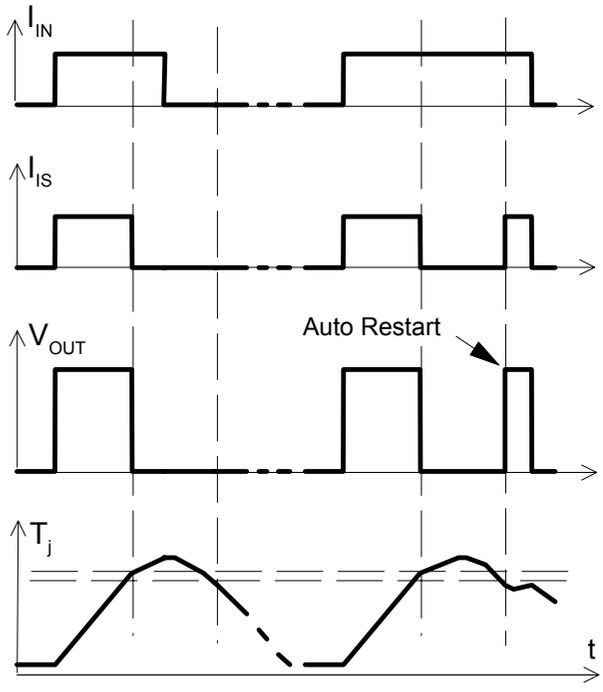


Figure 6f: Undervoltage restart of charge pump, overvoltage clamp

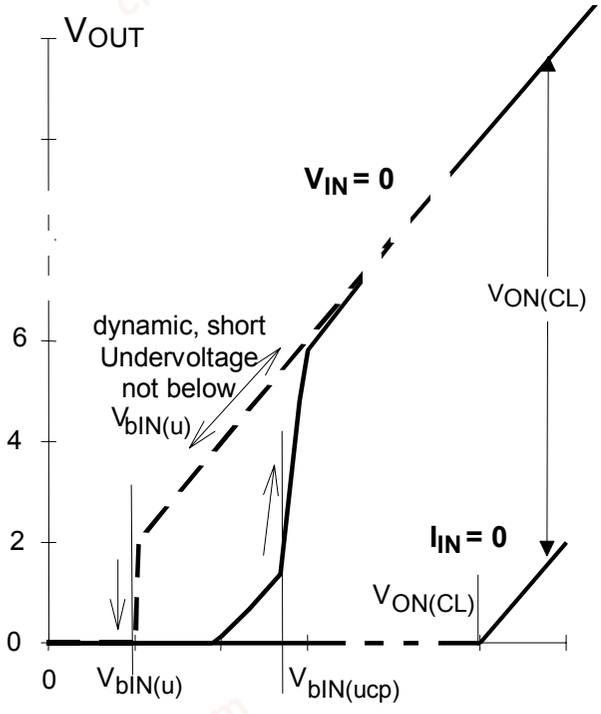


chanhvinh.com

Package and Ordering Code

All dimensions in mm


SMD: PG-TO220-7-4

Sales Code	BTS50055-1TMC

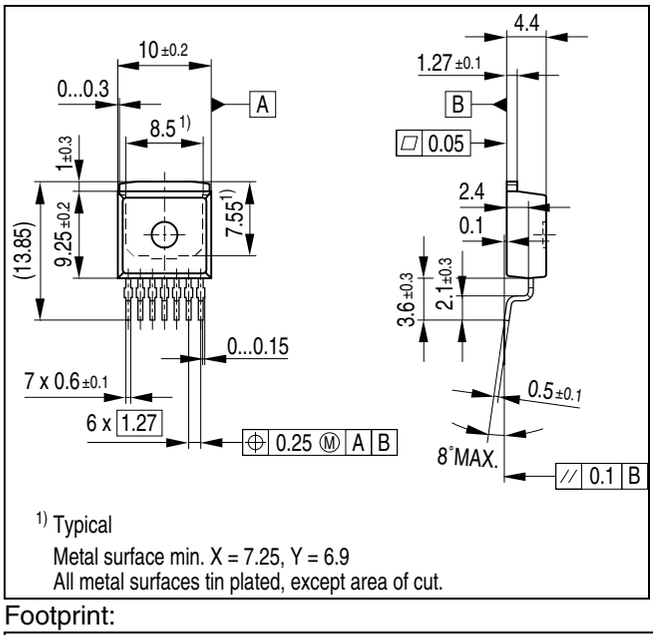

1) Typical
Metal surface min. X = 7.25, Y = 6.9
All metal surfaces tin plated, except area of cut.

Footprint:

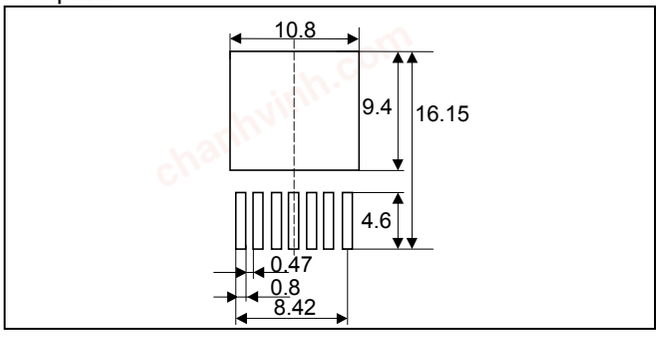

Green Product (RoHS compliant)

To meet the world-wide customer requirements for environmentally friendly products and to be compliant with government regulations the device is available as a green product. Green products are RoHS-Compliant (i.e Pb-free finish on leads and suitable for Pb-free soldering according to IPC/JEDEC J-STD-020).

chanhvinh.com

Revision History

Version	Date	Changes
Rev. 1.1	2010-04-27	Limits of parameter t_{on} changed to min 130µs / max 450µs Limits of parameter t_{off} changed to min 90µs / max 210µs
Rev. 1.0	2008-01-24	Initial version of data sheet. Green (RoHS compliant) variant of BTS6510B

chanhvinh.com

Edition 2010-April-27

Published by
Infineon Technologies AG
81726 Munich, Germany

© Infineon Technologies AG 2010.
All Rights Reserved.

Legal Disclaimer

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics (“Beschaffenheitsgarantie”). With respect to any examples or hints given herein, any typical values stated herein and/or any information regarding the application of the device, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation warranties of non-infringement of intellectual property rights of any third party.

Information

For further information on technology, delivery terms and conditions and prices please contact your nearest Infineon Technologies Office (**www.infineon.com**).

Warnings

Due to technical requirements components may contain dangerous substances. For information on the types in question please contact your nearest Infineon Technologies Office.

Infineon Technologies Components may only be used in life-support devices or systems with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support device or system, or to affect the safety or effectiveness of that device or system. Life support devices or systems are intended to be implanted in the human body, or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.