
chanhvinh.com

TLE9561QX

DC Motor System IC

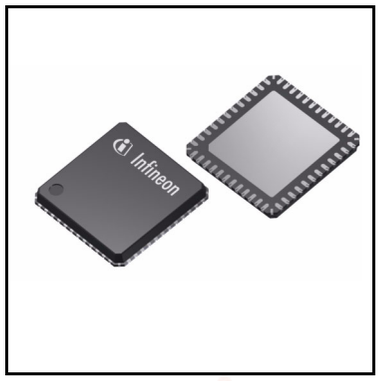

1 Overview

Features

- Low-drop voltage regulator 5 V, 250 mA for main supply
- Four half-bridge gate drivers for external N-channel MOSFETs
- Adaptive MOSFET gate control:
  - Regulation of the MOSFET switching time
  - Reduced switching losses in PWM mode
  - High efficient constant gate charge
- Control of reverse battery protection MOSFET
- High-speed CAN transceiver supporting CAN FD communication up to 5 Mbit/s according to ISO11898-2:2016
- Fail Outputs for fail-safe signalization
- Configurable wake-up sources
- Four high-side outputs 7 Ω typ.
- Four PWM inputs
  - High-side and low-side PWM capable
  - Active free-wheeling
  - Up to 25 kHz PWM frequency
- 32 bit serial peripheral interface (SPI) with cyclic redundancy check (CRC)
- Very low quiescent current consumption in Stop Mode and Sleep Mode
- Periodic cyclic sense and cyclic wake in Normal Mode, Stop Mode and Sleep Mode
- Reset and interrupt output
- Drain-source monitoring and open-load detection
- Configurable time-out and window watchdog
- Overtemperature and short circuit protection features
- Leadless power package with support of optical lead tip inspection
- Green Product (RoHS compliant)

chanhvinh.com

Potential applications

- Door module
- Power lift gate
- Power sliding doors
- Seat control module
- Seatbelt pretension
- Steering column lock
- Sunroof module

Product validation

Qualified for automotive applications. Product validation according to AEC-Q100.

Description

The TLE9561QX is a multifunctional system IC with integrated power supply, communication interfaces, multiple half-bridges and support features in an exposed pad PG-VQFN-48 power package. The device is designed for various motor control automotive applications.

To support these applications, the DC Motor System IC provides the main functions, such as a 5 V low-dropout voltage regulator one HS-CAN transceiver supporting CAN FD, four half-bridges for DC motor control, and one 32 bit serial peripheral interface (SPI).

The device includes diagnostic and supervision features, such as drain-source monitoring and open-load detection, short circuit protection, configurable time-out and window watchdog, fail-safe output, as well as overtemperature protection.

Type	Package	Marking
TLE9561QX	PG-VQFN-48	TLE9561QX

chanhvinh.com

Table of Contents

1 Overview ... 1
2 Block Diagram ... 7
3 Pin Configuration ... 8
3.1 Pin Assignment ... 8
3.2 Pin Definitions and Functions ... 8
3.3 Hints for not functional pins ... 10
4 General Product Characteristics ... 11
4.1 Absolute Maximum Ratings ... 11
4.2 Functional Range ... 12
4.3 Thermal Resistance ... 13
4.4 Current Consumption ... 14
5 System Features ... 18
5.1 Short State Machine Description ... 18
5.2 Device Configuration ... 19
5.3 Block Description of State Machine ... 21
5.4 State Machine Modes Description ... 22
5.4.1 Init Mode ... 22
5.4.2 Normal Mode ... 22
5.4.3 Stop Mode ... 23
5.4.4 Sleep Mode ... 24
5.4.5 Restart Mode ... 25
5.4.6 Fail-Safe Mode ... 26
5.4.7 Software Development Mode ... 26
5.5 Transition Between States ... 27
5.5.1 Transition into Init Mode ... 27
5.5.2 Init Mode -> Normal Mode ... 28
5.5.3 Normal Mode -> Stop Mode ... 28
5.5.4 Normal Mode -> Sleep Mode ... 29
5.5.5 Stop Mode -> Normal Mode ... 29
5.5.6 Sleep Mode -> Restart Mode ... 30
5.5.7 Restart Mode -> Normal Mode ... 30
5.5.8 Fail-Safe Mode -> Restart Mode ... 30
5.6 Reaction on Detected Faults ... 31
5.6.1 Stay in Current State ... 31
5.6.2 Transition into Restart Mode ... 31
5.6.3 Transition into Fail-Safe Mode ... 33
5.7 Wake Features ... 33
5.7.1 Cyclic Sense ... 34
5.7.1.1 Configuration and Operation of Cyclic Sense ... 34
5.7.1.2 Cyclic Sense in Low-power Mode ... 38
5.7.2 Cyclic Wake ... 38
5.7.3 Internal Timers ... 39
5.8 VS Supply Multiplexing ... 40
6 Voltage Regulator 1 ... 41
6.1 Block Description ... 41

chanhvinh.com

6.2 Functional Description ... 42
6.3 Electrical Characteristics ... 43

7 High-Side Switch ... 45
7.1 Block Description ... 45
7.2 Functional Description ... 45
7.2.1 Under Voltage Switch Off ... 46
7.2.2 Over Voltage Switch Off ... 46
7.2.3 Over Current Detection and Switch Off ... 46
7.2.4 Open Load Detection ... 46
7.2.5 PWM, Timer and SYNC Function ... 46
7.3 Electrical Characteristics ... 48

8 High Speed CAN Transceiver ... 49
8.1 Block Description ... 49
8.2 Functional Description ... 49
8.2.1 CAN OFF Mode ... 51
8.2.2 CAN Normal Mode ... 51
8.2.3 CAN Receive Only Mode ... 51
8.2.4 CAN Wake Capable Mode ... 52
8.2.5 CAN Bus termination ... 53
8.2.6 TXD Time-out Feature ... 53
8.2.7 Bus Dominant Clamping ... 53
8.2.8 Undervoltage Detection ... 54
8.3 Electrical Characteristics ... 54

9 High-Voltage Wake Input ... 61
9.1 Block Description ... 61
9.2 High-Voltage Wake Function ... 62
9.2.1 Functional Description ... 62
9.2.2 Wake Input Configuration ... 62
9.2.3 Wake configuration for Cyclic Sense ... 63
9.2.4 Wake configuration for Synchronization ... 63
9.2.5 Fail Safe Output Configuration ... 63
9.3 Electrical Characteristics ... 65

10 Interrupt Function ... 67
10.1 Block and Functional Description ... 67
10.2 Electrical Characteristics ... 70

11 Gate Drivers ... 71
11.1 MOSFET control ... 71
11.2 Static activation ... 72
11.2.1 Static activation of a high-side MOSFET ... 73
11.2.2 Static activation of a low-side MOSFET ... 76
11.2.3 Turn-off of the high-side and low-side MOSFETs of a half-bridge ... 76
11.3 PWM operation ... 77
11.3.1 Determination of the active and freewheeling MOSFET ... 77
11.3.2 Configurations in PWM mode ... 80
11.3.3 PWM mapping ... 81
11.3.4 PWM operation with adaptive gate control ... 83

chanhvinh.com

11.3.4.1 High-side PWM with adaptive gate control, motor operating as load ... 85
11.3.4.2 Low-side PWM with adaptive gate control, motor operating as load ... 95
11.3.4.3 High-side PWM with adaptive gate control, motor operating as generator ... 95
11.3.4.4 Low-side PWM with adaptive gate control, motor operating as generator ... 97
11.3.4.5 Status bits for regulation of turn-on and turn-off delay times ... 99
11.3.4.6 Time modulation of pre-charge and pre-discharge times ... 99
11.3.5 PWM operation without adaptive gate control ... 101
11.3.5.1 AGC[1:0]=00_B ... 101
11.3.5.2 AGC[1:0]=01_B ... 101
11.3.6 Gate driver current ... 102
11.3.7 PWM operation at high and low duty cycles with active freewheeling ... 108
11.3.8 Measurements of the switching times ... 111
11.4 Passive discharge ... 111
11.5 Slam mode ... 112
11.6 Parking braking mode ... 112
11.7 Charge pump ... 113
11.8 Frequency modulation ... 114
11.9 Electrical characteristics gate driver ... 115

12 Supervision Functions ... 123
12.1 Reset Function ... 123
12.1.1 Reset Output Description ... 123
12.1.2 Soft Reset Description ... 124
12.2 Watchdog Function ... 125
12.2.1 Time-Out Watchdog ... 126
12.2.2 Window Watchdog ... 127
12.2.3 Watchdog Setting Check Sum ... 127
12.2.4 Watchdog during Stop Mode ... 128
12.2.5 Watchdog Start in Stop Mode due to Bus Wake ... 128
12.3 VSINT Power On Reset ... 129
12.4 VSINT Under- and Overvoltage ... 130
12.4.1 VSINT Undervoltage ... 130
12.4.2 VSINT Overvoltage ... 130
12.5 VS Under- and Overvoltage ... 131
12.5.1 VS Undervoltage ... 131
12.5.2 VS Overvoltage ... 131
12.6 VSHS Under- Overvoltage ... 132
12.6.1 VSHS Undervoltage ... 132
12.6.2 VSHS Overvoltage ... 132
12.7 VCC1 Over-/ Undervoltage and Undervoltage Prewarning ... 133
12.7.1 VCC1 Undervoltage and Undervoltage Prewarning ... 133
12.7.2 VCC1 Overvoltage ... 134
12.8 VCC1 Short Circuit Diagnostics ... 134
12.9 VCAN Undervoltage ... 134
12.10 Thermal Protection ... 135
12.10.1 Individual Thermal Shutdown ... 135
12.10.2 Temperature Prewarning ... 135
12.10.3 Thermal Shutdown ... 135

chanhvinh.com

12.11 Bridge driver ... 137
12.11.1 Bridge driver supervision with activated charge pump ... 137
12.11.1.1 Drain-source voltage monitoring ... 137
12.11.1.2 Cross-current protection and drain-source overvoltage blank time ... 138
12.11.1.3 OFF-state diagnostic ... 139
12.11.1.4 Charge pump undervoltage ... 140
12.11.1.5 Switching parameters of MOSFETs in PWM mode ... 140
12.11.2 Low-side drain-source voltage monitoring during braking ... 141
12.11.3 VS or VSINT Overvoltage braking ... 141
12.12 Electrical Characteristics ... 142

13 Serial Peripheral Interface ... 148
13.1 SPI Block Description ... 148
13.2 Failure Signalization in the SPI Data Output ... 149
13.3 SPI Programming ... 151
13.3.1 CRC ... 152
13.4 SPI Bit Mapping ... 154
13.4.1 Register Banking ... 155
13.5 SPI control registers ... 157
13.5.1 Device Control Registers ... 159
13.5.2 Control registers bridge driver ... 179
13.6 SPI status information registers ... 199
13.6.1 Device Status Registers ... 201
13.6.2 Status registers bridge driver ... 213
13.6.3 Family and product information register ... 227
13.7 Electrical Characteristics ... 228

14 Application Information ... 230
14.1 Application Diagrams ... 230
14.2 ESD Tests ... 233
14.2.1 ESD according to IEC61000-4-2 ... 233
14.2.2 ESD according to SAE J2962 ... 233
14.3 Thermal Behavior of Package ... 234
14.4 Further Application Information ... 234

15 Package Outlines ... 235

16 Revision History ... 236

chanhvinh.com

2 Block Diagram

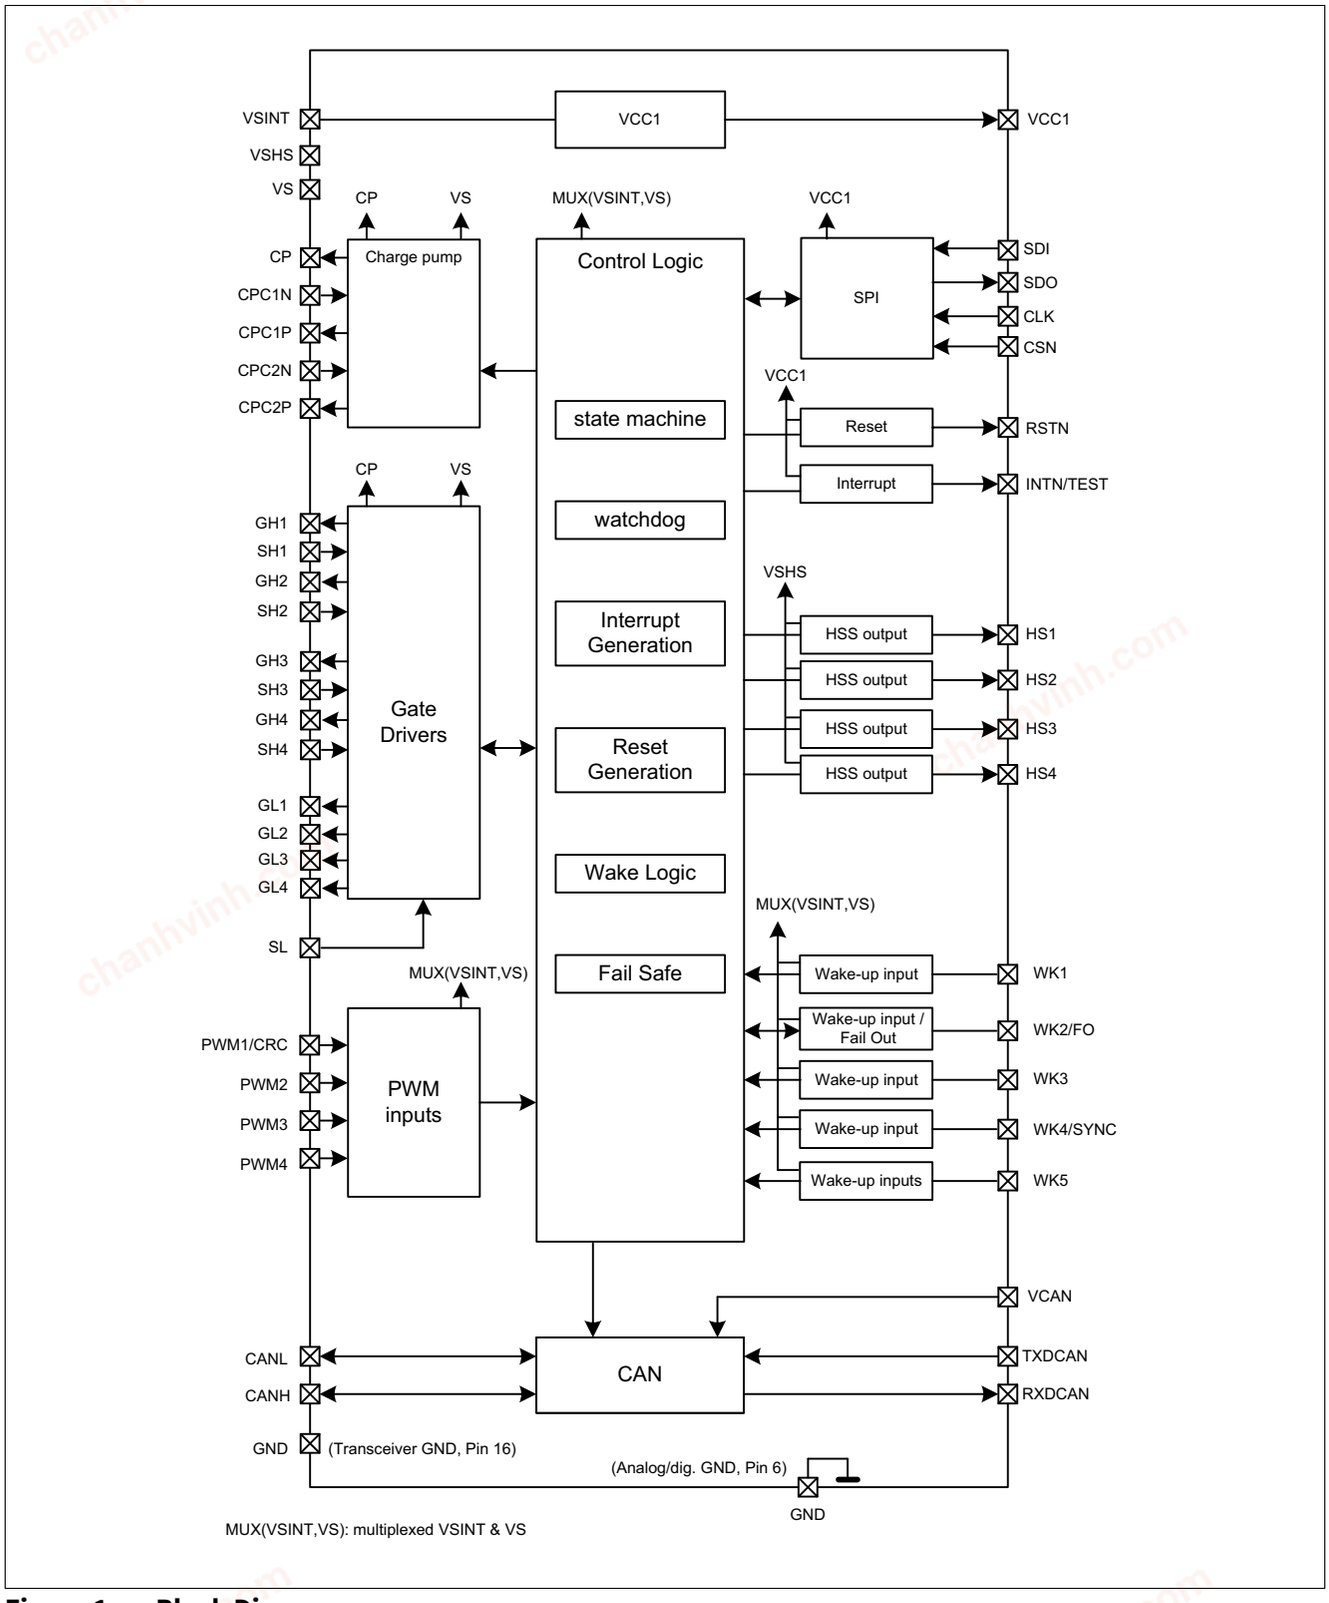


Figure 1 Block Diagram

chanhvinh.com

3 Pin Configuration

3.1 Pin Assignment

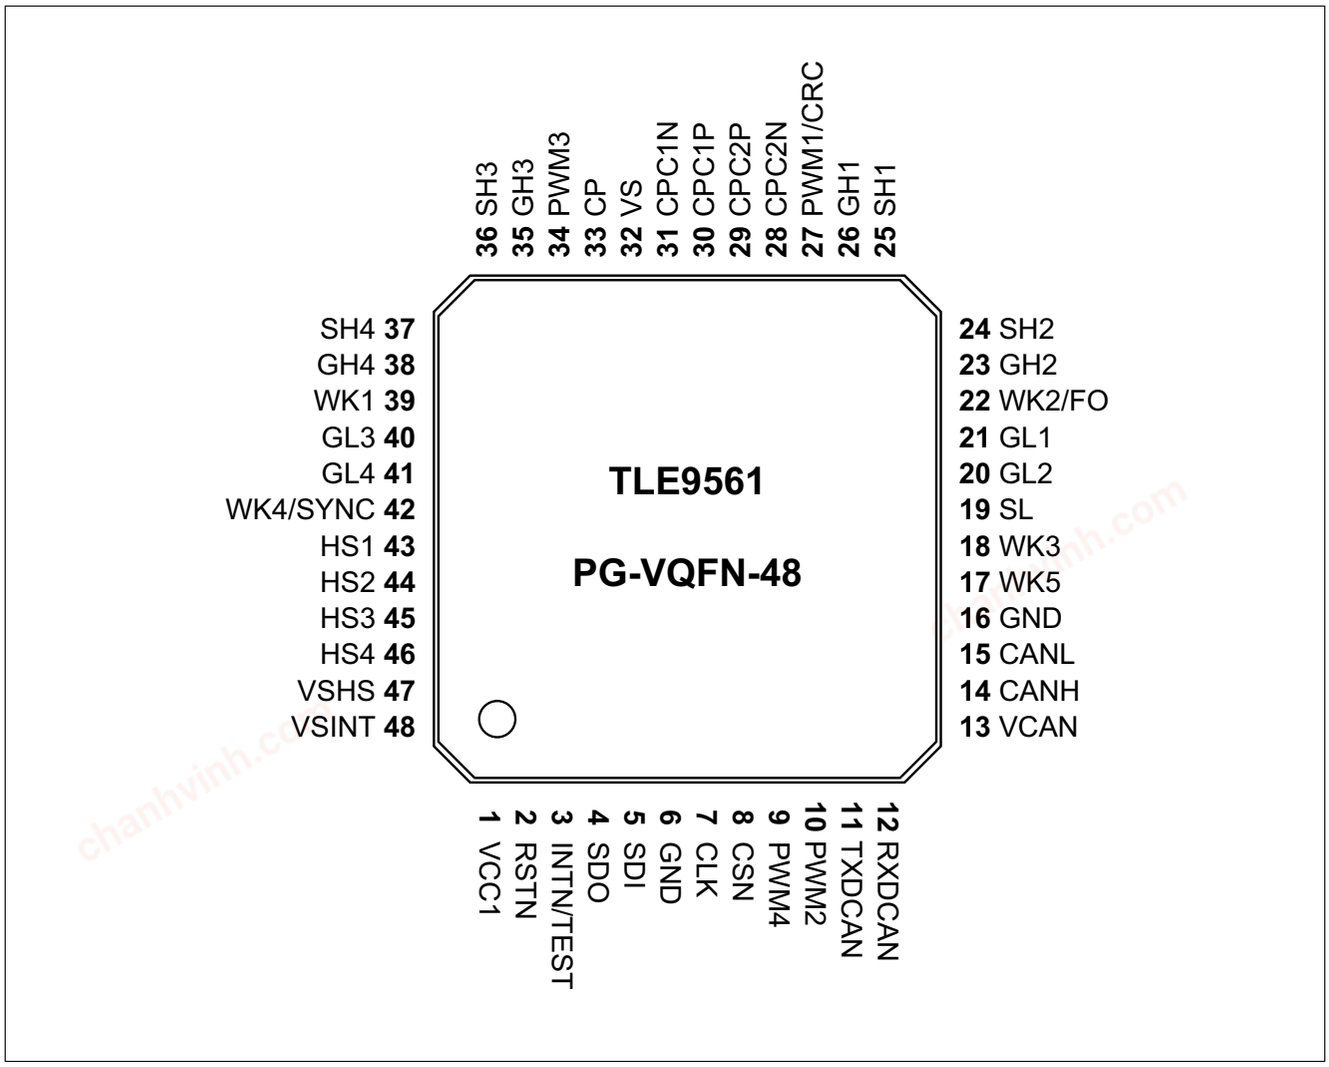


Figure 2 Pin Configuration

3.2 Pin Definitions and Functions

Pin	Symbol	Function
1	VCC1	**Voltage Regulator.** Output voltage 1
2	RSTN	**Reset Output.** Active LOW, internally passive pull-up with open-drain output
3	INTN/TEST	**Interrupt Output.** Active LOW output, push-pull structure **TEST.** Connect to GND (via pull-down) to activate Software Development Mode
4	SDO	**SPI Data Output to Microcontroller** (=MISO). Push-pull structure
5	SDI	**SPI Data Input from Microcontroller** (=MOSI). Internal pull-down
6	GND	**Ground.** Analog/digital ground
7	CLK	**SPI Clock Input.** Internal passive pull-down

chanhvinh.com

Pin Configuration

Pin	Symbol	Function
8	CSN	**SPI Chip Select Not input.** Internal passive pull-up
9	PWM4	**PWM input 4.** Internal passive pull-down
10	PWM2	**PWM input 2.** Internal passive pull-down
11	TXDCAN	**Transmit CAN.** Internal passive pull-up
12	RXDCAN	**Receive CAN.** Push-pull structure
13	VCAN	**HS-CAN Supply Input.** For internal HS-CAN cell needed for CAN Normal Mode
14	CANH	**CAN High Bus.**
15	CANL	**CAN Low Bus.**
16	GND	**Ground.** Transceiver ground (CAN)
17	WK5	**Wake-up input 5.**
18	WK3	**Wake-up input 3.**
19	SL	**Source Low Side.**
20	GL2	**Gate Low Side 2.**
21	GL1	**Gate Low Side 1.**
22	WK2/FO	**Wake-up input 2 or Fail Safe Output.**
23	GH2	**Gate High Side 2.**
24	SH2	**Source High Side 2.**
25	SH1	**Source High Side 1.**
26	GH1	**Gate High Side 1.**
27	PWM1/CRC	**PWM input 1.** Internal passive pull-down **CRC.** Connect to GND (via pull-down) to activate CRC functionality
28	CPC2N	**Negative connection to Charge Pump Capacitor 2.**
29	CPC2P	**Positive connection to Charge Pump Capacitor 2.**
30	CPC1P	**Positive connection to Charge Pump Capacitor 1.**
31	CPC1N	**Negative connection to Charge Pump Capacitor 1.**
32	VS	**Supply voltage for Bridge Drivers and Charge pump.** Connected to the battery voltage after reverse protection.
33	CP	**Charge Pump output voltage.**
34	PWM3	**PWM input 3.** Internal passive pull-down
35	GH3	**Gate High Side 3.**
36	SH3	**Source High Side 3.**
37	SH4	**Source High Side 4.**
38	GH4	**Gate High Side 4.**
39	WK1	**Wake-up input 1.**
40	GL3	**Gate Low Side 3.**
41	GL4	**Gate Low Side 4.**
42	WK4/SYNC	**Wake-up input 4/Sync.**
43	HS1	**High Side output 1.**
44	HS2	**High Side output 2.**

chanhvinh.com

Pin	Symbol	Function
45	HS3	**High Side output 3.**
46	HS4	**High Side output 4.**
47	VSHS	**Supply voltage for HSx.** Connected to the battery voltage after reverse protection
48	VSINT	**Voltage regulator and main supply voltage.** Connected to the battery voltage after reverse protection
Cooling Tab	GND	Cooling Tab - Exposed Die Pad; For cooling purposes only, do not use as an electrical ground[1)]

1) The exposed die pad at the bottom of the package allows better power dissipation of heat from the device via the PCB. The exposed die pad is not connected to any active part of the IC. However, it should be connected to GND for the best EMC performance.

Note: The GND pin as well as the Cooling Tab must be connected to one common GND potential.

3.3 Hints for not functional pins

It must be ensured that the correct configurations are also selected, i.e. in case functions are not used that they are disabled via SPI. Unused pins should be handled as follows:

- **N.U.**: not used; internally bonded for testing purpose; leave open.
- **RSVD**: must be connected to GND.

chanhvinh.com

4 General Product Characteristics

4.1 Absolute Maximum Ratings

Table 1 Absolute Maximum Ratings[1)]

T_j = -40°C to +150°C; all voltages with respect to ground, positive current flowing into pin (unless otherwise specified)

Parameter	Symbol	Values			Unit	Note or Test Condition	Number
		Min.	Typ.	Max.			
Voltages							
Supply Voltage VS	$V_{S, max}$	-0.3	–	28	V	–	P_4.1.1
Supply Voltage VS	$V_{S, max}$	-0.3	–	40	V	Load Dump	P_4.1.2
Supply Voltage VSINT	$V_{SINT, max}$	-0.3	–	28	V	–	P_4.1.3
Supply Voltage VSINT	$V_{SINT, max}$	-0.3	–	40	V	Load Dump	P_4.1.4
Supply Voltage VSHS	$V_{SHS, max}$	-0.3	–	28	V	–	P_4.1.5
Supply Voltage VSHS	$V_{SHS, max}$	-0.3	–	40	V	Load Dump	P_4.1.6
Voltage Regulator 1	$V_{CC1, max}$	-0.3	–	5.5	V		P_4.1.7
Charge Pump Output Pin (CP)	$V_{CP, max}$	V_S - 0.8	–	V_S + 17	V	I_{CP} > - 200 µA if CP is disabled	P_4.1.8
CPC1P, CPC2P	$V_{CPCxP, max}$	- 0.3	–	V_S + 17	V		P_4.1.38
CPC1N, CPC2N	$V_{CPCxN, max}$	- 0.3	–	V_S + 0.3	V		P_4.1.39
Bridge Driver Gate High Side (GHx)	$V_{GHx, max}$	-8.0	–	40	V	–	P_4.1.11
Bridge Driver Gate Low Side (GLx)	$V_{GLx, max}$	-8.0	–	24	V	–	P_4.1.12
Voltage difference between GHx-SHx and between GLx-SLx	V_{GS}	-0.3	–	16	V	–	P_4.1.13
Bridge Driver Source High (SHx)	$V_{SHx, max}$	-8.0	–	40	V	–	P_4.1.14
Bridge Driver Source Low Side SL	$V_{SL, max}$	-8.0	–	6.0	V	–	P_4.1.15
Wake Input WKx	$V_{WKx, max}$	-0.3	–	40	V	–	P_4.1.19
High Side HSx	$V_{HSx, max}$	-0.3	–	$V_{SHS, max}$ + 0.3	V	–	P_4.1.20
CANH, CANL	$V_{BUS, max}$	-27	–	40	V	–	P_4.1.22
PWM1/CRC, PWM3 Input Pins	$V_{PWM1-3, max}$	-0.3	–	40	V	–	P_4.1.23
PWM2,PWM4 Input Pins	$V_{PWM2-4, max}$	-0.3	–	V_{CC1} + 0.3	V	–	P_4.1.24

chanhvinh.com

Table 1 Absolute Maximum Ratings[1)] (cont'd)

T_j = -40°C to +150°C; all voltages with respect to ground, positive current flowing into pin (unless otherwise specified)

Parameter	Symbol	Values			Unit	Note or Test Condition	Number
		Min.	Typ.	Max.			
Logic Input Pins (CSN, CLK, SDI, TXDCAN)	$V_{I, max}$	-0.3	–	V_{CC1} + 0.3	V	–	P_4.1.27
Logic Output Pins (SDO, RSTN, INTN, RXDCAN)	$V_{O, max}$	-0.3	–	V_{CC1} + 0.3	V	–	P_4.1.30
VCAN Input Voltage	$V_{VCAN, max}$	-0.3	–	5.5	V		P_4.1.31
Temperatures							
Junction Temperature	T_j	-40	–	150	°C	–	P_4.1.32
Storage Temperature	T_{stg}	-55	–	150	°C	–	P_4.1.33
ESD Susceptibility							
ESD Resistivity	$V_{ESD,11}$	-2	–	2	kV	HBM[2)]	P_4.1.34
ESD Resistivity to GND, CANH, CANL	$V_{ESD,12}$	-8	–	8	kV	HBM[2)3)]	P_4.1.35
ESD Resistivity to GND	$V_{ESD,21}$	-500	–	500	V	CDM[4)]	P_4.1.36
ESD Resistivity Pin 1, 12,13,24,25,36,37,48 (corner pins) to GND	$V_{ESD,22}$	-750	–	750	V	CDM[4)]	P_4.1.37

1) Not subject to production test, specified by design.
2) ESD susceptibility, HBM according to ANSI/ESDA/JEDEC JS-001 (1.5 kΩ, 100 pF).
3) For ESD "GUN" Resistivity (according to IEC61000-4-2 "gun test" (150 pF, 330 Ω)), is shown in Application Information and test report will be provided from IBEE.
4) ESD susceptibility, Charged Device Model "CDM" EIA/JESD22-C101 or ESDA STM5.3.1.

Notes

1. *Stresses above the ones listed here may cause permanent damage to the device. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.*
2. *Integrated protection functions are designed to prevent IC destruction under fault conditions described in the data sheet. Fault conditions are considered as "outside" normal operating range. Protection functions are not designed for continuous repetitive operation.*

4.2 Functional Range

Table 2 Functional Range[1)]

Parameter	Symbol	Values			Unit	Note or Test Condition	Number
		Min.	Typ.	Max.			
Supply Voltage	$V_{SINT,func}$	$V_{POR,f}$	–	28	V	[2)]	P_4.2.1
Bridge Supply Voltage	$V_{S,func}$	6.0	–	28	V	–	P_4.2.2
High Side Supply Voltage	$V_{SHS_HS,func}$	6.0	–	28	V	[2)]	P_4.2.7
CAN Supply Voltage	$V_{CAN,func}$	4.75	–	5.25	V	–	P_4.2.4
Junction Temperature	T_j	-40	–	150	°C	–	P_4.2.6

chanhvinh.com

1) Not subject to production test, specified by design.
2) Including Power-On Reset, Over- and Undervoltage Protection.

Note: Within the functional range the IC operates as described in the circuit description. The electrical characteristics are specified within the conditions given in the related electrical characteristics table.

Device Behavior Outside of Specified Functional Range

- 28 V < **$V_{SINT,func}$** < 40 V: Device will still be functional including the state machine; the specified electrical characteristics might not be ensured anymore. The V_{CC1} is working properly, however, a thermal shutdown might occur due to high power dissipation. HSx switches might be turned OFF depending on HSx_OV configurations. The specified SPI communication speed is ensured; the absolute maximum ratings are not violated, however the device is not intended for continuous operation of V_{SINT} > 28 V and a thermal shutdown might occur due to high power dissipation. The device operation at high junction temperatures for long periods might reduce the operating life time.

  Note: V_{CAN} < 4.75 V: The undervoltage bit will be set in the SPI register and the transmitter will be disabled as long as the UV condition is present.

  Note: 5.25 V < V_{CAN} < 5.5 V: CAN transceiver still functional. However, the communication might fail due to out-of-spec operation.
- **$V_{POR,f}$** < V_{SINT} < 5.5 V (given the fact that the device was powered up correctly before with V_{SINT} > 5.5 V): Device will still be functional; the specified electrical characteristics might not be ensured anymore:
  - The voltage regulator will enter the low-drop operation mode.
  - A reset could be triggered depending on the Vrthx settings.
  - HSx switch behavior will depend on the respective configuration:
    HS_UV_SD_DIS = '0' (default): HSx will be turned OFF for V_{SHS} < $V_{SHS,UVD}$ and will stay OFF.
    HS_UV_SD_DIS = '1': HSx stays on as long as possible. An unwanted overcurrent shut down may occur. OC shut down bit set and the respective HSx switch will stay OFF.
  - If WK2/FO is configured as Fail Safe Output, FO outputs will remain ON if they were enabled before V_{SINT} > 5.5 V.
  - The specified SPI communication speed is ensured.

*Note: **$V_{S,UV}$** < V_S < 6.0 V: the charge pump might be deactivated due to a charge pump undervoltage detection, resulting in a turn-off of the external MOSFETs.*

4.3 Thermal Resistance

Table 3 Thermal Resistance[1)]

Parameter	Symbol	Values			Unit	Note or Test Condition	Number
		Min.	Typ.	Max.			
Junction to Soldering Point	$R_{th(JSP)}$	–	7.2	–	K/W	Exposed Pad	P_4.3.1
Junction to Ambient	$R_{th(JA)}$	–	27	–	K/W	2)	P_4.3.2

1) Not subject to production test, specified by design.
2) Specified $R_{th(JA)}$ value is according to Jedec JESD51-2,-5,-7 at natural convection on FR4 2s2p board for a power dissipation of 1.5 W; the product (chip+package) was simulated on a 76.2 x 114.3 x 1.5 mm^3 with 2 inner copper layers (2 x 70 µm Cu, 2 x 35 µm C); where applicable a thermal via array under the exposed pad contacted the first inner copper layer and 300 mm^2 cooling areas on the top layer and bottom layers (70 µm).

chanhvinh.com

4.4 Current Consumption

Table 4 Current Consumption

Current consumption values are specified at T_j = 25°C, V_{SINT}= V_{SHS} = 13.5 V, all outputs open (unless otherwise specified)

Parameter	Symbol	Values			Unit	Note or Test Condition	Number
		Min.	Typ.	Max.			
Normal Mode							
Normal Mode current consumption	I_{Normal}	–	4.5	5.5	mA	1) V_{SINT} = 5.5 V to 28 V; T_j = -40°C to +150°C; CAN=CP=off	P_4.4.1
Stop Mode							
Stop Mode current consumption (low active peak threshold)	$I_{Stop_1,25}$	–	50	65	µA	1)2) CAN=off; WKx=HSx=CP=off: Cyclic Wak./Sen.=off Watchdog = off; no load on V_{CC1}; **I_PEAK_TH** = 0_B	P_4.4.2
Stop Mode current consumption (low active peak threshold)	$I_{Stop_1,85}$	–	55	80	µA	1)2)3) T_j = 85°C; CAN=off; WKx=HSx=CP=off: Cyclic Wak./Sen.=off Watchdog = off; no load on V_{CC1}; **I_PEAK_TH** = 0_B	P_4.4.3
Stop Mode current consumption (high active peak threshold)	$I_{Stop_2,25}$	–	70	95	µA	1)2) CAN=off; WKx=HSx=CP=off: Cyclic Wak./Sen.=off Watchdog = off; no load on V_{CC1}; **I_PEAK_TH** = 1_B	P_4.4.4
Stop Mode current consumption (high active peak threshold)	$I_{Stop_2,85}$	–	75	105	µA	1)2)3) T_j = 85°C; CAN=off; Cyclic Wak./Sen.=off; Watchdog = off; no load on V_{CC1}; **I_PEAK_TH** = 1_B	P_4.4.5
Sleep Mode							
Sleep Mode current consumption	$I_{Sleep,25}$	–	18	30	µA	1) CAN=off; WKx=HSx=CP=off: Cyclic Wak./Sen.= off	P_4.4.6
Sleep Mode current consumption	$I_{Sleep,85}$	–	28	40	µA	1)3) T_j = 85°C; CAN=off; WKx=HSx=CP=off: Cyclic Wak./Sen.=off	P_4.4.7

chanhvinh.com

Table 4 Current Consumption (cont'd)

Current consumption values are specified at T_j = 25°C, V_{SINT}= V_{SHS} = 13.5 V, all outputs open (unless otherwise specified)

Parameter	Symbol	Values			Unit	Note or Test Condition	Number
		Min.	Typ.	Max.			
Feature Incremental Current Consumption							
Current consumption for CAN module, recessive state	$I_{CAN,rec}$	–	2	3.5	mA	[1)3)] Normal/Stop Mode; CAN Normal Mode; T_j = -40°C to +150°C; V_{CC1} connected to V_{CAN}; V_{TXDCAN} = V_{CC1}; no RL on CAN	P_4.4.13
Current consumption for CAN module, dominant state	$I_{CAN,dom}$	–	3	5.0	mA	[1)3)] Normal/Stop Mode; CAN Normal Mode; T_j = -40°C to +150°C; V_{CC1} connected to V_{CAN}; V_{TXDCAN} = GND; no RL on CAN	P_4.4.14
Current consumption for CAN module, Receive Only Mode, Normal Mode	I_{CAN,Rec_onlyN}	–	0.5	0.7	mA	[1)3)] Normal Mode; CAN Receive Only Mode; T_j = -40°C to +150°C; V_{CC1} connected to V_{CAN}; V_{TXDCAN} = V_{CC1}; no RL on CAN	P_4.4.15
Current consumption for CAN module, Receive Only Mode, Stop Mode	I_{CAN,Rec_only}	–	1.4	1.5	mA	[1)3)] Stop Mode; CAN Receive Only Mode; T_j = -40°C to +150°C; V_{CC1} connected to V_{CAN}; V_{TXDCAN} = V_{CC1}; no RL on CAN	P_4.4.16
Current consumption for CAN wake capability	$I_{CAN,wake,25}$	–	4.5	7	µA	[4)] Sleep Mode; CAN wake capable;	P_4.4.17
Current consumption for CAN wake capability	$I_{CAN,wake,85}$	–	8	10	µA	[3)4)] Sleep Mode; T_j = 85°C; CAN wake capable; WK = off;	P_4.4.18
Current consumption for each WK input	$I_{WK,wake,25}$	–	0.2	2	µA	[1)4)5)6)] Sleep Mode; WK wake capable; no activity on WK pin;	P_4.4.22
Current consumption for each WK input	$I_{WK,wake,85}$	–	0.5	3	µA	[1)3)4)5)6)] Sleep Mode; T_j = 85°C; WK wake capable; no activity on WK pin;	P_4.4.23

chanhvinh.com

Table 4 Current Consumption (cont'd)

Current consumption values are specified at T_j = 25°C, V_{SINT}= V_{SHS} = 13.5 V, all outputs open (unless otherwise specified)

Parameter	Symbol	Values			Unit	Note or Test Condition	Number
		Min.	Typ.	Max.			
Current consumption for first High-Side in Stop Mode	$I_{Stop,HS,25}$	–	250	375	µA	3)4)7)9)8) Stop Mode; HS with 100% duty cycle (no load);	P_4.4.24
Current consumption for first High-Side in Stop Mode	$I_{Stop,HS,85}$	–	250	375	µA	3)4)7)9)8) Stop Mode; T_j = 85°C; HS with 100% duty cycle (no load);	P_4.4.25
Current consumption for cyclic sense function	$I_{Stop,CS25}$	–	20	26	µA	4)7)9)10) Stop Mode; WD = off;	P_4.4.26
Current consumption for cyclic sense function	$I_{Stop,CS85}$	–	24	32	µA	3)4)7)9)10) Stop Mode; T_j = 85°C; WD = off;	P_4.4.27
Current consumption for watchdog active in Stop Mode	$I_{Stop,WD25}$	–	18	23	µA	3)11) Stop Mode; Watchdog running;	P_4.4.28
Current consumption for watchdog active in Stop Mode	$I_{Stop,WD85}$	–	19	25	µA	3)11) Stop Mode; T_j = 85°C; Watchdog running;	P_4.4.29
Current consumption for active Fail Output FO	$I_{Stop,FO}$	–	350	600	µA	3)11) all modes; T_j < 85°C; FO = on (no load);	P_4.4.30
Current consumption in parking braking mode (LSx ON)	$I_{parking}$	–	10	14	µA	3)11) Stop Mode or Sleep Mode; T_j < 85°C; **PARK_BRK_EN** = 1_B	P_4.4.32
Current consumption Over voltage braking mode (LSx OFF)	I_{OV,LS_OFF}	–	7	10	µA	3)11) Stop Mode or Sleep Mode; T_j < 85°C; **OV_BRK_EN** = 1_B	P_4.4.34
Current consumption in VS for Charge Pump and Bridge Driver	$I_{CP,BD}$	–	30	40	mA	Normal Mode; T_j = -40°C to +150°C; **CPEN** = 1; All HB OFF	P_4.4.35

1) Measured at V_{SINT}.
2) If the load current on V_{CC1} will exceed the configured V_{CC1} active peak threshold, the current consumption will increase by typ. 2.9 mA to ensure optimum dynamic load behavior. See also **Chapter 6**.
3) Not subject to production test, specified by design.
4) Current consumption adders of features defined for Stop Mode also apply for Sleep Mode and vice versa. Wake input signals are stable (i.e. not toggling), cyclic wake/sense & watchdog are OFF (unless otherwise specified).
5) No pull-up or pull-down configuration selected.
6) The specified WKx current consumption adder for wake capability applies regardless how many WK inputs are activated.
7) Additional current will be drawn from V_{SHS} and V_{SINT}.
8) Typical adder of additional high-side switch activation 200 µA.

chanhvinh.com

9) HSx used for cyclic sense, Timerx with 20ms period, 0.1 ms on-time, no load.
In general the current consumption adder for cyclic sense in Stop Mode can be calculated with below equation:
I_{Stop,CS_typ} = 18 µA + ($I_{Stop,HS,25}$ x ton/TPer)
where the 18 uA is the base current consumption of the digital cyclic sense/wake functionality.
10) Also applies to cyclic wake but without adder from HS biasing contribution.
11) Additional current will be drawn from V_{SINT}.

Notes

1. *There is no additional current consumption contribution in Normal Mode due to PWM generators or Timers.*
2. *The quiescent current consumption in Stop Mode and Sleep Mode will increase for V_{SINT} < 9 V.*

chanhvinh.com

5 System Features

This chapter describes the system features and behavior of the TLE9561QX:

- State machine
- Device configuration
- State machine modes and mode transitions
- Wake-up features such as cyclic sense and cyclic wake

5.1 Short State Machine Description

The DC Motor System IC offers six operating modes:

- Init Mode: Power-up of the device and after a soft reset.
- Normal Mode: The main operating mode of the device.
- Stop Mode: The first-level power saving mode with the main voltage regulator VCC1 enabled.
- Sleep Mode: The second-level power saving mode with VCC1 disabled.
- Restart Mode: An intermediate mode after a wake event from Sleep Mode or Fail-Safe Mode or after a failure (e.g. WD failure, VCC1 under voltage reset) to bring the microcontroller into a defined state via a reset.
- Fail-Safe Mode: A safe-state mode after critical failures (e.g. Temperature shutdown) to bring the system into a safe state and to ensure a proper restart of the system.

A special mode, called Software Development Mode, is available during software development or debugging of the system. All above mentioned operating modes can be accessed in this mode. However, the watchdog is still running, but no reset to the microcontroller is applied. Watchdog failures are indicated over INTN pin instead.

However, the watchdog reset signaling can be reactivated again in Software Development Mode. The Watchdog will start always with the Long Open Windows (t_low).

The DC Motor System IC is controlled via a 32-bit SPI interface (refer to **Chapter 13** for detailed information). The configuration as well as the diagnosis is handled via the SPI.

The device offers various supervision features to support functional safety requirements. Refer to **Chapter 12** for more information.

chanhvinh.com

5.2 Device Configuration

Two features on the DC Motor System IC can be configured by hardware:

- The selection of the normal device operation or the Software Development Mode.
- Enabling/disabling the CRC on the SPI interface.

The configurations are done monitoring the follow pins:

- INTN/TEST
- PWM1/CRC

The hardware configuration can be done typically at device power-up, where the device is in Init Mode or (only in case of CRC setting) in Restart Mode.

Software development Mode configuration detail

After the RSTN is released, the INTN/TEST pin is internally pulled HIGH with a weak pull-up resistor. Therefore the default configuration is the device in normal operation.

In order to configure the Software Development Mode, the following conditions have to be fulfilled:

- Init Mode from power-up
- VCC1>Vrtx
- **POR**=1
- RSTN = HIGH

The Software Development Mode is configured using the following scheme:

- Only one external pull-down on INTN/TEST pin followed by an arbitrary SPI command, the device latches the Software Development Mode.
- External pull-up or no pull-down on INTN/TEST pin enable the device in normal operation.
- To enter Software Development Mode, a pull-down resistor to GND might be used.

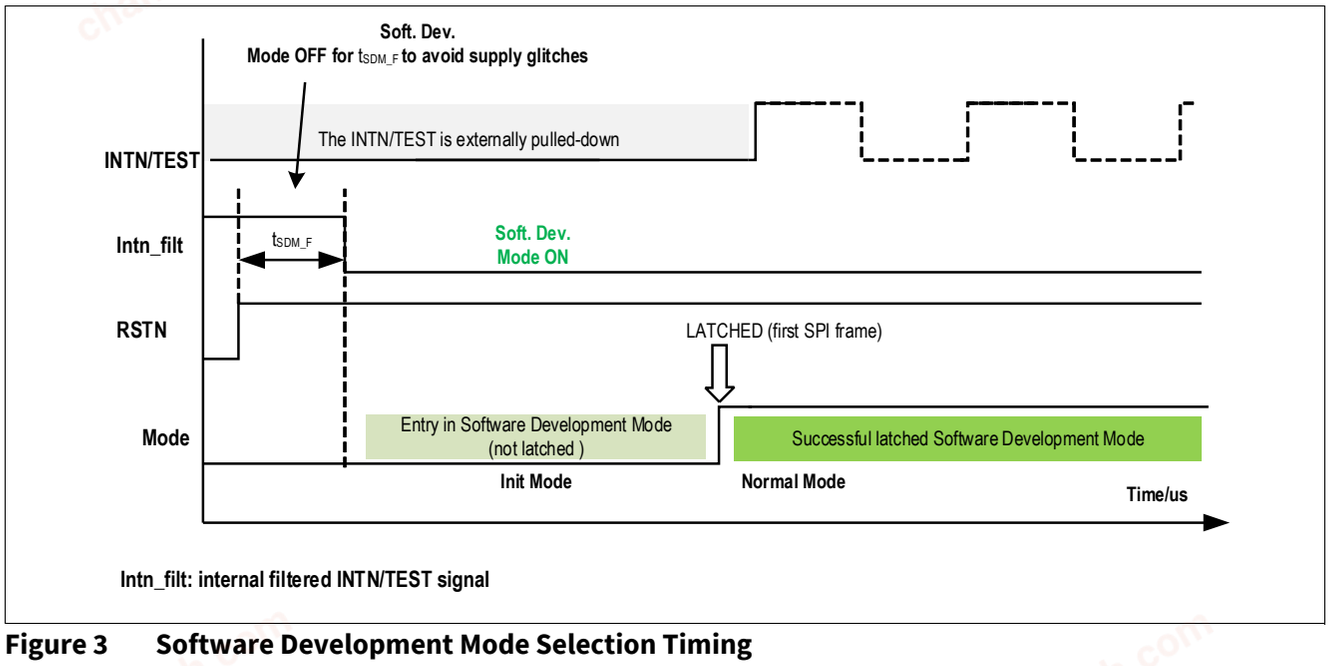


Figure 3 Software Development Mode Selection Timing

Intn_filt is a filtered signal from INTN/TEST, with the filter time t_{SMD_F} (P_11.2.7). Intn_filt starts (at the rising edge if RSNT) wit the value 1.

chanhvinh.com

Note: If during monitoring the INTN/TEST pin for Software Development Mode entry, the device changes the mode without SPI command, the device will not enter/stay in Software Development Mode.

CRC configuration detail

The CRC is configured using the following scheme:

- Pull-down on PWM1/CRC enable the CRC.
- No external components on PWM1/CRC disables the CRC.

In order to configure the CRC, the follow conditions have to be full filled:

- Init Mode (from power-up) or Restart Mode
- VCC1>Vrtx
- **POR**=1
- RSTN = LOW

The configuration selection is done during the reset delay time t_{RD1} with a continuous filter time of t_{CFG_F} and the configuration (depending on the voltage level at PWM1/CRC) is latched at the rising edge of RSTN.

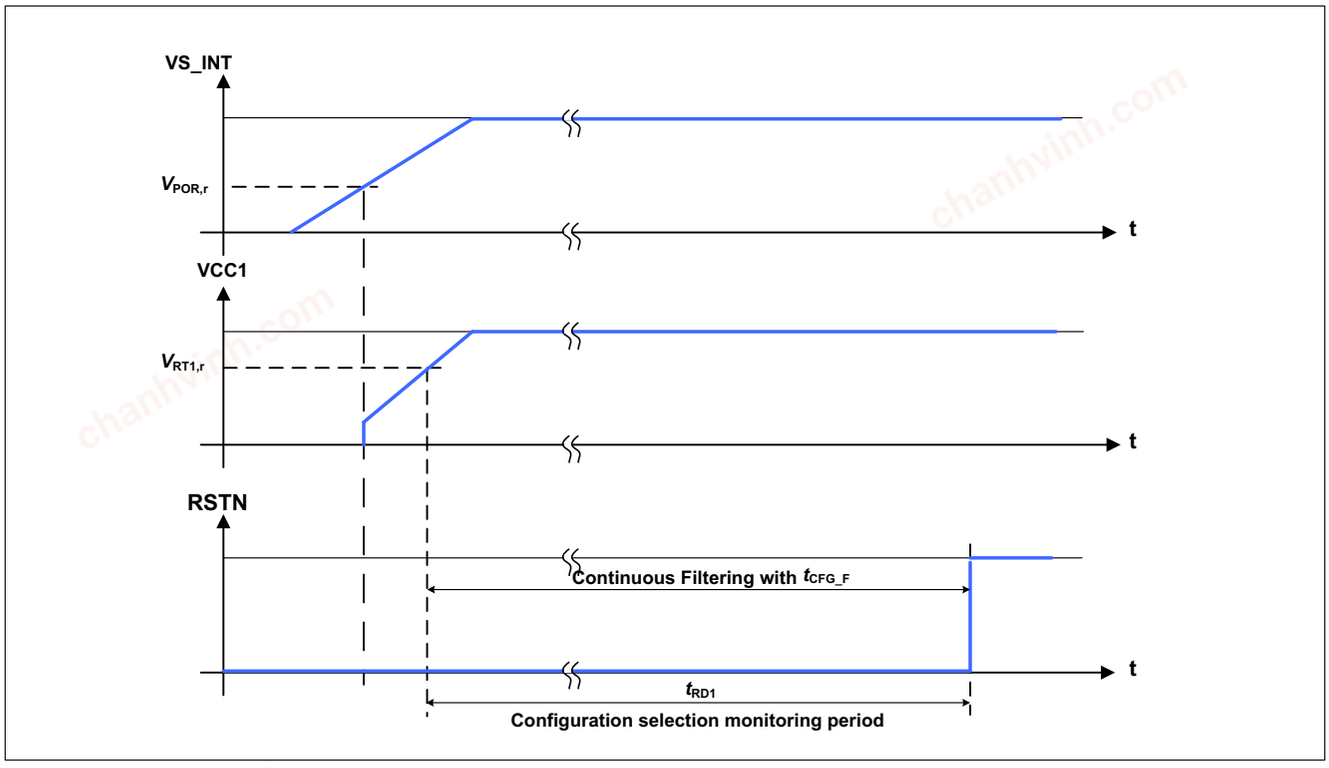


Figure 4 CRC configuration Selection Timing Diagram at the device power-up.

In case of mismatch between CRC setting between the device and µC (**CRC_STAT**), the device can accept two recovery SPI commands (static patterns).

The pattern 67AA AA0E$_H$ (addr + rw_bit = 67 ; data = AAAA ; CRC = 0E) enables the CRC.

The pattern E7AA AAC3$_H$ (addr + rw_bit = E7 ; data = AAAA ; CRC = C3) disables the CRC.

The patterns shall be send only in Normal Mode.

For additional details about the CRC setting and configuration, refer also to **Chapter 13.3.1**.

chanhvinh.com

5.3 Block Description of State Machine

The state machine describes the different states of operation, the device may get into. The following figure shows the state machine flow diagram.

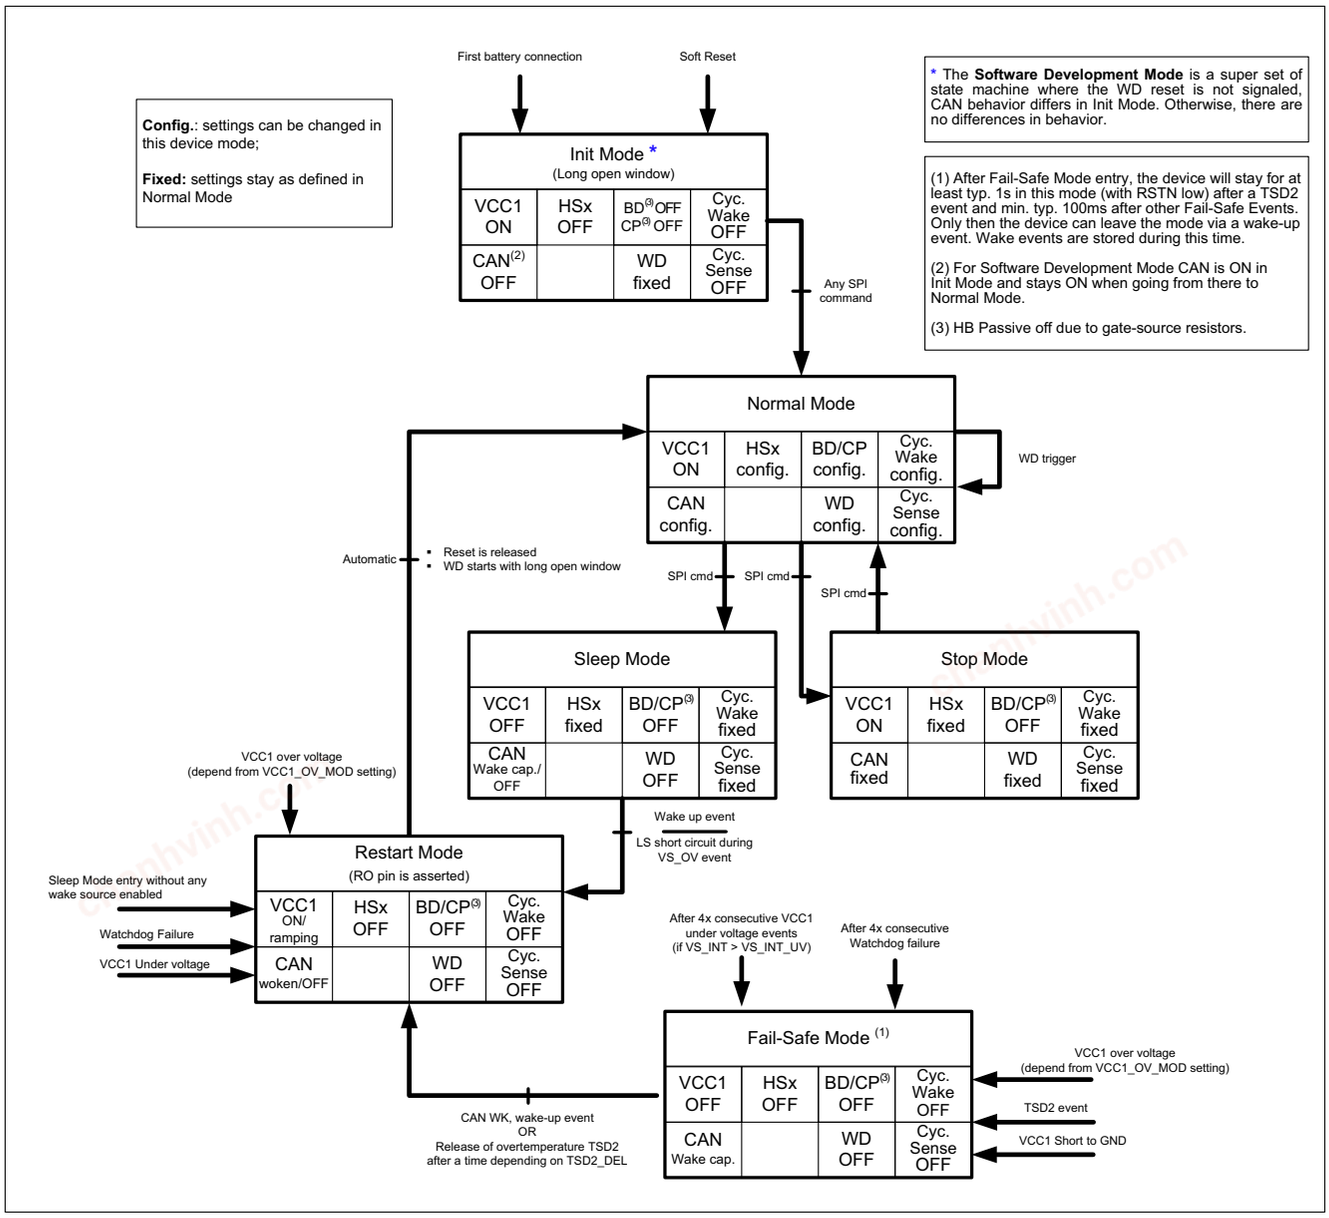


Figure 5 State Diagram showing the operating modes

Description:

- ON /OFF:= Indicate if the module is enabled or disabled either via SPI or from the device itself
- config:= Settings can be changed in this mode
- fixed:= Settings stay as defined in Normal Mode or Init Mode
- active/inactive:= Indicate if the device activates/deactivates one specific feature
- Wake capable:= Transceiver that is capable to detect one wake-up events
- woken:= Transceiver that has detected one wake-up event

chanhvinh.com

5.4 State Machine Modes Description

5.4.1 Init Mode

The device starts up in Init Mode after crossing the power-on reset $V_{POR,r}$ threshold (see also **Chapter 12.3**) and the watchdog will start with a long open window (t_{LW}) after RSTN is released (High level).

In Init Mode, the device waits for the microcontroller to finish its startup and initialization sequence.

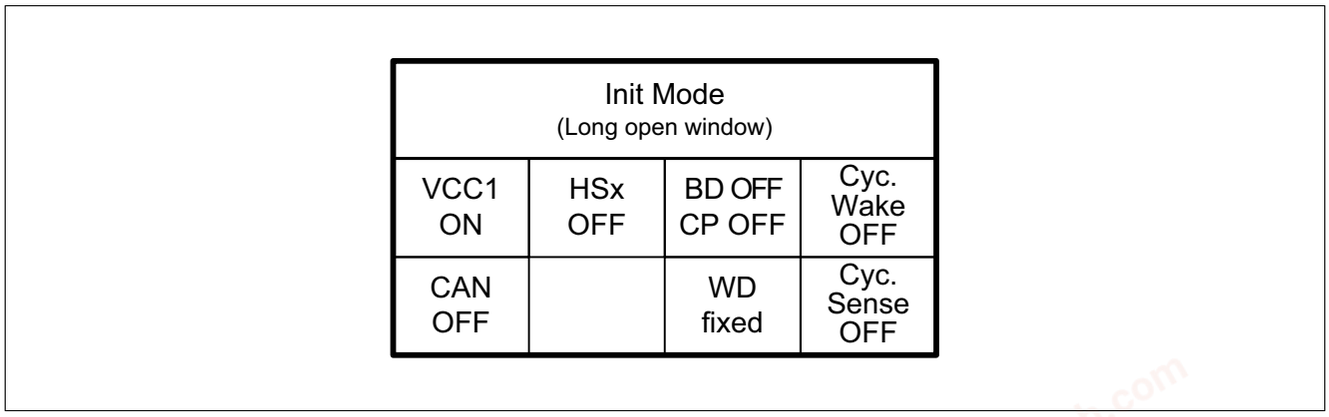


Figure 6 Init Mode

Table 5 Init Mode Settings

Part/Function	Value	Description
VCC1	ON	• The VCC1 is ON
WD	fixed	• Watchdog is fixed and set with a long open window (t_{LW})
HSx	OFF	• All HSx are OFF
BD	OFF	• Bridge Drivers is OFF
CP	OFF	• Charge Pump is OFF
CAN	OFF	• CAN transceiver is OFF[1)]
Cyc Sense	OFF	• Cycle Sense is OFF
Cyc Wake	OFF	• Cycle Wake is OFF

1) Exception: The CAN transceiver is ON during Software Development Mode

5.4.2 Normal Mode

The Normal Mode is the standard operating mode for the device. The VCC1 is active and all features are configurable. Supervision and monitoring features are enabled.

chanhvinh.com

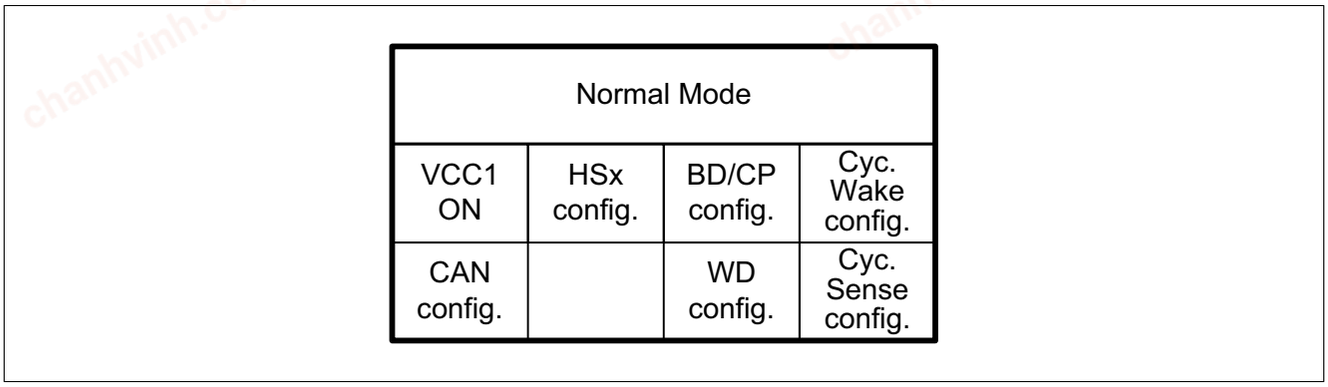


Figure 7 Normal Mode

Table 6 Normal Mode Settings

Part/Function	Value	Description
VCC1	ON	• VCC1 is active
WD	config	• Watchdog may be configured by SPI
HSx	config	• The High Side Switches may be configured and switched ON or OFF by SPI
BD/CP	config	• The Bridge Drivers and Charge Pump may be configured and switched ON or OFF by SPI
CAN	config	• CAN may be configurable and switched ON or OFF by SPI
Cyc. Sense	config	• Cyclic sense may be configured with the HSx, WKx inputs and Timer1 or Timer2 or SYNC (WK4)
Cyc. Wake	config	• Cyclic wake can be configured with the Timer1 or Timer 2

5.4.3 Stop Mode

The Stop Mode is the first level technique to reduce the overall current consumption by setting the voltage regulator VCC1 into a low-power mode.

Note: All settings have to be done before entering Stop Mode.

In Stop Mode any kind of SPI WRITE commands are ignored and the **SPI_FAIL** bit is set, except for changing to Normal Mode, triggering a device Soft Reset, refreshing the watchdog as well as for reading and clearing the SPI status registers.

*Note: A wake-up event on CAN, WKx, Low-Side short circuit detection in parking braking mode or overvoltage brake detection, could generate an interrupt on pin INTN (based on INTN masking configuration; refer to **Chapter 10**) however, no change of the device mode will occur.*

chanhvinh.com

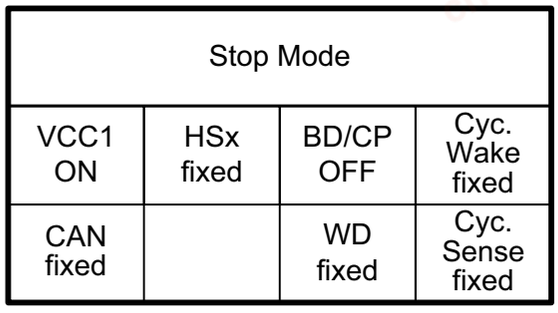


Figure 8 Stop Mode

Table 7 Stop Mode Settings

Part/Function	Value	Description
VCC1	ON	• VCC1 is ON
WD	fixed	• Watchdog is fixed as configured in Normal Mode
HSx	fixed	• HSx are fixed as configured in Normal Mode
BD/CP	OFF	• The Bridge Drivers and Charge Pump are OFF
CAN	fixed	• CAN fixed as configured in Normal Mode
Cyc. Sense	fixed	• Cyclic sense fixed as configured in Normal Mode
Cyc. Wake	fixed	• Cyclic wake is fixed as configured in Normal Mode

*Note: In Stop Mode, it is possible to activate the Low-Side of Bridge Drivers (e.g. in case of parking braking mode or overvoltage brake detection). Refer to **Chapter 12.11** for additional details.*

5.4.4 Sleep Mode

The Sleep Mode is the second level technique to reduce the overall current consumption to a minimum needed to react on wake-up events or for the device to perform autonomous actions (e.g. cyclic sense).

Note: All settings have to be done before entering Sleep Mode.

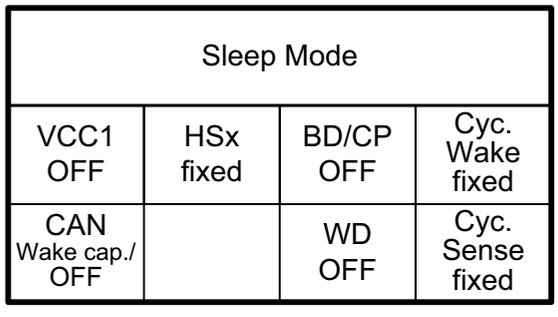


Figure 9 Sleep Mode

chanhvinh.com

Table 8 Sleep Mode Settings

Part/Function	Value	Description
VCC1	OFF	• VCC1 is OFF
WD	OFF	• Watchdog is OFF
HSx	fixed	• HSx are fixed as configured in Normal Mode
BD/CP	OFF	• The Bridge Drivers and Charge Pump are OFF
CAN	Wake Cap/ OFF	• CAN fixed as configured (Wake Capable or OFF)
Cyc. Sense	fixed	• Cyclic sense fixed as configured in Normal Mode
Cyc. Wake	fixed	• Cyclic wake is fixed

*Note: In Sleep Mode, it is possible to activate the Low-Side's of Bridge Drivers (e.g. in case of parking braking mode or overvoltage braking). Refer to **Chapter 12.11** for additional details.*

5.4.5 Restart Mode

The Restart Mode is a transition state where the RSNT pin is asserted.

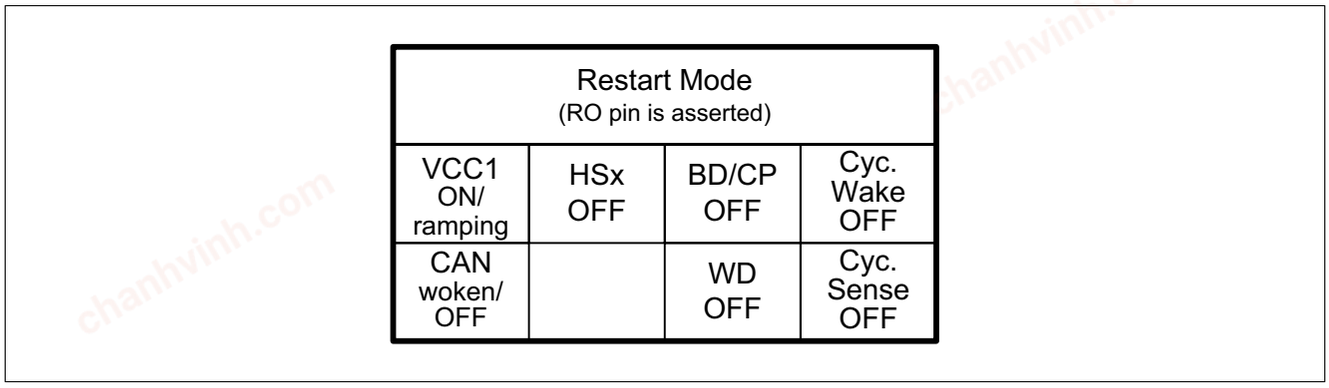


Figure 10 Restart Mode

Table 9 Restart Mode Settings

Part/Function	Value	Description
VCC1	ON/ ramping	• VCC1 is ON or ramping up
WD	OFF	• WD will be disabled if it was activated before
HSx	OFF	• HSx will be disabled if it was activated before
BD/CP	OFF	• The Bridge Drivers and Charge Pump are OFF
CAN	Woken/ wake capable/ OFF	• CAN may woken (in case of wake-up event on the Bus) or wake capable or OFF
Cyc. Sense	OFF	• Cyclic sense will be disabled if it was activated before
Cyc. Wake	OFF	• Cyclic wake will be disabled if it was activated before

chanhvinh.com

5.4.6 Fail-Safe Mode

The purpose of this mode is to bring the system in a safe status after a failure condition by turning OFF the VCC1 supply and powering off the microcontroller. After a wake event the system is then able to restart again.

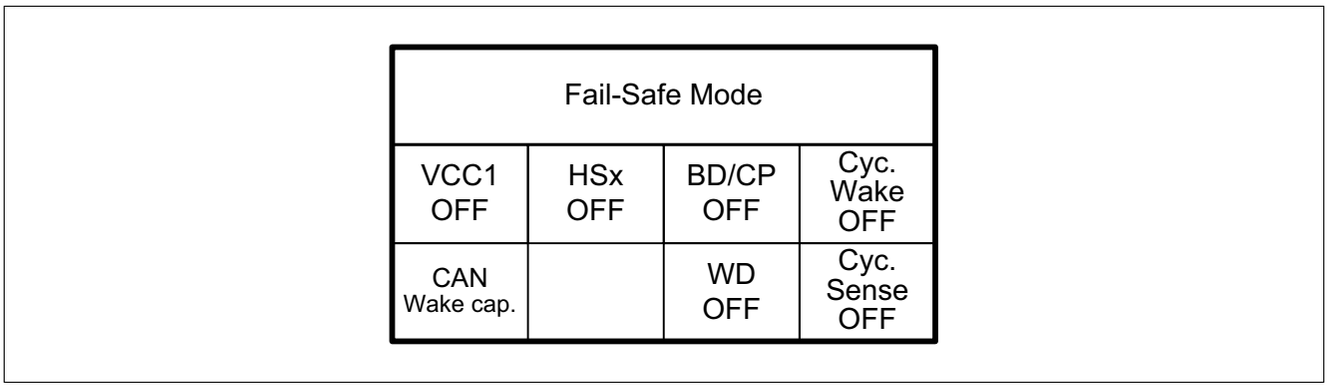


Figure 11 Fail-Safe Mode

Table 10 Fail-Safe Mode Settings

Part/Function	Value	Description
VCC1	OFF	• VCC1 is switched OFF
WD	OFF	• WD is switched OFF
HSx	OFF	• HSx are switched OFF
BD/CP	OFF	• The Bridge Drivers and Charge Pump are OFF
CAN	Wake Cap	• CAN is forced to be Wake capable
Cyc. Sense	OFF	• Cyclic sense is switched OFF
Cyc. Wake	OFF	• Cyclic wake is switched OFF

Note

- In Fail-Safe Mode, the default wake sources CAN and WKx (if configured as wake inputs) are activated automatically and all wake event bits will be cleared.
- In case that WK2 is set as Fail Safe Output (FO), the WK2/FO is automatically activated.
- The Fail-Safe Mode will be maintained until a wake event on the default wake sources occurs. To avoid any fast toggling behavior a filter time of typ. 100ms ($t_{FS,min}$) is implemented. Wake events during this time will be stored and will automatically lead to entering Restart Mode after the filter time.
  In case of an VCC1 overtemperature shutdown (TSD2) the Restart Mode will be reached automatically after a filter time of typ. 1s (t_{TSD2}) without the need of a wake event once the device temperature has fallen below the TSD2 threshold.
- The parking braking mode is automatically disabled in Fail-Safe Mode.

5.4.7 Software Development Mode

The Software Development Mode is a dedicated device configuration especially useful for software development.

Compared to the default device user mode operation, this mode is a super set of the state machine. The device will start also in Init Mode and it is possible to use all the modes and functions with following differences:

chanhvinh.com

- Restart Mode or Fail-Safe Mode (depending on the configuration) is not reached due to watchdog failure but the other reasons to enter these modes are still valid.
- CAN default value in Init Mode and entering Normal Mode from Init Mode is ON instead of OFF.

Table 11 Normal Mode Settings (Software Development Mode active)

Part/Function	Default State	Description
VCC1	ON	• VCC1 is active
WD	ON	• WD is on, but will not trigger transition to Fail-Safe Mode or Restart Mode
HSx	OFF	• The High Side Switches may be configured and switched ON or OFF by SPI
BD/CP	OFF	• The Bridge Drivers and Charge Pump may be configured and switched ON or OFF by SPI
CAN	ON	• CAN may be configurable and switched ON or OFF by SPI
Cyc. Sense	OFF	• Can be configured
Cyc. Wake	OFF	• Can be configured

Software Development Mode entry

For timing and configuration details, refer to **Chapter 5.2**.

Note

- After Init Mode, the pull-up is released as the INTN/TEST pin acts as output then to drive the INTN signal.
- If the device enters Fail-Safe Mode due to VCC1 short circuit to GND during the Init Mode, the Software Development Mode will not be entered and can only be reached at the next power-up of the device after the VCC1 short circuit is removed.
- The absolute maximum ratings of the pin INTN must be observed. To increase the robustness of this pin during debugging or programming a series resistor between INTN and the connector can be added.

Watchdog in Software Development Mode

The Watchdog is enabled in Software Development Mode as default state. One INTN event is generated due to wrong watchdog trigger.

It is possible to deactivate the integrated Watchdog module using the **WD_SDM_DISABLE** bit. After disabling the Watchdog, no INTN events are generated and the **WD_FAIL** bit will also not be set anymore in case of a trigger failure. It is also possible only to mask / unmask the INTN event of the WD in Software Development Mode by using the bit **WD_SDM**. In case of unmasking, a WD trigger fail will only lead to **WD_FAIL** bit set.

5.5 Transition Between States

This chapter describes the transition between the modes triggered by power-up, SPI commands or wake-up events.

5.5.1 Transition into Init Mode

The device goes into Init Mode in case of a power-up or after sending a soft-reset in Normal or Stop Mode.

Prerequisites:

- Power OFF

chanhvinh.com

System Features

- Device in Normal Mode or Stop Mode with follow conditions:
  - VSINT > VPOR,r
  - RSTN High

Triggering Events:

- A Soft Reset command (**MODE** = '11'). All SPI registers will be changed to their respective Soft Reset values.

Note

- In case of Soft Reset command, a hardware RSTN event can be generated depending on the configuration. An external Reset will be generated in case of **SOFT_RESET_RO** = 0_B . In case of **SOFT_RESET_RO** = 1_B, no RSTN hardware event is generated in case of Soft Reset.
- At power-up, the SPI bit **VCC1_UV** will not be set as long as VCC1 is below the VRT,x threshold and if VSINT is below the VSINT,UV threshold. The RSTN pin will be kept LOW as long as VCC1 is below the selected VRT1,r threshold. The reset delay counter will start after VRT1,r threshold is reached. After the first threshold crossing of VCC1 > $V_{RT1,R}$ and RSTN transition from low to high, all subsequent undervoltage events will lead to Restart Mode.
- Wake events are ignored during Init Mode and will be lost.
- The bit **VSINT_UV** will only be updated in Init Mode once RSTN resumes a high level.

5.5.2 Init Mode -> Normal Mode

This transition moves the device in the mode where all configurations are accessable via SPI command.

Prerequisites:

- VSINT > VPOR,r
- Init Mode
- RSTN High

Triggering Events:

- Any valid SPI command (from SPI protocol point of view) will bring the device to Normal Mode (i.e. any register can be written, cleared and read) during the long open window where the watchdog has to be triggered (refer also **Chapter 13.2**). The CRC is not taken into account for this transition.
- For example:
  - A SPI Sleep Mode command will still bring the device into Normal Mode. However, as this is an invalid state transition, the SPI bit **SPI_FAIL** is set.
  - Any invalid SPI command (from content point of view) will still bring the device into Normal Mode. The SPI bit **SPI_FAIL** is set.

Note

- It is recommended to use the first SPI command to trigger and to configure the watchdog.

5.5.3 Normal Mode -> Stop Mode

This transition is intended as first measure to reduce the current consumption. All the device features needed in Stop Mode shall be configured in Normal Mode.

Prerequisites:

- VCC1>Vrtx
- Device in Normal Mode

Triggering Events:

chanhvinh.com

System Features

- State transition is only initiated by specific SPI command.

Note

- An interrupt is triggered on the pin INTN when Stop Mode is entered and not all wake source signalization flags were cleared.
- If high-side switches are kept enabled during Stop Mode, then the device current consumption will increase.
- It is not possible to switch directly from Stop Mode to Sleep Mode. Doing so will also set the **SPI_FAIL** flag and will bring the device into Restart Mode.

5.5.4 Normal Mode -> Sleep Mode

This transition is intended to reduce as much as possible the current consumption keeping active only wake-up sources. All wake-up sources configurations shall be done in Normal Mode.

Prerequisites:

- VCC1>Vrtx
- Device in Normal Mode
- All wake source signalization flags were cleared (including the LSxDSOV_BRK bit)
- At least one wake-up source activated

Triggering Events:

- State transition is only initiated by specific SPI command.

Note

- If the HSx outputs are kept enabled during Sleep Mode, then the device current consumption will increase (see **Chapter 4.4**).
- The Cyclic Sense function will not work properly anymore in case of a failure event (e.g. overcurrent, over temperature, reset) because the configured HSx and Timers will be disabled.
- If **VCC1_UV** or **VCC1_OV** (with Config to go to Restart Mode) occurs at the border of the Sleep Mode entry: The device will go immeditaley into Restart Mode.
- If **TSD2** or **VCC1_OV** (with Config to go to Fail-Safe Mode) occurs at the border of the Sleep Mode entry: The device will enter immediately Fail-Safe Mode.
- As soon as the Sleep Mode command is sent, the Reset will go low.
- It is not possible to switch all wake sources off in Sleep Mode. Doing so will set the **SPI_FAIL** flag and will bring the device into Restart Mode.

5.5.5 Stop Mode -> Normal Mode

This transition is intented to set the device in Normal Mode where all the device integrated features are availbale and configurable.

Prerequisites:

- VCC1>Vrtx
- Device in Stop Mode

Triggering Events:

- State transition is only initiated by SPI command.

chanhvinh.com



Note

- None

5.5.6 Sleep Mode -> Restart Mode

This transition is the consequence of a detection of wake-up event by the device. This transition is used to ramp up VCC1 after a wake in a defined way.

Prerequisites:

- Device in Sleep Mode
- At least one wake-up source active

Triggering Events:

- A wake-up event on CAN, WKx, Cyclic Sense, Cyclic Wake.
- Bridge driver low-side short circuit detected during overvoltage braking or in parking braking mode.

Note

- It is not possible to switch off all wake sources in Sleep Mode. Doing so will set the **SPI_FAIL** flag and will bring the device into Restart Mode.
- RSTN is pulled low during Restart Mode.
- The Restart Mode entry is signalled in the SPI register **DEV_STAT**.
- The wake-up events are flaged in **WK_STAT** register or **DSOV** register.

5.5.7 Restart Mode -> Normal Mode

From Restart Mode, the device goes automatically to Normal Mode.

Prerequisites:

- Device in Sleep Mode or Fail-Safe Mode

Triggering Events:

- Automatic
- Reset is released

Note

- The watchdog timer will start with a long open window starting from the moment of the rising edge of RSTN and the watchdog period setting in the register **WD_CTRL** will be changed to the respective default value.

5.5.8 Fail-Safe Mode -> Restart Mode

This transition is similar to device from Sleep Mode to Restart Mode and consequence of a detection of wake-up event by the device. This transition is used to ramp up VCC1 after a wake in a defined way.

Prerequisites:

- Device in Fail-Safe Mode

Triggering Events:

- A wake-up event on CAN, WKx, TSD2 (released over temperature TDS2 after t_{TSD2}).
- Bridge Driver Low Side short circuit detected during VS/VSINT overvoltage braking mode or in parking braking mode.

chanhvinh.com

*Note: After leaving Fail-Safe Mode, the **FAILURE** bit in **DEV_STAT** register is set and needs to be cleared in order to release the FO pin.*

5.6 Reaction on Detected Faults

The device can react at some critical events either signalling the specific failure or changing the device mode. The chapter describes actions taken from the device in case of critical events in particular related the device mode change.

5.6.1 Stay in Current State

The following failures will not trigger any device mode changes, but will indicate the failures by an INTN event (depending from the Interrupt Masking) and in dedicated status registers:

- Failures on CAN
- Failures in Bridge Driver and/or Charge Pump
- Failures on HSx

5.6.2 Transition into Restart Mode

The Restart Mode can be entered in case of failure as shown in following figure.

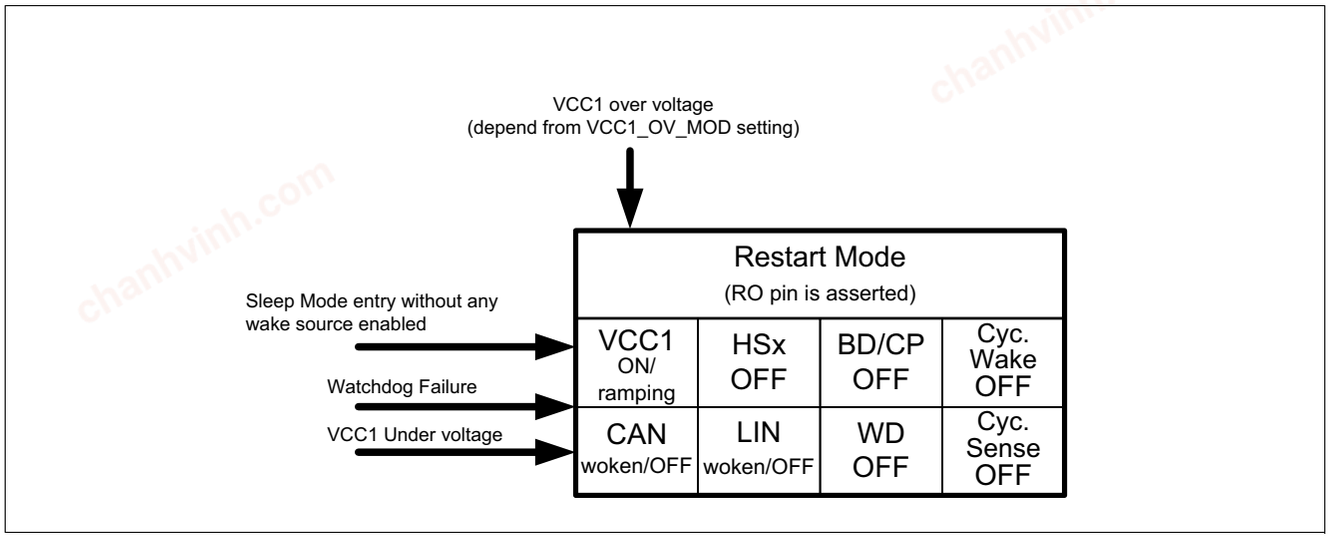


Figure 12 Move into Restart Mode

Prerequisites

- In case of wake-up event from Sleep Mode or Fail Safe Mode
- In case of Normal Mode
- In case of Stop Mode

Trigger Events

- VCC1 Undervoltage in case of Normal Mode or Stop Mode.
- Watchdog trigger failure in case of Normal Mode or Stop Mode.
- VCC1 Overvoltage (based on **VCC1_OV_MOD**) in case of Normal Mode or Stop Mode.
- Sleep Mode entry without any wake-up sources enabled in Normal Mode or Stop Mode.

chanhvinh.com

System Features

Note

- None

chanhvinh.com

5.6.3 Transition into Fail-Safe Mode

The Fail-Safe Mode can be entered in case of critical event as shown in the following figure.

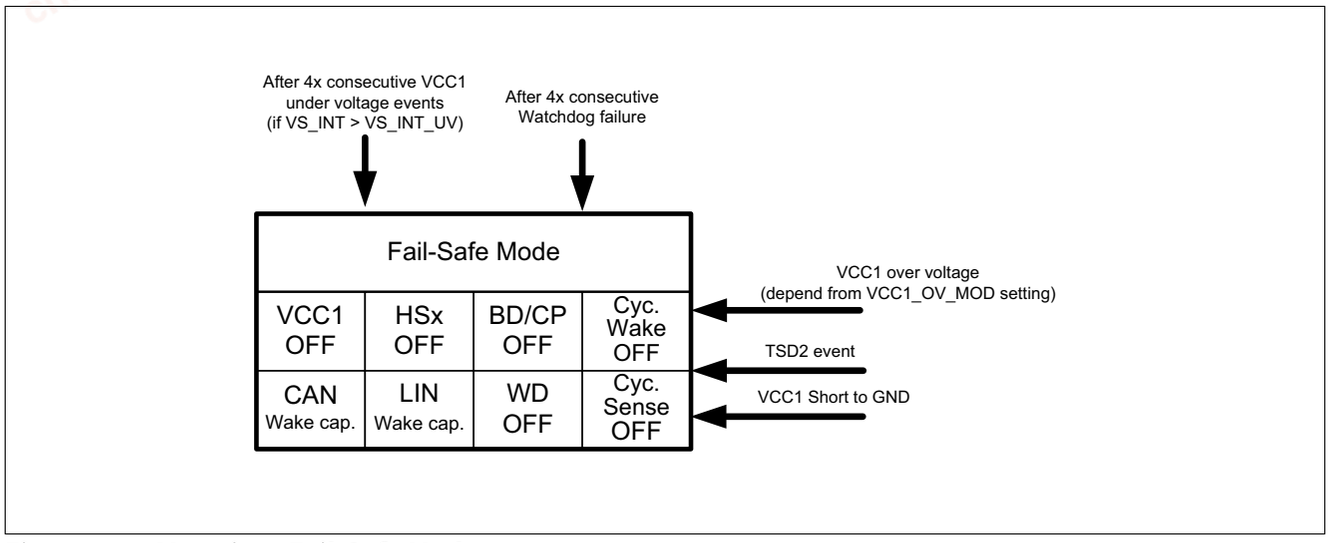


Figure 13 Move into Fail-Safe Mode

Prerequisites:

- Critical events on VCC1
- Watchdog trigger failures

Trigger Events:

- Device thermal shutdown (TSD2) (see also **Chapter 12.10.3**).
- VCC1 is shorted to GND (see also **Chapter 12.8**).
- VCC1 over voltage (based on **VCC1_OV_MOD**).
- 4 consecutive Watchdog trigger failure.
- 4 consecutive VCC1 under voltage events.

Note

- The FO/WK2 will be automatically activated if it was before configured as Fail Safe Output (FO).

5.7 Wake Features

Following wake sources are implemented in the device:

- Static Sense: WKx inputs are permanently active as wake sources.
- Cyclic Sense: WKx inputs only active during on-time of cyclic sense period. Internal timers are activating HSx during on-time for sensing the WKx inputs.
- Cyclic Wake: wake controlled by internal timers, wake inputs are not used for cyclic wake.
- CAN wake: Wake-up via Bus pattern (refer to **Chapter 8.2.4**).

Note: Differences of 'cyclic sense' and 'cyclic wake':
In both cases a timer is active. With 'cyclic sense' one of the high-side drivers is switched on periodically and supplies some external circuits connected to the WK inputs. For the design, this means that the WK input states are only sampled at the end of the selected HS on-phase which is set by the corresponding SPI settings for GPIO HS and the timer. 'Cyclic wake' means that the timer is a wake source and thus generates periodic interrupts as long as it is enabled.

chanhvinh.com

5.7.1 Cyclic Sense

The cyclic sense feature is intended to reduce the quiescent current of the device and the application.
In the cyclic sense configuration, one high-side driver is switched on periodically controlled by **TIMER_CTRL** or WK4/SYNC pin. One high-side driver supplies external circuitries e.g. switches and/or resistor arrays, which are connected to one wake input WKx (see **Figure 14**). Any edge change of the WKx input signal during the on-time of the cyclic sense period causes a wake event. Depending on the device mode, either the INTN is pulled low (Normal Mode and Stop Mode) or the device is woken enabling the VCC1 (after Sleep Mode).

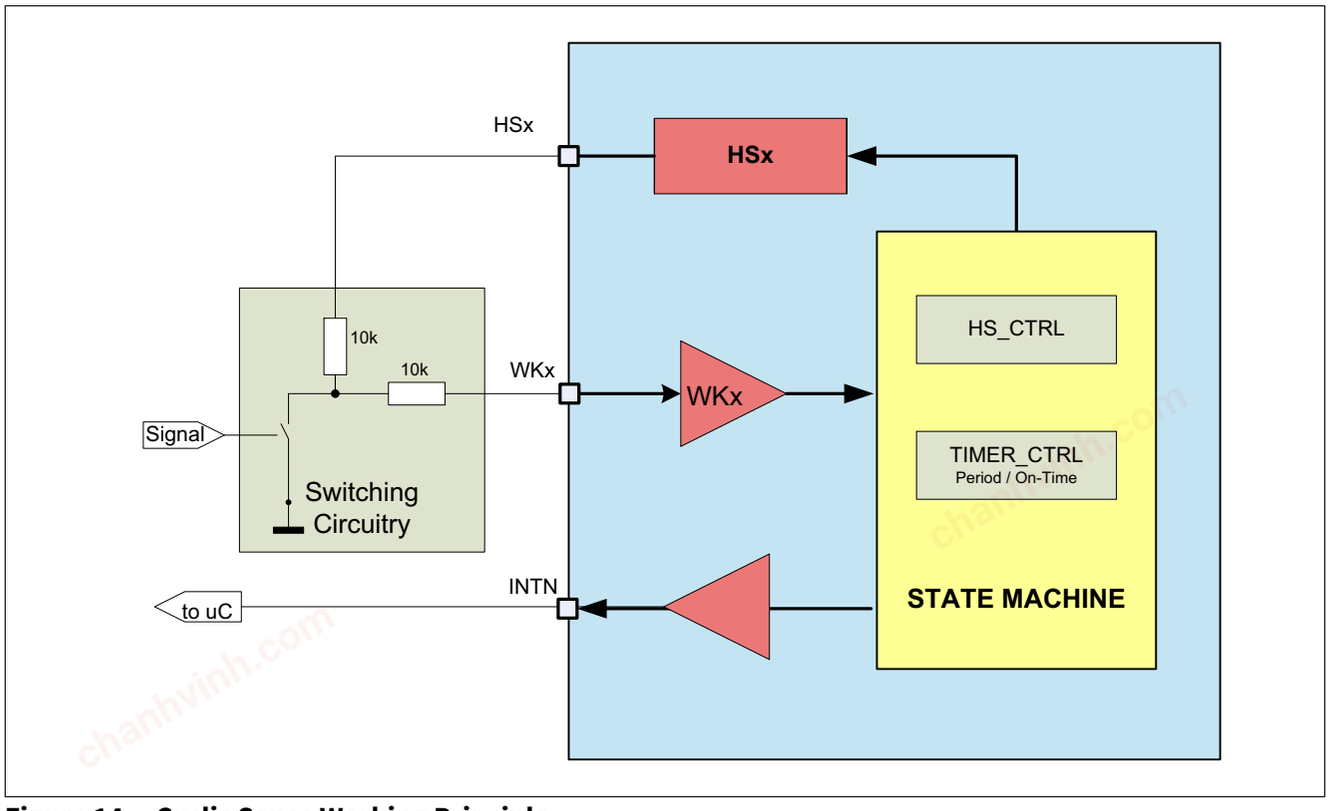


Figure 14 Cyclic Sense Working Principle

5.7.1.1 Configuration and Operation of Cyclic Sense

The correct sequence to configure the cyclic sense is shown in **Figure 15**. All the configurations have to be performed before the on-time is set in the **TIMER_CTRL** registers. The settings “OFF / LOW” and “OFF / HIGH” define the voltage level of the respective HS driver before the start of the cyclic sense. The intention of this selection is to avoid an unintentional wake due to a voltage level change at the start of the cyclic sense.

Cyclic Sense will start as soon as the respective on-time has been selected independently from the assignment of the HS and filter configuration. The correct configuration sequence is as follows:

- Configure the initial level.
- Mapping of a Timer to the respective HSx outputs.
- Configuring the respective filter timing and WK pins.
- Configuring the timer period and on-time.

chanhvinh.com

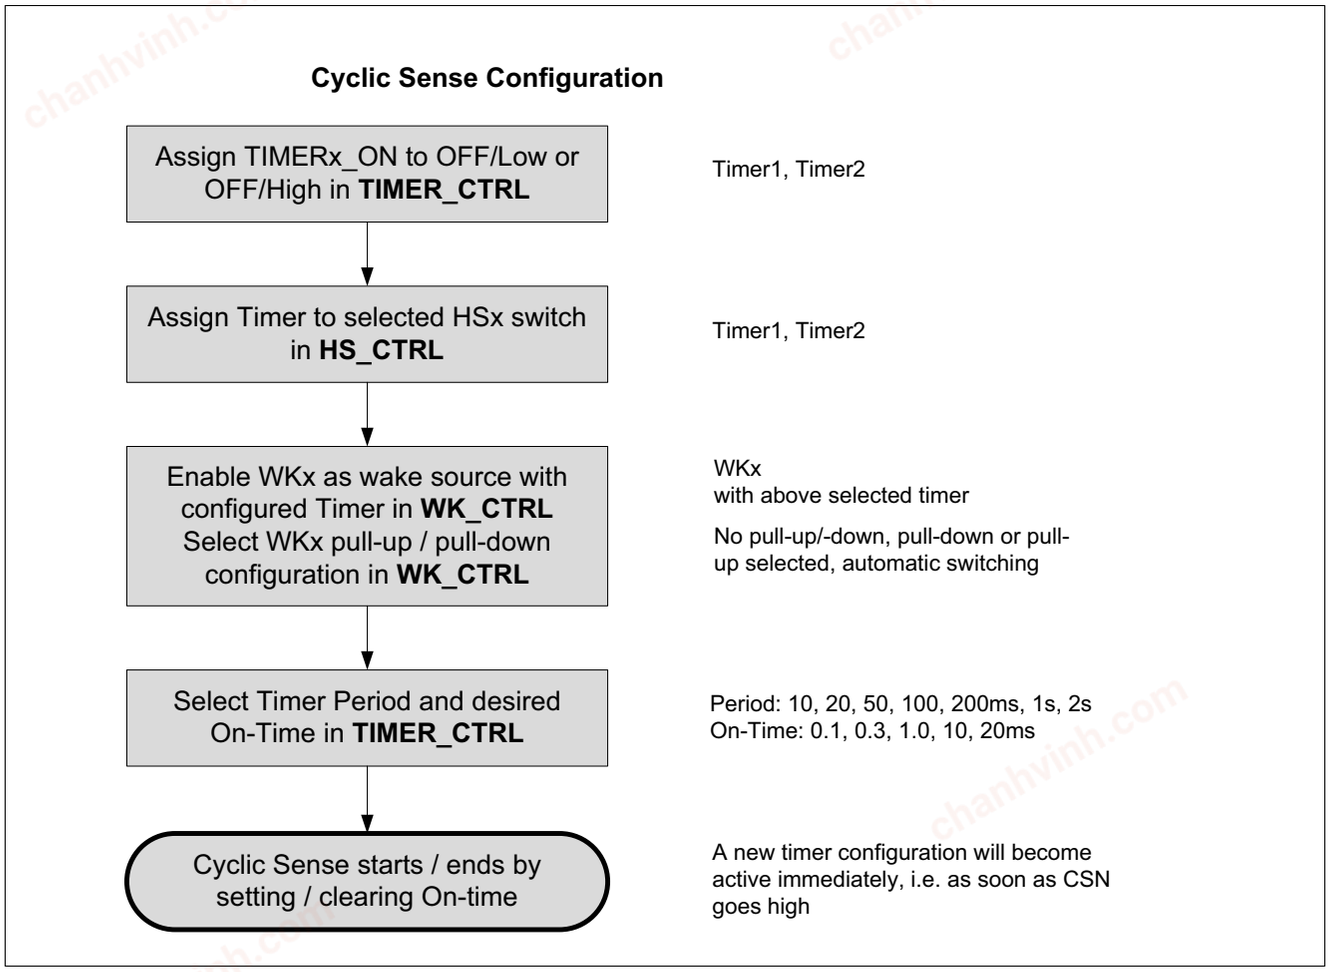


Figure 15 Cyclic Sense: Configuration and Sequence

chanhvinh.com

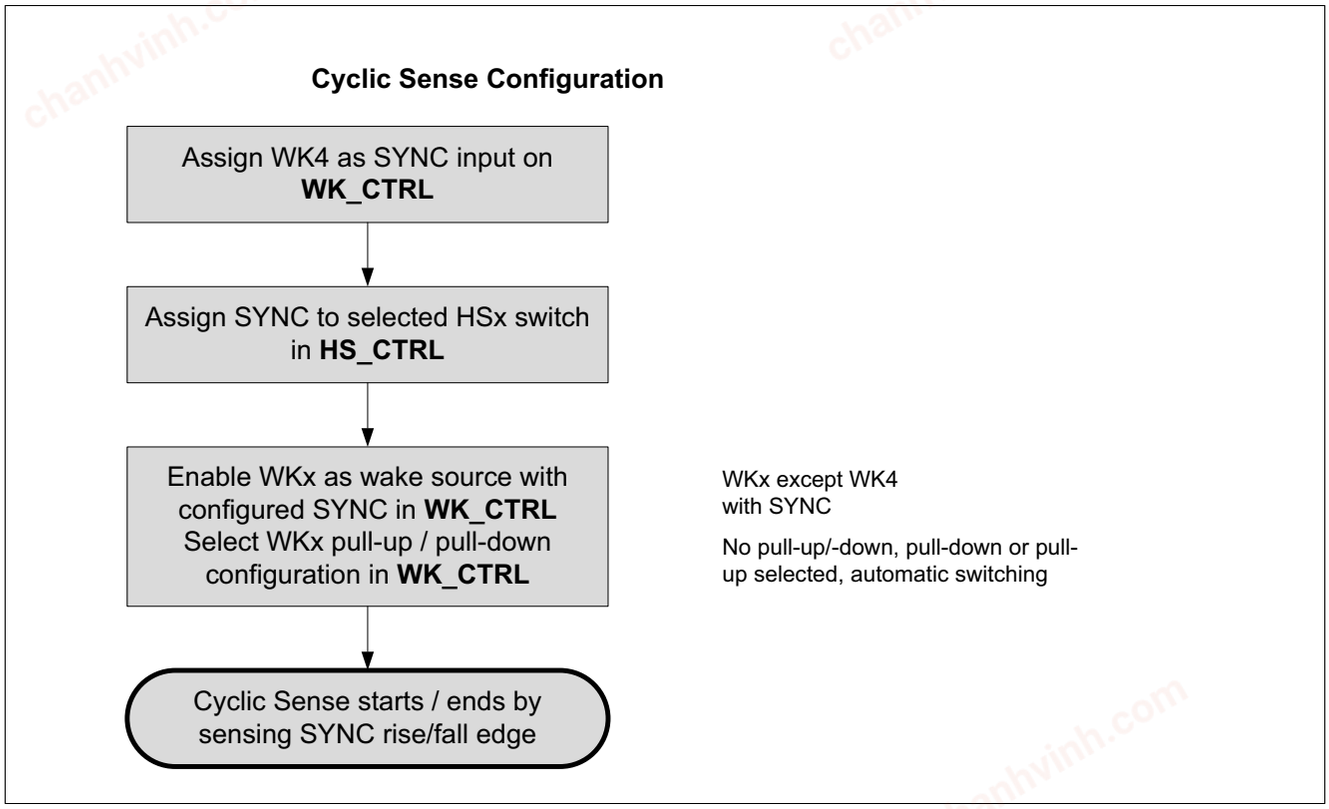


Figure 16 Cyclic Sense: Configuration and Sequence in case of SYNC usage

Note

- All configurations of period and on-time can be selected. However, recommended on-times for cyclic sense are 0.1ms, 0.3ms and 1ms for quiescent current saving reasons. The **SPI_FAIL** will be set if the on-time is longer than the period.
- If the sequence is not ensured before entering Sleep Mode, then the cyclic sense function might not work properly, e.g. an interrupt could be missed or an unintentional interrupt could be triggered. However, if cyclic sense is the only wake source and it is not configured properly, then Restart Mode will be entered immediately because no valid wake source was set.
- During the HSx on phase in cyclic-sensing, the WKx level is sampled only once (one sample point). In case, a level change will appear during HSx on phase, but before the sampling, as the sampling will happen at the end of the on time, the level change will not be detected and has to wait for the next sensing-cycle.

A wake event caused by cyclic-sensing will also set the corresponding bit WKx_WU.

During Cyclic Sense, **WK_LVL_STAT** is updated only with the sampled voltage levels of the WKx pin in Normal Mode or Stop Mode.

The functionality of the sampling and different scenarios are depicted in **Figure 17** to **Figure 19**. The behavior in Stop Mode and Sleep Mode is identical except that in Normal Mode and Stop Mode INTN will be triggered to signal a change of WKx input level and in Sleep Mode, VCC1 will power-up instead. A wake event will be triggered regardless if the bit WKx_WU is already set.

chanhvinh.com

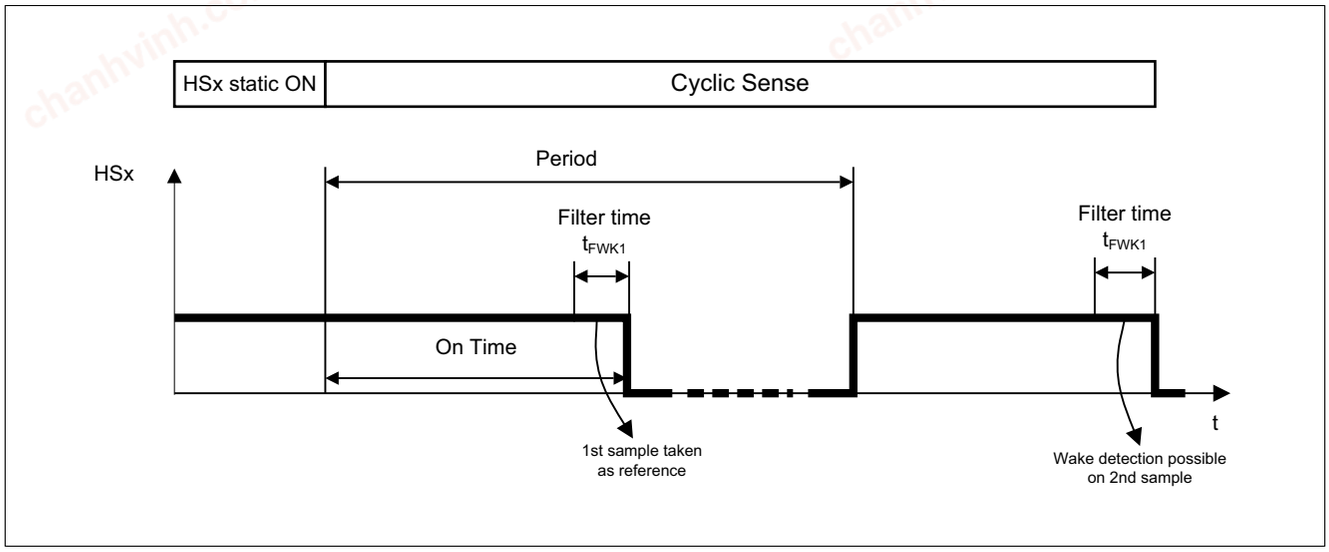


Figure 17 Cyclic Sense Timing

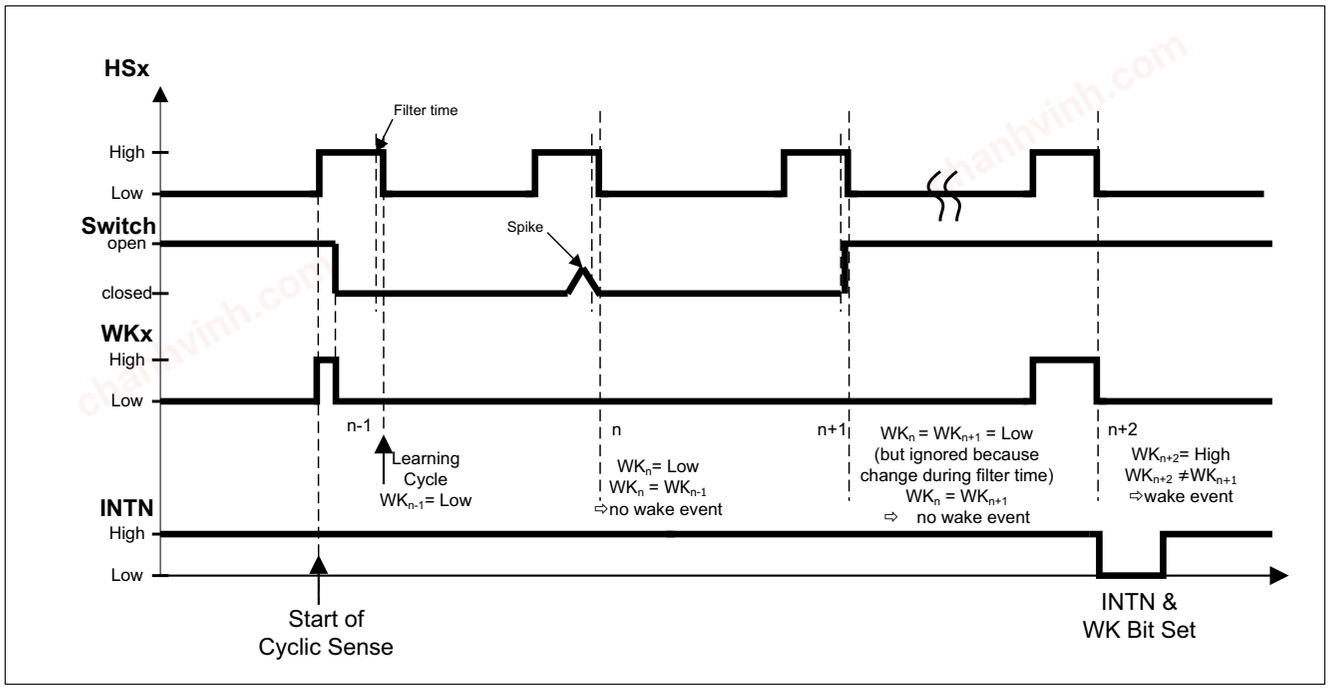


Figure 18 Cyclic Sense Example Timing for Stop Mode, HSx starts LOW, GND based WKx input

chanhvinh.com

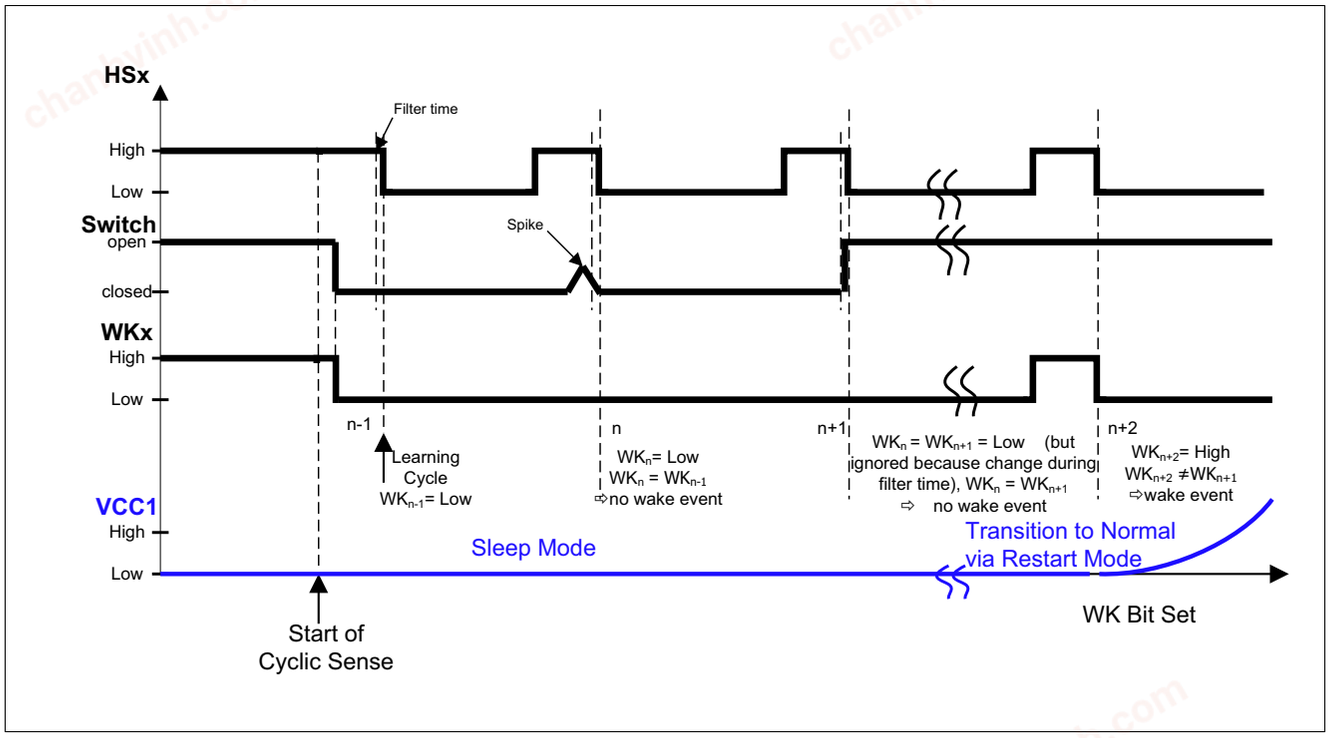


Figure 19 Cyclic Sense Example Timing for Sleep Mode, HSx starts with ON, GND based WKx input

The cyclic sense function will be disabled in case of following conditions:

- in case Fail-Safe Mode is entered, the HSx switch will be disabled and the WKx pin will be changed to static sensing. An unintended wake-up event could be triggered when the WKx input is changed to static sensing.
- In Normal Mode, Stop Mode, or Sleep Mode in case of an overcurrent, or overtemperature, or under- or overvoltage event, the respective HS switch will be disabled.

5.7.1.2 Cyclic Sense in Low-power Mode

If cyclic sense is intended for Stop Mode or Sleep Mode, it is necessary to activate cyclic sense in Normal Mode before going to the low-power mode. A wake event due to cyclic sense will set the bit WKx_WU. In Stop Mode a wake event will trigger an interrupt, in Sleep Mode the wake event will send the device via Restart Mode to Normal Mode.

Before returning to Sleep Mode, the wake status registers **WK_STAT** and **DSOV** must be cleared. Trying to go to Sleep Mode with uncleared wake flags will lead to a direct wake-up from Sleep Mode by going via Restart Mode to Normal Mode and triggering of RSTN.

5.7.2 Cyclic Wake

For the cyclic wake feature one timer is configured as internal wake-up source and will periodically trigger an interrupt on INTN in Normal Mode and Stop Mode. During Sleep Mode, the timer triggers and wakes up the device again. The device enters via Restart Mode the Normal Mode.

The correct sequence to configure the cyclic wake is shown in **Figure 20**. The sequence is as follows:

chanhvinh.com

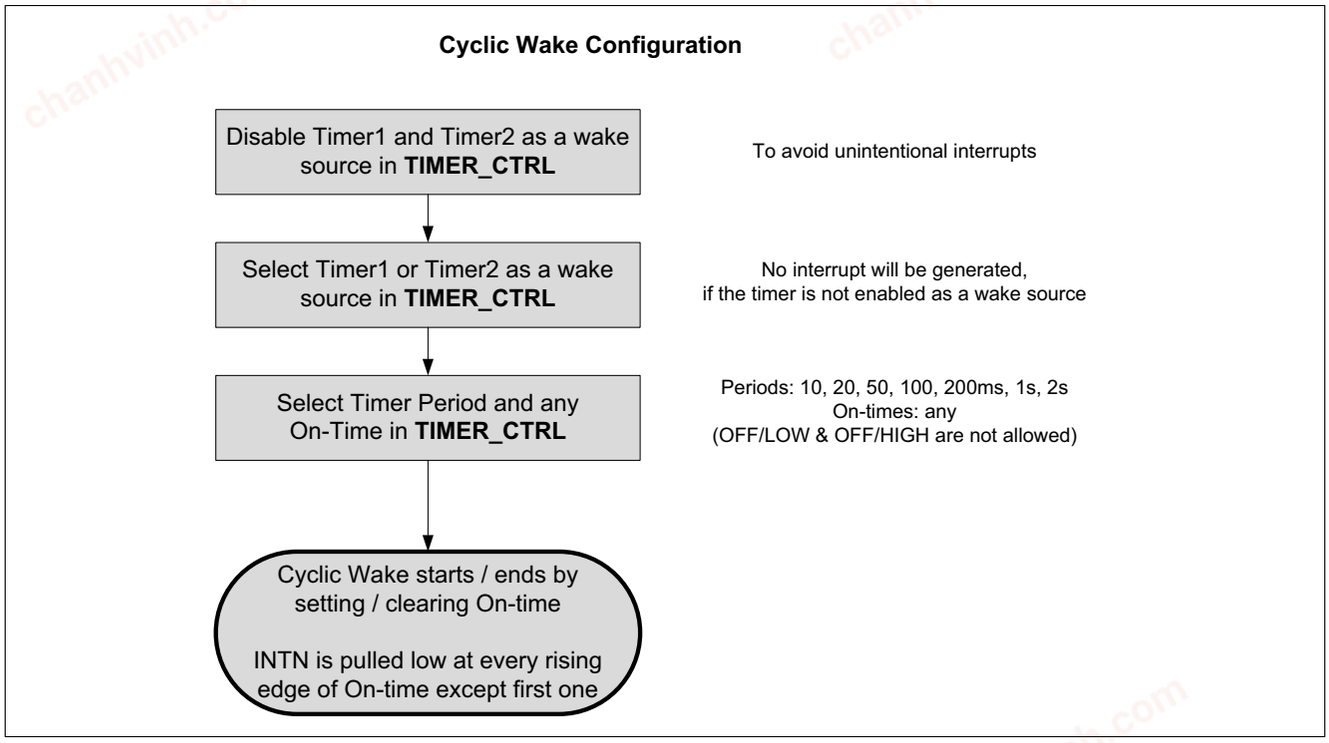


Figure 20 Cyclic Wake: Configuration and Sequence

Note: The on-time is only used to enable the cyclic wake function regardless of the value of the on time, i.e. the on time value has no meaning to the cyclic wake function as long as it is not '000' or '110' or '111'.

As in cyclic sense, the cyclic wake function will start as soon as the on-time is configured. An interrupt is generated for every start of the on-time except for the very first time when the timer is started.

5.7.3 Internal Timers

Two integrated timers can be used to control the below features:

- Cyclic Wake, i.e. to wake up the microcontroller periodically in Normal Mode, Stop Mode and Sleep Mode.
- Cyclic Sense, i.e. to perform cyclic sensing using the wake input WKx and the HSx by mapping the timer accordingly via the **HS_CTRL** register.

chanhvinh.com

5.8 VS Supply Multiplexing

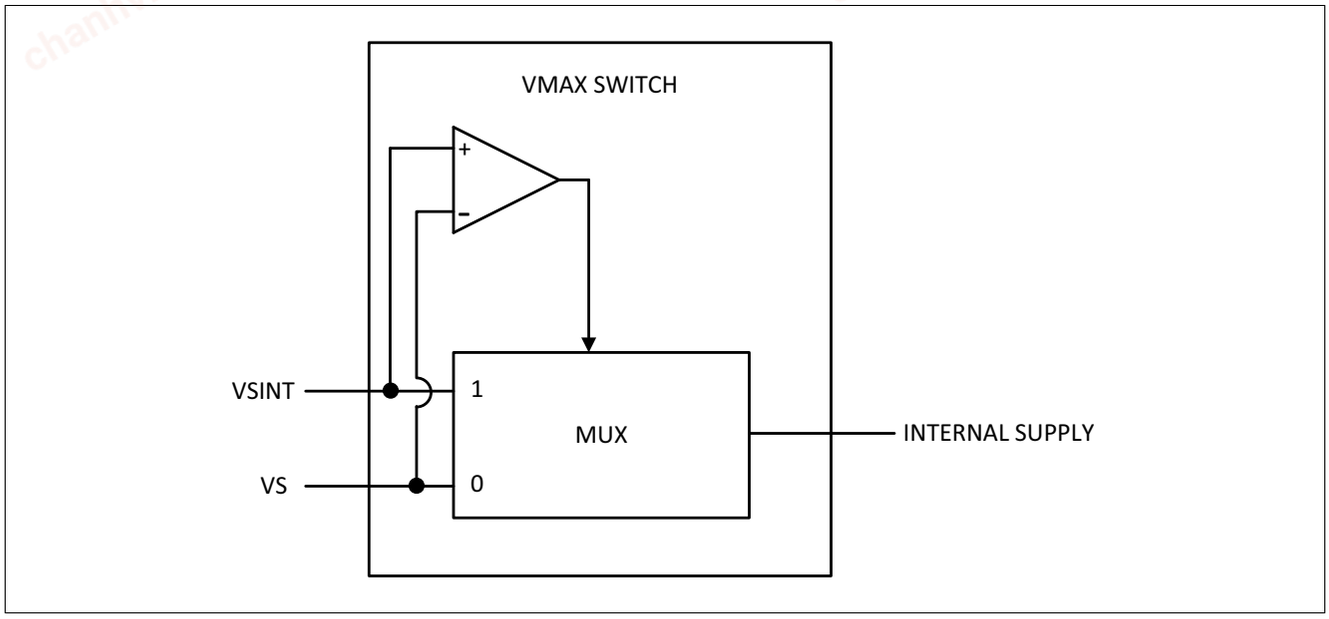


Figure 21 VS Supply Multiplexing

The internal supply voltage is multiplexed from VSINT and VS, choosing continuously the larger of both. In case of transient low VBAT, the buffered supply voltage takes over the internal supply, avoiding loss of power.

Note: Only the internal digital logic of the device is supplied by the VMAX SWITCH. In case of a power loss of either VS or VSINT, the internal register values will not be lost.

chanhvinh.com

6 Voltage Regulator 1

6.1 Block Description

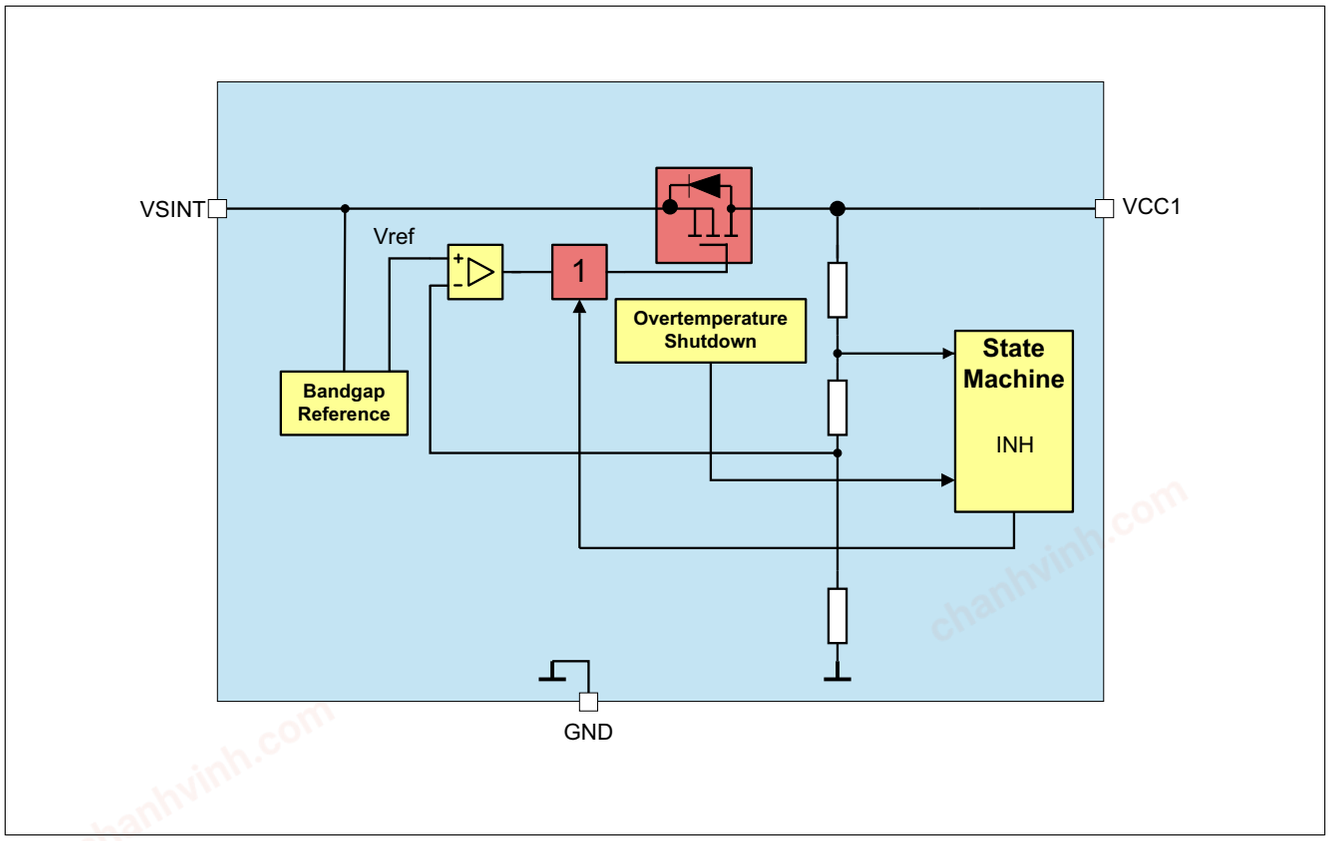


Figure 22 Module Block Diagram

Functional Features

- 5 V low-drop voltage regulator.
- Undervoltage monitoring with adjustable reset level and VCC1 undervoltage prewarning (refer to **Chapter 12.7** and **Chapter 12.8** for more information).
- Short circuit detection and switch off with undervoltage fail threshold, device enters Fail-Safe Mode.
- Effective capacitance must be ≥ 1 µF at nominal voltage output for stability. A 2.2 µF ceramic capacitor (MLCC) is recommended for best transient response.
- Output current capability up to $I_{VCC1,lim}$.

chanhvinh.com

6.2 Functional Description

The Voltage Regulator 1 (=VCC1) is “ON” in Normal Mode and Stop Mode and is disabled in Sleep Mode and in Fail-Safe Mode. The regulator can provide an output current up to $I_{VCC1,lim}$.

For low-quiescent current reasons, the output voltage tolerance is decreased in Stop Mode because only the less accurate low-power mode regulator will be active for small loads. If the load current on VCC1 exceeds the selected threshold ($I_{VCC1,Ipeak1,r}$ or $I_{VCC1,Ipeak2,r}$) then the high-power mode regulator will be also activated to support an optimum dynamic load behavior. The current consumption will then increase (approx. 2.8 mA additional quiescent current). The device mode stays unchanged.
If the load current on VCC1 falls below the selected threshold ($I_{VCC1,Ipeak1,f}$ or $I_{VCC1,Ipeak2,f}$), then the low-quiescent current mode is resumed again by disabling the high-power mode regulator.
Both regulators (low-power mode and high-power mode) are active in Normal Mode.

Two different active peak thresholds can be selected via SPI:

- **I_PEAK_TH** = ‘0’(default): the lower VCC1 active peak threshold 1 is selected with lowest quiescent current consumption in Stop Mode.
- **I_PEAK_TH** = ‘1’: the higher VCC1 active peak threshold 2 is selected with an increased quiescent current consumption in Stop Mode.

chanhvinh.com

6.3 Electrical Characteristics

Table 12 Electrical Characteristics

V_{SINT} = 5.5 V to 28 V; T_j = -40°C to +150°C; all voltages with respect to ground, positive current flowing into pin (unless otherwise specified).

Parameter	Symbol	Values			Unit	Note or Test Condition	Number
		Min.	Typ.	Max.			
Output Voltage including Line and Load Regulation	$V_{CC1,out1}$	4.9	5.0	5.1	V	1)Normal Mode; 10 µA < I_{VCC1} < 150 mA;	P_6.3.1
Output Voltage including Line and Load Regulation (Full Load Current Range)	$V_{CC1,out2}$	4.9	5.0	5.1	V	1)Normal Mode; 6 V < V_{SINT} < 28 V; 10 µA < I_{VCC1} < 250 mA	P_6.3.2
Output Voltage including Line and Load Regulation (Higher Accuracy Rage)	$V_{CC1,out3}$	4.95	–	5.05	V	2)Normal Mode; 20 mA < I_{VCC1} < 80 mA; 8 V < V_{SINT} < 18 V; 25°C < T_j < 150°C	P_6.3.3
Output Voltage including Line and Load Regulation (low-power mode)	$V_{CC1,out4}$	4.9	5.05	5.2	V	Stop Mode; 10 µA < I_{VCC1} < $I_{VCC1,Ipeak}$	P_6.3.4
Output Drop Voltage	$V_{CC1,d1}$	–	200	400	mV	I_{VCC1} = 50 mA, V_{SINT} = 5 V	P_6.3.9
Output Drop Voltage	$V_{CC1,d2}$	–	300	500	mV	I_{VCC1} = 150 mA, V_{SINT} = 5 V	P_6.3.10
VCC1 Active Peak Threshold 1 (Transition threshold between low-power and high-power mode regulator)	$I_{VCC1,Ipeak1,r}$	–	3.25	5.0	mA	2) I_{CC1} rising; V_{SINT} = 13.5 V; **I_PEAK_TH** = '0'	P_6.3.17
VCC1 Active Peak Threshold 1 (Transition threshold between high-power and low-power mode regulator)	$I_{VCC1,Ipeak1,f}$	1.2	1.7	–	mA	2) I_{CC1} falling; V_{SINT} = 13.5V; **I_PEAK_TH** = '0'	P_6.3.18
VCC1 Active Peak Threshold 2 (Transition threshold between low-power and high-power mode regulator)	$I_{VCC1,Ipeak2,r}$	6	–	20	mA	2) I_{CC1} rising; V_{SINT} = 13.5 V; **I_PEAK_TH** = '1'	P_6.3.19
VCC1 Active Peak Threshold 2 (Transition threshold between high-power and low-power mode regulator)	$I_{VCC1,Ipeak2,f}$	5	–	15	mA	2) I_{CC1} falling; V_{SINT} = 13.5V; **I_PEAK_TH** = '1'	P_6.3.20
Overcurrent Limitation	$I_{VCC1,lim}$	260	360	500	mA	current following out of pin, VCC1= 0V 2)	P_6.3.21

chanhvinh.com

Table 12 Electrical Characteristics (cont'd)

V_{SINT} = 5.5 V to 28 V; T_j = -40°C to +150°C; all voltages with respect to ground, positive current flowing into pin (unless otherwise specified).

Parameter	Symbol	Values			Unit	Note or Test Condition	Number
		Min.	Typ.	Max.			
Minimum Output Capacitance for stability	$C_{VCC1,min}$	1 3)	–	–	µF	2)	P_6.3.22
Maximum Output Capacitance	$C_{VCC1,max}$	–	–	47	µF	2)	P_6.3.23

1) In Stop Mode, the specified output voltage tolerance applies when I_{VCC1} has exceeded the selected active peak threshold ($I_{VCC1,Ipeak1,r}$ or $I_{VCC1,Ipeak2,r}$) but with increased current consumption.
2) Not subject to production test, specified by design.
3) Value is meant to be an effective value at rated output voltage level.

chanhvinh.com

7 High-Side Switch

7.1 Block Description

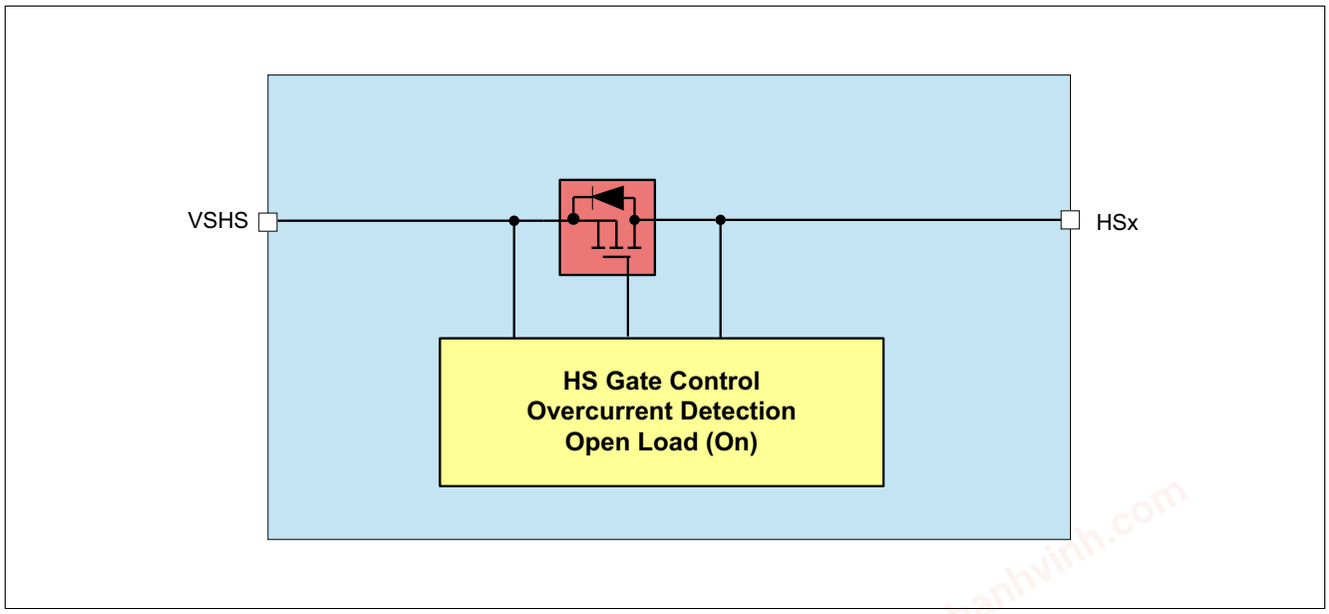


Figure 23 High-Side Module Block Diagram

Features

- All HSx supplied by VSHS
- Under voltage switch off configurable via SPI.
- Dedicated over voltage switch off per each HSx in Normal Mode- configurable via SPI.
- Overvoltage switch off in Stop Mode and Sleep Mode- configurable via SPI.
- Overcurrent detection and switch off.
- Open load detection in ON-state.
- PWM capability with internal or external timers configurable via SPI.
- Switch recovery after removal of OV or UV condition configurable via SPI.

7.2 Functional Description

The High-Side switches can be used for control of LEDs, as supply for the wake inputs and for other loads (except inductive load). The High-Side outputs can be controlled either directly via SPI by the integrated timers or by the integrated PWM generators or by external sync signal (using WK4/SYNC pin).

The high-side outputs are supplied by VSHS pin. The topology supports improved cranking condition behavior.

The configuration of the High-Sides (Permanent On, PWM, cyclic sense, etc.) drivers must be done in Normal Mode. The configuration is taken over in Stop Mode or Sleep Mode and cannot be modified. When entering Restart Mode or Fail-Safe Mode the HSx outputs are disabled.

chanhvinh.com

7.2.1 Under Voltage Switch Off

All HS drivers in on-state are switched off in case of under voltage on VSHS. The feature can be disabled by setting the SPI bit **HS_UV_SD_DIS** .

After release of under voltage condition, the HSx switch goes back to programmed state in which it was configured via SPI. This behavior is only valid if the bit **HS_UV_REC** is set. Otherwise the switches will stay off and the respective SPI control bits are cleared.
The under voltage is signaled in the bit **HS_UV**, no other error bits are set.

7.2.2 Over Voltage Switch Off

The HS drivers in on-state are switched off in case of over voltage on VSHS.. In Normal Mode the HSx can be kept in on-state above the VSHS overvoltage threshold if the HSx_OV_SDN_DIS bit is set.

In Stop Mode or Sleep Modes all HS drivers can be kept in on-state if **HS_OV_SDS_DIS** bit is set.

When the HSx are configured to switch off in case of over voltage condition, after release of over voltage condition, the HS switch goes back to programmed state in which it was configured via SPI. This behavior is only valid if the respective bit HSx_OV_REC is set. Otherwise the switch will stay off and the respective SPI control bits are cleared. This configuration is available for each HSx.
The over voltage is signaled in the bit **HS_OV**, no other error bits are set.

7.2.3 Over Current Detection and Switch Off

If the load current exceeds the over current shutdown threshold for a time longer then the over current shutdown filter time the output is switched off.

The over current condition and the switch off is signaled with the respective HSx_OC_OT bit in the register **HS_OL_OC_OT_STAT**. The HSx configuration is then reset to 000 by the device. To activate the High-Side again the HSx configuration has to be set to ON (001) or be programmed to a timer function. It is recommended to clear the over current bit before activation the High-Side switch, as the bits are not cleared automatically by the device.

7.2.4 Open Load Detection

Open load detection on the High-Side outputs is done during on state of the output. If the current in the activated output falls below the open load detection current threshold, the open load is detected and signaled via the respective bit HS1_OL, HS2_OL, HS3_OL, or HS4_OL in the register **HS_OL_OC_OT_STAT**. The High-Side output stays activated.. If the open load condition disappears the Open Load bit in the SPI can be cleared. The bits are not cleared automatically by the device.

7.2.5 PWM, Timer and SYNC Function

Each integrated HSx can be configured in different ways, in particular:

- Static OFF
- Static ON
- Timer 1
- Timer 2
- Internal generator PWM1
- Internal generator PWM2
- Internal generator PWM3
- Internal generator PWM4

chanhvinh.com

- SYNC (via WK4)

*Note: PWMx mentioned in this chapter refer to the internal PWM generators, which are configured by the registers **HS_CTRL** and **PWM_CTRL**. They can be used to control the internal high-side switches HSx.*

*Note: PWMx mentioned in this chapter **do not refer** to the PWMx pins. The PWMx pins are used for the PWM operation of the bridge drivers, to control the external MOSFETs.*

Static configuration (ON/OFF)

This configuration set the HSx permanently ON or OFF. This configuration is available in Normal Mode, Stop Mode and Sleep Mode.

The configuration shall be done via SPI.

Timer configuration (TIMER1 or TIMER2)

Two Timers are dedicated to control the ON phase of dedicated HS outputs.

The Timers are mapped to the dedicated HS outputs. Period and the duty cycle can be independently configured with via SPI.

PWM configuration (PWM1..PWM4)

Several internal PWM generators are dedicated to generate a PWM signal on the HSx output, e.g. for brightness adjustment or compensation of supply voltage fluctuation. The PWM generators are mapped to the dedicated HS outputs, and the duty cycle can be independently configured with a 10-bit resolution via SPI (**PWM_CTRL**). Two different frequencies can be selected independently for every PWM generator in the register **PWM_CTRL**.

In order to assign and configure the PWMx to specific HSX, the follow steps have to be followed:

- Configure duty cycle and frequency for respective PWM generator in **PWM_CTRL**.
- Assign PWM generator to respective HS switch(es) in HSx_CTRL.
- The PWM generation will start right after the HSx is assigned to the PWM generator (**HS_CTRL**) .

Note: The min. on-time during PWM is limited by the actual on- and off-time of the respective HS switch, e.g. the PWM setting '00 0000 0001' could not be realized.

SYNC configuration (using WK4)

Another possible configuration is to use the WK4 (set as SYNC pin) and mapped to one dedicated HSx output.

The configuration of the WK4/SYNC bit is done using the **WK_EN** bits. If the **WK_EN**=10_B (SYNC selected), all bits in WK4 bank are ignored and wake-up capability on WK4 is not available.

Only after the WK4/SYNC configuration, the HSx can be configured for SYNC usage (HSx = 1000_B).

chanhvinh.com

7.3 Electrical Characteristics

Table 13 Electrical Characteristics

V_{SINT} = 5.5 V to 28 V; T_j = -40°C to +150°C; all voltages with respect to ground, positive current flowing into pin (unless otherwise specified)

Parameter	Symbol	Values			Unit	Note or Test Condition	Number
		Min.	Typ.	Max.			
Output HS1, HS2, HS3, HS4							
Static Drain-Source ON Resistance HSx	$R_{ON,HS25}$	–	7	–	Ω	I_{ds} = 60 mA, T_j < 25°C	P_7.3.1
Static Drain-Source ON Resistance HSx	$R_{ON,HS150}$	–	11.5	16	Ω	I_{ds} = 60 mA, T_j < 150°C	P_7.3.2
Leakage Current HSx / per channel	$I_{leak,HS}$	–	–	2	µA	1) 0 V < V_{HSx} < V_{S_HS}; T_j < 85°C	P_7.3.3
Output Slew Rate (rising)	$SR_{raise,HS}$	0.8	–	2.5	V/µs	1) 20 to 80% V_{SHS} = 6 to 18 V R_L = 220 Ω	P_7.3.4
Output Slew Rate (falling)	$SR_{fall,HS}$	-2.5	–	-0.8	V/µs	1) 80 to 20% V_{SHS} = 6 to 18 V R_L = 220 Ω	P_7.3.5
Switch-on time HSx	$t_{ON,HS}$	3	–	30	µs	CSN = HIGH to 0.8 × VSHS; R_L = 220 Ω; V_{SHS} = 6 to 18 V	P_7.3.6
Switch-off time HSx	$t_{OFF,HS}$	3	–	30	µs	CSN = HIGH to 0.2 × VSHS; R_L = 220 Ω; V_{SHS} = 6 to 18 V	P_7.3.7
Short Circuit Shutdown Current	$I_{SD,HS}$	150	245	300	mA	V_{SHS} = 6 to 20 V	P_7.3.8
Short Circuit Shutdown Filter Time	$t_{SD,HS}$	12	16	22	µs	2)	P_7.3.9
Open Load Detection Current	$I_{OL,HS}$	0.4	–	2	mA	hysteresis included	P_7.3.10
Open Load Detection hysteresis	$I_{OL,HS,hys}$	–	0.45	–	mA	1)	P_7.3.11
Open Load Detection Filter Time	$t_{OL,HS}$	160	220	270	µs	2)	P_7.3.12

1) Not subject to production test, specified by design.

2) Not subject to production test, tolerance defined by internal oscillator tolerance.

chanhvinh.com

8 High Speed CAN Transceiver

8.1 Block Description

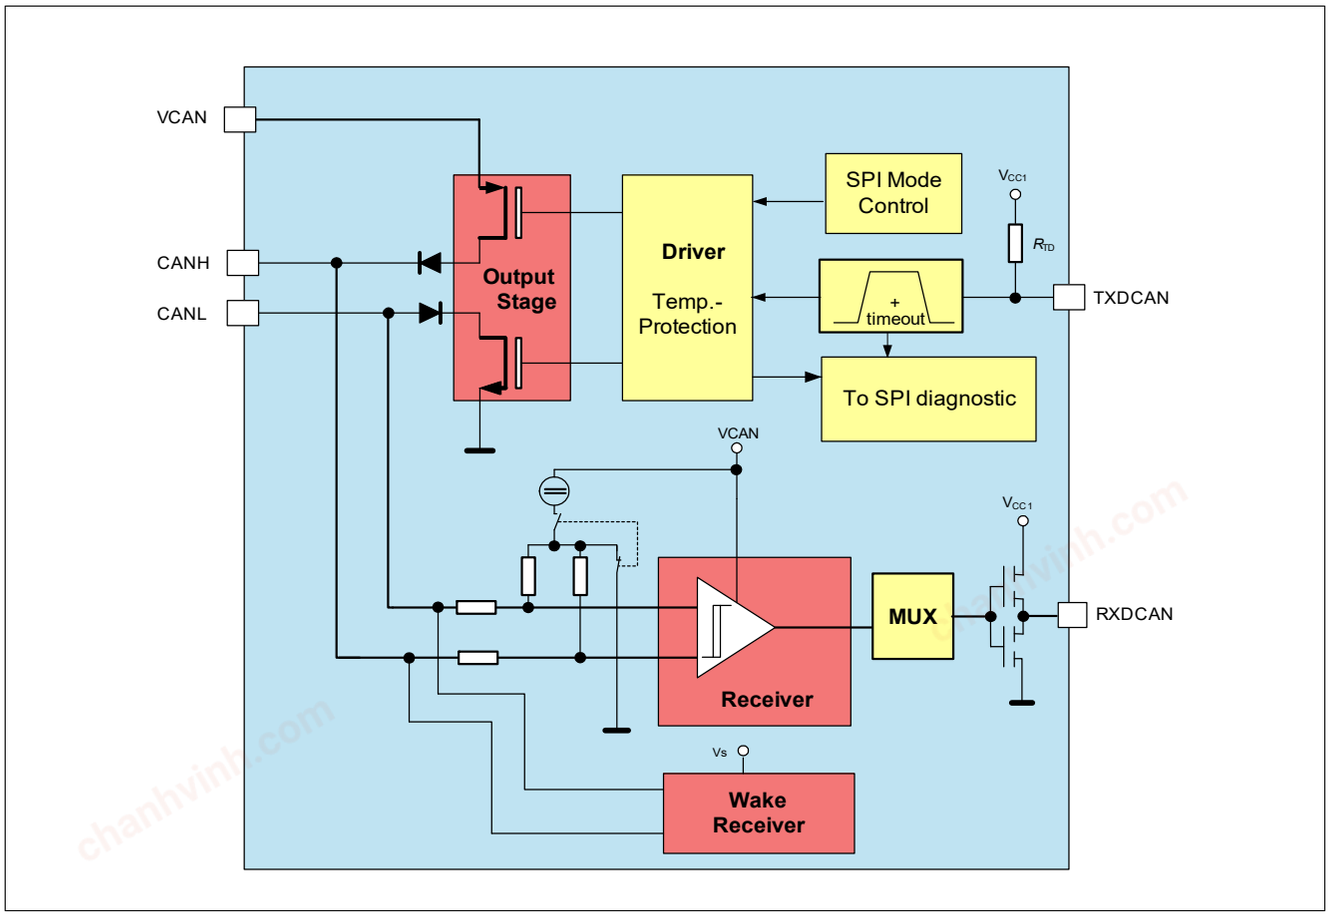


Figure 24 Functional Block Diagram

8.2 Functional Description

The Controller Area Network (CAN) transceiver part of the device provides High-Speed (HS) differential mode data transmission (up to 2 Mbaud/s) and reception in automotive and industrial applications. It works as an interface between the CAN protocol controller and the physical bus lines compatible to ISO11898-2:2016 and SAE J2284.

The CAN FD transceiver offers low-power modes to reduce current consumption. This supports networks with partially powered down nodes. To support software diagnostic functions, a CAN Receive Only Mode is implemented.

It is designed to provide excellent passive behavior when the transceiver is switched off (mixed networks, clamp 15/30 applications).

A wake-up from the CAN Wake Capable Mode is possible via a message on the bus. Thus, the microcontroller can be powered down or idled and is woken up by the CAN bus activities.

The CAN transceiver is designed to withstand the severe conditions of automotive applications and to support 12 V applications.

chanhvinh.com

The transceiver can also be configured to Wake Capable in order to save current and to ensure a safe transition from Normal Mode to Sleep Mode (to avoid loosing messages).

Figure 25 shows the possible transceiver mode transition when changing the device mode.

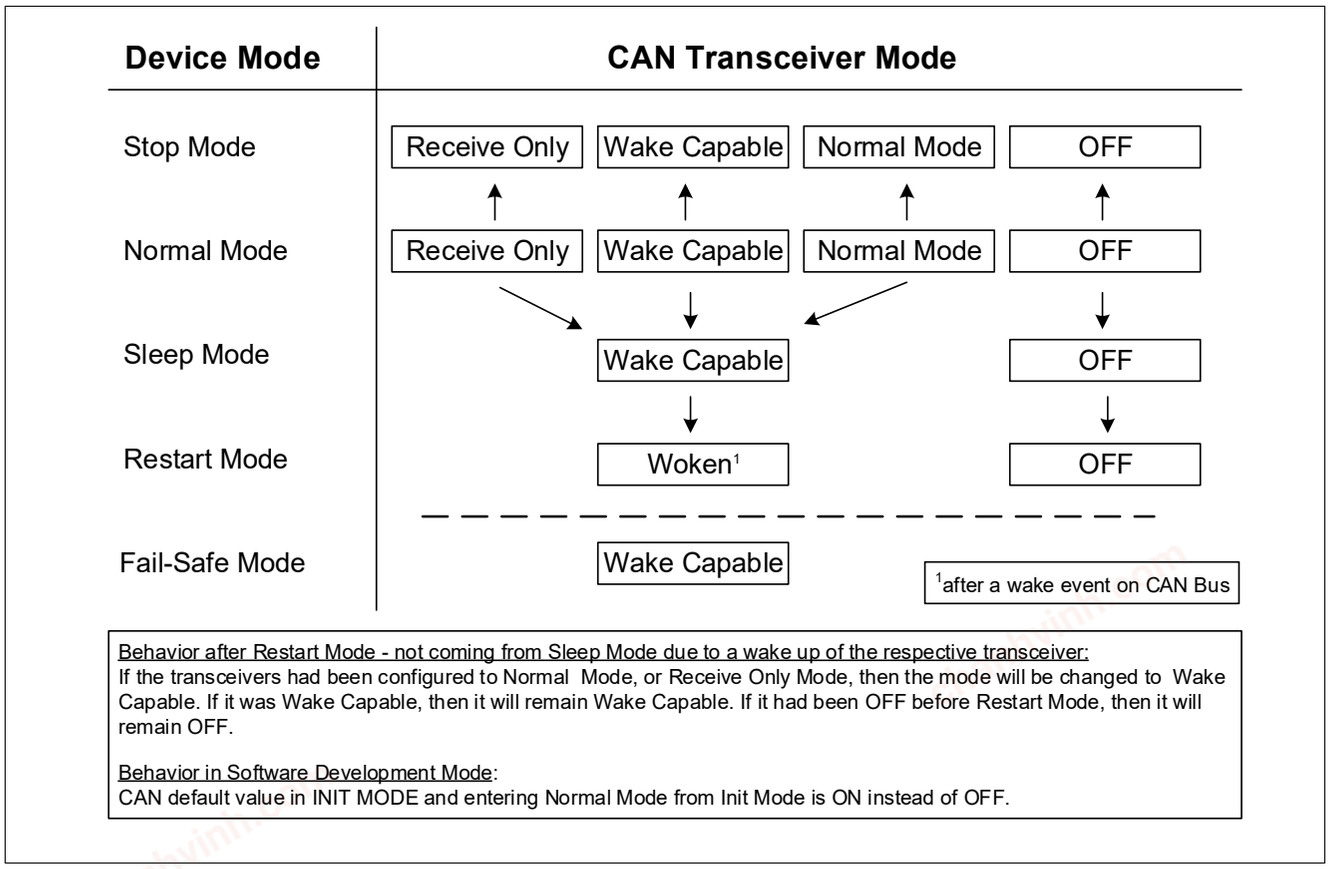


Figure 25 CAN Mode Control Diagram

CAN FD Support

CAN FD stands for 'CAN with Flexible Data Rate'. It is based on the well established CAN protocol as specified in ISO11898-2:2016. CAN FD still uses the CAN bus arbitration method. The benefit is that the bit rate can be increased by switching to a shorter bit time at the end of the arbitration process and then to return to the longer bit time at the CRC delimiter, before the receivers transmit their acknowledge bits. See also **Figure 26**. In addition, the effective data rate is increased by allowing longer data fields. CAN FD allows the transmission of up to 64 data bytes compared to the 8 data bytes from the standard CAN.

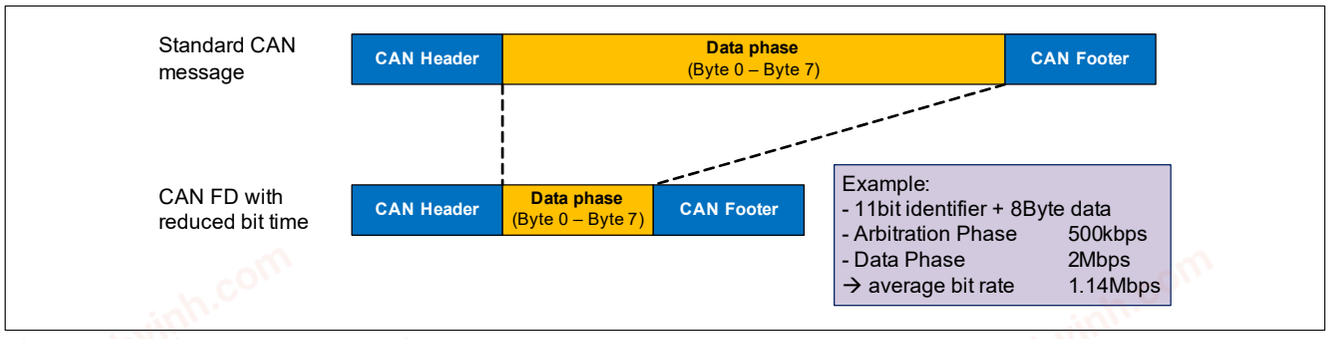


Figure 26 Bit Rate Increase with CAN FD vs. Standard CAN

chanhvinh.com

Not only the physical layer must support CAN FD but also the CAN controller. In case the CAN controller is not able to support CAN FD then the respective CAN node must at least tolerate CAN FD communication. This CAN FD tolerant mode is realized in the physical layer.

8.2.1 CAN OFF Mode

The CAN OFF Mode is the default mode after power-up of the device. It is available in all device modes and is intended to completely stop CAN activities or when CAN communication is not needed. In CAN OFF Mode, a wake-up event on the bus will be ignored.

8.2.2 CAN Normal Mode

The CAN Transceiver is enabled via SPI in Normal Mode. CAN Normal Mode is designed for normal data transmission/reception within the HS-CAN network. The mode is available in Normal Mode and in Stop Mode. The bus biasing is set to VCAN/2.

Transmission

The signal from the microcontroller is applied to the TXDCAN input of the device. The bus driver switches the CANH/L output stages to transfer this input signal to the CAN bus lines.

Enabling sequence

The CAN transceiver requires an enabling time $t_{CAN,EN}$ before a message can be sent on the bus. This means that the TXDCAN signal can only be pulled low after the enabling time. If this is not ensured, then the TXDCAN needs to be set back to high (=recessive) until the enabling time is completed. Only the next dominant bit will be transmitted on the bus. **Figure 27** shows different scenarios and explanations for CAN enabling.

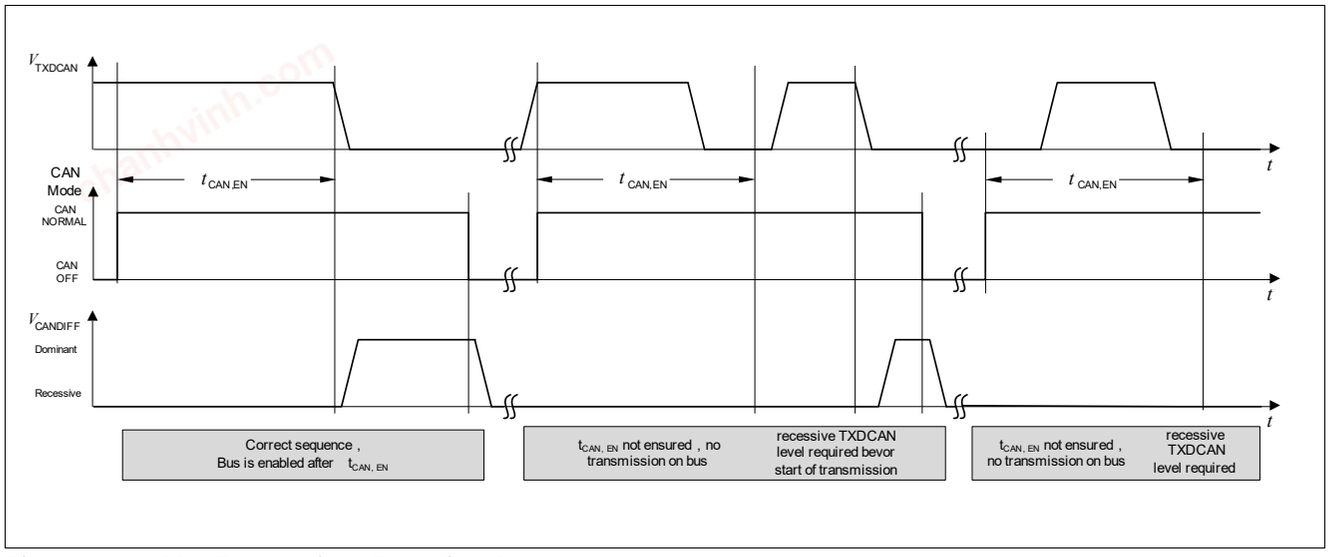


Figure 27 CAN Transceiver Enabling Sequence

Reduced Electromagnetic Emission

To reduce electromagnetic emissions (EME), the bus driver controls CANH/L slopes symmetrically.

Reception

Analog CAN bus signals are converted into digital signals at RXDCAN via the differential input receiver.

8.2.3 CAN Receive Only Mode

In CAN Receive Only Mode (RX only), the driver stage is de-activated but reception is still operational. This mode is accessible by an SPI command in Normal Mode and in Stop Mode.

chanhvinh.com

Note: The transceiver is still properly working in CAN Receive Only Mode even if VCAN is not available because of an independent receiver supply.

8.2.4 CAN Wake Capable Mode

This mode can be used in Stop Mode, Sleep Mode, Restart Mode and Normal Mode by programming via SPI and it is used to monitor bus activities. It is automatically accessed in Fail-Safe Mode. A wake-up signal on the bus results in a change of behavior of the device, as described in **Table 14**. As a signalization to the microcontroller, the RXDCAN pin is set low and will stay low until the CAN transceiver is changed to any other mode. After a wake-up event, the transceiver can be switched to CAN Normal Mode via SPI for bus communication.

As shown in **Figure 28**, a wake-up pattern (WUP) is signaled on the bus by two consecutive dominant bus levels for at least t_{Wake1} (wake-up time) and less than t_{Wake2}, each separated by a recessive bus level of greater than t_{Wake1} and shorter than t_{Wake2}.

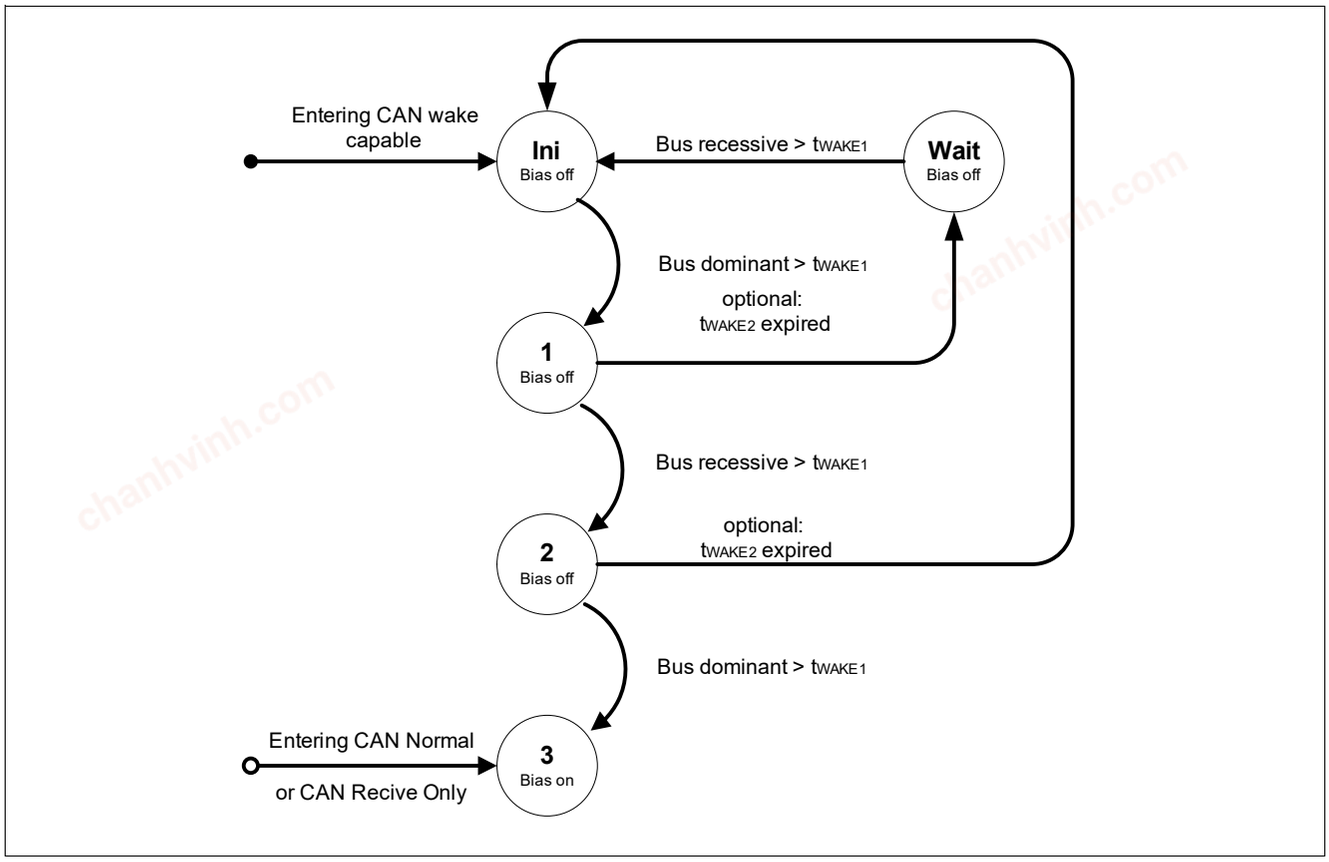


Figure 28 CAN Wake-up Pattern Detection according to the Definition in ISO11898-2:2016

Rearming the Transceiver for Wake Capability

After a BUS wake-up event, the transceiver is woken. However, the **CAN** transceiver mode bits will still show wake capable (=‘01’) so that the RXDCAN signal will be pulled low. There are two possibilities how the CAN transceiver’s wake capable mode is enabled again after a wake-up event:

- The CAN transceiver mode must be toggled, i.e. switched from CAN Wake Capable Mode to CAN Normal Mode, CAN Receive Only Mode or CAN OFF Mode, before switching to CAN Wake Capable Mode again.
- Rearming is done automatically when the device is changed to Stop Mode, Sleep Mode or Fail-Safe Mode to ensure wake-up capability.

chanhvinh.com

Wake-Up in Stop Mode and Normal Mode

In Stop Mode, if a wake-up is detected, it is always signaled by the INTN output and in the **WK_STAT** SPI register. It is also signaled by RXDCAN pulled to low. The same applies for the Normal Mode. The microcontroller should set the device from Stop Mode to Normal Mode, there is no automatic transition to Normal Mode.

For functional safety reasons, the watchdog will be automatically enabled in Stop Mode after a bus wake-up event in case it was disabled before (if bit **WD_EN_ WK_BUS** was configured to high before).

Wake-Up in Sleep Mode

Wake-up is possible via a CAN message. The wake-up automatically transfers the device into the Restart Mode and from there to Normal Mode the corresponding RXDCAN pin is set to low. The microcontroller is able to detect the low signal on RXDCAN and to read the wake source out of the **WK_STAT** register via SPI. No interrupt is generated when coming out of Sleep Mode. The microcontroller can now for example switch the CAN transceiver into CAN Normal Mode via SPI to start communication.

Table 14 Action due to CAN Bus Wake-Up

Mode	Mode after Wake	VCC1	INTN	RXDCAN
Normal Mode	Normal Mode	On	Low	Low
Stop Mode	Stop Mode	On	Low	Low
Sleep Mode	Restart Mode	Ramping Up	High	Low
Restart Mode	Restart Mode	On	High	Low
Fail-Safe Mode	Restart Mode	Ramping Up	High	Low

8.2.5 CAN Bus termination

In accordance with the CAN configuration, four types of bus terminations are allow:

- CAN Normal Mode: VCAN/2 termination.
- CAN Receive Only Mode: VCAN/2 termination in case that VCAN is nominal supply. when VCAN UV is detected, the termination is 2.5 V.
- CAN Wake Capable Mode: GND termination: after wake-up, the termination is 2.5 V.
- CAN OFF Mode: no termination necessary (bus floating).

When entering CAN Wake Capable Mode the termination is only connected to GND after the t_silence time has expired.

8.2.6 TXD Time-out Feature

If the TXDCAN signal is dominant for a time $t > t_{TXDCAN_TO}$, in CAN Normal Mode, the TXDCAN time-out function deactivates the transmission of the signal at the bus setting the TXDCAN pin to recessive. This is implemented to prevent the bus from being blocked permanently due to an error. The transmitter is disabled and thus switched to recessive state. The CAN SPI control bits (**CAN** on **BUS_CTRL**) remain unchanged and the failure is stored in the SPI flag **CAN_FAIL**. The CAN transmitter stage is activated again after the dominant time-out condition is removed and the transceiver is automatically switched back to CAN Normal Mode.

8.2.7 Bus Dominant Clamping

If the CAN bus is dominant for a time $t > t_{BUS_CAN_TO}$, when CAN is configured as CAN Normal Mode or CAN Receive Only Mode, a bus dominant clamping is detected and the SPI bit **CAN_FAIL** is set. The transceiver configuration stays unchanged. In order to avoid that a bus dominant clamping is detected due to a TXD time-out the bus dominant clamping filter time $t_{BUS_CAN_TO} > t_{TXDCAN_TO}$.

chanhvinh.com

8.2.8 Undervoltage Detection

The voltage at the CAN supply pin is monitored in CAN Normal Mode and CAN Receive Only Mode. In case of VCAN undervoltage a signalization via SPI bit **VCAN_UV** is triggered and the TLE9561QX disables the transmitter stage. If the CAN supply reaches a higher level than the undervoltage detection threshold (VCAN > **VCAN_UV**), the transceiver is automatically switched back to CAN Normal Mode.

The undervoltage detection is enabled if the mode bit CAN_1 = '1', i.e. in CAN Normal or CAN Receive Only Mode. .

8.3 Electrical Characteristics

Table 15 Electrical Characteristics

T_j = -40°C to +150°C; V_{SINT} = 5.5 V to 28 V; V_{CAN} = 4.75 V to 5.25 V; RL = 60 Ω; CAN Normal Mode; all voltages with respect to ground, positive current flowing into pin (unless otherwise specified)

Parameter	Symbol	Values			Unit	Note or Test Condition	Number
		Min.	Typ.	Max.			
CAN Bus Receiver							
Differential Receiver Threshold Voltage, recessive to dominant edge	V_{diff,rd_N}	–	0.80	0.90	V	$V_{diff} = V_{CANH} - V_{CANL}$; -12 V ≤ V_{CM}(CAN) ≤ 12 V; CAN Normal Mode	P_8.3.1
Differential Receiver Threshold Voltage, dominant to recessive edge	V_{diff,dr_N}	0.50	0.60	–	V	$V_{diff} = V_{CANH} - V_{CANL}$; -12 V ≤ V_{CM}(CAN) ≤ 12 V; CAN Normal Mode	P_8.3.2
Dominant state differential input voltage range	$V_{diff_D_range}$	0.9	–	8.0	V	$V_{diff} = V_{CANH} - V_{CANL}$; -12 V ≤ VCM(CAN) ≤ +12 V; CAN Normal Mode	P_8.3.60
Common Mode Range	CMR	-12	–	12	V	4)	P_8.3.3
Recessive state differential input voltage range	$V_{diff_R_range}$	-3.0	–	0.5	V	$V_{diff} = V_{CANH} - V_{CANL}$; -12 V ≤ VCM(CAN) ≤ +12 V; CAN Normal Mode	P_8.3.61
Maximum Differential Bus Voltage	$V_{diff,max}$	-5	–	10	V	4)	P_8.3.4
CANH, CANL Input Resistance	R_i	20	40	50	kΩ	CAN Normal / Wake Capable Mode; Recessive state -2V ≤ $V_{CANH/L}$ ≤ +7V	P_8.3.5
Differential Input Resistance	R_{diff}	40	80	100	kΩ	CAN Normal / Wake Capable Mode; Recessive state -2V ≤ $V_{CANH/L}$ ≤ +7V	P_8.3.6
Input Resistance Deviation between CANH and CANL	DR_i	-3	–	3	%	4) Recessive state $V_{CANH} = V_{CANL}$ = 5V	P_8.3.7

chanhvinh.com

Table 15 Electrical Characteristics (cont'd)

T_j = -40°C to +150°C; V_{SINT} = 5.5 V to 28 V; V_{CAN} = 4.75 V to 5.25 V; RL = 60 Ω; CAN Normal Mode; all voltages with respect to ground, positive current flowing into pin (unless otherwise specified)

Parameter	Symbol	Values			Unit	Note or Test Condition	Number
		Min.	Typ.	Max.			
Input Capacitance CANH, CANL versus GND	C_{in}	–	20	40	pF	[1] V_{TXDCAN} = 5 V	P_8.3.8
Differential Input Capacitance	C_{diff}	–	10	20	pF	[1] V_{TXDCAN} = 5 V	P_8.3.9
Wake-up Receiver Threshold Voltage, recessive to dominant edge	V_{diff, rd_W}	–	0.8	1.15	V	-12 V ≤ V_{CM}(CAN) ≤ 12 V; CAN Wake Capable Mode	P_8.3.10
Wake-up Receiver Dominant state differential input voltage range	V_{diff,D_range_W}	1.15	–	8.0	V	-12 V ≤ V_{CM}(CAN) ≤ +12 V; CAN Wake Capable Mode	P_8.3.62
Wake-up Receiver Threshold Voltage, dominant to recessive edge	V_{diff, dr_W}	0.4	0.7		V	-12 V ≤ V_{CM}(CAN) ≤ 12 V; CAN Wake Capable Mode	P_8.3.11
Wake-up Receiver Recessive state differential input voltage range	V_{diff,R_range_W}	-3.0	–	0.4	V	-12 V ≤ V_{CM}(CAN) ≤ +12 V; CAN Wake Capable Mode	P_8.3.63
CAN Bus Transmitter							
CANH/CANL Recessive Output Voltage (CAN Normal Mode)	V_{CANL/H_NM}	2.0	–	3.0	V	CAN Normal Mode V_{TXDCAN} = V_{cc1}; no load	P_8.3.12
CANH/CANL Recessive Output Voltage (CAN Wake Capable Mode)	V_{CANL/H_LP}	-0.1	–	0.1	V	CAN Wake Capable Mode; V_{TXDCAN} = V_{cc1}; no load	P_8.3.13
CANH, CANL Recessive Output Voltage Difference V_{diff} = V_{CANH} - V_{CANL} (CAN Normal Mode)	$V_{diff_r_N}$	-500	–	50	mV	CAN Normal Mode; V_{TXDCAN} = V_{cc1}; no load	P_8.3.14
CANH, CANL Recessive Output Voltage Difference V_{diff} = V_{CANH} - V_{CANL} (CAN Wake Capable Mode)	$V_{diff_r_W}$	-200	–	200	mV	CAN Wake Capable Mode; V_{TXDCAN} = V_{cc1}; no load	P_8.3.15
CANL Dominant Output Voltage	V_{CANL}	0.5	–	2.25	V	[4] CAN Normal Mode; V_{TXDCAN} = 0 V; V_{CAN} = 5 V; 50 Ω ≤ R_L ≤ 65 Ω	P_8.3.16

chanhvinh.com

Table 15 Electrical Characteristics (cont'd)

T_j = -40°C to +150°C; V_{SINT} = 5.5 V to 28 V; V_{CAN} = 4.75 V to 5.25 V; RL = 60 Ω; CAN Normal Mode; all voltages with respect to ground, positive current flowing into pin (unless otherwise specified)

Parameter	Symbol	Values			Unit	Note or Test Condition	Number
		Min.	Typ.	Max.			
CANH Dominant Output Voltage	V_{CANH}	2.75	–	4.5	V	4)CAN Normal Mode; V_{TXDCAN} = 0 V; V_{CAN} = 5 V; 50 Ω ≤ R_L ≤ 65 Ω	P_8.3.17
CANH, CANL Dominant Output Voltage Difference $V_{diff} = V_{CANH} - V_{CANL}$	$V_{diff_d_N}$	1.5	2.0	2.5	V	4)CAN Normal Mode; V_{TXDCAN} = 0 V; V_{CAN} = 5 V; 50 Ω ≤ R_L ≤ 65 Ω	P_8.3.18
CANH, CANL Dominant Output Voltage Difference (resistance during arbitration) $V_{diff} = V_{CANH} - V_{CANL}$	$V_{diff_d_N}$	1.5	–	5.0	V	4)CAN Normal Mode; V_{TXDCAN} = 0 V; V_{CAN} = 5 V; R_L = 2240 Ω	P_8.3.19
CANH, CANL output voltage difference slope, recessive to dominant	$V_{diff_slope_rd}$	–	–	70	V/us	4)30% to 70% of measured differential bus voltage, C_L = 100 pF, R_L = 60 Ω	P_8.3.54
CANH, CANL output voltage difference slope, dominant to recessive	$V_{diff_slope_dr}$	–	–	70	V/us	4)70% to 30% of measured differential bus voltage, C_L = 100 pF, R_L = 60 Ω	P_8.3.55
Driver Symmetry $V_{SYM} = V_{CANH} + V_{CANL}$	V_{SYM}	4.5	–	5.5	V	2)CAN Normal Mode; V_{TXDCAN} = 0 V / 5 V; V_{CAN} = 5 V; C_{SPLIT} = 4.7 nF; 50 Ω ≤ R_L ≤ 60 Ω;	P_8.3.21
CANH Short Circuit Current	I_{CANHsc}	-115	-80	-50	mA	CAN Normal Mode; $V_{CANHshort}$ = -3 V	P_8.3.22
CANL Short Circuit Current	I_{CANLsc}	50	80	115	mA	CAN Normal Mode; $V_{CANLshort}$ = 18 V;	P_8.3.23
Leakage Current	$I_{CANH,lk}$ $I_{CANL,lk}$	–	5	7.5	µA	$V_S = V_{CAN}$ = 0 V; 0 V ≤ $V_{CANH,L}$ ≤ 5 V; 3)R_{test} = 0 / 47kΩ	P_8.3.24
Receiver Output RXDCAN							
High level Output Voltage	$V_{RXDCAN,H}$	0.8 × V_{CC1}	–	–	V	CAN Normal Mode; I_{RXDCAN} = -2 mA	P_8.3.26
Low Level Output Voltage	$V_{RXDCAN,L}$	–	–	0.2 × V_{cc1}	V	CAN Normal Mode; I_{RXDCAN} = 2 mA	P_8.3.27

chanhvinh.com

Table 15 Electrical Characteristics (cont'd)

T_j = -40°C to +150°C; V_{SINT} = 5.5 V to 28 V; V_{CAN} = 4.75 V to 5.25 V; RL = 60 Ω; CAN Normal Mode; all voltages with respect to ground, positive current flowing into pin (unless otherwise specified)

Parameter	Symbol	Values			Unit	Note or Test Condition	Number
		Min.	Typ.	Max.			
Transmission Input TXDCAN							
High Level Input Voltage Threshold	$V_{TXDCAN,H}$	–	–	0.7 × V_{cc1}	V	CAN Normal Mode; recessive state	P_8.3.28
Low Level Input Voltage Threshold	$V_{TXDCAN,L}$	0.3 × V_{cc1}	–	–	V	CAN Normal Mode; dominant state	P_8.3.29
TXDCAN Input Hysteresis	$V_{TXDCAN,hys}$	–	0.12 × V_{cc1}	–	V	4)	P_8.3.30
TXDCAN Pull-up Resistance	R_{TXDCAN}	20	50	80	kΩ	-	P_8.3.31
TXDCAN input capacitance	C_{TXDCAN}	–	6	10	pF	4)	P_8.3.64
CAN Transceiver Enabling Time	$t_{CAN,EN}$	8	12	18	µs	6) CSN = high to first valid transmitted TXDCAN dominant	P_8.3.32
Dynamic CAN-Transceiver Characteristics							
Min. Dominant Time for Bus Wake-up	t_{Wake1}	0.5	–	1.8	µs	-12 V ≤ V_{CM}(CAN) ≤ 12 V; CAN Wake Capable Mode	P_8.3.33
Wake-up Time-out, Recessive Bus	t_{Wake2}	0.8	–	10	ms	6)CAN Wake Capable Mode	P_8.3.34
Loop delay (recessive to dominant)	$t_{LOOP,f}$	–	150	255	ns	2)CAN Normal Mode; C_L = 100 pF; R_L = 60 Ω; V_{CAN} = 5 V; C_{RXDCAN} = 15 pF	P_8.3.35
Loop delay (dominant to recessive)	$t_{LOOP,r}$	–	150	255	ns	2)CAN Normal Mode; C_L = 100 pF; R_L = 60 Ω; V_{CAN} = 5 V; C_{RXDCAN} = 15 pF	P_8.3.36
Propagation Delay TXDCAN low to bus dominant	$t_{d(L),T}$	–	50	140	ns	CAN Normal Mode; C_L = 100 pF; R_L = 60 Ω; V_{CAN} = 5 V	P_8.3.37
Propagation Delay TXDCAN high to bus recessive	$t_{d(H),T}$	–	50	140	ns	CAN Normal Mode; C_L = 100 pF; R_L = 60 Ω; V_{CAN} = 5 V	P_8.3.38

chanhvinh.com

Table 15 Electrical Characteristics (cont'd)

T_j = -40°C to +150°C; V_{SINT} = 5.5 V to 28 V; V_{CAN} = 4.75 V to 5.25 V; RL = 60 Ω; CAN Normal Mode; all voltages with respect to ground, positive current flowing into pin (unless otherwise specified)

Parameter	Symbol	Values			Unit	Note or Test Condition	Number
		Min.	Typ.	Max.			
Propagation Delay bus dominant to RXDCAN low	$t_{d(L),R}$	–	100	–	ns	CAN Normal Mode; C_L = 100 pF; R_L = 60 Ω; V_{CAN} = 5 V; C_{RXDCAN} = 15 pF	P_8.3.39
Propagation Delay bus recessive to RXDCAN high	$t_{d(H),R}$	–	100	–	ns	CAN Normal Mode; C_L = 100 pF; R_L = 60 Ω; V_{CAN} = 5 V; C_{RXDCAN} = 15 pF	P_8.3.40
Received Recessive bit width	$t_{bit(RXD)}$	400	–	550	ns	CAN Normal Mode; C_L = 100 pF; R_L = 60 Ω ; V_{CAN} = 5 V; C_{RXDCAN} = 15 pF; $t_{bit(TXD)}$ = 500 ns; Parameter definition in according to **Figure 30**.	P_8.3.42
Transmitted Recessive bit width	$t_{bit(BUS)}$	435	–	530	ns	CAN Normal Mode; C_L = 100 pF; R_L = 60 Ω; V_{CAN} = 5 V; C_{RXDCAN} = 15 pF; $t_{bit(TXD)}$ = 500 ns; Parameter definition in according to **Figure 30**.	P_8.3.43
Receiver timing symmetry[5)]	Δt_{Rec}	-65	–	40	ns	CAN Normal Mode; C_L = 100 pF; R_L = 60 Ω; V_{CAN} = 5 V; C_{RXDCAN} = 15 pF; $t_{bit(TXD)}$ = 500 ns; Parameter definition in according to **Figure 30**.	P_8.3.44

chanhvinh.com

Table 15 Electrical Characteristics (cont'd)

T_j = -40°C to +150°C; V_{SINT} = 5.5 V to 28 V; V_{CAN} = 4.75 V to 5.25 V; RL = 60 Ω; CAN Normal Mode; all voltages with respect to ground, positive current flowing into pin (unless otherwise specified)

Parameter	Symbol	Values			Unit	Note or Test Condition	Number
		Min.	Typ.	Max.			
Received Recessive bit width	$t_{bit(RXD)}$	120	–	220	ns	CAN Normal Mode; C_L = 100 pF; R_L = 60 Ω ; V_{CAN} = 5 V; C_{RXDCAN} = 15 pF; $t_{bit(TXD)}$ = 200 ns; Parameter definition in according to **Figure 30**.	P_8.3.45
Transmitted Recessive bit width	$t_{bit(BUS)}$	155	–	210	ns	CAN Normal Mode; C_L = 100 pF; R_L = 60 Ω; V_{CAN} = 5 V; C_{RXDCAN} = 15 pF; $t_{bit(TXD)}$ = 200 ns; Parameter definition in according to **Figure 30**.	P_8.3.46
Receiver timing symmetry Δt Rec = t_bit(RXD) - t_bit(Bus)	Δt_{Rec}	-45	–	15	ns	CAN Normal Mode; C_L = 100 pF; R_L = 60 Ω; V_{CAN} = 5 V; C_{RXDCAN} = 15 pF; $t_{bit(TXD)}$ = 200 ns; Parameter definition in according to **Figure 30**.	P_8.3.47
TXDCAN Permanent Dominant Time-out	t_{TXDCAN_TO}	1.6	2.0	2.4	ms	[6)]CAN Normal Mode	P_8.3.48
BUS Permanent Dominant Time-out	$t_{BUS_CAN_TO}$	2.0	2.5	3.0	ms	[6)]CAN Normal Mode	P_8.3.49
Timeout for bus inactivity	$t_{SILENCE}$	0.6	–	1.2	s	[6)]	P_8.3.50
Bus Bias reaction time	t_{Bias}	–	–	250	µs	[6)]	P_8.3.51

1) Not subject to production test, specified by design, S2P - Method; f = 10 MHz
2) V_{SYM} shall be observed during dominant and recessive state and also during the transition dominant to recessive and vice versa while TXD is simulated by a square signal (50% duty cycle) with a frequency of up to 1 MHz (2MBit/s).
3) R_{tests} between (Vs /VCAN) and 0V (GND).
4) Not subject to production test, specified by design.
5) $\Delta t_{Rec} = t_{bit(RXD)} - t_{bit(BUS)}$.
6) Not subject to production test, tolerance defined by internal oscillator tolerance.

chanhvinh.com

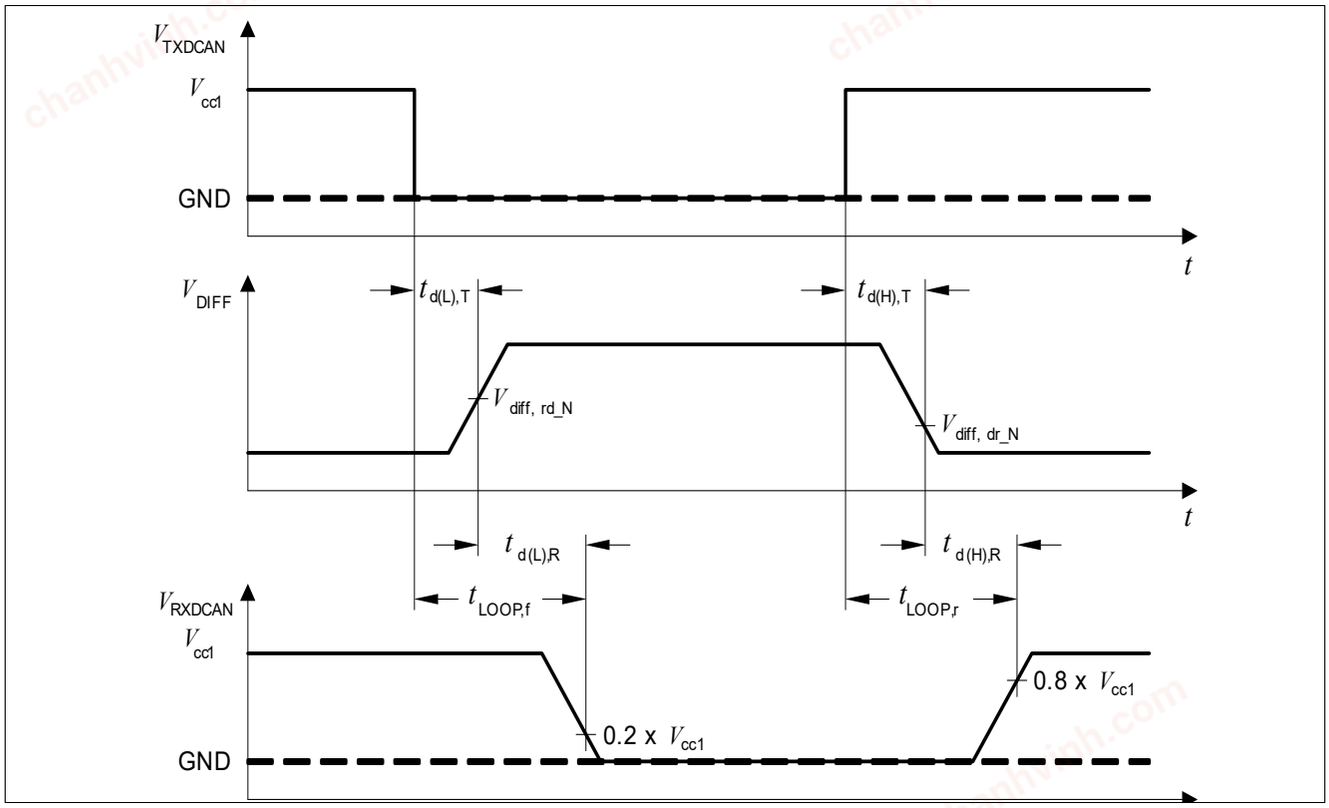


Figure 29 Timing Diagrams for Dynamic Characteristics

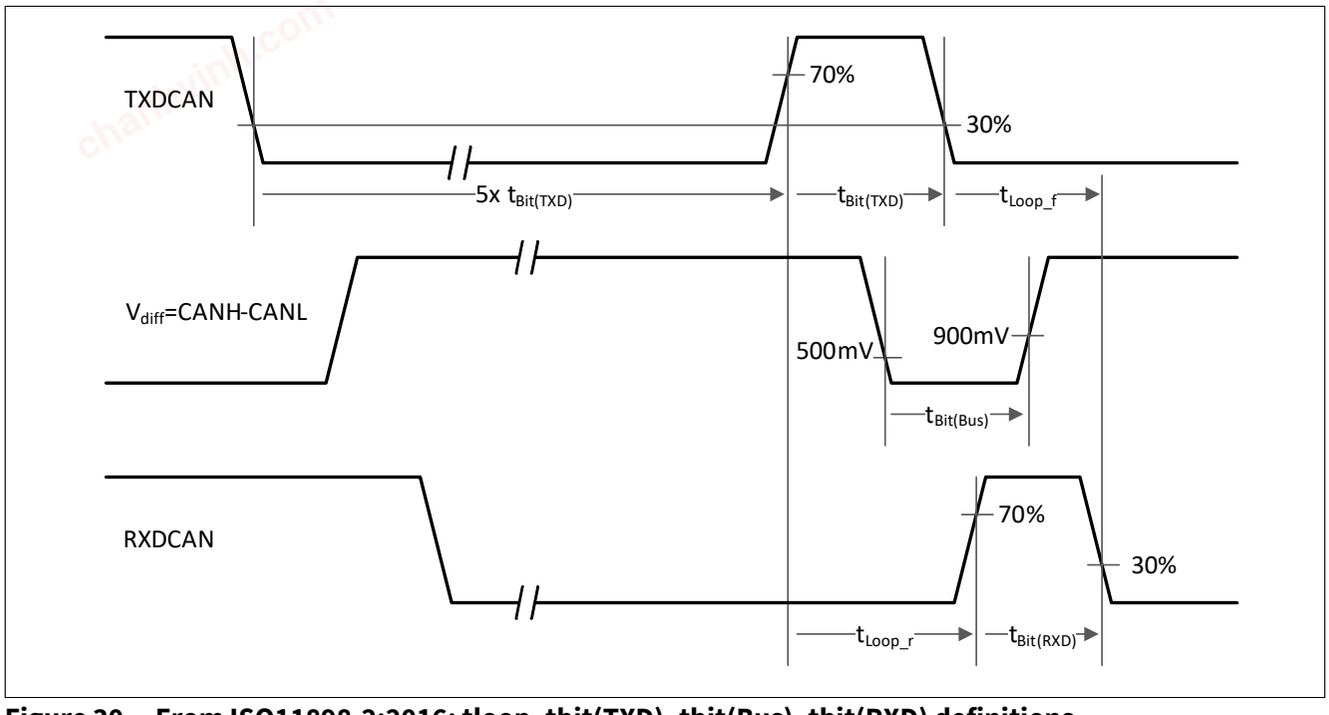


Figure 30 From ISO11898-2:2016: tloop, tbit(TXD), tbit(Bus), tbit(RXD) definitions

chanhvinh.com

9 High-Voltage Wake Input

9.1 Block Description

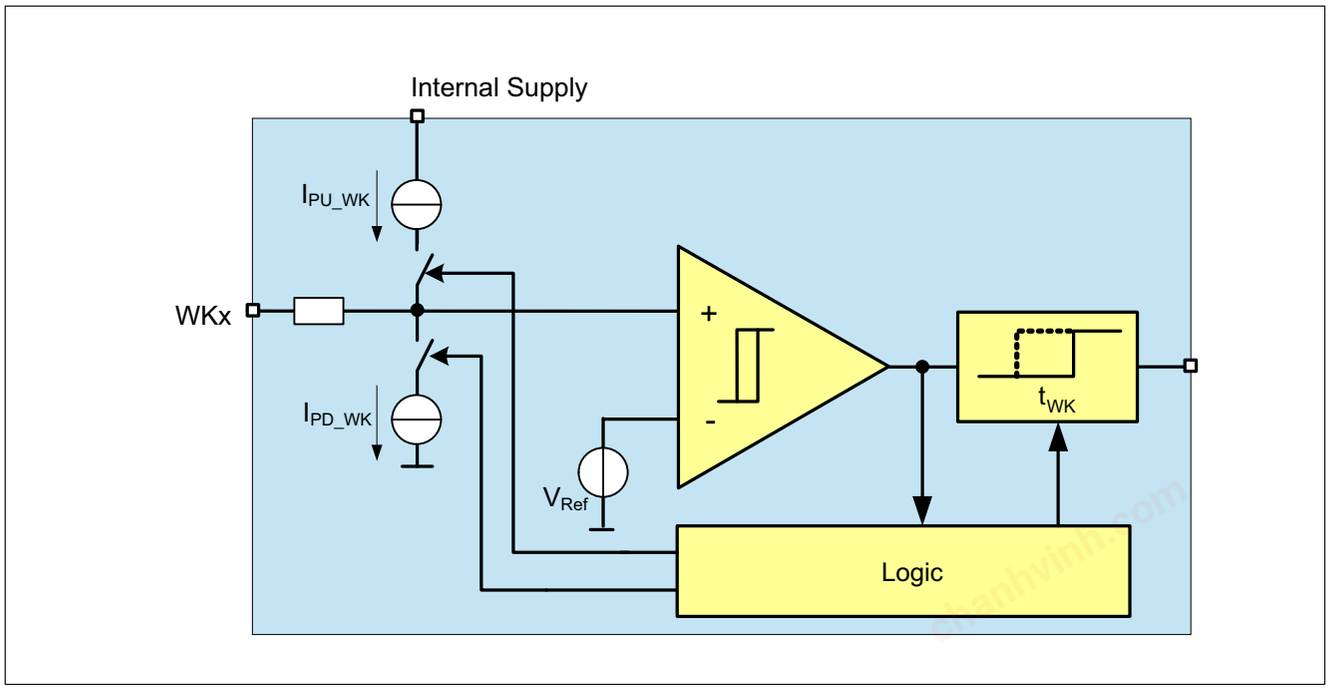


Figure 31 Wake Input Block Diagram

Features

- High-Voltage inputs with a 3 V (typ.) threshold voltage except WK5 (0.5 × VSHS).
- Wake-up capability for power saving modes.
- Edge sensitive wake feature low to high and high to low.
- Pull-up and Pull-down current sources except for WK5 (pull-up fixed), configurable via SPI.
- Selectable configuration for static sense or cyclic sense.
- In Normal Mode and Stop Mode the level of the WKx pin can be read via SPI unless WK4 is configured as SYNC or WK2 is configured as FO.
- Synchronization with HSx via WK4 (for cyclic sense).
- Fail Safe Output configurability (only WK2).

chanhvinh.com

9.2 High-Voltage Wake Function

9.2.1 Functional Description

The wake inputs pin are edge-sensitive inputs with a switching threshold of typically 3 V except WK5. Both transitions, high to low and low to high, result in a signalization by the device. The signalization occurs either in triggering the interrupt in Normal Mode and Stop Mode or by a wake up of the device in Sleep Mode and Fail-Safe Mode.

Two different wake detection modes can be selected via SPI:

- Static sense: WK inputs are always active.
- Cyclic sense: WK inputs are only active for a certain time period (see **Chapter 5.7.1**).

A filter time tFWKx is implemented to avoid an unintentional wake-up due to transients or EMC disturbances in static sense configuration.

The filter time (tFWKx) is triggered by a level change crossing the switching threshold and a wake signal is recognized if the input level will not cross again the threshold during the selected filter time.

Figure 32 shows a typical wake-up timing and filtering of transient pulses.

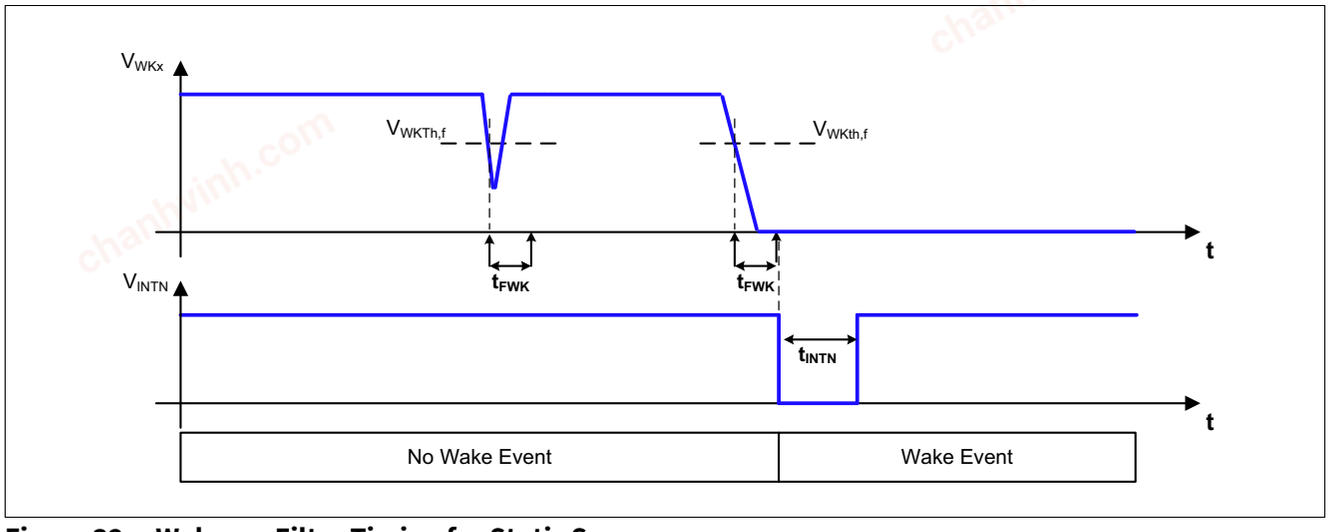


Figure 32 Wake-up Filter Timing for Static Sense

The wake-up capability for the WKx pin can be enabled or disabled via SPI command.

A wake event via the WKx pin can always be read in the register **WK_STAT** at the bit **WK5_WU**.

The actual voltage level of the WKx pin (low or high) can always be read in Normal Mode, Stop Mode and Init Mode in the register **WK_LVL_STAT**. During Cyclic Sense, the register shows the sampled levels of the respective WKx pin.

9.2.2 Wake Input Configuration

To ensure a defined and stable voltage levels at the internal comparator input it is possible to configure integrated current sources via the SPI register **WK_CTRL**.

chanhvinh.com

Table 16 Pull-Up / Pull-Down Resistor (not valid for WK5)

WKx_PUPD_1	WKx_PUPD_0	Current Sources	Note
0	0	no current source	WK input is floating if left open (default setting)
0	1	pull-down	WK input internally pulled to GND
1	0	pull-up	WK input internally pulled to internal 5V supply
1	1	Automatic switching	If a high level is detected at the WK input the pull-up source is activated, if low level is detected the pull down is activated.

Note: If a WK input is not used, the respective WK input must be tied to GND on board to avoid unintended floating state of the pin.

One additional configuration is related the filter time of each Wake-up module. The bits **WK_FILT** permit to set the filter time in static sensing or in cyclic sensing.

Note: When the device mode is changed to normal (from INIT), in case of static sense, if the WK pin is set, the WK_STAT register is set in this time (also the interrupt pin).

9.2.3 Wake configuration for Cyclic Sense

The wake-up inputs can also be used for cyclical sensing signals during low-power modes. For this function the WKx input performs a cyclic sensing of the voltage level during the on-time of specific HSx.
A transition of the voltage level will trigger a wake-up event.
See also **Chapter 5.7.1** for more details.

9.2.4 Wake configuration for Synchronization

The WK4 pin can be configured as SYNC input for driving the HSx.

Prerequisite to configure the WK4 as SYNC input is that the WK4 has to be OFF.

The configuration of the WK4/SYNC bit is done using the **WK_EN** bits. if the **WK_EN**=10_B (SYNC selected), all bits in WK4 bank are ignored and wake-up capability on WK4 is not available.

Note: If WKx is the only wake source available and is configured with cyclic sense with SYNC (WKx_FILT = 100), trying to go to Sleep Mode is not possible (restart mode is entered) - because SYNC is driven by the microcontroller which is not supplied in Sleep Mode.

9.2.5 Fail Safe Output Configuration

The WK2 is by default configured as Fail Safe Output. It is possible to configure the WK2/FO pin as wake-up source using the **WK2_FO** bit.

As soon as the bit **WK2_FO** is written (first SPI write access of bank 2 on **WK_CTRL**), the configuration can be changed only after a software reset or a new power-up sequence.

In case that the **WK2_FO** is locked, any attempt to configured again it will set the **SPI_FAIL**.

The Fail Output consists of a failure logic block and one LOW-side switch. In case of a failure, the FO output is activated and the SPI bit **FAILURE**, in the register **DEV_STAT**, is set.

The Failure Output is activated due to the following failure conditions:

chanhvinh.com

High-Voltage Wake Input

- After four consecutive Watchdog Trigger failures.
- Thermal Shutdown **TSD2**.
- VCC1 short to GND.
- VCC1 overvoltage in case **VCC1_OV_MOD**=11_B.
- after four consecutive VCC1 undervoltage detection.

In order to deactivate the Fail Output, the failure conditions (e.g. TSD2) must not be present anymore and the bit **FAILURE** needs to be cleared via SPI command.

In case of Watchdog fail, the deactivation of the Fail Output is only allowed after a successful WD trigger, i.e. the **FAILURE** bit must be cleared.

*Note: The internally stored default value used for the wake-enabled configuration is 'low'. A level change will be signalized in the corresponding bits in **WK_STAT** in case the externally connected signal proceeds a rising or falling edge transition if the WK-enable is configured to high.*

chanhvinh.com

9.3 Electrical Characteristics

Table 17 Electrical Characteristics

V_{SINT} = 5.5 V to 28 V; T_j = -40°C to +150°C; all voltages with respect to ground, positive current flowing into pin (unless otherwise specified)

Parameter	Symbol	Values			Unit	Note or Test Condition	Number
		Min.	Typ.	Max.			
WK1, WK2 ,WK3, WK4 Input Pin Characteristics							
Wake-up/monitoring threshold voltage falling	$V_{WKx_th,f}$	2.5	3	3.5	V	without external serial resistor R_S	P_10.3.1
Wake-up/monitoring threshold voltage rising	$V_{WKx_th,r}$	3	3.5	4	V	without external serial resistor R_S	P_10.3.2
Threshold hysteresis	$V_{WKx_th,hys}$	0.4	0.6	0.85	V	without external serial resistor R_S	P_10.3.3
WK pin Pull-up Current	I_{PU_WKx}	-20	-10	-3	µA	V_{WKx} = 4 V	P_10.3.4
WK pin Pull-down Current	I_{PD_WKx}	3	10	20	µA	V_{WKx} = 2.5 V	P_10.3.5
Input leakage current	$I_{LK,Ix}$	-2		2	µA	0 V < V_{WKx} < 40 V; Pull-up / Pull-down disabled	P_10.3.6
WK5 Input Pin Characteristics							
Wake-up/monitoring threshold voltage falling	$V_{WK5_th,f}$	0.4 x V_{SHS}	0.45 x V_{SHS}	-	V		P_10.3.7
Wake-up/monitoring threshold voltage rising	$V_{WK5_th,r}$	-	0.55 x V_{SHS}	0.6 x V_{SHS}	V		P_10.3.8
Threshold hysteresis	$V_{WK5_th,hys}$	0.07 × V_{SHS}	0.1 × V_{SHS}	0.175 × V_{SHS}	V		P_10.3.9
Pull-up resistance on WK5	$R_{WK5,pull-up}$	20	30	47	kΩ		P_10.3.10
WK4 as SYNC input pin							
LOW input voltage threshold	$WK4_{SYNC_th,L}$	0.3 × V_{CC1}	-	-	V		P_10.3.11
HIGH input voltage threshold	$WK4_{SYNC_th,H}$	-	-	0.7 × V_{CC1}	V		P_10.3.12
Pull-down resistance on WK/SYNC	R_{SYNC}	20	40	80	kΩ	V_{SYNC} = 1 V	P_10.3.13
WK2/FO as Fail Safe Output							
FO low-side output voltage (active)	$V_{FO,L1}$	–	0.6	1	V	WK2 configured as Fail-Safe Output; I_{FO} = 4.0 mA	P_10.3.14

chanhvinh.com

Table 17 Electrical Characteristics (cont'd)

V_{SINT} = 5.5 V to 28 V; T_j = -40°C to +150°C; all voltages with respect to ground, positive current flowing into pin (unless otherwise specified)

Parameter	Symbol	Values			Unit	Note or Test Condition	Number
		Min.	Typ.	Max.			
FO input leakage current (all inactive)	$I_{FO,LK}$	–	–	2	µA	V_FO = 28 V	P_10.3.15
Timing							
Wake-up filter time 1	t_{FWK1}	12	16	22	µs	1)	P_10.3.16
Wake-up filter time 2	t_{FWK2}	50	64	80	µs	1)	P_10.3.17

1) Not subject to production test, tolerance defined by internal oscillator tolerance.

chanhvinh.com

10 Interrupt Function

10.1 Block and Functional Description

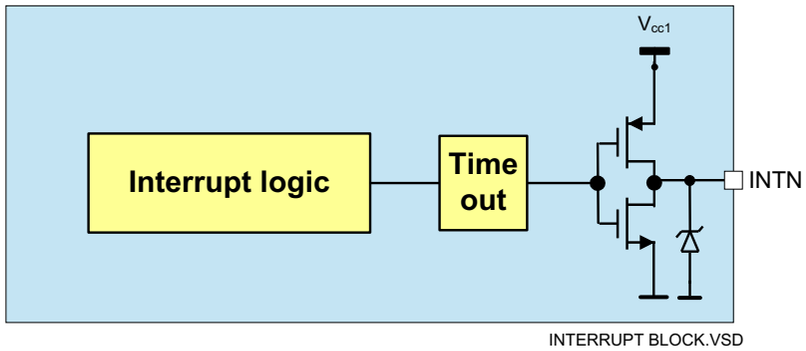


Figure 33 Interrupt Block Diagram

The interrupt is used to signalize special events in real time to the microcontroller. The interrupt block is designed as a push/pull output stage as shown in **Figure 33**. An interrupt is triggered and the INTN pin is pulled low (active low) for t_{INTN} in Normal Mode and Stop Mode and it is released again once t_{INTN} is expired. The minimum high-time of INTN between two consecutive interrupts is t_{INTND}. An interrupt does not cause a device mode change.

Two different interrupt generation methods are implemented:

- Interrupt Mask: One dedicated register (INT_MASK) is intended to enable or disable set of interrupt sources. The interrupt sources follow the SPI Status Information Field.
  In details:
  - SUPPLY_STAT: “OR” of all bits on SUP_STAT register except POR, VCC1_UV, VCC1_SC, VCC1_OV
  - TEMP_STAT: “OR” of all bits on THERM_STAT register except TSD2
  - BUS_STAT: “OR” of all bits on BUS_STAT register
  - HS_STAT: “OR” of all bits on HS_OL_OC_OT_STAT register
  - BD_STAT: “OR” of all bits on DSOV register
  - SPI_CRC_FAIL: or between SPI_FAIL and CRC_FAIL bits on DEV_STAT register.
- Wake-up events: all wake-up events stored in the wake status SPI register WK_STAT only in case the corresponding input was configured as wake-up source.
  The wake-up sources are:
  - via CAN (wake-up pattern or wake-up frame)
  - via WK pins
  - via TIMERx (cyclic wake)
  - via LSx_DSOV_BRK if any of the brake-feature is enabled

The methods are both available at the same time.

Note: The errors which will cause Restart or Fail-Safe Mode (VCC1_UV, VCC1_SC, VCC1_OV, TSD2) are the exceptions of an INTN generation. Also the bit POR will not generate interrupts. If the above mentioned bits are not cleared after the device is back in Normal Mode or Stop Mode, the INTN is periodically generated (Register based cyclic interrupt generation).

chanhvinh.com

Note: Periodical interrupts are only generated by CRC fail and SPI fail from DEV_STAT register.

Note: During Restart Mode the SPI is blocked and the microcontroller is in reset. Therefore the INTN will not be in Restart Mode, which is the same behavior in Fail-Safe Mode or Sleep Mode.

In addition to this behavior, INTN will be triggered when Stop Mode is entered and not all wake source bits were cleared in the WK_STAT register and also the LSx_DSOV_BRK bits in the DSOV register..

The SPI status registers are updated at every falling edge of the INTN pulse. All interrupt events are stored in the respective register until the register is cleared via SPI command. A second SPI read after reading out the respective status register is optional but recommended to verify that the interrupt event is not present anymore. The interrupt behavior is shown in **Figure 34**.

The INTN pin is also used during Init Mode to select the Software Development Mode entry. See **Chapter 5.2** for further information.

In case of pending INTN event (SPI Status registers are not cleared after INTN event), additional periodical INTN events are generated as shown in **Figure 35**.

The periodical INTN events generation can be disabled via SPI command using **INTN_CYC_EN** bit.

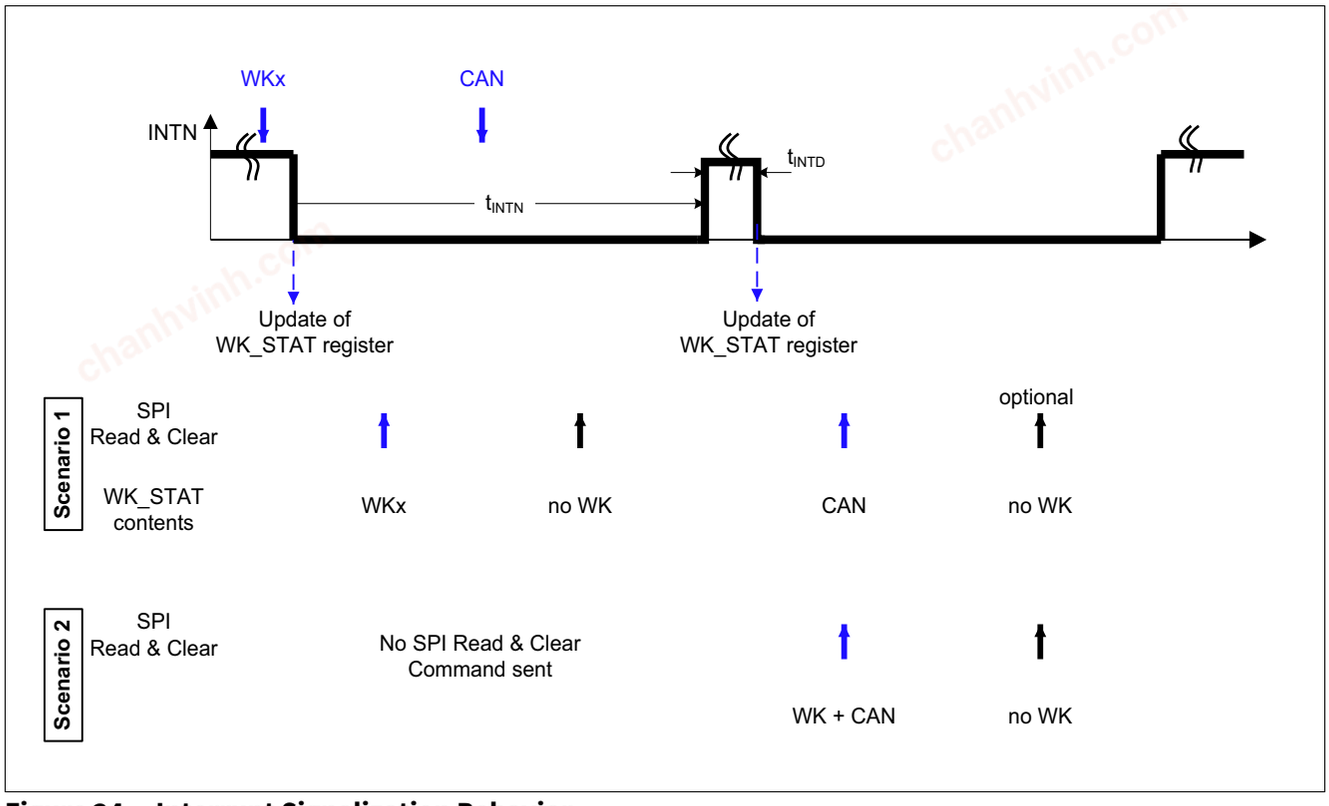


Figure 34 Interrupt Signalization Behavior

Note: For two or more interrupt events at the same time, when INTN pin is low the same time, it will not start multiple toggling.

chanhvinh.com

Interrupt Function

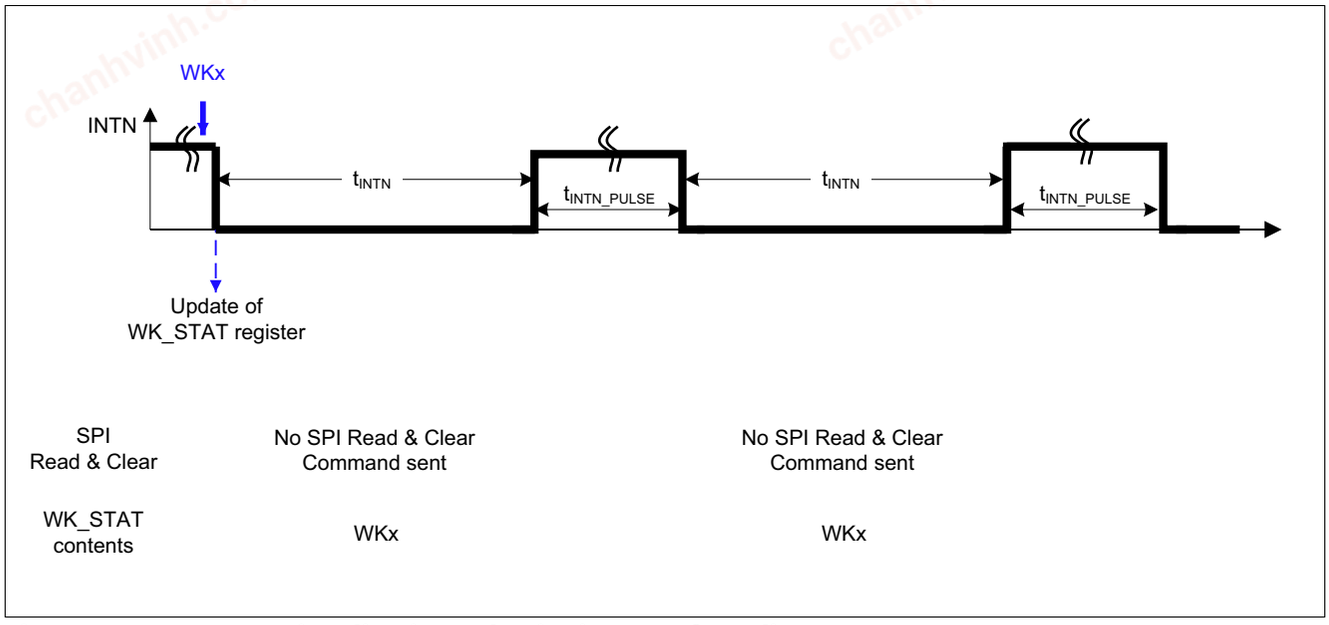


Figure 35 Interrupt Signalization Behavior in case of pending INTN events

chanhvinh.com

10.2 Electrical Characteristics

Table 18 Electrical Characteristics

V_{SINT} = 5.5 V to 28 V; T_j = -40°C to +150°C; Normal Mode; all voltages with respect to ground; positive current defined flowing into pin; unless otherwise specified.

Parameter	Symbol	Values			Unit	Note or Test Condition	Number
		Min.	Typ.	Max.			
Interrupt Output; Pin INTN							
INTN High Output Voltage	$V_{INTN,H}$	0.8 × V_{CC1}	–	–	V	1) I_{INTN} = -2 mA; INTN = off	P_11.2.1
INTN Low Output Voltage	$V_{INTN,L}$	–	–	0.2 × V_{CC1}	V	1) I_{INTN} = 2mA; INTN = on	P_11.2.2
INTN Pulse Width	t_{INTN}	80	100	120	µs	2)	P_11.2.3
INTN Pulse Minimum Delay Time	t_{INTND}	80	100	120	µs	2) between consecutive pulses	P_11.2.4
Pulse in case of pending INTN	t_{INTN_PULSE}	4	5	6	ms	2) between consecutive pulses	P_11.2.5
SDM Select; Pin INTN							
Config Pull-up Resistance	R_{SDM}	30	60	100	kΩ	V_{INTN} = 5 V	P_11.2.6
Config Select Filter Time	t_{SDM_F}	50	64	80	µs	2)	P_11.2.7

1) Output Voltage Value also determines device configuration during Init Mode.

2) Not subject to production test, tolerance defined by internal oscillator tolerance.

chanhvinh.com

11 Gate Drivers

The TLE9561QX integrates eight floating gate drivers capable of controlling a wide range of N-channel MOSFETs. They are configured as four high-sides an d four low-sides, building four half-bridges.

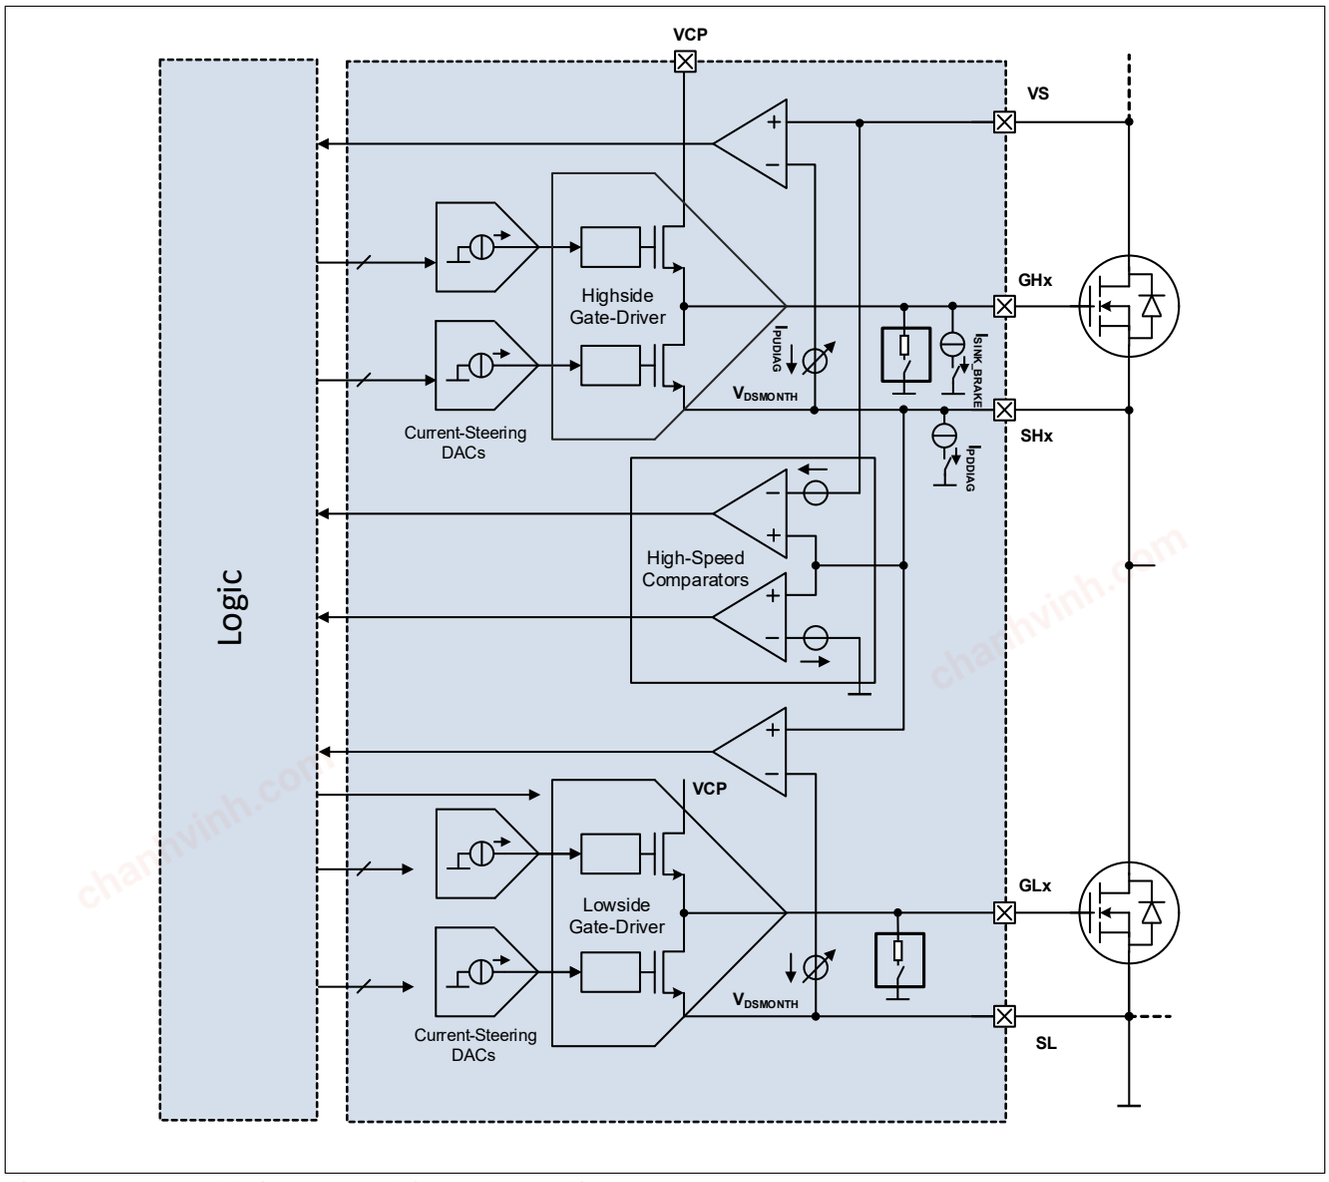


Figure 36 Half-bridge gate driver - Block diagram

This section describes the MOSFET control in static activation and during PWM operation.

Note: PWMx mentioned in this chapter refer to the PWMx pins and signal used by the bridge driver to control the external MOSFETs.

*Note: In this chapter PWMx **do not refer** to the internal PWM generators used to control the internal high-side switches HSx.*

11.1 MOSFET control

Depending on the configuration bits HBxMODE[1:0] (refer to **HBMODE**), **CPEN**, each high-side and low-side MOSFETs can be:

chanhvinh.com

- Kept off with the passive discharge.
- Kept off actively.
- Activated (statically, no PWM, HBx_PWM_EN = 0).
- Activated in PWM mode (HBx_PWM_EN = 1).

Refer to **Table 19** for details.

Table 19 Half-bridge mode selection

CPEN	HBxMODE[1:0][1)]	Configuration of HSx/LSx[1)]
CPEN = 0	Don't care	All MOSFETs are kept off by the passive discharge
CPEN = 1	00_B	HBx MOSFETs are kept off by the passive discharge
CPEN = 1	01_B	LSx MOSFET is ON, HSx MOSFET is actively kept OFF
CPEN = 1	10_B	HSx MOSFET is ON, LSx MOSFET is actively kept OFF
CPEN = 1	11_B	LSx and HSx MOSFETs are actively kept OFF with IHOLD

1) x = 1 … 4

11.2 Static activation

In this section, we consider the static activation of the high-side and low-side MOSFET of the half-bridge x: HBx_PWM_EN= 0 (in **ST_ICHG**) and **CPEN** = 1.

The low-side or high-side MOSFET of HBx is statically activated (no PWM) by setting HBxMODE[1:0] to respectively (0,1) or (1,0).

The configured active cross-current protection and the Drain-Source overvoltage blank times for the Half-Bridge x are noted $t_{HBxCCP\ ACTIVE}$ and $t_{HBxBLANK\ ACTIVE}$.
The charge and discharge currents applied to the static controlled Half-Bridge x are noted ICHGSTx (**ST_ICHG**).

IHARDOFF is the maximum current that the gate drivers can sink (100 mA typ.). This current is used to keep a MOSFET off, when the opposite MOSFET of the same half-bridge is being turned on. This feature reduces the risk of parasitic cross-current conduction.

ICHGSTx is the current sourced, respectively sunk, by the gate driver to turn-on the high-side x or low-side x. ICHGSTx is configured in the control register **ST_ICHG**.

Table 20 Static charge and discharge currents

ICHGSTx[3:0]	Nom. charge current [mA]	Nom. discharge current [mA]	Max. deviation to typ. values
0000_B	0.5 (I_{CHG0})	0.5 (I_{DCHG0})	+/- 60 %
0001_B	1.4 (I_{CHG4})	1.4 (I_{DCHG4})	+/- 60 %
0010_B	3.1 (I_{CHG8})	3.1 (I_{DCHG8})	+/- 55%
0011_B	5.7 (I_{CHG12})	5.7 (I_{DCHG12})	+/- 40 %
0100_B	9.2 (I_{CHG16})	9.2 (I_{DCHG16})	+/- 40 %
0101_B	13.7 (I_{CHG20})	13.5 (I_{DCHG20})	+/- 40 %

chanhvinh.com

Table 20 Static charge and discharge currents (cont'd)

ICHGSTx[3:0]	Nom. charge current [mA]	Nom. discharge current [mA]	Max. deviation to typ. values
0110_B	19.2(I_{CHG24})	18.8(I_{DCHG24})	+/- 40 %
0111_B	25.8 (I_{CHG28})	25.2 (I_{DCHG28})	+/- 30 %
1000_B	32.8 (I_{CHG32})	32.2 (I_{DCHG32})	+/- 30 %
1001_B	40.1 (I_{CHG36})	39.4 (I_{DCHG36})	+/- 30 %
1010_B	47.8 (I_{CHG40})	47.0 (I_{DCHG40})	+/- 30 %
1011_B	55.9 (I_{CHG44})	55.0 (I_{DCHG44})	+/- 30 %
1100_B	64.3 (I_{CHG48})	63.2 (I_{DCHG48})	+/- 30 %
1101_B	73.2 (I_{CHG52})	72.4 (I_{DCHG52}	+/- 30 %
1110_B	82.7 (I_{CHG56})	82.1 (I_{CHG56})	+/- 30 %
1111_B	92.7 (I_{CHG60})	92.2 (I_{CHG60})	+/- 30 %

IHOLD is the hold current used to keep the gate of the external MOSFETs in the desired state. This parameter is configurable with the IHOLD control bit in **GENCTRL**.

If the control bit IHOLD = 0:

- A MOSFET is kept ON with the current I_{CHG19}.
- A MOSFET is kept OFF with the current I_{DCHG19}.

If the control bit IHOLD = 1:

- A MOSFET is kept ON with the current I_{CHG25}.
- A MOSFET is kept OFF with the current I_{CHG25}.

11.2.1 Static activation of a high-side MOSFET

Turn-on with cross-current protection

If LSx is ON (HBxMODE[1:0] = 01_B), before the activation of HSx (HBxMODE[1:0] = 10_B) then the high-side MOSFET is turned on after a cross-current protection time (refer to **Figure 37**):

- After the CSN rising edge and for the duration $t_{HBxCCP\ ACTIVE}$:
  - The high-side MOSFET is kept OFF with the current -ICHGSTx.
  - The gate of the low-side MOSFET is discharged with the current -ICHGSTx.
- At the end of $t_{HBxCCP\ ACTIVE}$ and for the duration $t_{HBxBLANK\ ACTIVE}$ + t_{FVDS}:
  - The gate of the high-side MOSFET is charged with the current ICHGSTx.
  - Low-side MOSFET is kept OFF with the current -IHARDOFF (hard off phase).
- At the end of t_{FVDS}:
  - The drive current of the high-side MOSFET is reduced to IHOLD.
  - The drive current of the low-side MOSFET is set to -IHOLD.

chanhvinh.com

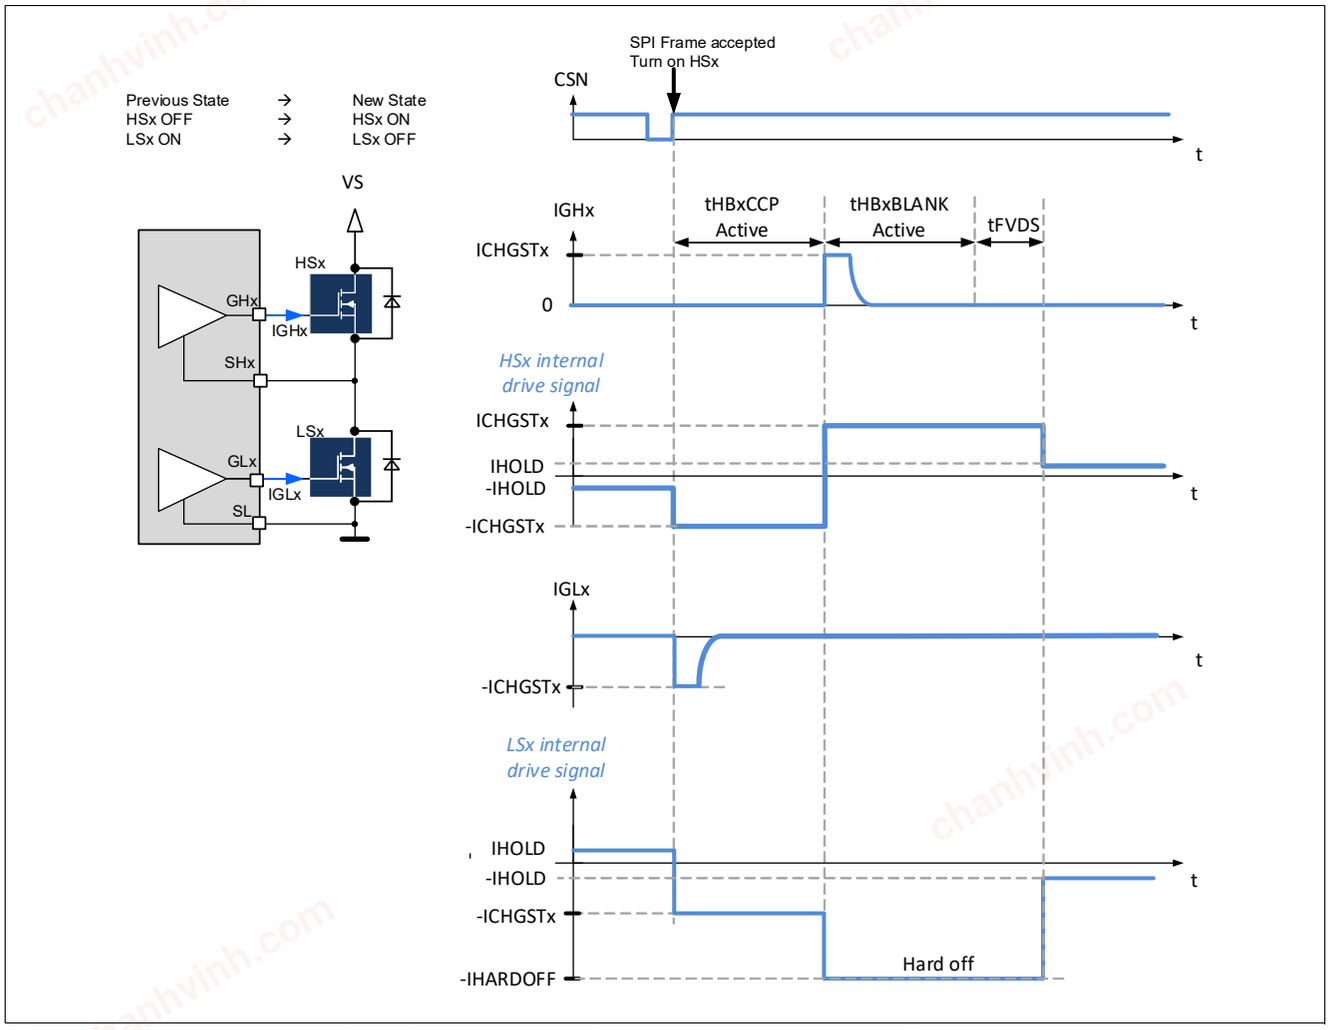


Figure 37 Turn-on of a high-side MOSFET with cross-current protection

Note: The CSN rising edge must be synchronized with the device logic. Therefore SPI commands are executed with a delay of up to 3 µs after the CSN rising edge.

chanhvinh.com

Turn-on without cross-current protection

If LSx is OFF (HBxMODE[1:0] = 11_B), before the activation of HSx (HBxMODE[1:0] = 10_B), then the high-side MOSFET is turned on without cross-current protection (refer to **Figure 38**):

- right after the CSN rising edge and for a duration $t_{HBxBLANK\ ACTIVE} + t_{FVDS}$:
  - The gate of the high-side MOSFET is charged with the current ICHGSTx.
  - The low-side MOSFET is kept OFF with the current -IHARDOFF.
- At the end of t_{FVDS}:
  - The drive current of the high-side MOSFET is reduced to IHOLD.
  - The drive current of the low-side MOSFET is set to -IHOLD.

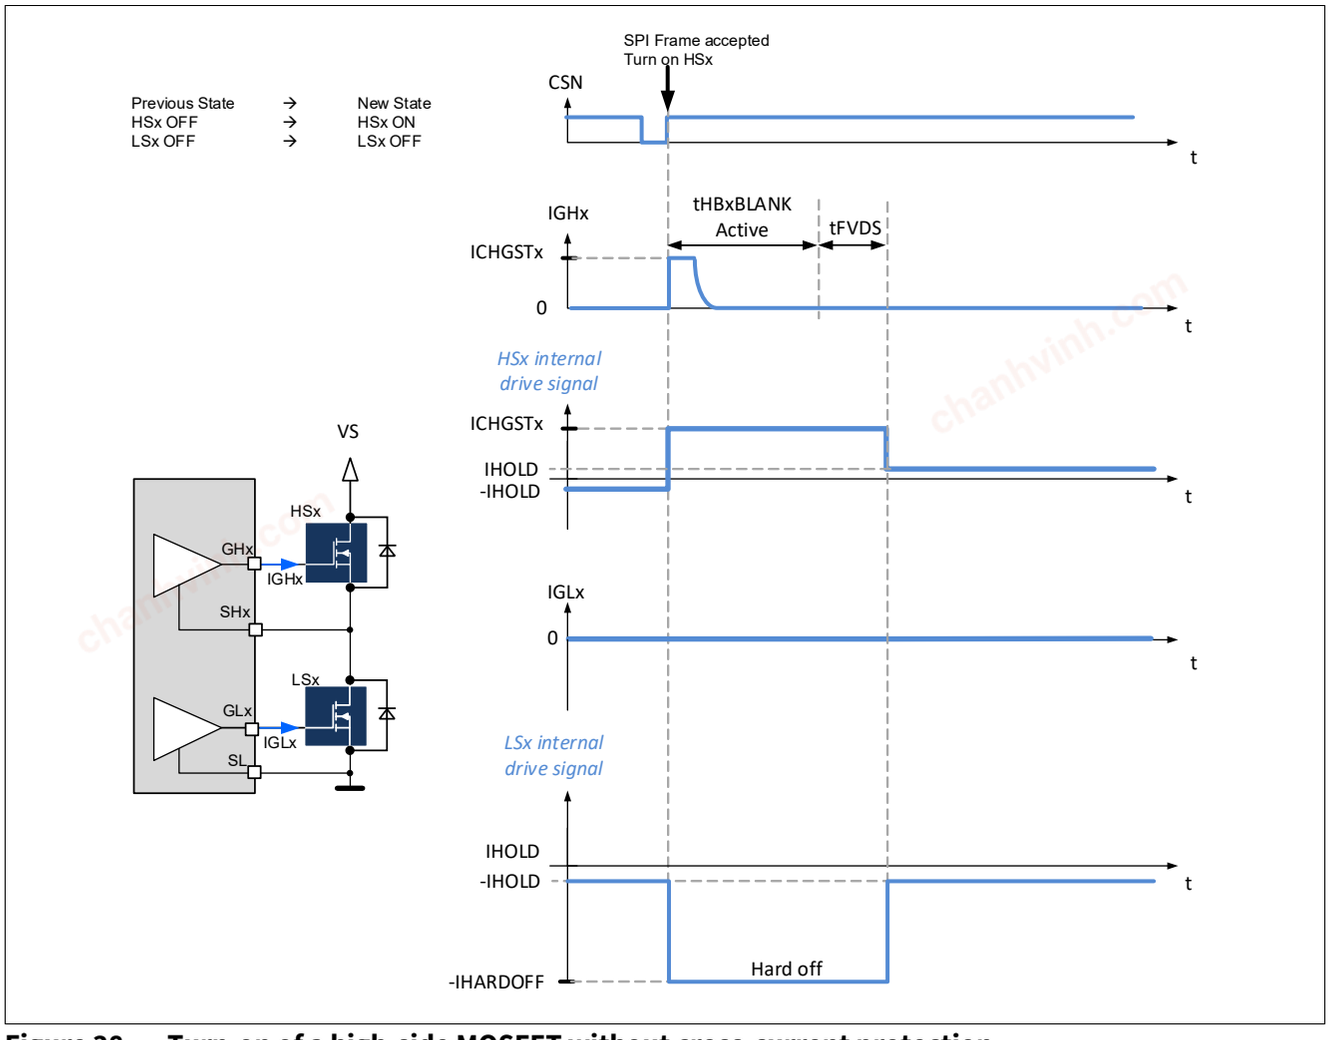


Figure 38 Turn-on of a high-side MOSFET without cross-current protection

Note: The CSN rising edge must be synchronized with the device logic. Therefore SPI commands are executed with a delay of up to 3 µs after the CSN rising edge.

chanhvinh.com

11.2.2 Static activation of a low-side MOSFET

The description of the static activation of a low-side x differs from the description of **Chapter 11.2.1** only by exchanging high-side x and low-side x.

11.2.3 Turn-off of the high-side and low-side MOSFETs of a half-bridge

When the TLE9561QX receives a SPI command to turn-off both the high-side and low-side MOSFETs of the half-bridge x (HBxMODE[1:0] = (0,0) or (1,1)):

- The gate of HSx and LSx are discharged with the current -ICHGSTx for the duration $t_{HBxCCP\ ACTIVE}$ (**Figure 39**).
- At the end of $t_{HBxCCP\ ACTIVE}$, the drive current of HSx and LSx are reduced to -IHOLD.

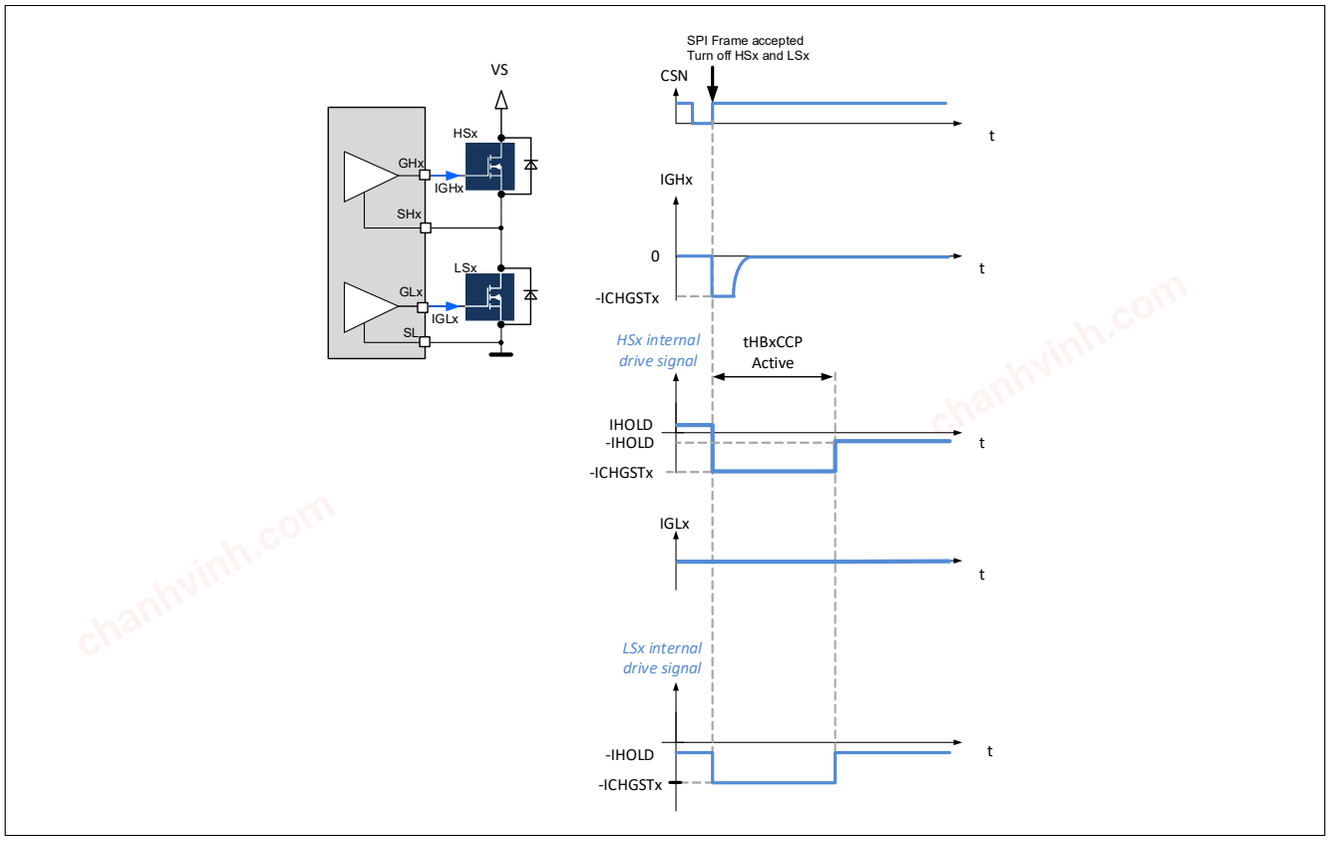


Figure 39 Turn-off of the high-side and low-side MOSFETs of a half-bridge

Note: The CSN rising edge must be synchronized with the device logic. Therefore SPI commands are executed with a delay of up to 3 µs after the CSN rising edge.

chanhvinh.com

11.3 PWM operation

The pins PWMx provide the PWM signal for each PWM channel.

Each half-bridge is activated in PWM mode by setting the corresponding HBx_PWM_EN bit (**HBMODE**).

11.3.1 Determination of the active and freewheeling MOSFET

If **EN_GEN_CHECK** = 1, right before each MOSFET activation, the device detects which MOSFET of the half-bridge is the active MOSFET and which MOSFET is the free-wheeling (FW) MOSFET (**Figure 40**):

- If VSHx > V_{SHH} : The high-side MOSFET is the FW MOSFET and the low-side MOSFET is the active MOSFET.
- If VSHx < V_{SHL}: Then the low-side MOSFET is the FW MOSFET and the high-side MOSFET is the active MOSFET.
- If V_{SHL} < VSHx < V_{SHH}: No clear distinction between the active FW MOSFET and the active MOSFET. The next MOSFET to be turned on is turned on as if it was the active MOSFET.
- No distinction between active MOSFET and FW MOSFET is possible (and the PWM MOSFET is considered as the active MOSFET), if:
  - the ON-time of the external PWM signal is shorter than tHBxCCP FW
  - the OFF-time of the external PWM signal is shorter than tHBxCCP Active

Note: The PWM signal is applied to the MOSFET selected by HBxMODE[1:0], independently from the free-wheeling and the active MOSFET.

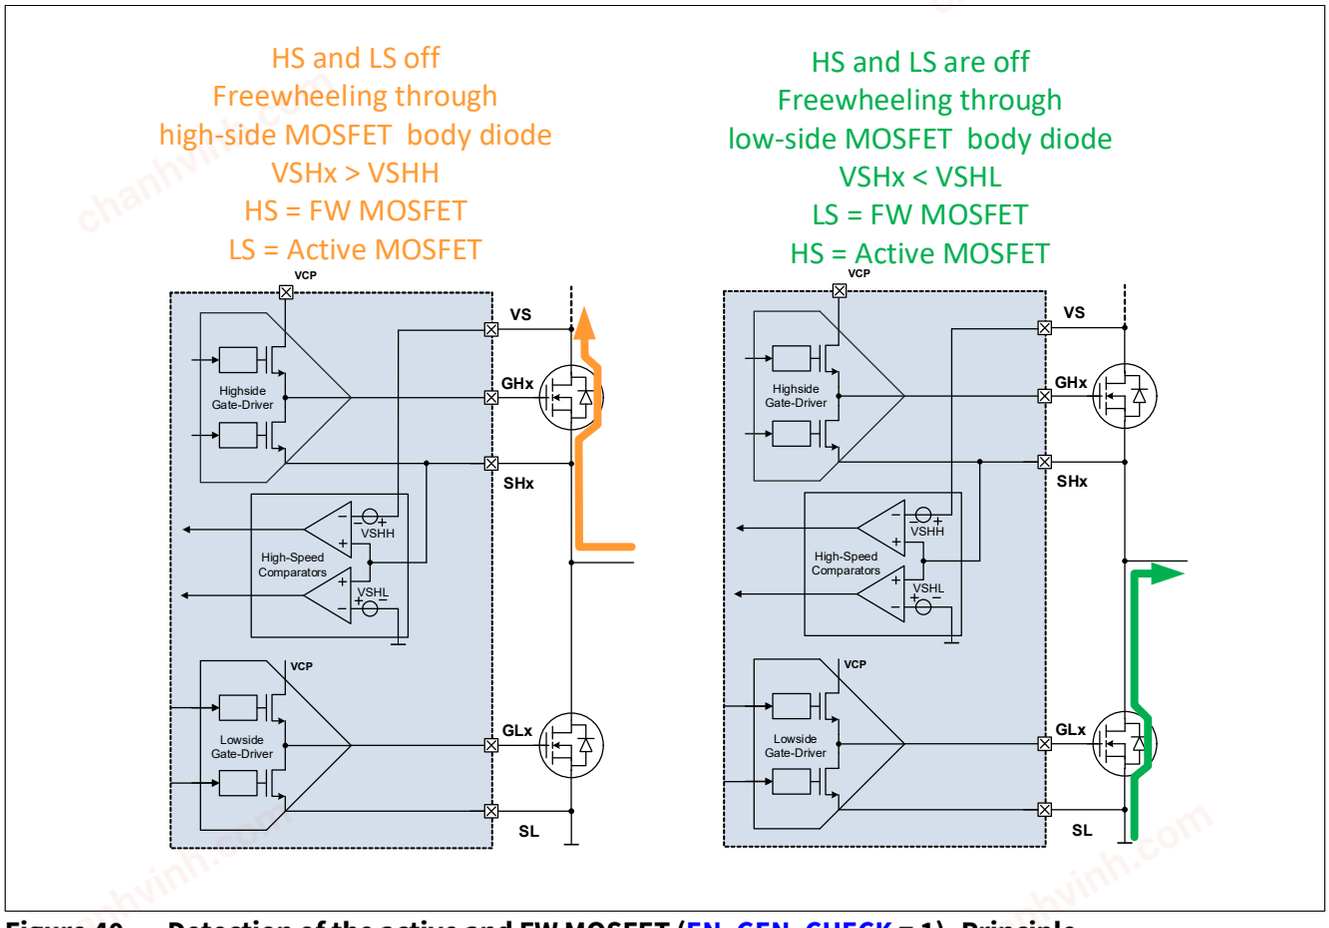


Figure 40 Detection of the active and FW MOSFET (EN_GEN_CHECK = 1)- Principle

chanhvinh.com

Figure 41 and **Figure 42** show examples of free-wheeling and active MOSFET when the motor operates as load.

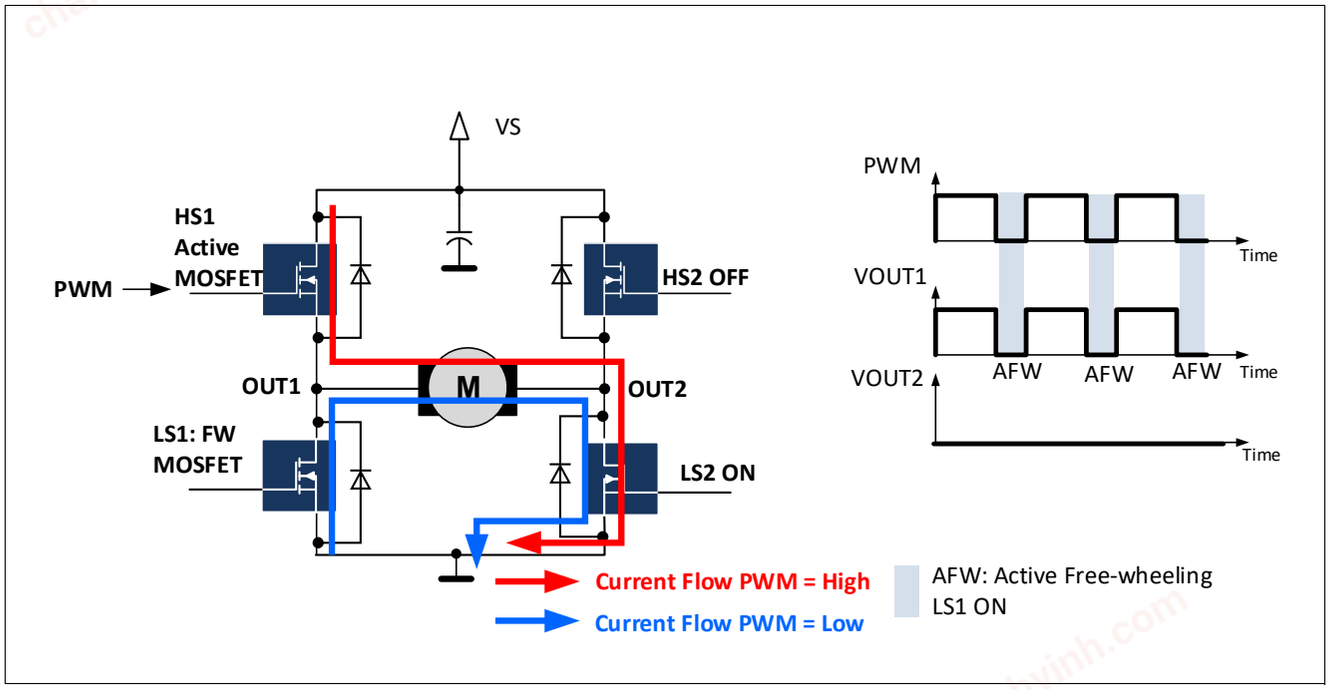


Figure 41 Active freewheeling on HB1: AFW1 = 1, HB1_PWM_EN = 1. PWM applied to HS1 (HB1MODE[1:0] = 10_B). The motor operates as load: HS1 is the active MOSFET, LS1 is the FW MOSFET.

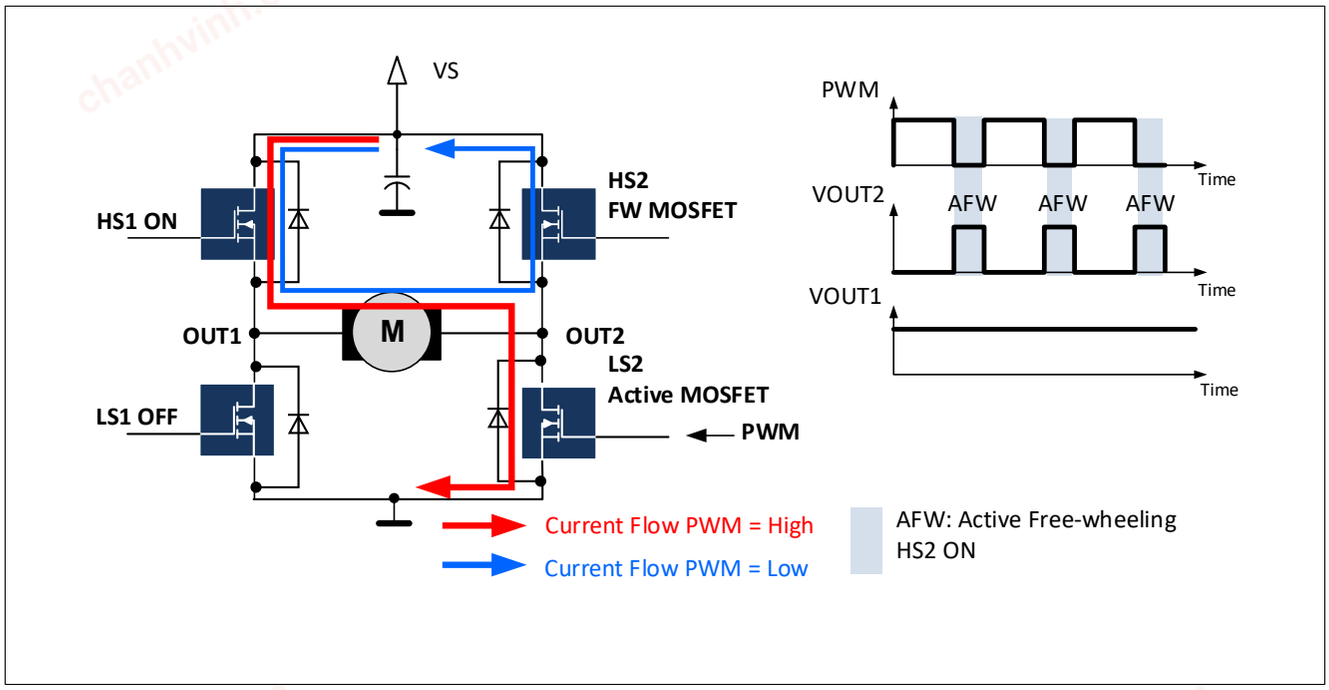


Figure 42 Active freewheeling on HB2: AFW2 = 1, HB1_PWM_EN = 1. PWM applied to LS2 (HB2MODE[1:0] = 01_B). The motor operates as load: LS2 is the active MOSFET, HS2 is the FW MOSFET.

chanhvinh.com

Figure 43 and **Figure 44** show examples of free-wheeling and active MOSFETs when the motor operates as generator.

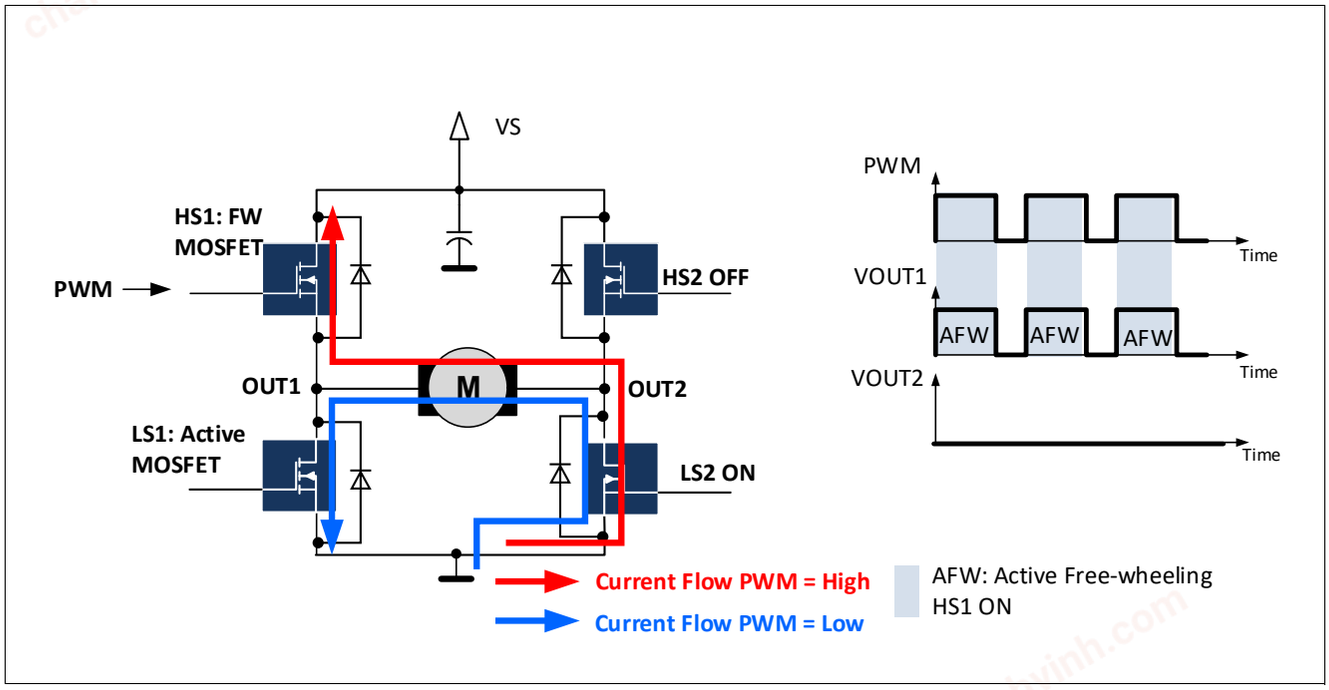


Figure 43 Active freewheeling on HB1: AFW1 = 1, HB1_PWM_EN = 1. PWM applied to HS1 (HB1MODE[1:0] = 10_B), EN_GEN_CHECK = 1.The motor operates as generator: LS1 is the active MOSFET, HS1 is the FW MOSFET.

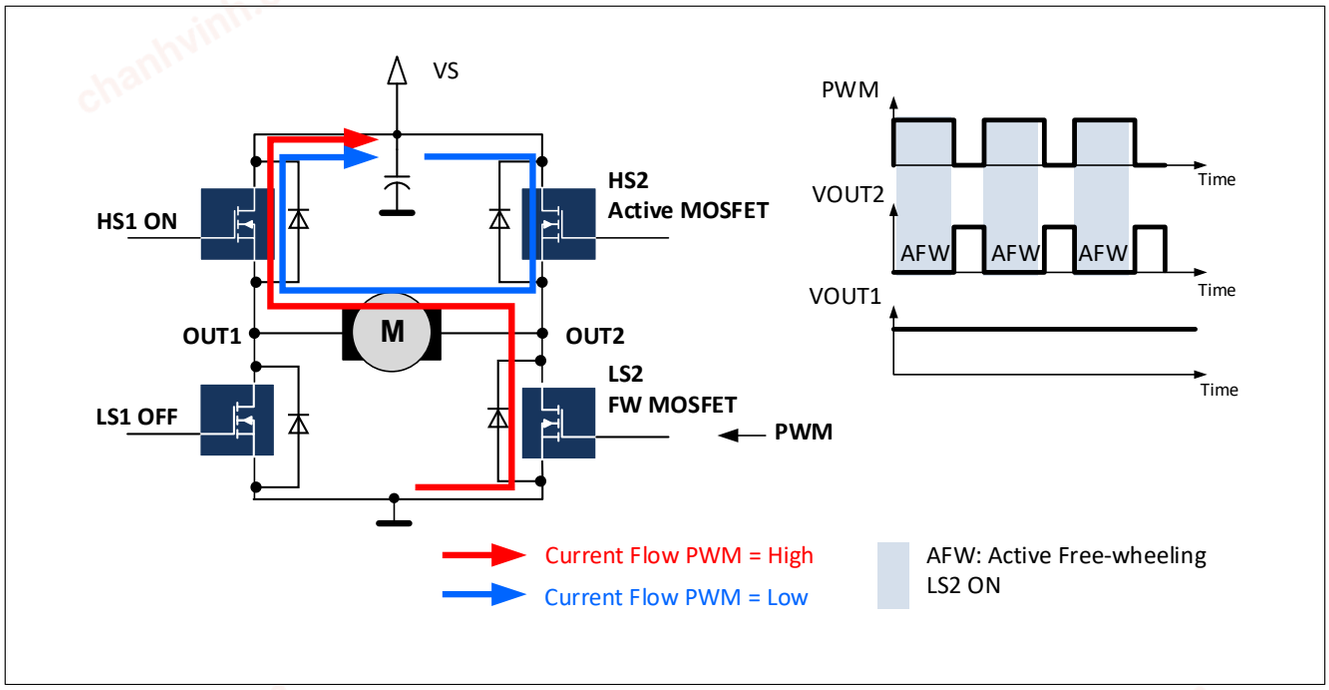


Figure 44 Active freewheeling on HB2: AFW2 = 1, HB1_PWM_EN = 1. PWM applied to LS2 (HB2MODE[1:0] = 01_B), EN_GEN_CHECK = 1. The motor operates as generator: HS2 is the active MOSFET, LS2 is the FW MOSFET.

chanhvinh.com

11.3.2 Configurations in PWM mode

The following sections describe the different control schemes in PWM mode.

Active gate control (AGC)

The control scheme during the pre-charge and pre-discharge phases are configured by the control bits AGC[1:0]:

- Adaptive gate control (AGC[1:0] = (1,0) or (1,1), **GENCTRL**): in this mode a pre-charge current and a pre-discharge current are applied to the gate of the active MOSFET. These currents are used to regulate the turn-on and turn-off delays to the respective target values. Refer to **Chapter 11.3.4**.
- No adaptive gate control (AGC[1;0] = (0,0)): in this mode, the pre-charge and pre-discharge phases (of the active MOSFET) are deactivated. Refer to **Chapter 11.3.5**.
- No adaptive gate control (AGC[1;0] = (0,1)). In this mode:
  - During the pre-charge phase, the gate of the active MOSFET is charged with the configured current IPCHGINIT (**HB_PCHG_INIT**).
  - During the pre-discharge phase, the gate of the active MOSFET is discharged with the configured current IPDCHGINIT (**HB_PCHG_INIT**).

*Note: It is recommended to configure tPCHGx < tHBxBLANK Active and tPDCHGx < tHBxCCP Active (Refer to **TPRECHG** and **CCP_BLK**) independently from the AGC settings.*

Active free-wheeling (AFW)

The active free-wheeling is activated for HBx if the AFWx and HBx_PWM_EN (**HBMODE**) are set to 1 to reduce the power dissipation of the free-wheeling MOSFET. If an active MOSFET is OFF, the opposite MOSFET of the same half-bridge is actively turned on. See examples of high-side and low-side PWM operation in **Figure 41** and **Figure 42**.

If AFWx = 1, a cross-current protection time is applied to HBx (set by **CCP_BLK**) during the PWM operation.

If AFWx = 0, no cross current protection is applied to HBx during the PWM operation.

AFWx can be changed either when HBx is in high impedance or when one of the HBx MOSFETs is on:

- In motor mode :
  - If AFWx is changed from 1 to 0: then the new value of AFWx is read and latched at the end to tCCP FW which follows the PWM rising edge.
  - If AFWx is changed from 0 to 1: then the new value of AFWx is read and latched at the PWM rising edge.
- In generator mode (**EN_GEN_CHECK** = 1): If AFWx is changed from 0 to 1 or from 1 to 0, then the new value of AFWx is read and latched at the end to tCCP active which follows a PWM rising edge.

chanhvinh.com

Post-charge

A post-charge is initiated if **POCHGDIS** is set to 0 (**GENCTRL**) to reach the minimum MOSFET Rdson.

- **POCHGDIS** = 0: The post-charge phase is initiated at the end of the turn-on of the active MOSFET. The charge current is increased by one current step at every bridge driver clock cycle (**BDFREQ**) to ICHGMAXx.
- **POCHGDIS** = 1: The post-charge phase is disabled. The charge current is kept to ICHGx.

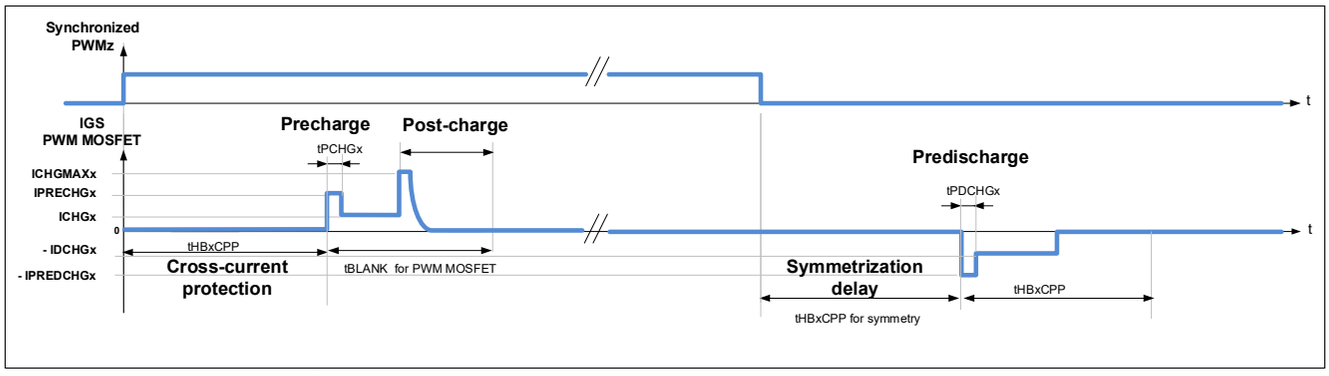


Figure 45 PWM overview - AGC = 10_B or 11_B, POCHGDIS=0, AFWx = 1

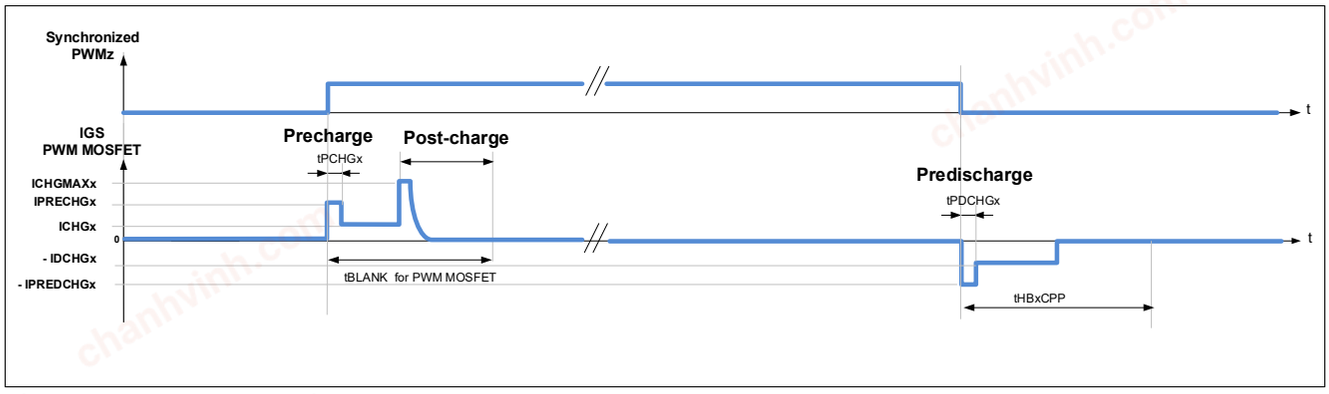


Figure 46 PWM overview - AGC = 10_B or 11_B, POCHGDIS=0, AFWx = 0

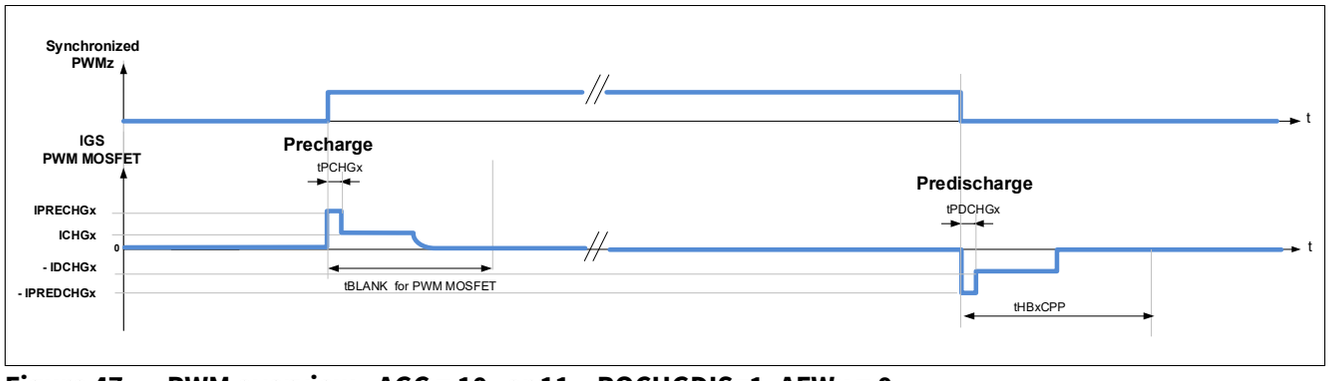


Figure 47 PWM overview - AGC = 10_B or 11_B, POCHGDIS=1, AFWx = 0

11.3.3 PWM mapping

The PWM inputs can be mapped by different half-bridges by setting the configuration bits PWM12MAP and PWM34MAP in **GENCTRL**.

chanhvinh.com

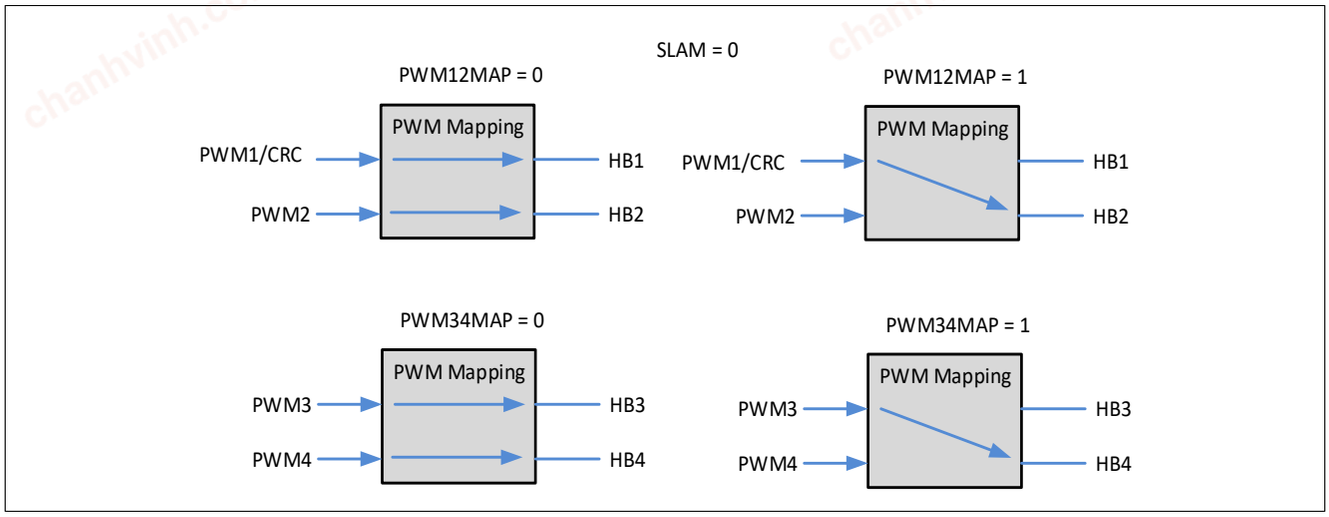


Figure 48 PWM input mapping TLE9561QXC

chanhvinh.com

11.3.4 PWM operation with adaptive gate control

This section describes the MOSFETs control during high-side or low-side PWM operation when the adaptive gate control is enabled (AGC[1:0] = (1,0) or (1,1), **GENCTRL**).

Assumption: A high-side or low-side MOSFET is mapped to the PWM input PWMz.

The TLE9561QX adapts the pre-charge current, respectively the pre-discharge current, in order to match the effective turn-on delay (t_{DON}) and turn-off delay (t_{DOFF}) to the configured values.

The configured turn-on and turn-off delays of the respective PWM MOSFETs are set by the registers **TDON_HB_CTRL** and **TDOFF_HB_CTRL**.

The effective turn-on and turn-off delays of the respective PWM MOSFETs are read out from the status registers EFF_TDON_OFFx.

Table 21 Abbreviations for adaptive turn-on and turn-off phases in PWM configuration

Abbreviation	Definition
Suffix x	Related to the half-bridge x.
Suffix z	Related to the PWM input z.
VGS_HSx	Gate-Source voltage of high-side MOSFET x.
IGS_HSx	Gate current of high-side MOSFET x. IGS_HSx is positive when the current flows out of GHx.
VGS_LSx	Gate-Source voltage of low-side MOSFET x.
IGS_LSx	Gate current of low-side MOSFET x. IGS_LSx is positive when the current flows out of GLx.
tPWM_SYNCH	Synchronization delay between external and internal PWM signal.
tHBxCCP ACTIVE	Active cross-current protection time of HBx. See control register **CCP_BLK**.
tHBxBLANK ACTIVE	Active Drain-source overvoltage blank time of HBx. See control register and **CCP_BLK**.
tHBxCCP FW	Freewheeling cross-current protection time of HBx. See control register **CCP_BLK**.
tHBxBLANK FW	Freewheeling drain-source overvoltage blank time of HBx. See control register and **CCP_BLK**.
PWMz	External PWM signal applied to the input pin PWMz.
ICHGMAXx	Maximum drive current of the half-bridge x during the pre-charge and pre-discharge phases. See control register **HB_ICHG_MAX**. IPRECHGx and IPREDCHGx are limited to ICHGMAXx.
IPRECHGx	Pre-charge current sourced by the gate driver to the active MOSFET of the half-bridge x during tPCHGx (**TPRECHG**). Internal and self-adaptive parameter (if AGC[1:0] = (1,0) or (1,1), **GENCTRL**). IPRECHGx is clamped between I_{CHG0} (0.5 mA typ.) and ICHGMAXx.
IPCHGINITx	Initial value of IPRECHGx. Refer to **HB_PCHG_INIT**.
IPREDCHGx	Pre-discharge-current sunk by the gate driver mapped to the half-bridge x during tPDCHGx. Internal and self-adaptive parameter (if AGC[1:0] = (1,0) or (1,1), **GENCTRL**). IPREDCHGx is clamped between I_{DCHG0} (0.5 mA typ.) and ICHGMAXx.
IPDCHGINITx	Initial value of IPREDCHGx. Refer to **HB_PCHG_INIT**.

chanhvinh.com

Table 21 Abbreviations for adaptive turn-on and turn-off phases in PWM configuration (cont'd)

Abbreviation	Definition
ICHGx	Current sourced by the gate driver to the active MOSFET of the half-bridge x during the charge phase. See control register **HB_ICHG**.
IDCHGx	Current sunk by the gate driver to turn-off the active MOSFET of the half-bridge x during the discharge phase. See control register **HB_ICHG**.
ICHGFWx	Current sourced or sunk by the gate driver to turn on / turn off the freewheeling MOSFET of the half-bridge x. See control register **HB_ICHG**.
tPCHGx	Duration of the pre-charge phase of half-bridge x. tPCHGx is configurable by SPI. See control register **TPRECHG**.
tPDCHGx	Duration of the pre-discharge phase of half-bridge x. tPDCHGx is configurable by SPI. See control register **TPRECHG**.
tDONx	Turn-on delay of the active MOSFET of HBx.
tDOFFx	Turn-off delay of the active MOSFET of HBx.
IHOLD	Hold current sourced or sunk by the gate driver to keep the MOSFET in the desired state. See **IHOLD** control bit in **GENCTRL**.
IHARDOFF	IHARDOFF is the maximum current that the gate drivers can sink. It corresponds to the discharge current when IDCHGx[5:0] = 63_D (100 mA typ.).
TFVDS	Drain-Source overvoltage filter time. See **LS_VDS**.

chanhvinh.com

11.3.4.1 High-side PWM with adaptive gate control, motor operating as load

The following section describes the MOSFET control when the PWM signal is applied to the high-side MOSFET of one half-bridge while the motor operates as a load.

Assumption: the PWM input z is mapped to the high-side MOSFET of the half-bridge x.

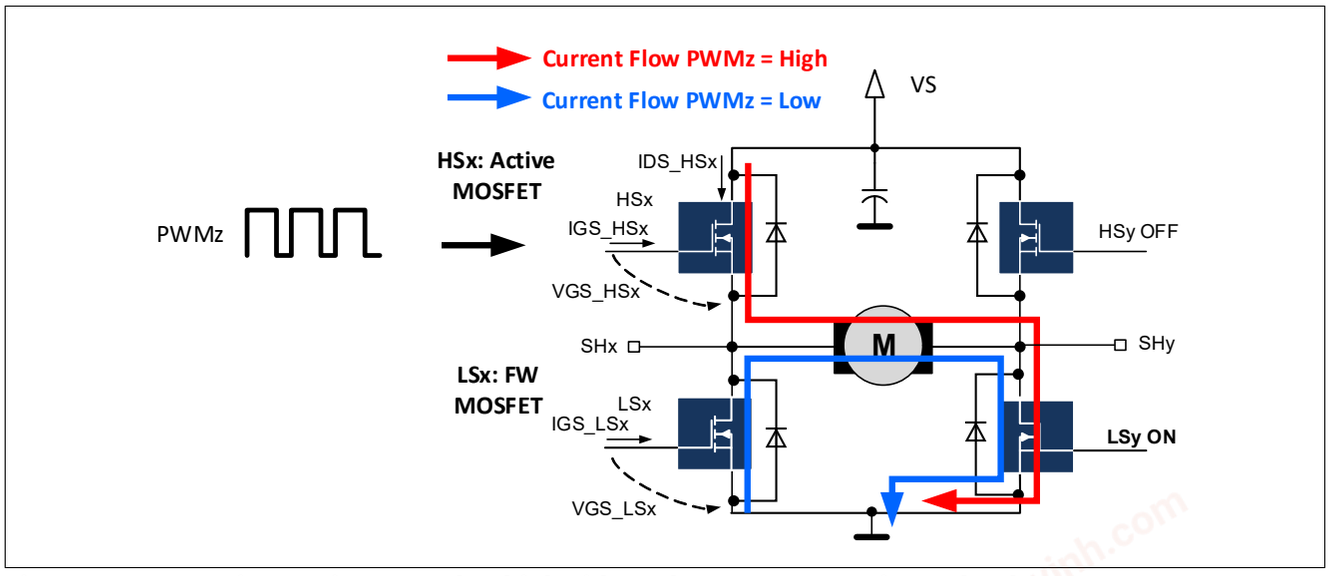


Figure 49 PWM input z is mapped to high-side x, the motor operating as load

11.3.4.1.1 High-side PWM with adaptive gate control and active free-wheeling

This section describes the MOSFETs control scheme applied to HBx with active free-wheeling (AFWx = 1).

chanhvinh.com

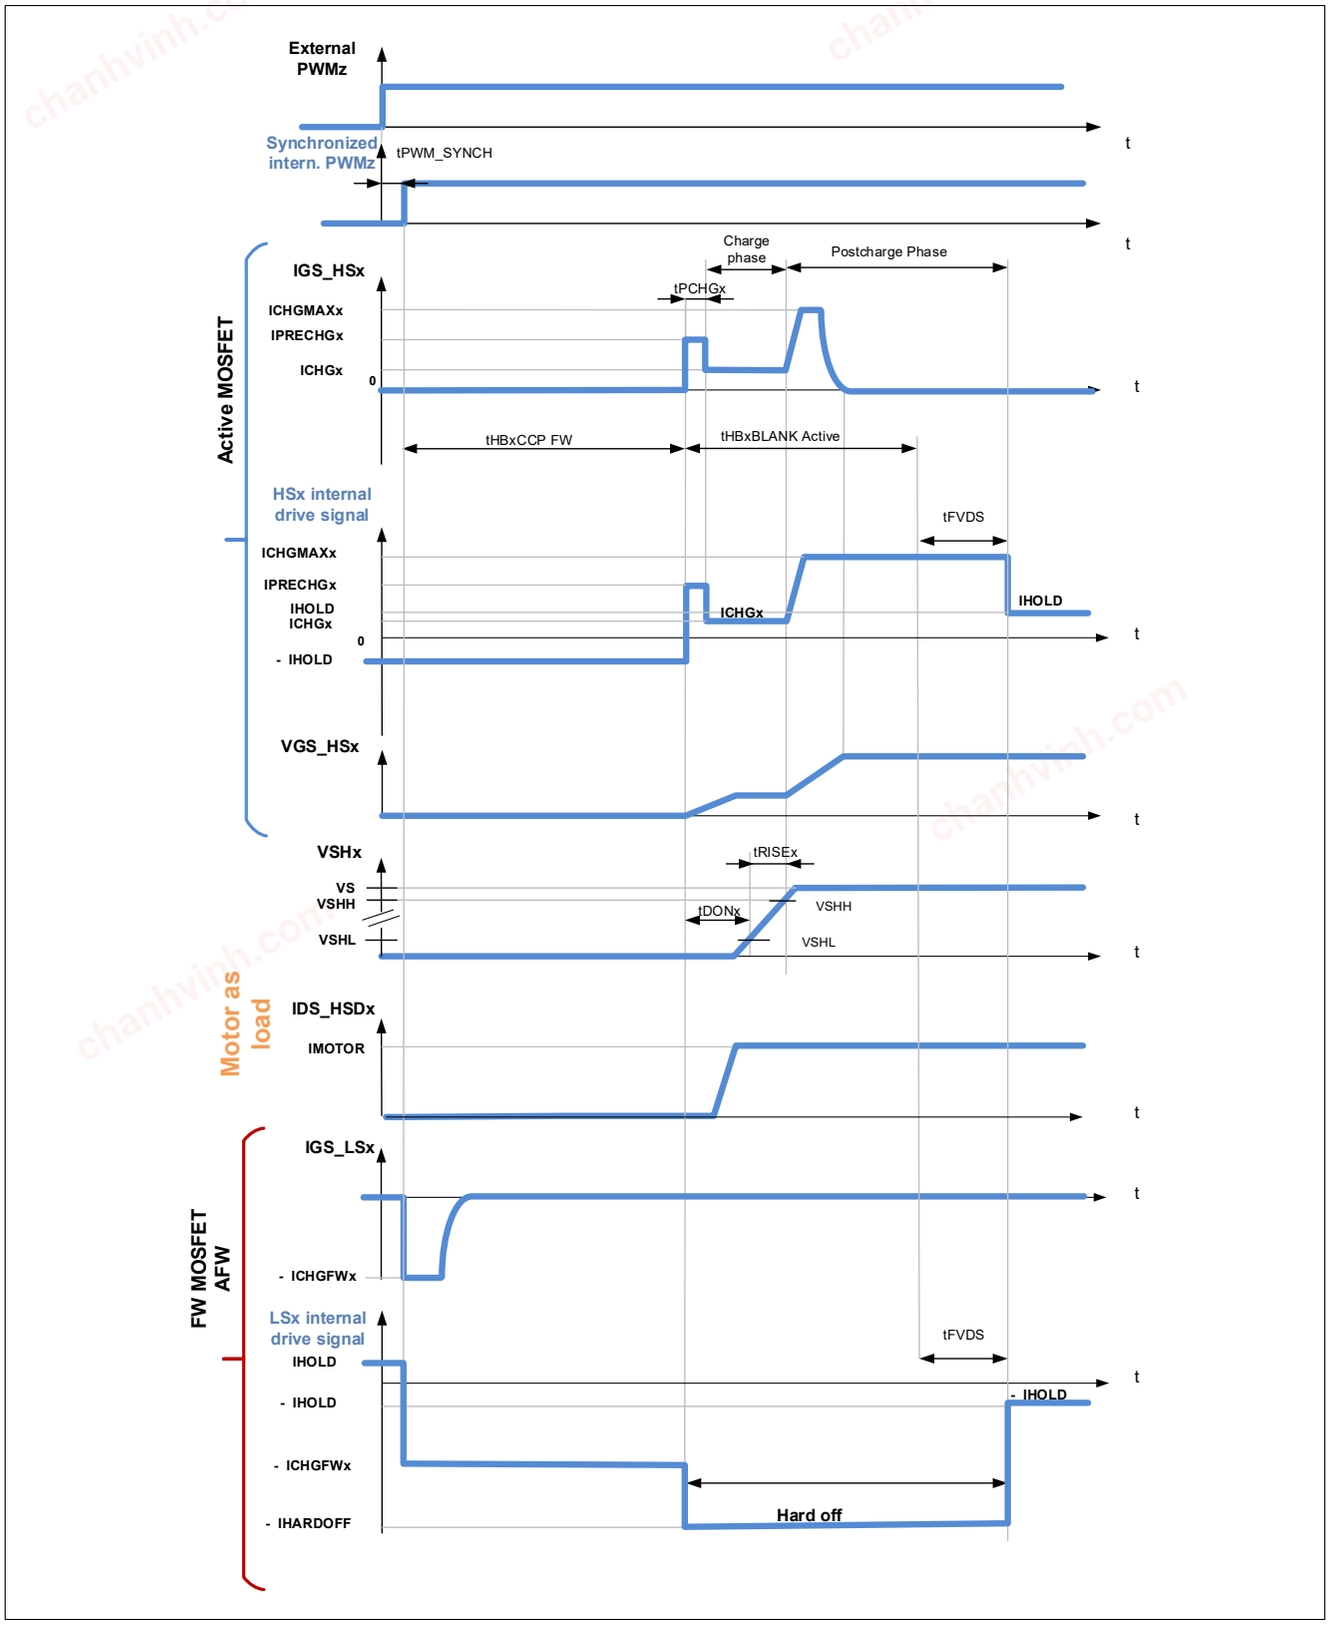


Figure 50 Adaptive turn-on with high-side PWM, AGC[1:0] = (1,0) or (1,1), AFWx=1, POCHGDIS=0, motor operating as load

Adaptive turn-on during high-side PWM

The turn-on of the high-side MOSFET is done in four phases (Refer to **Figure 50**):

chanhvinh.com

1. **Cross-current protection phase**: The cross-current protection tHBxCCP FW starts at the rising edge of PWMz. During tHBxCCP FW, the low-side MOSFET x is turned off with the discharge current - ICHGFWx, while the high-side MOSFET x is kept off.
2. **Pre-charge:** [1]Once tHBxCCP FW has elapsed, the gate of the high-side MOSFET x is pre-charged with the current IPRECHGx for a duration tPCHGx. IPRECHGx[2] is an internal parameter, which is self-adaptive (see next phase).
3. **Charge:** After tPCHGx, the charge current is decreased from IPRECHGx down to ICHGx. The effective tDONx[3] is measured and compared to the configured tDONx for the automatic adaptation of IPRECHGx (see **Adaptive control of pre-charge current**). The charge phase ends up when V_{SHx} reaches V_{SHH} (typically V_S - 2.25 V)
4. **Post-charge:** After the charge phase, the control signal for the charge current of HSx is increased by one current step at every bridge driver clock cycle (**BDFREQ**) to ICHGMAXx until the end of tFVDS.

Adaptive control of pre-charge current

Refer to **Chapter 11.3.6** for information on the pre-discharge currents.

The pre-charge current IPRECHGx is a self-adaptive parameter if AGC[1:0] = (1,0) or (1,1) (see **GENCTRL**). It is applied during tPCHGx (see **TPRECHG**). The TLE9561QX adapts the IPRECHGx to match the effective tDONx to the configured value.

IPRECHGx is clamped between I_{CHG0} (0.5 mA typ.) and ICHGMAXx (**HB_ICHG_MAX**).

IPRECHGx is initialized to Min(IPCHGINITx,ICHGMAXx) when the TLE9561QX receives an SPI command setting HBx_PWM_EN to 1 (see **HBMODE**). IPCHGINITx is set by the register **HB_PCHG_INIT**.

The following adaptive schemes can be selected.

AGCFILT = 0: No filter is applied:

- If the effective tDONx is longer than the configured tDONx, then IPRECHGx is increased during the next pre-charge phase.
- If the effective tDONx is shorter than the configured tDONx, then IPRECHGx is decreased during the next pre-charge phase.
- The pre-charge current is increased or decreased by one, respectively by two current steps (**Chapter 11.3.6**) if the control bit IPCHGADT in the control register **GENCTRL** is set to 0 respectively 1.

AGCFILT = 1: A filter is applied:

- If the effective tDONx **of the last two PWM cycles** are longer than the configured tDONx, then IPRECHGx is increased during the next pre-charge phase.
- If the effective tDONx **of the last two PWM cycles** are shorter than the configured tDONx, then IPRECHGx is decreased during the next pre-charge phase.
- The pre-charge current is increased or decreased by one, respectively by two current steps (**Chapter 11.3.6**) if the control bit IPCHGADT in the control register **GENCTRL** is set to 0 respectively 1.
- If none of the two cases are applicable, then IPRECHGx is unchanged during the next pre-charge phase.

1) For a correct operation, it is recommended to configure tPCHGx < tHBxBLANK Active.
2) IPRECHGx is clamped between ICHGMAXx and I_{CHG0}.
3) The effective tDON can be read out. Refer to **EFF_TDON_OFF1**, **EFF_TDON_OFF2**, **EFF_TDON_OFF3**, **EFF_TDON_OFF4**.

chanhvinh.com

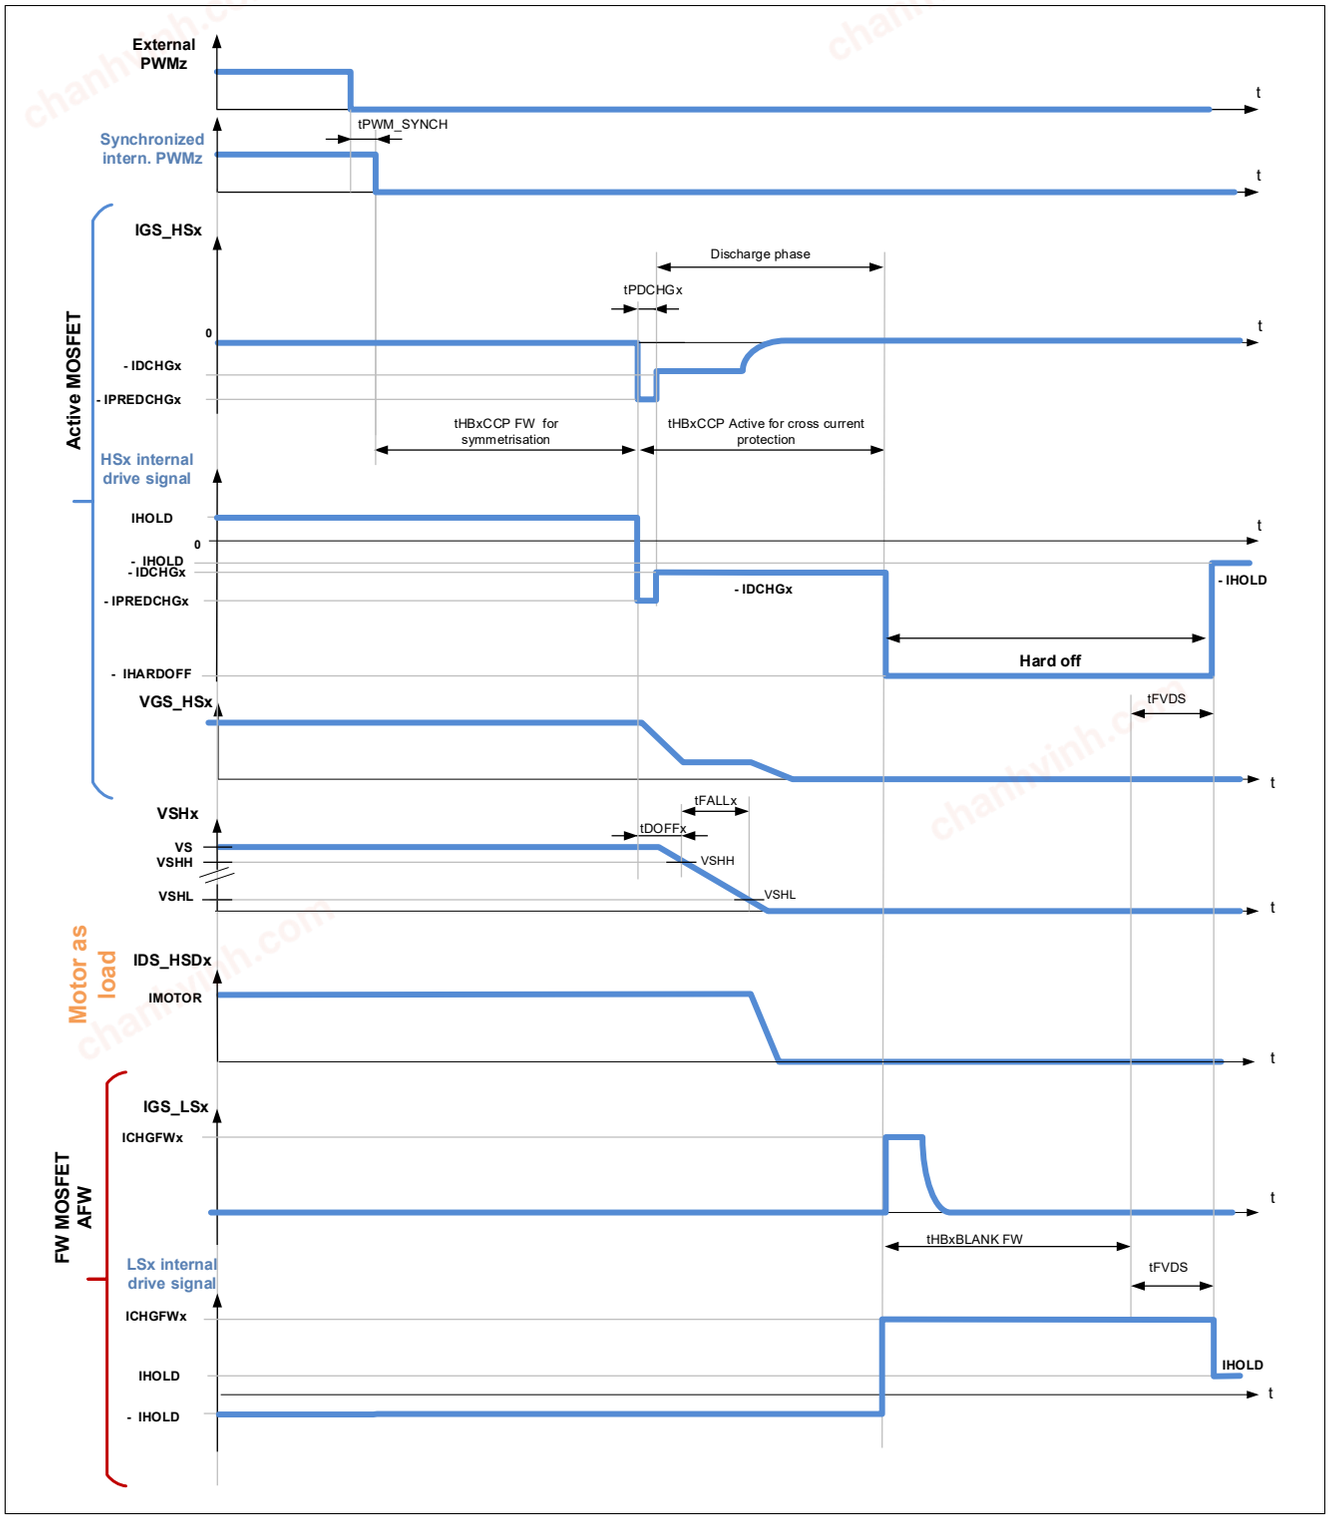


Figure 51 Adaptive turn-off with high-side PWM, AGC[1:0] = (1,0) or (1,1), AFWx=1, motor operating as load

Adaptive turn-off during high-side PWM

The turn-off of the high-side MOSFET is done in four phases (Refer to **Figure 51**):

1. **Turn-off delay time for symmetrization** of the PWM signal: The turn-off of HSx is delayed by tHBxCCP FW after the falling edge of PWMz, in order to compensate the distortion caused by the cross-current protection time at turn-on.

chanhvinh.com

2. **Pre-discharge:** [1]once tHBxCCP FW for symmetrization has elapsed, the gate of the high-side MOSFET x is pre-discharged with the current - IPREDCHGx for a duration tDPCHGx. IPREDCHGx is a device internal parameter, which is self-adaptive (See next phase).
3. **Discharge:** After tPREDCHGx, the pre-discharge current is decreased in absolute value from IPREDCHGx[2] down to IDCHGx. The effective tDOFF[3] is measured and compared to the configured tDOFFx for the automatic adaptation of IPREDCHGx (see **Adaptive control of pre-discharge current**). The discharge phase ends up at expiration of tHBxCCP active for cross-current protection.
4. **Cross-current protection phase:** The cross-current protection is concurrent to the pre-discharge and discharge of the high-side MOSFET. The cross-current protection phase starts when the turn-off delay for symmetrization ends up. It has the duration tHBxCCP active . During tHBxCCP active, the low-side MOSFETx is kept OFF. When tHBxCCP active has elapsed, the gate of the low-side MOSFET x is charged with the current ICHGFWx until the end of tFVDS, provided that $V_{SHx} < V_{SHL}$.

Adaptive control of pre-discharge current

Refer to **Chapter 11.3.6** for information on the pre-discharge currents.

The pre-discharge current IPREDCHGx is a self-adaptive parameter if AGC[1:0] = (1,0) or (1,1) (see **GENCTRL**). The TLE9561QX adapts the IPREDCHGx to match the measured t_{DOFFx} to the configured value.

IPREDCHGx is clamped between I_{DCHG0} (0.5 mA typ.) and ICHGMAXx (see **HB_ICHG_MAX**).

IPREDCHGx is initialized to Min(IPDCHGINITx, ICHGMAXx) when the TLE9561QX receives a SPI command setting HBx_PWM_EN to 1 (see **HBMODE**). IPDCHGINITx is set by the register **HB_PCHG_INIT**.

The pre-discharge current is increased or decreased by one, respectively by two current steps (**Chapter 11.3.6**) if the control bit IPCHGADT in the control register **GENCTRL** is set to 0 respectively 1.

The following adaptive schemes can be selected:

AGCFILT = 0: No filter is applied.

- If the effective tDOFFx is longer than the configured tDOFFx, then IPREDCHGx is increased during the next pre-discharge phase.
- If the effective tDOFFx is shorter than the configured tDOFFx, then IPREDCHGx is decreased during the next pre-discharge phase.
- The pre-charge current is increased or decreased by one, respectively by two current steps (**Chapter 11.3.6**) if the control bit IPCHGADT in the control register **GENCTRL**is set to 0 respectively 1.

AGCFILT = 1:

- If the effective tDOFFx **of the last two PWM cycles** are longer than the configured tDOFFx, then IPREDCHGx is increased during the next pre-discharge phase.
- If the effective tDOFFx **of the last two PWM cycles** are shorter than the configured tDOFFx, then IPREDCHGx is decreased during the next pre-discharge phase.
- If none of the two cases are applicable, then IPRECHGx is unchanged during the next pre-discharge phase.

1) For a correct operation, it is required to configure tPDCHGx < tHBxCCPActive.
2) IPREDCHGx is clamped between ICHGMAXx and I_{DCHG0}.
3) The effective tDOFF can be read out.

chanhvinh.com

- The pre-discharge current is increased or decreased by one, respectively by two current steps if the control bit IPCHGADT is set to 0 respectively 1.

11.3.4.1.2 High-side PWM with adaptive gate control and passive free-wheeling

This section describes the MOSFETs control scheme with passive free-wheeling (AFWx = 0, **HBMODE**).

In contrast to the active free-wheeling, if AFWx =0, only the PWM MOSFET can be turned on, while the complementary MOSFET is always kept off.

Turn-on of the PWM MOSFET, AFWx = 0

If AFWx = 0, the cross-current protection time at the rising edge of the synchronized PWM signal is omitted in contrast to the active free-wheeling. The pre-charge, the charge and the post-charge phases are identical to the control scheme with active free-wheeling. Refer to **Figure 52**.

Turn-off of the PWM MOSFET, AFWx = 0

If AFWx = 0, the cross-current protection time at the falling edge of the synchronized PWM signal is omitted in contrast to the active free-wheeling. The pre-discharge, the discharge and the post-charge phases are identical to the control scheme with active free-wheeling. Refer to **Figure 53**.

chanhvinh.com

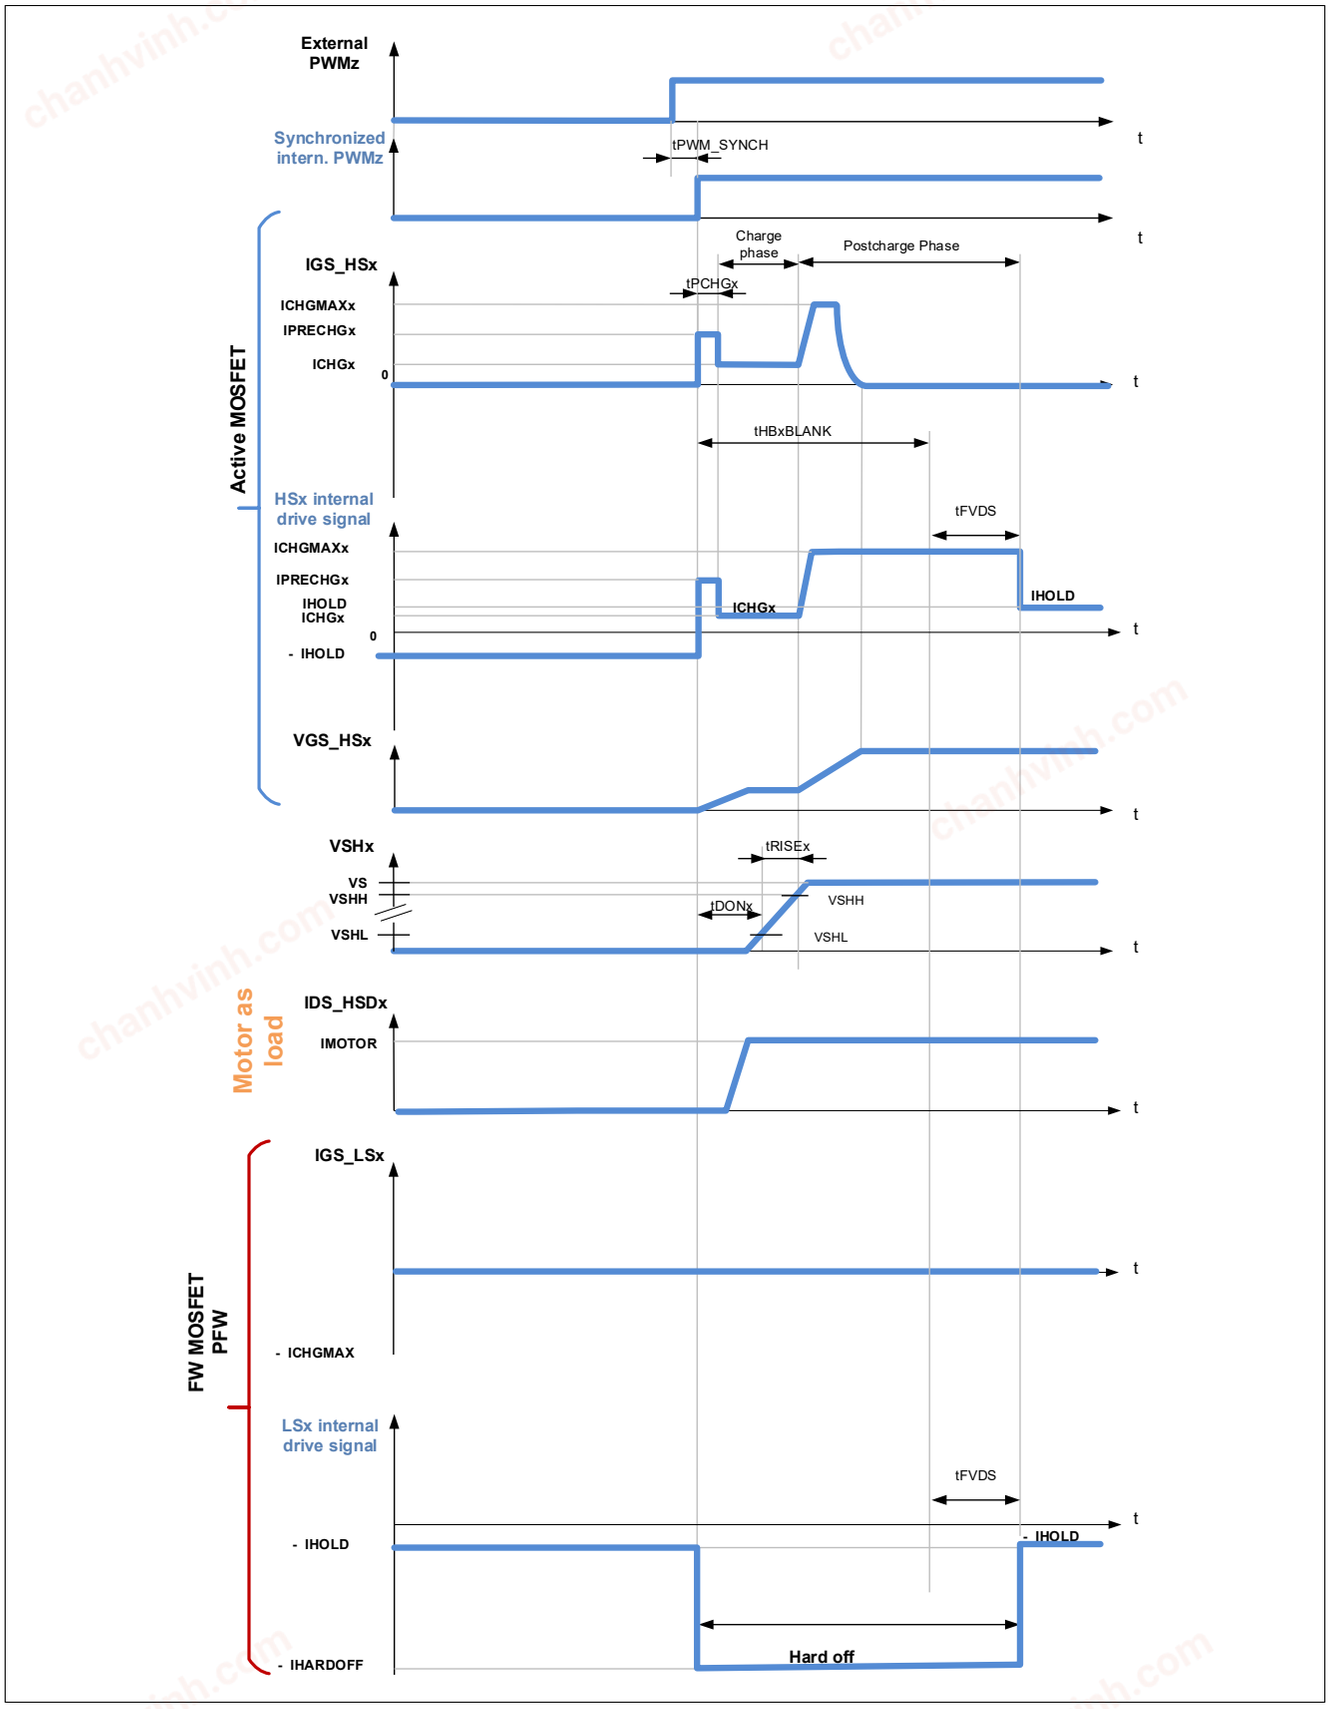


Figure 52 Adaptive turn-on with high-side PWM, AGC[1:0] = (1,0) or (1,1), AFWx=0, POCHGDIS=0, motor operating as load

chanhvinh.com

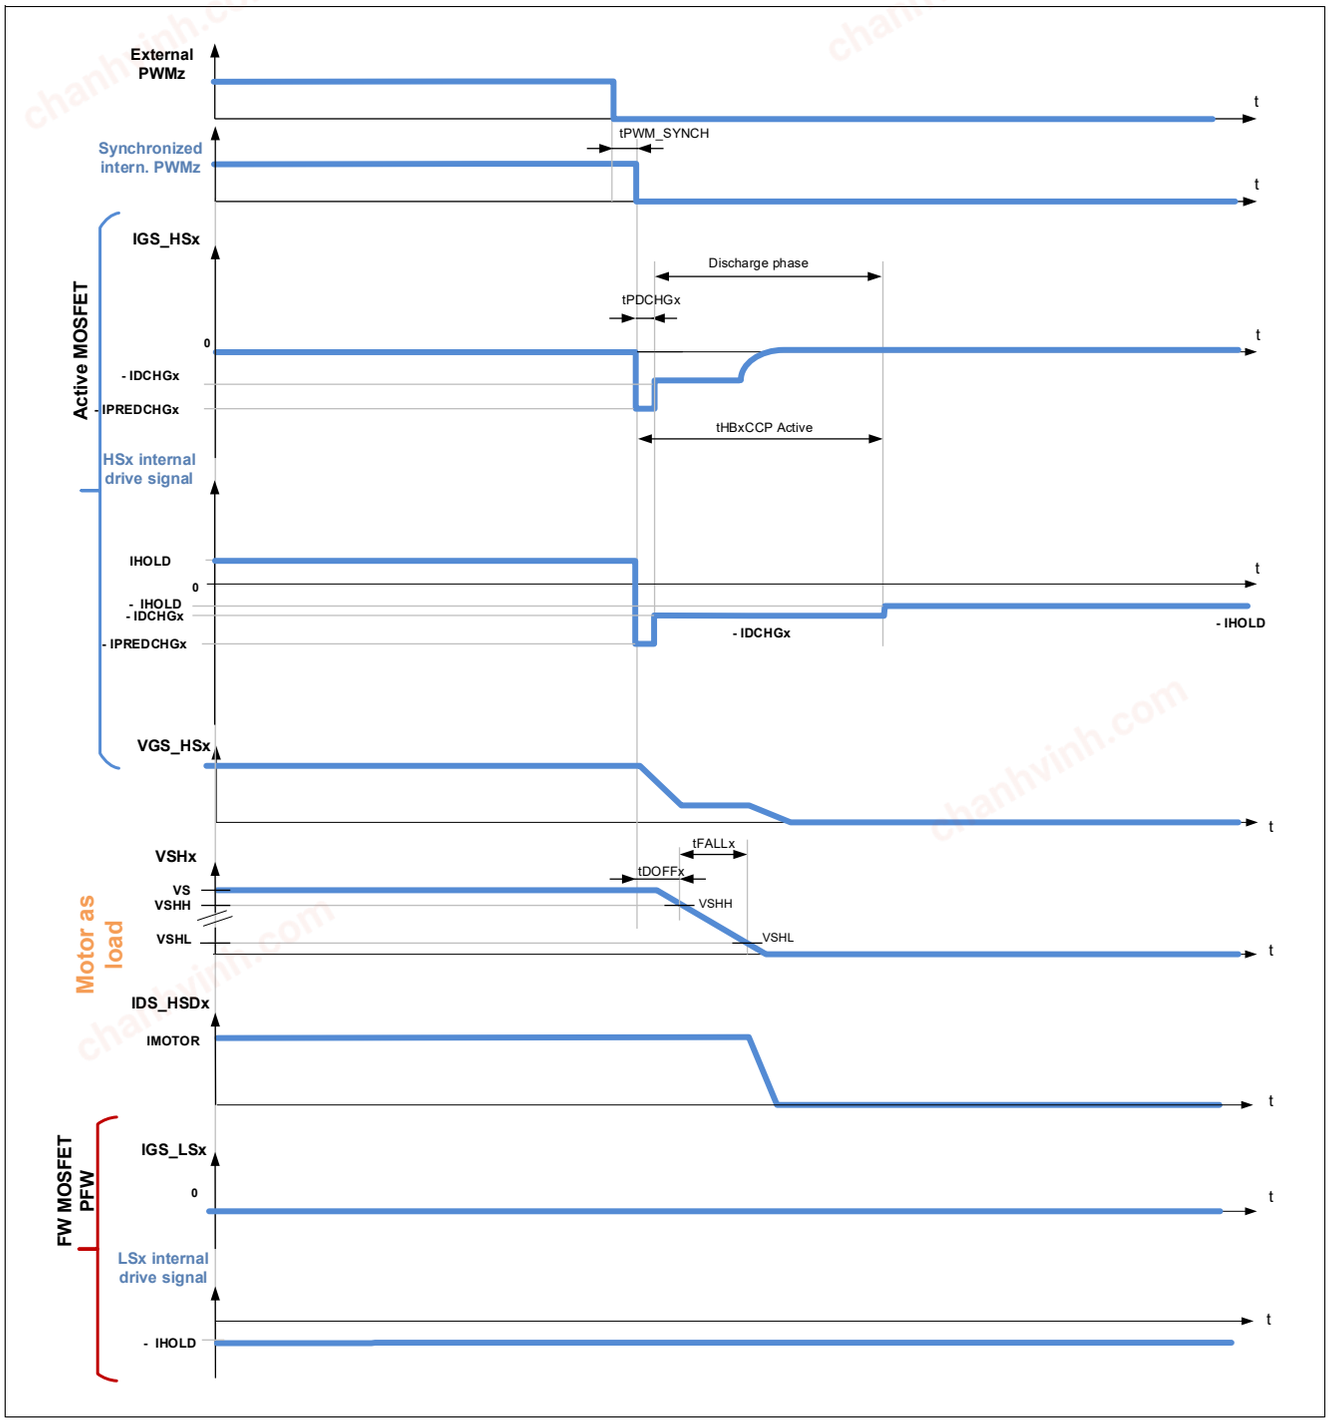


Figure 53 Adaptive turn-off with high-side PWM, AGC[1:0] = (1,0) or (1,1), AFWx=0, motor operating as load

chanhvinh.com

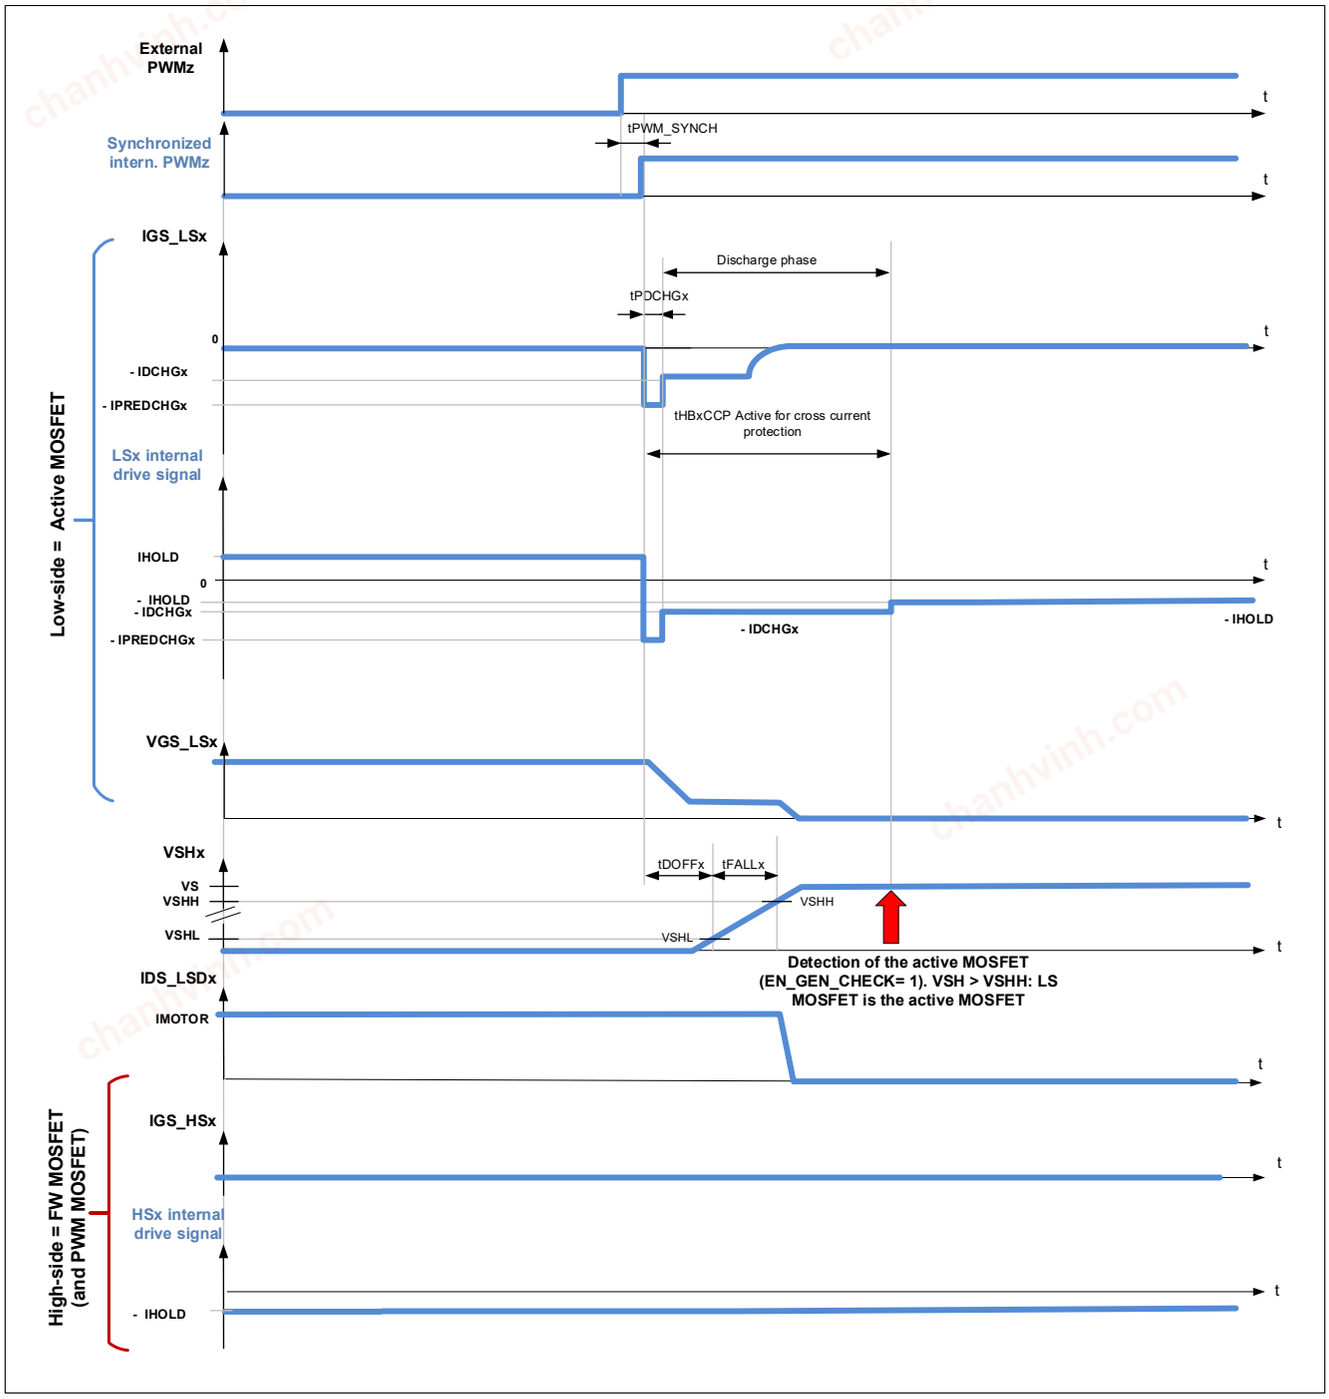


Figure 54 PWM rising edge in generator mode with high-side PWM, adaptive gate control on, AGC[1:0] = (1,0) or (1,1), AFWx=0, POCHGDIS=0. EN_GEN_CHECK = 1. The PWM MOSFET is the FW MOSFET

chanhvinh.com

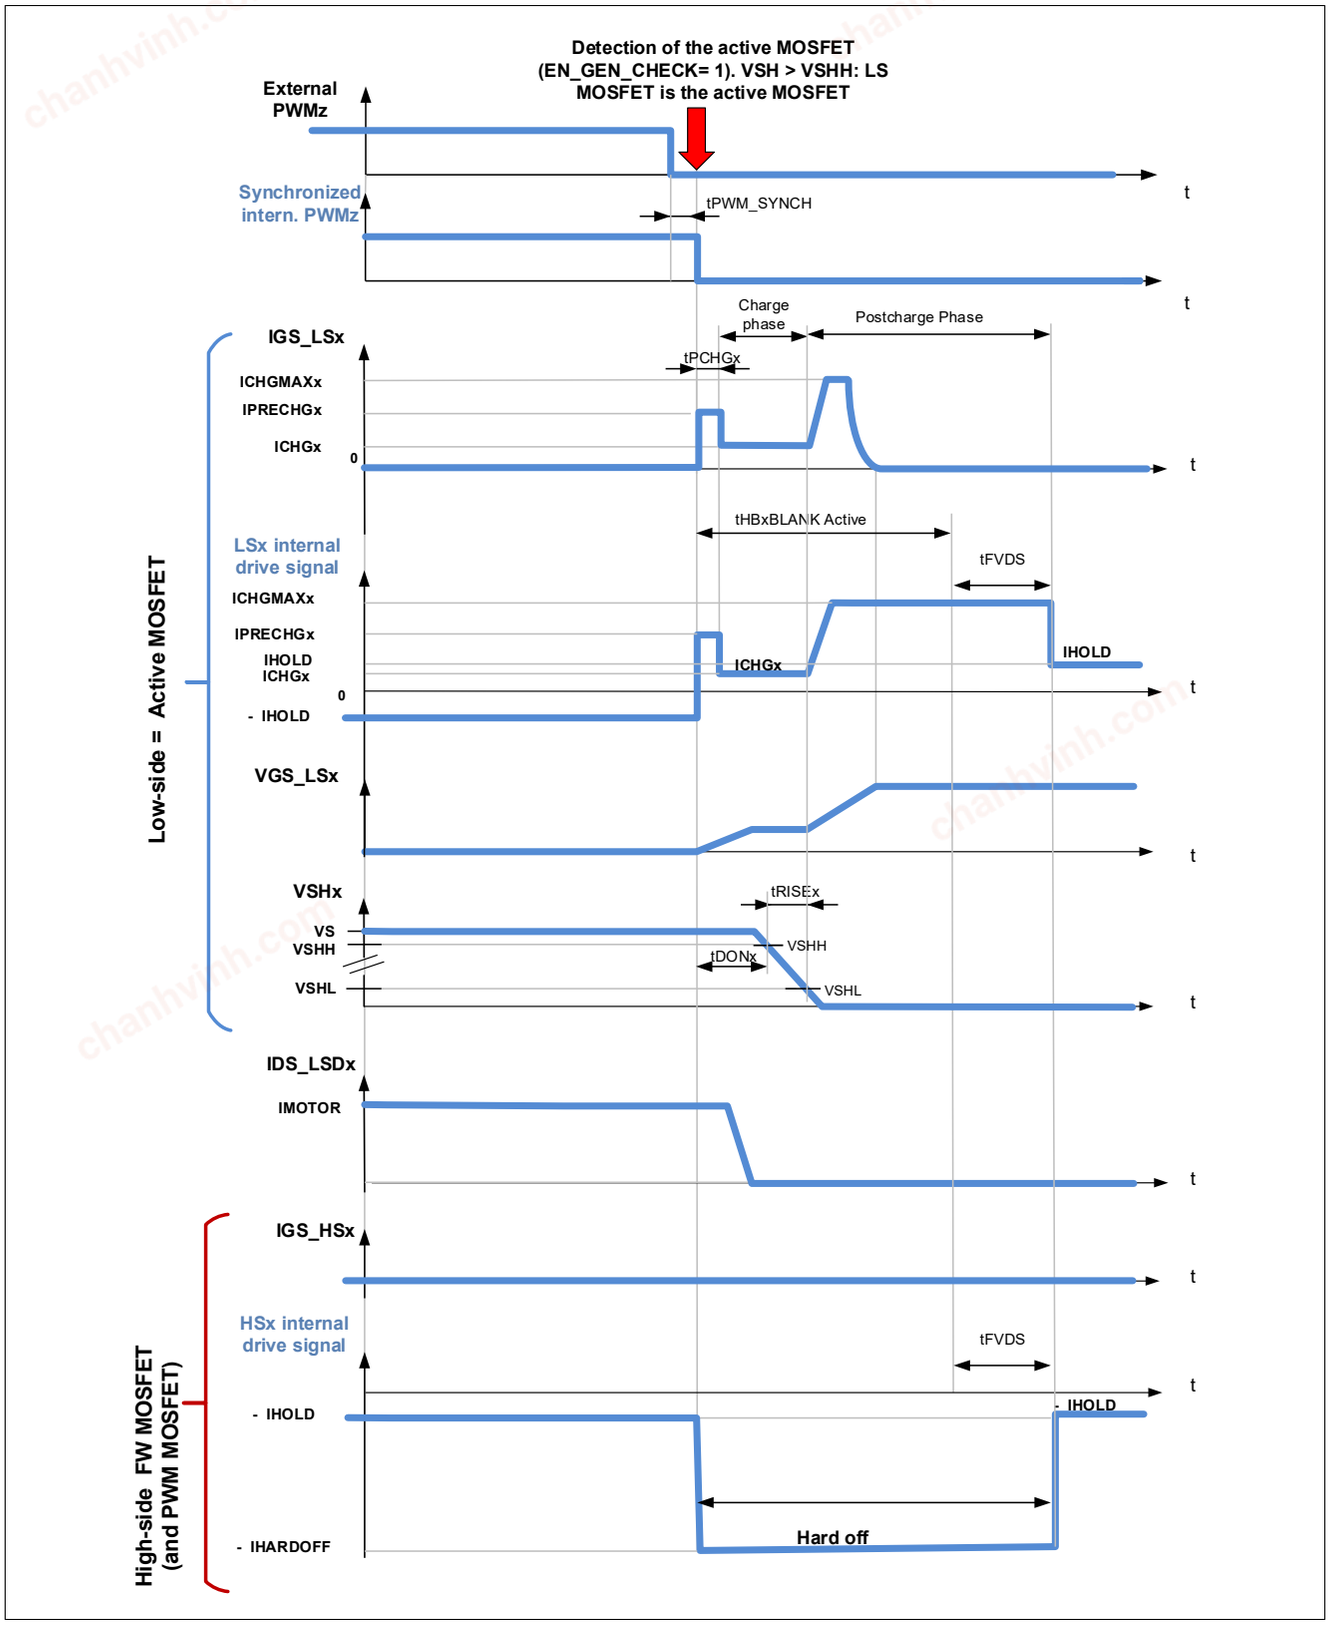


Figure 55 PWM falling edge in generator mode with high-side PWM, adaptive gate control on, AGC[1:0] = (1,0) or (1,1), AFWx=0, POCHGDIS=0. EN_GEN_CHECK = 1. The PWM MOSFET is the FW MOSFET

chanhvinh.com

11.3.4.2 Low-side PWM with adaptive gate control, motor operating as load

The following section describes the MOSFET control when the PWM signal is applied to the low-side MOSFET of one half-bridge.

Assumption: the PWM channel z is applied to the low-side MOSFET of the half-bridge x (**Figure 56**).

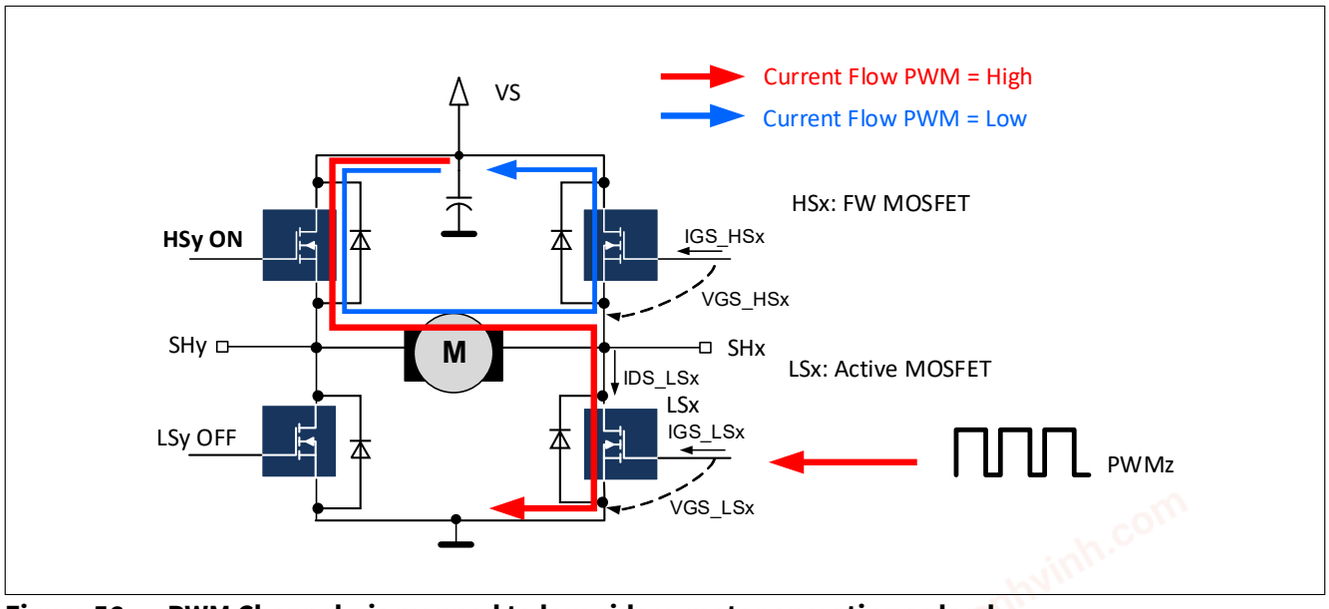


Figure 56 PWM Channel z is mapped to low-side x, motor operating as load

The description of the control of the PWM half-bridge differs from the description of **Chapter 11.3.4.1** only by exchanging high-side x and low-side x and thresholds V_{SHH} and V_{SHL}.

11.3.4.3 High-side PWM with adaptive gate control, motor operating as generator

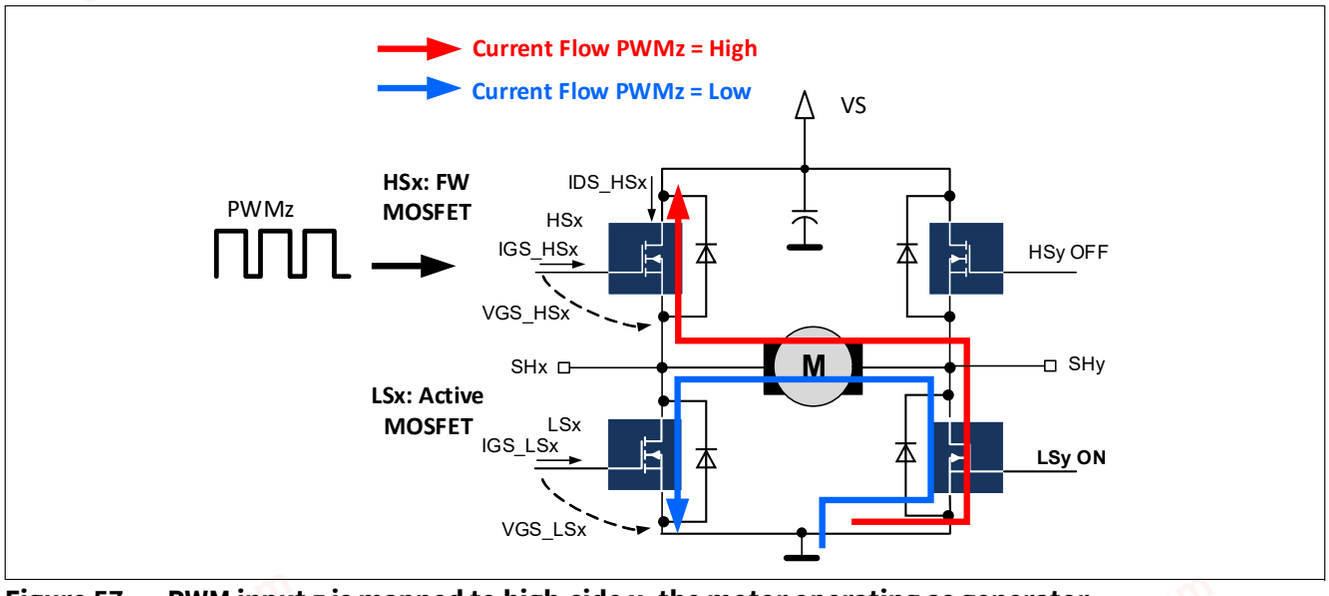


Figure 57 PWM input z is mapped to high-side x, the motor operating as generator

chanhvinh.com

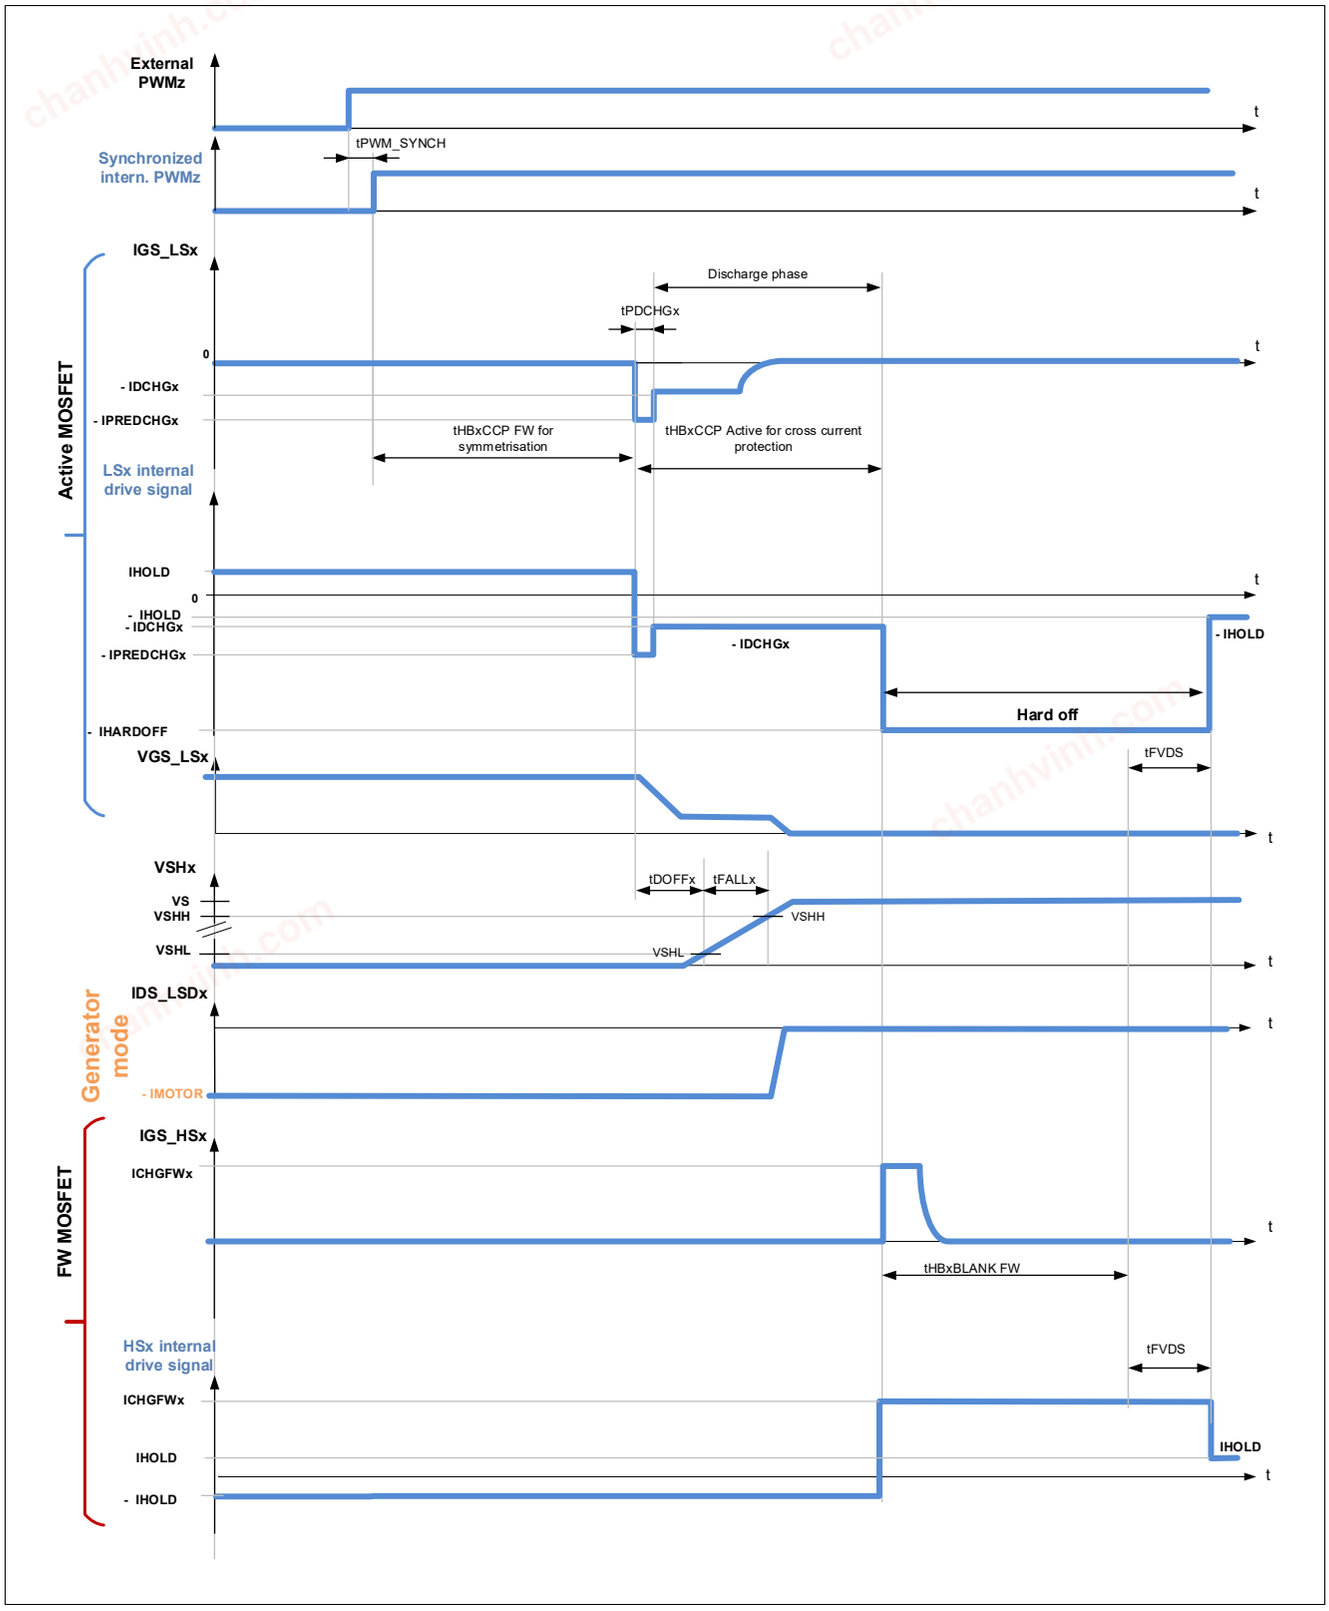


Figure 58 Adaptive turn-on with high-side PWM, AGC[1:0] = (1,0) or (1,1), AFWx=1, motor operating as generator

chanhvinh.com

11.3.4.4 Low-side PWM with adaptive gate control, motor operating as generator

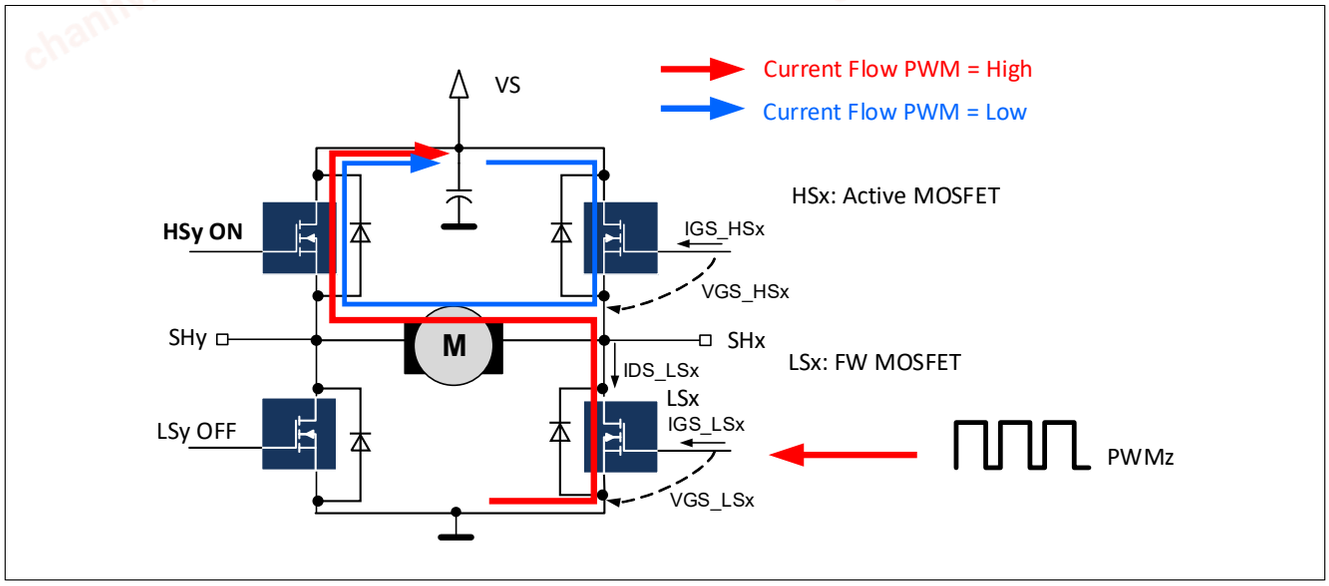


Figure 59 PWM input z is mapped to low-side x, the motor operating as generator

chanhvinh.com

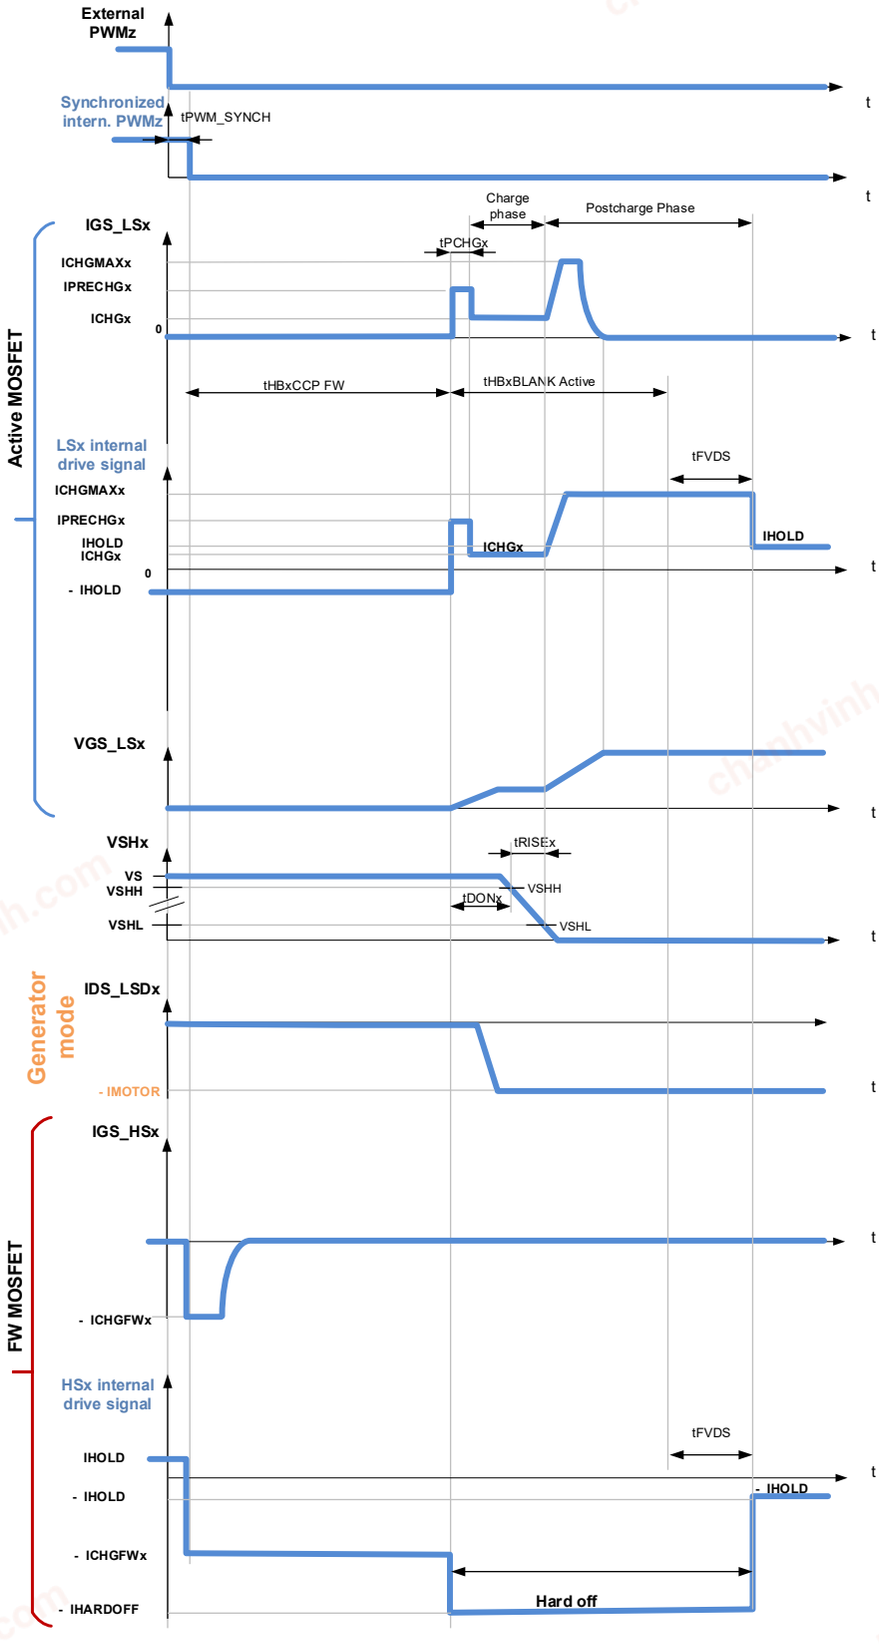


Figure 60 Adaptive turn-off with high-side PWM, AGC[1:0] = (1,0) or (1,1), AFWx=1, motor operating as generator and EN_GEN_CHECK = 1

chanhvinh.com

11.3.4.5 Status bits for regulation of turn-on and turn-off delay times

The control bits TDREGx (**TDREG**) indicate if tDONx and tDOFFx of the half-bridge x, using the adaptive control scheme (**AGC** = 10_B or 11_B), are in regulation.

The half-bridge x is considered in regulation if one of the following conditions is met:

- Condition 1: The effective turn-on and turn-off delays are equal to the configured delays for at least eight cumulative PWM cycle (HBx tDON counter ≥ 8 and HBx tDOFF counter ≥ 8). For each PWM cycle
  - if tDONxEFF[1] = TDONx[2]: HBx tDON counter is incremented
  - if tDONxEFF[1] ≠ TDONx[2]: HBx tDON counter is decremented
  - if tDOFFxEFF[1] = TDOFFx[3]: HBx tDOFF counter is incremented
  - if tDOFFxEFF [1] ≠ TDOFFx[3]: HBx tDOFF counter is decremented
- Condition 2: The error between the effective delays ((tDONxEFF-TDONx) and(tDOFFxEFF-TDOFFx)) changes its sign three times consecutively

11.3.4.6 Time modulation of pre-charge and pre-discharge times

If **DEEP_ADAP** =0:

- one single precharge current is applied during tPCHGx to regulate TDON
- one single precharge current is applied during tPDCHGx to regulate TDOFF

If **DEEP_ADAP** = 1 (“deep adaptation” or “time modulation”) it is possible to:

- to divide the precharge phase in two parts, during which two different precharge currents can be applied
- to divide the predischarge phase in two parts, during which two different precharge currents can be applied

Figure 61 describes the principle of the time modulation applied to the precharge phase. The same principle is also applied for the regulation of the pre-discharge phase.

1) Refer to **EFF_TDON_OFF1**, **EFF_TDON_OFF2**, **EFF_TDON_OFF3**, **EFF_TDON_OFF4**
2) Refer to **TDON_HB_CTRL**
3) Refer to **TDOFF_HB_CTRL**

chanhvinh.com

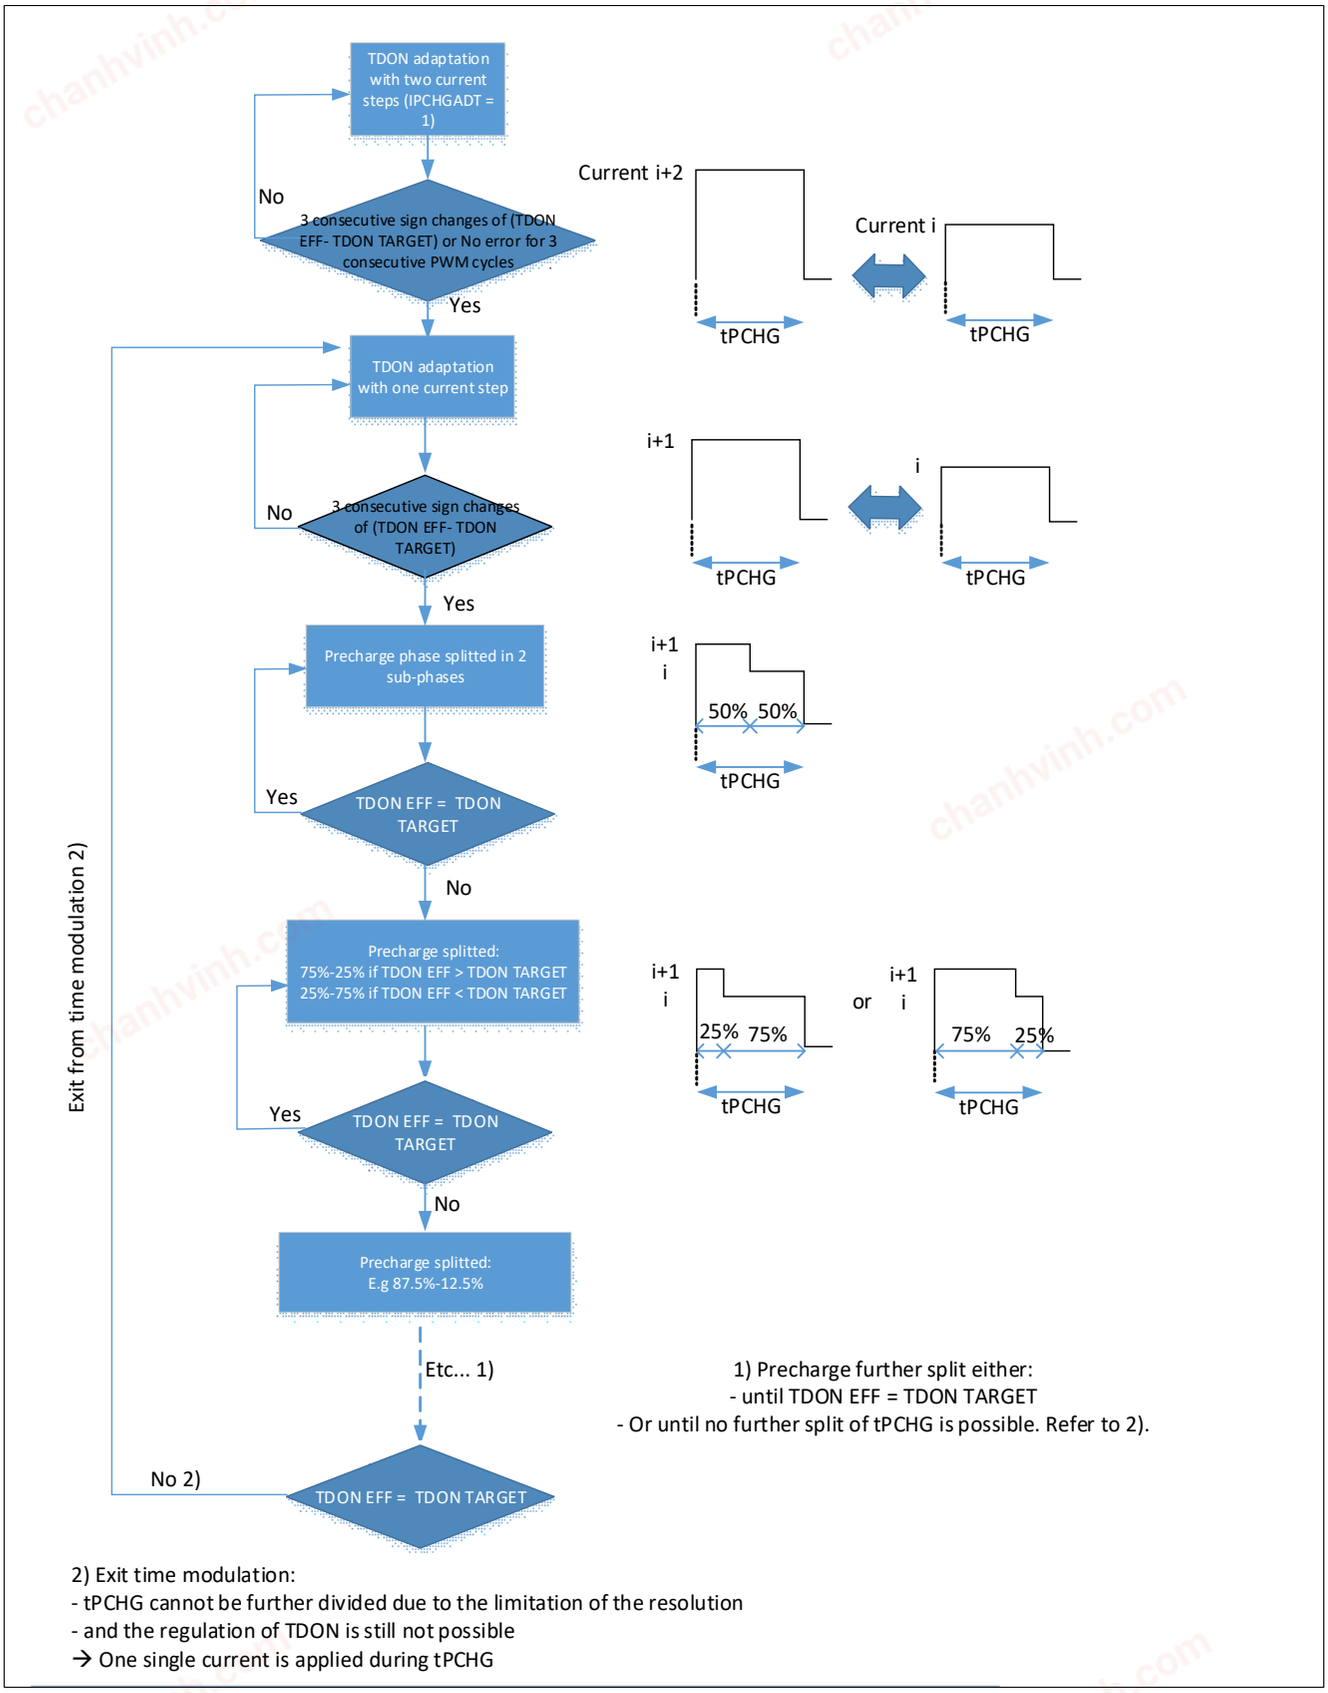


Figure 61 Principle of the time modulation of the precharge phase, DEEP_ADAP = 1, AGC = 10_B or 11_B

chanhvinh.com

11.3.5 PWM operation without adaptive gate control

The adaptive gate control is disabled if AGC[1:0] is set to (0,0) or (0,1). The effective turn-on and turn -off delays of the PWM MOSFETs are not regulated. Two modes can be selected.

The target turn-on and turn-off delay times of PWM MOSFETs (configured in **TRISE_FALL1**, **TRISE_FALL2**, **TRISE_FALL3**, **TRISE_FALL4**) are no longer regulated. Nevertheless the status registers **EFF_TDON_OFF1**, **EFF_TDON_OFF2**, **EFF_TDON_OFF3**, **EFF_TDON_OFF4** still report the effective turn-on and turn-off times of the PWM MOSFET.

11.3.5.1 AGC[1:0]=00_B

When AGC[1:0] = (0,0) (see **GENCTRL**), the control of the gate drivers in PWM mode differs from the description of **Chapter 11.3.4**, **PWM operation with adaptive gate control**, only by the suppression of the pre-charge and pre-discharge phases.

11.3.5.2 AGC[1:0]=01_B

When **AGC** = (0,1) (see **GENCTRL**), then:

- During the pre-charge phase (tDCHGx) the gate of the PWM MOSFET mapped to the PWM input z is charged with the current IPCHGINITx (**HB_PCHG_INIT**).
- During the pre-discharge phase (tPDCHGx), the gate of the PWM MOSFET mapped to the PWM input z is discharged with the current -IPDCHGINITx (**HB_PCHG_INIT**).

chanhvinh.com

11.3.6 Gate driver current

Each gate driver is able to source and sink currents from 0.5 mA to 100 mA, with 64 steps according to **Figure 62** and **Figure 63**.

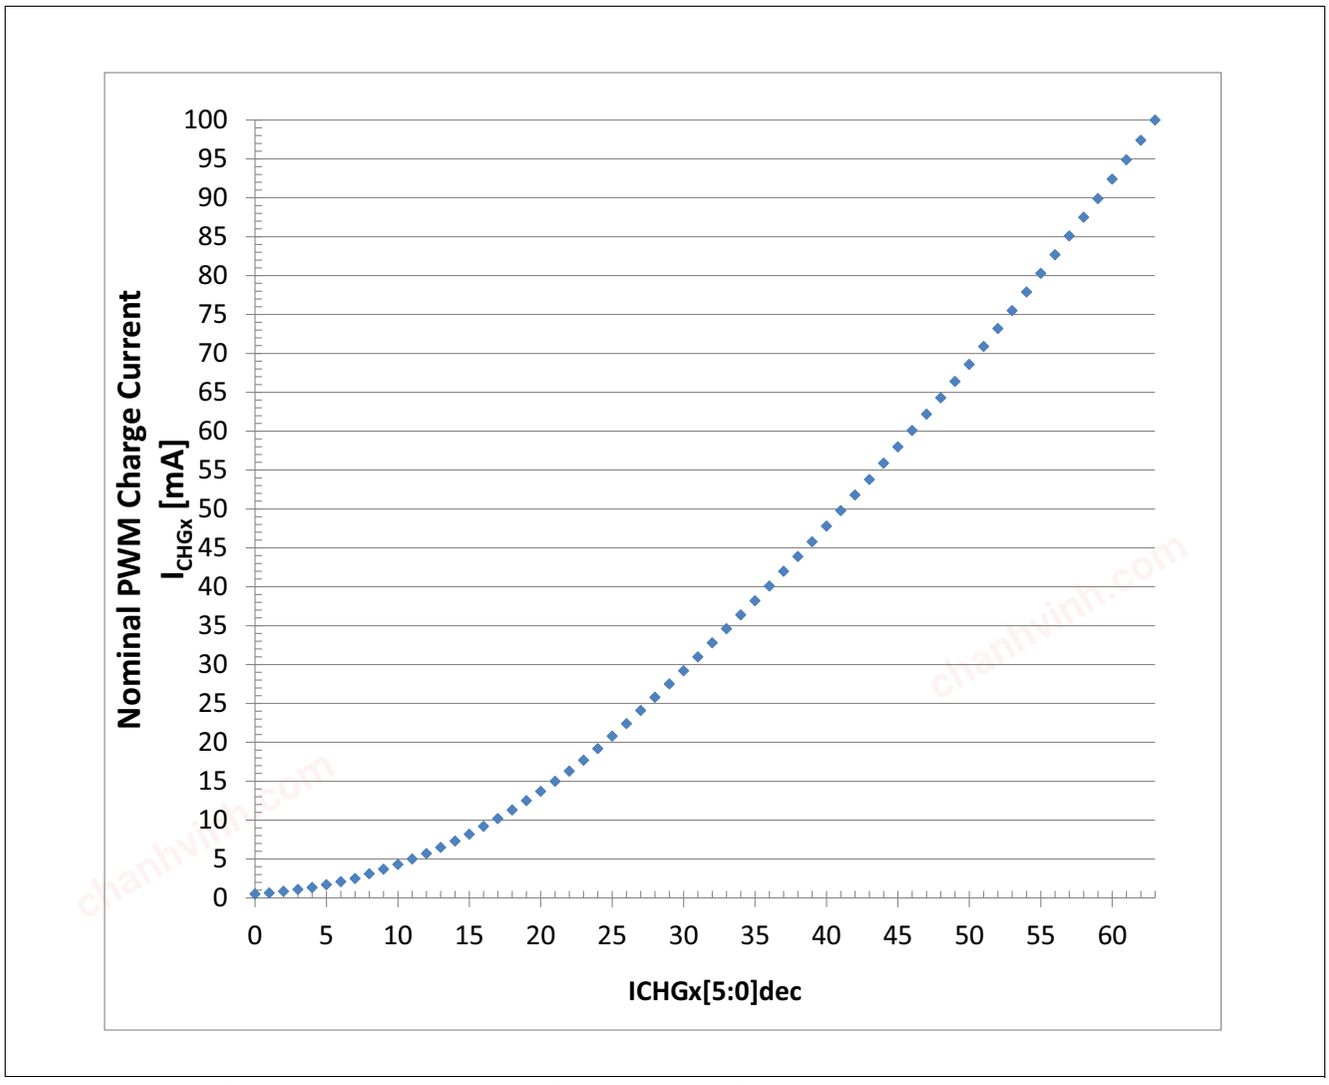


Figure 62 Configurable charge currents in PWM operation

chanhvinh.com

Table 22 Charge currents in PWM operation, initial precharge current and freewheeling MOSFETs charge current

ICHGx[5:0], PCHGINIT[5:0]	Parameter name	Nom. charge current [mA]	Max. deviation to nominal values [%]
000000_B	I_{CHG0}	0.5	+/- 60%
000001_B	I_{CHG1}	0.65	+/- 60%
000010_B	I_{CHG2}	0.85	+/- 60%
000011_B	I_{CHG3}	1.1	+/- 60%
000100_B	I_{CHG4}	1.35	+/- 60%
000101_B	I_{CHG5}	1.7	+/- 60%
000110_B	I_{CHG6}	2.1	+/- 60%
000111_B	I_{CHG7}	2.5	+/- 60%
001000_B	I_{CHG8}	3.1	+/- 55%
001001_B	I_{CHG9}	3.7	+/- 55%
001010_B	I_{CHG10}	4.3	+/- 55%
001011_B	I_{CHG11}	5.0	+/- 55%
001100_B	I_{CHG12}	5.7	+/- 55%
001101_B	I_{CHG13}	6.5	+/- 55%
001110_B	I_{CHG14}	7.3	+/- 40%
001111_B	I_{CHG15}	8.2	+/- 40%
010000_B	I_{CHG16}	9.2	+/- 40 %
010001_B	I_{CHG17}	10.2	+/- 40 %
010010_B	I_{CHG18}	11.3	+/- 40%
010011_B	I_{CHG19}	12.5	+/- 40%
010100_B	I_{CHG20}	13.7	+/- 40%
010101_B	I_{CHG21}	15	+/- 40%
010110_B	I_{CHG22}	16.3	+/- 40%
010111_B	I_{CHG23}	17.7	+/- 40%
011000_B	I_{CHG24}	19.2	+/- 40%
011001_B	I_{CHG25}	20.8	+/- 40%
011010_B	I_{CHG26}	22.4	+/- 40%
011011_B	I_{CHG27}	24.1	+/- 40%
011100_B	I_{CHG28}	25.8	+/- 40%
011101_B	I_{CHG29}	27.5	+/- 40%
011110_B	I_{CHG30}	29.2	+/- 30%
011111_B	I_{CHG31}	31	+/- 30%
100000_B	I_{CHG32}	32.8	+/- 30%
100001_B	I_{CHG33}	34.6	+/- 30%
100010_B	I_{CHG34}	36.4	+/- 30%
100011_B	I_{CHG35}	38.2	+/- 30%

chanhvinh.com

Table 22 Charge currents in PWM operation, initial precharge current and freewheeling MOSFETs charge current (cont'd)

ICHGx[5:0], PCHGINIT[5:0]	Parameter name	Nom. charge current [mA]	Max. deviation to nominal values [%]
100100_B	I_{CHG36}	40.1	+/- 30%
100101_B	I_{CHG37}	42	+/- 30%
100110_B	I_{CHG38}	43.9	+/- 30%
100111_B	I_{CHG39}	45.8	+/- 30%
101000_B	I_{CHG40}	47.8	+/- 30%
101001_B	I_{CHG41}	49.8	+/- 30%
101010_B	I_{CHG42}	51.8	+/- 30%
101011_B	I_{CHG43}	53.8	+/- 30%
101100_B	I_{CHG44}	55.9	+/- 30%
101101_B	I_{CHG45}	58	+/- 30%
101110_B	I_{CHG46}	60.1	+/- 30%
101111_B	I_{CHG47}	62.2	+/- 30%
110000_B	I_{CHG48}	64.3	+/- 30%
110001_B	I_{CHG49}	66.4	+/- 30%
110010_B	I_{CHG50}	68.6	+/- 30%
110011_B	I_{CHG51}	70.9	+/- 30%
110100_B	I_{CHG52}	73.2	+/- 30%
110101_B	I_{CHG53}	75.5	+/- 30%
110110_B	I_{CHG54}	77.9	+/- 30%
110111_B	I_{CHG55}	80.3	+/- 30%
111000_B	I_{CHG56}	82.7	+/- 30%
111001_B	I_{CHG57}	85.1	+/- 30%
111010_B	I_{CHG58}	87.5	+/- 30%
111011_B	I_{CHG59}	89.9	+/- 30%
111100_B	I_{CHG60}	92.4	+/- 30%
111101_B	I_{CHG61}	94.9	+/- 30%
111110_B	I_{CHG62}	97.4	+/- 30%
111111_B	I_{CHG63}	100	+/- 30%

chanhvinh.com

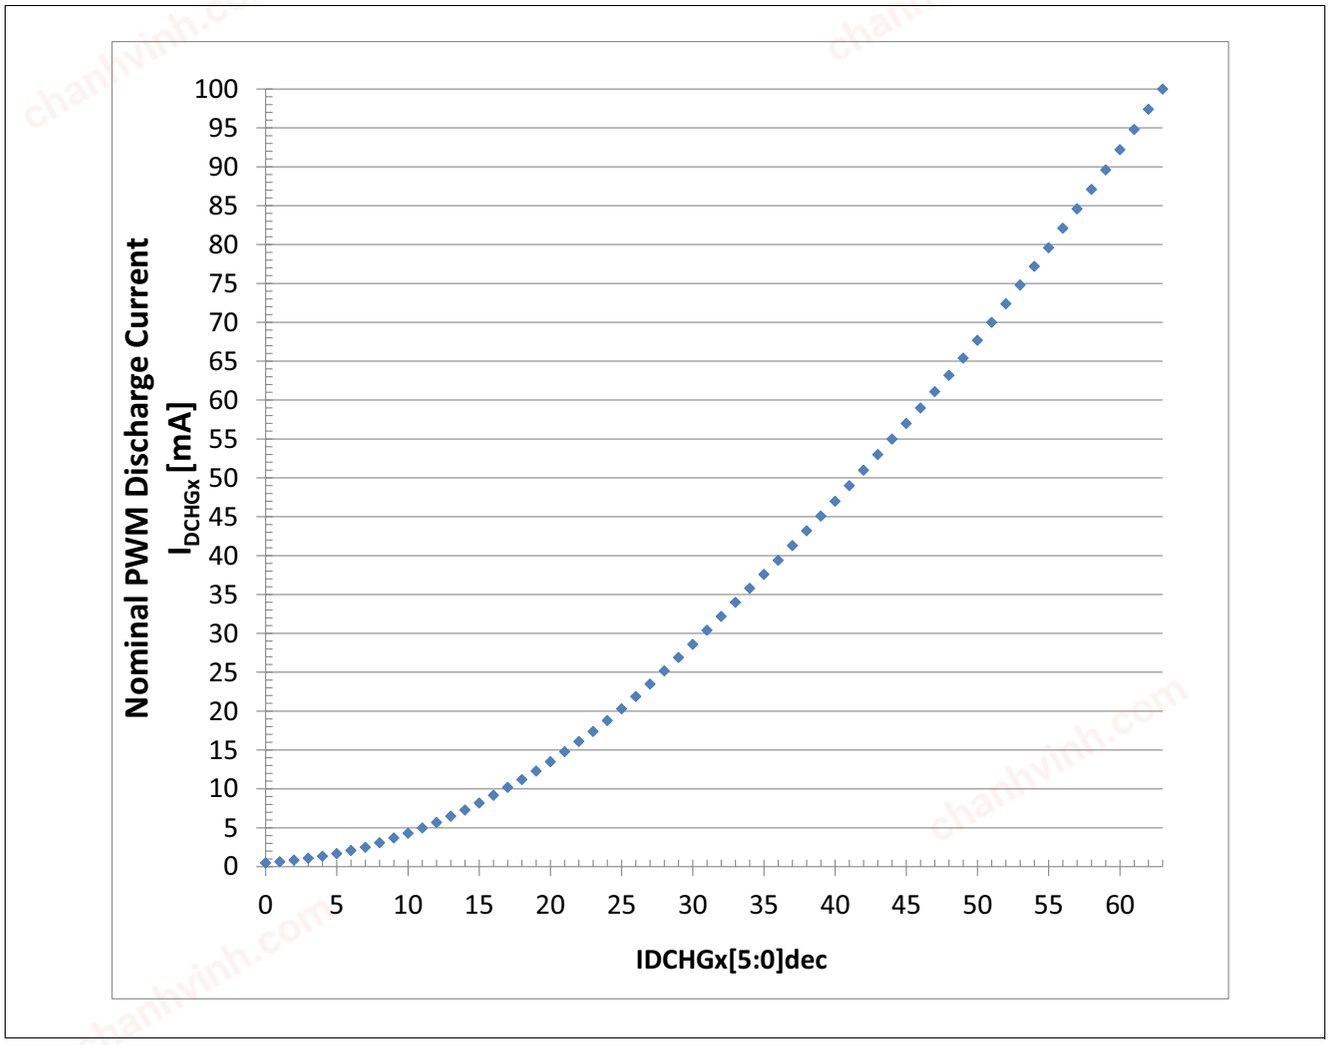


Figure 63 Configurable discharge currents in PWM operation

chanhvinh.com

Table 23 Discharge currents in PWM operation, initial predischarge current and freewheeling MOSFETs discharge current

IDCHGx[5:0], PDCHGINIT[5:0]	Parameter name	Nom. discharge current [mA]	Max. deviation to nominal values [%]
000000_B	I_{DCHG0}	0.5	+/- 60%
000001_B	I_{DCHG1}	0.65	+/- 60%
000010_B	I_{DCHG2}	0.85	+/- 60%
000011_B	I_{DCHG3}	1.1	+/- 60%
000100_B	I_{DCHG4}	1.35	+/- 60%
000101_B	I_{DCHG5}	1.7	+/- 60%
000110_B	I_{DCHG6}	2.1	+/- 60%
000111_B	I_{DCHG7}	2.5	+/- 60%
001000_B	I_{DCHG8}	3.1	+/- 55%
001001_B	I_{DCHG9}	3.7	+/- 55%
001010_B	I_{DCHG10}	4.3	+/- 55%
001011_B	I_{DCHG11}	5.0	+/- 55%
001100_B	I_{DCHG12}	5.7	+/- 55%
001101_B	I_{DCHG13}	6.5	+/- 55%
001110_B	I_{DCHG14}	7.3	+/- 40%
001111_B	I_{DCHG15}	8.2	+/- 40%
010000_B	I_{DCHG16}	9.2	+/- 40%
010001_B	I_{DCHG17}	10.2	+/- 40%
010010_B	I_{DCHG18}	11.2	+/- 40%
010011_B	I_{DCHG19}	12.3	+/- 40%
010100_B	I_{DCHG20}	13.5	+/- 40%
010101_B	I_{DCHG21}	14.8	+/- 40%
010110_B	I_{DCHG22}	16.1	+/- 40%
010111_B	I_{DCHG23}	17.4	+/- 40%
011000_B	I_{DCHG24}	18.8	+/- 40%
011001_B	I_{DCHG25}	20.3	+/- 40%
011010_B	I_{DCHG26}	21.9	+/- 40%
011011_B	I_{DCHG27}	23.5	+/- 40%
011100_B	I_{DCHG28}	25.2	+/- 40%
011101_B	I_{DCHG29}	26.9	+/- 40%
011110_B	I_{DCHG30}	28.6	+/- 30%
011111_B	I_{DCHG31}	30.4	+/- 30%
100000_B	I_{DCHG32}	32.2	+/- 30%
100001_B	I_{DCHG33}	34	+/- 30%
100010_B	I_{DCHG34}	35.8	+/- 30%
100011_B	I_{DCHG35}	37.6	+/- 30%

chanhvinh.com

Table 23 Discharge currents in PWM operation, initial predischarge current and freewheeling MOSFETs discharge current (cont'd)

IDCHGx[5:0], PDCHGINIT[5:0]	Parameter name	Nom. discharge current [mA]	Max. deviation to nominal values [%]
100100_B	I_{DCHG36}	39.4	+/- 30 %
100101_B	I_{DCHG37}	41.3	+/- 30 %
100110_B	I_{DCHG38}	43.2	+/- 30 %
100111_B	I_{DCHG39}	45.1	+/- 30 %
101000_B	I_{DCHG40}	47	+/- 30 %
101001_B	I_{DCHG41}	49	+/- 30 %
101010_B	I_{DCHG42}	51	+/- 30 %
101011_B	I_{DCHG43}	53	+/- 30 %
101100_B	I_{DCHG44}	55	+/- 30 %
101101_B	I_{DCHG45}	57	+/- 30 %
101110_B	I_{DCHG46}	59	+/- 30 %
101111_B	I_{DCHG47}	61.1	+/- 30 %
110000_B	I_{DCHG48}	63.2	+/- 30 %
110001_B	I_{DCHG49}	65.4	+/- 30 %
110010_B	I_{DCHG50}	67.7	+/- 30 %
110011_B	I_{DCHG51}	70	+/- 30 %
110100_B	I_{DCHG52}	72.4	+/- 30 %
110101_B	I_{DCHG53}	74.8	+/- 30 %
110110_B	I_{DCHG54}	77.2	+/- 30 %
110111_B	I_{DCHG55}	79.6	+/- 30 %
111000_B	I_{DCHG56}	82.1	+/- 30 %
111001_B	I_{DCHG57}	84.6	+/- 30 %
111010_B	I_{DCHG58}	87.1	+/- 30 %
111011_B	I_{DCHG59}	89.6	+/- 30 %
111100_B	I_{DCHG60}	92.2	+/- 30 %
111101_B	I_{DCHG61}	94.8	+/- 30 %
111110_B	I_{DCHG62}	97.4	+/- 30 %
111111_B	I_{DCHG63}	100	+/- 30 %

chanhvinh.com

11.3.7 PWM operation at high and low duty cycles with active freewheeling

This section describes the internal PWM signal of the active and FW MOSFET when the motor operates as load or generator with active freewheeling (AFWx = 1). In particular, at low and high duty cycles, the active freewheeling is disabled.

Notes

1. *It is recommended to clear **EN_GEN_CHECK** (**EN_GEN_CHECK** to 0)at very high and very low duty cycles: $t_{ON} < t_{HBxCCP}$ FW or $t_{OFF} < t_{HBxCCP}$ active. Under these conditions, a generator mode cannot be correctly detected. The control scheme of the active MOSFET and of the freewheeling MOSFET can therefore be inverted.*
2. *The device cannot measure the switching times t_{DON}, t_{DOFF}, t_{RISE} and t_{FALL} at very high and very low duty cycles: $t_{ON} < t_{HBxCCP}$ FW or $t_{OFF} < t_{HBxCCP}$ active.*

General case, motor operating as load, tON > tHBxCCP FW and tOFF > tHBxCCP FW + tHBxCCP active

Figure 64 shows the internal control signals of the PWM MOSFETs and the freewheeling MOSFET while the motor operates as load:

- tON is longer than the FW cross-current protection time (tHBxCCP FW).
- tOFF is longer than the active cross-current protection time (tHBxCCP FW + tHBxCCP Active).

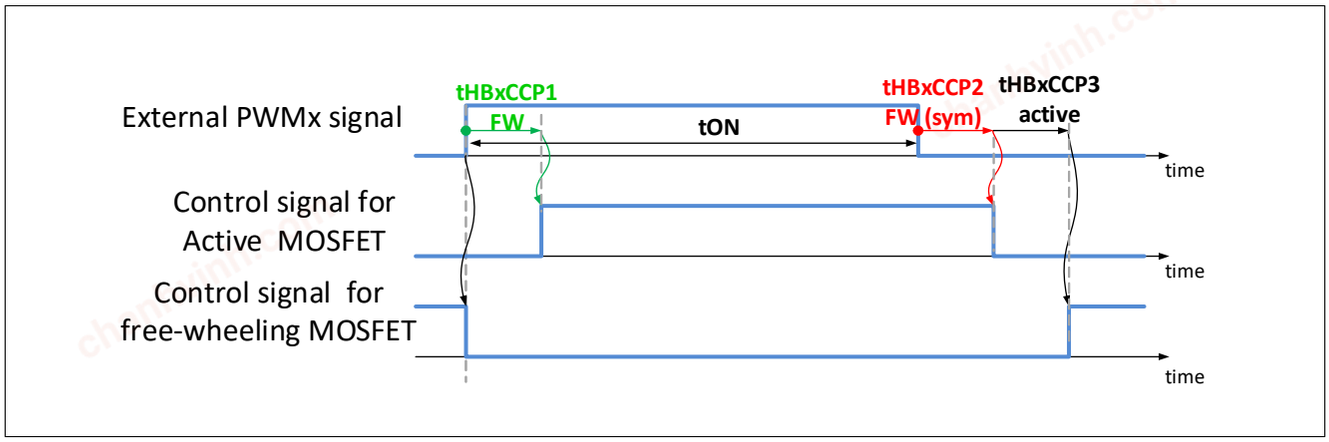


Figure 64 Internal signals for PWM operation - General case tON > tHBxCCP FW, tOFF > tHBxCCP FW + tHBxCCP active, motor operating as load

General case, motor operating as generator, tOFF > tHBxCCP FW and tON > tHBxCCP FW + tHBxCCP active

Figure 65 shows the internal control signals of the PWM MOSFETs and the freewheeling MOSFET while the motor operates as generator:

- tOFF is longer than the FW cross-current protection time (tHBxCCP FW).
- tON is longer than the active cross-current protection time (tHBxCCP FW + tHBxCCP Active).

chanhvinh.com

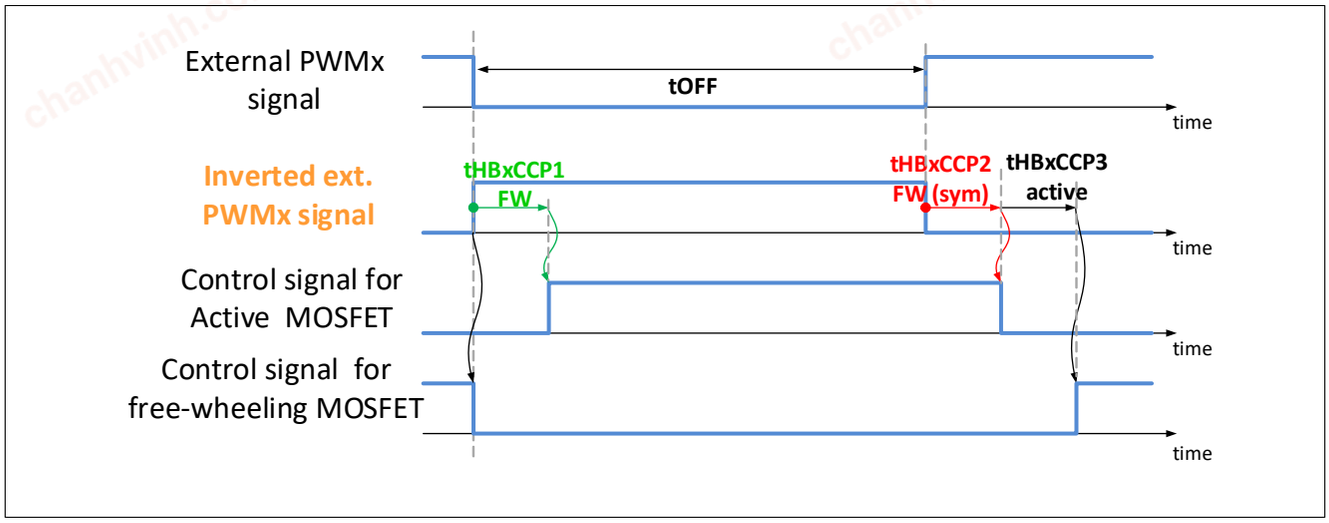


Figure 65 Internal signals for PWM operation - General case: tOFF > tHBxCCP FW, tON > tHBxCCP FW + tHBxCCP FW, Motor operating as generator

chanhvinh.com

High duty cycle: tOFF < tHBxCCP active

No distinction between active MOSFET and FW MOSFET is possible, when the OFF-time of the external PWM signal is shorter than the configured active cross-current protection time. Therefore the PWM MOSFET (selected by HBxMODE[1:0]) is controlled as the active MOSFET. In other words, it is assumed that the motor operates as load. The control signal of the PWM MOSFET is shifted by one FW cross-current protection time compared to the external PWM signal. The MOSFET opposite to the PWM MOSFET stays OFF (passive FW).

Refer to **Figure 66**.

Note: No active FW is applied if tOFF < tHBxCCP FW + tHBxCCP active

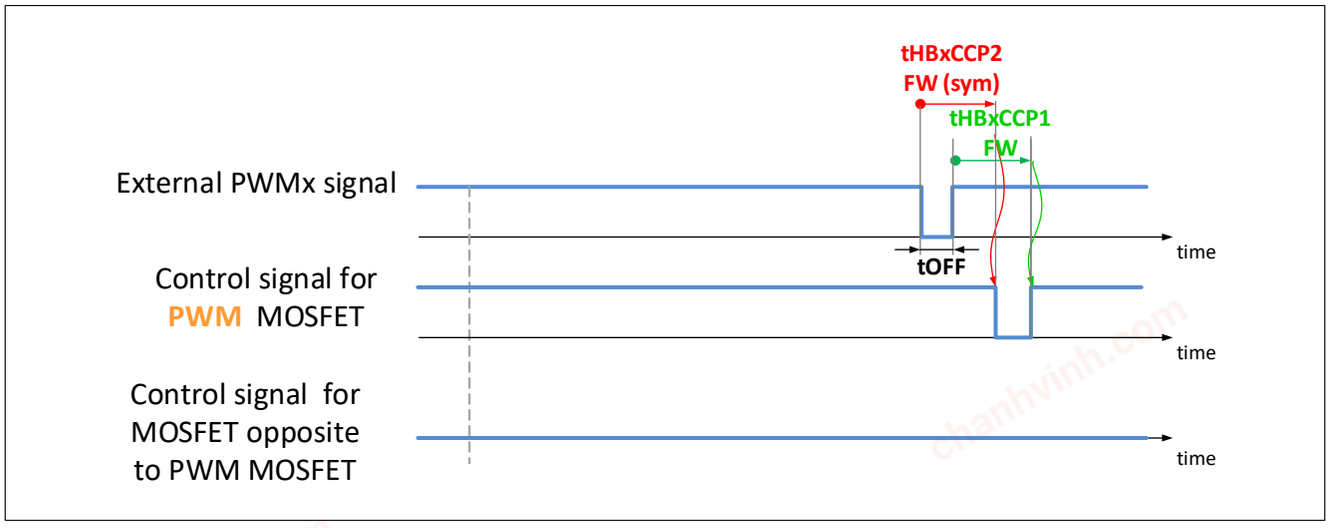


Figure 66 Internal signals for PWM operation at high duty cycle, tOFF < tHBxCCP Active + tHBxCCP FW

Low duty cycle: tON < tHBxCCP FW

No distinction between active MOSFET and FW MOSFET is possible, when the ON-time of the external PWM signal is shorter than the configured FW cross-current protection time. Therefore the PWM MOSFET (selected by HBxMODE[1:0]) is controlled as the active MOSFET. In other words, it is assumed that the motor operates as load. The control signal of the PWM MOSFET is shifted by one cross-current protection time compared to the external PWM signal.

Refer to **Figure 67**.

chanhvinh.com

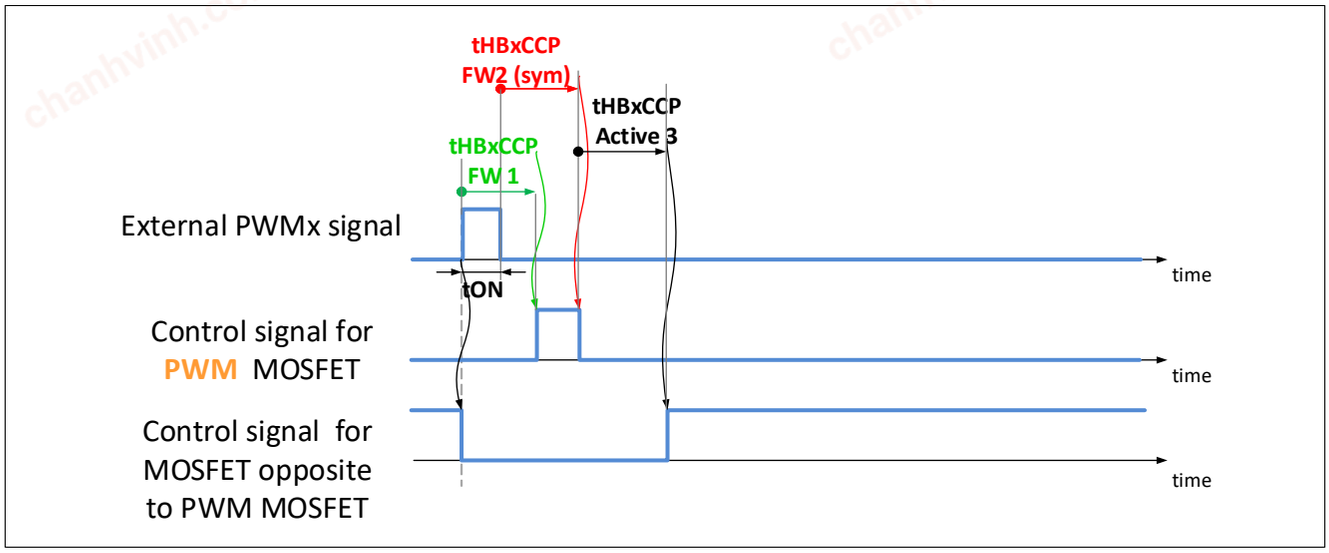


Figure 67 Internal signals for PWM operation at low duty cycle, tON < tHBxCCP FW

11.3.8 Measurements of the switching times

The effective switching times in PWM operation:

- of the PWM MOSFET if **EN_GEN_CHECK** = 0
- of the active MOSFET if **EN_GEN_CHECK** = 1

are reported in the registers:

EFF_TDON_OFF1,**EFF_TDON_OFF2**,**EFF_TDON_OFF3**, **EFF_TDON_OFF4**.

If the end of the rise time for a given MOSFET is not detected before $t_{HBxBLANK}$ Active elapses, then the corresponding status register reports an effective rise time equal to zero.

If the end of the fall time for a given MOSFET is not detected before t_{HBxCCP} Active active elapses, then the corresponding status register reports an effective fall time equal to zero.

The device cannot measure the switching times t_{DON}, t_{DOFF}, t_{RISE} and t_{FALL} at very high and very low duty cycles: $t_{ON} < t_{HBxCCP}$ FW and $t_{OFF} < t_{HBxCCP}$ active. In this case, the corresponding registers report effective t_{DON}, t_{DOFF}, t_{RISE} and t_{FALL} equal to zero.

11.4 Passive discharge

Resistors (R_{GGND}) between the gate of GHx and GND, and between GLx and GND, ensure that the external MOSFETs are turned off in the following conditions:

- V_{CC1} undervoltage
- HBxMODE = 00_B in Normal Mode
- **CPEN** = 0 in Normal Mode
- VS overvoltage or VSINT overvoltage
- Charge pump undervoltage and charge pump blank time (**$t_{CPUVBLANK}$**)
- Charge pump overtemperature (**CP_OT**)
- VDS overvoltage after active discharge in Normal Mode

chanhvinh.com

- In Init Mode, Stop Mode, Fail Safe Mode, Restart Mode and Sleep Mode (exceptions for low-sides in parking braking and VS / VSINT overvoltage braking , refer to **Chapter 11.6** and **Chapter 12.11.3**)

11.5 Slam mode

The slam mode is applicable in Normal Mode.

If the SLAM bit is set in **BRAKE** register:

1. If HBxMODE = 01b or 10b , then the corresponding MOSFETs are actively turned off with their static discharge current during their respective tHBxCCP Active.
2. Then charge pump is deactivated independently from **CPEN**
3. Then PWM1/CRC input pin is mapped to LS1, LS2, LS3 and LS4, independently from PMW12MAP, PWM34MAP, HBxMODE and HBx_PWM_EN
   a) If PWM1/CRC is High, then the low-side MOSFETs are turned on within t_{ON_BRAKE}.
   b) If PWM1/CRC is Low, then the low-side MOSFETs are turned off within t_{OFF_BRAKE}.

There is also the possibility to disable selectively the LSx in SLAM mode.

11.6 Parking braking mode

If **PARK_BRK_EN** bit is set, while the device goes in Sleep Mode or in Stop Mode:

1. If HBxMODE = 01b or 10b , then the corresponding MOSFETs are actively turned off with their static discharge current during their respective tHBxCCP Active.
2. Then charge pump is deactivated independently from CPEN bit.
3. Then the passive discharge (R_{GGND}) of the low-sides is deactivated, the passive discharge of the high-sides are activated
4. If PWM1/CRC is High, then the low-side MOSFETs are turned on within t_{ON_BRAKE}.

Refer to **Chapter 12.11.2** for the protection of the of low-side MOSFETs against short circuits when the parking braking mode is activated.

chanhvinh.com

11.7 Charge pump

A dual-stage charge pump supplies the gate drivers for the high-side and low-side MOSFETs. It requires three external capacitors connected between CPC1N and CPC1P, CPC2N and CPC2P, VS and CP.

The buffer capacitor between VS and CP must have a capacitance equal or higher than 470 nF.

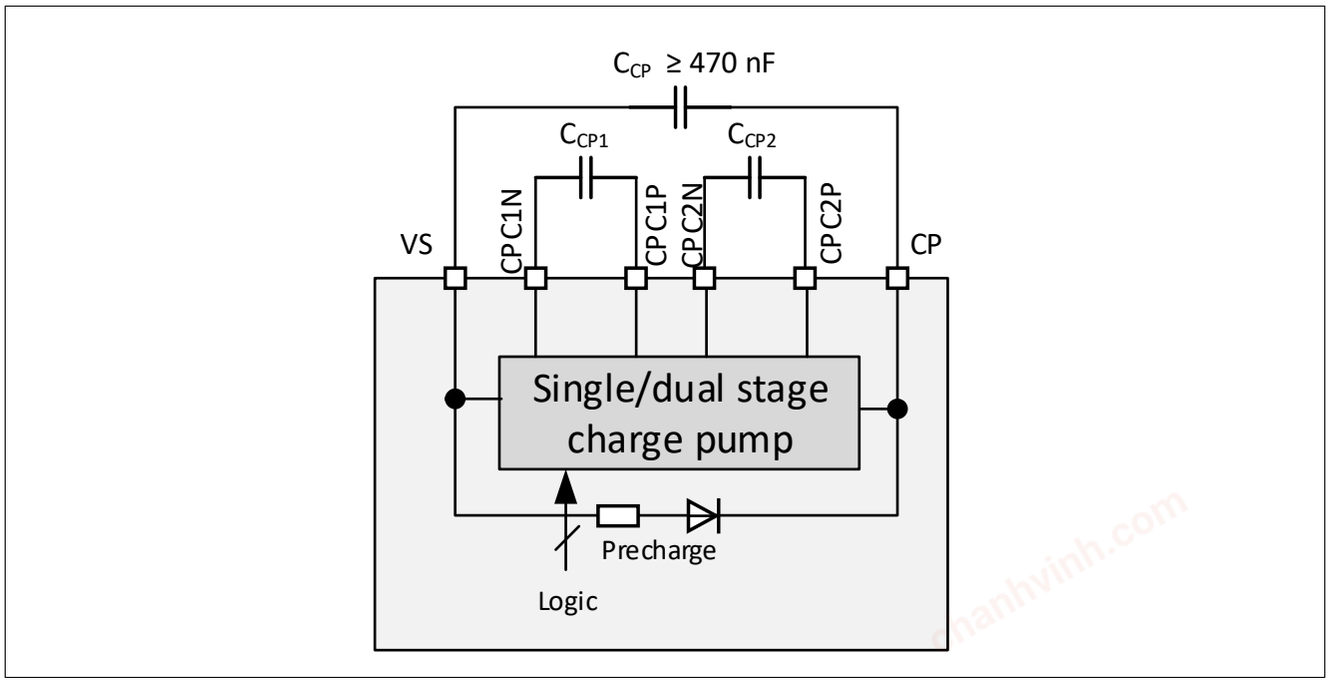


Figure 68 Charge pump - Block diagram

Logic or normal level MOSFETs

The regulation of the charge pump outputs voltage can be configured depending on the type of MOSFET.

FET_LVL = 0: Logic level MOSFETs are selected:

- VCP - VS = V_{CP3} (11 V typ. at VS > 8 V).
- The high-side gate-source voltage GHx - SHx is V_{GH4} (V_S > 8 V).
- The low-side gate-source voltage GLx - SL is V_{GH3} (V_S > 8 V).

FET_LVL = 1: Normal level MOSFETs are selected:

- VCP - VS = V_{CP1}(15 V typ. at VS > 8 V).
- The high-side and low-side gate-source voltage GHx - SHx or GLx - SL is V_{GH1} (V_S > 8 V).

CPSTGA = 0 (default, see **GENCTRL**), the device operates with the dual-stage charge pump.

If CPSTGA = 1, the device switches to single-stage or dual-stage charge pump automatically:

- If $V_S > V_{CPSO\ DS}$: the TLE9561QX switches from a dual-stage to a single-stage charge pump.
- If $V_S < V_{CPSO\ SD}$: the TLE9561QX switches from single-stage to dual-stage charge pump.

The operation with the single-stage charge pump reduces the current consumption from the VS pin.

chanhvinh.com

11.8 Frequency modulation

A modulation of the charge pump frequency can be activated to reduce the peak emission.

The modulation frequency is set by the control bit FMODE in **GENCTRL**:

- FMODE = 0: No modulation.
- FMODE = 1: Modulation frequency = 15.6 kHz (default).

chanhvinh.com

11.9 Electrical characteristics gate driver

The electrical characteristics related to the gate driver are valid for $V_{CP} > V_S + 8.5$ V

Table 24 Electrical characteristics: gate drivers

V_{SINT} = 5.5 V to 28 V, T_j = -40°C to +150°C,
$V_{CP} > V_S + 8.5$ V, V_S = 6 to 19V, all voltages with respect to ground, positive current flowing into pin except for I_{GLx} and I_{GHx} (unless otherwise specified).

Parameter	Symbol	Values			Unit	Note or Test Condition	Number
		Min.	Typ.	Max.			
Comparators							
SHx High Threshold	V_{SHH}	V_S - 2.6	–	V_S - 1.9	V		P_12.11.1
SHx Low Threshold	V_{SHL}	1.9	–	2.6	V	Referred to GND	P_12.11.2
SHx comparator delay	t_{SHx}	–	12	30	ns	1)	P_12.11.3
MOSFET Driver Output							
High Level Output Voltage GHx vs. SHx and GLx vs. SL	V_{GH1}	10	11.5	12.5	V	2) $V_S \geq 8$ V, C_{Load} = 10 nF, I_{CP} = -12 mA, FET_LVL = 1	P_12.11.4
High Level Output Voltage GHx vs. SHx and GLx vs. SL	V_{GH2}	7	–	12.5	V	V_S = 6 V, C_{Load} = 10 nF, I_{CP} = -6 mA, FET_LVL = 1	P_12.11.5
High Level Output Voltage GLx vs. SL	V_{GH3}	10	–	12.5	V	3) $V_S \geq 6$ V, C_{Load} = 10 nF, FET_LVL = 0	P_12.11.6
High Level Output Voltage GHx vs. SHx	V_{GH4}	8.5	10	12.5	V	2) $V_S \geq 8$ V, C_{Load} = 10 nF, I_{CP} = -12 mA, FET_LVL = 0	P_12.11.7
High Level Output Voltage GHx vs. SHx	V_{GH5}	7	–	12.5	V	V_S = 6 V, C_{LOAD}= 10 nF, I_{CP} = -6 mA, FET_LVL =0	P_12.11.8
Charge current	I_{CHG0}	-60%	0.5	+60%	mA	ICHG = 0_D 1) C_{Load} = 2.2 nF $V_S \geq 8$V, $V_{GS} \leq V_{GS(ON)}$ 4)	P_12.11.10
Charge current	I_{CHG8}	-55%	3.1	+55%	mA	ICHG = 8_D 1) C_{Load} = 2.2 nF $V_S \geq 8$V, $V_{GS} \leq V_{GS(ON)}$ 4)	P_12.11.11
Charge current	I_{CHG16}	-40%	9.2	+40%	mA	ICHG = 16_D 1) C_{Load} = 2.2 nF $V_S \geq 8$V, $V_{GS} \leq V_{GS(ON)}$ 4)	P_12.11.12
Charge current	I_{CHG32}	-30%	32.8	+30%	mA	ICHG = 32_D 1) C_{Load} = 10 nF $V_S \geq 8$V, $V_{GS} \leq V_{GS(ON)}$ 4)	P_12.11.13

chanhvinh.com

Table 24 Electrical characteristics: gate drivers (cont'd)

V_{SINT} = 5.5 V to 28 V, T_j = -40°C to +150°C,
$V_{CP} > V_S + 8.5$ V, V_S = 6 to 19V, all voltages with respect to ground, positive current flowing into pin except for I_{GLx} and I_{GHx} (unless otherwise specified).

Parameter	Symbol	Values			Unit	Note or Test Condition	Number
		Min.	Typ.	Max.			
Charge current	I_{CHG48}	-30%	64.3	+30%	mA	ICHG = 48_D [1] C_{Load} = 10 nF $V_S \geq 8V$, $V_{GS} \leq V_{GS(ON)}$ [4]	P_12.11.14
Charge current	I_{CHG63}	-30%	100	+30%	mA	ICHG = 63_D [1] C_{Load} = 10 nF $V_S \geq 8V$, $V_{GS} \leq V_{GS(ON)}$ [4]	P_12.11.15
Discharge current	I_{DCH0}	-60 %	-0.5	+60%	mA	IDCHG = 0_D [1] C_{Load} = 2.2 nF $V_S \geq 8V$, $V_{GS} \geq V_{GS(OFF1)}$	P_12.11.16
Discharge current	I_{DCH8}	-55 %	-3.1	+55%	mA	IDCHG = 8_D [1] C_{Load} = 2.2 nF $V_S \geq 8V$, $V_{GS} \geq V_{GS(OFF1)}$	P_12.11.17
Discharge current	I_{DCHG16}	-40%	-9.2	+40%	mA	IDCHG = 16_D [1] C_{Load} = 2.2 nF $V_S \geq 8V$, $V_{GS} \geq V_{GS(OFF1)}$	P_12.11.18
Discharge current	I_{DCHG32}	-30%	-32.2	+30%	mA	IDCHG = 32_D [1] C_{Load} = 10 nF $V_S \geq 8V$, $V_{GS} \geq V_{GS(OFF2)}$	P_12.11.19
Discharge current	I_{DCHG48}	-30%	-63.2	+30%	mA	IDCHG = 48_D [1] C_{Load} = 10 nF $V_S \geq 8V$, $V_{GS} \geq V_{GS(OFF2)}$	P_12.11.20
Discharge current	I_{DCHG63}	-30%	-100	+30%	mA	IDCHG = 63_D [1] C_{Load} = 10 nF $V_S \geq 8V$, $V_{GS} \geq V_{GS(OFF2)}$	P_12.11.21
Charge current temperature drift	$I_{CHG0,TDrift}$	-37%	-12%	15%		ICHG = 0_D [1)5)]	P_12.11.107
Charge current temperature drift	$I_{CHG8,TDrift}$	-17%	1%	20%		ICHG = 8_D [1)5)]	P_12.11.108
Charge current temperature drift	$I_{CHG16,TDrift}$	-12%	3%	18%		ICHG = 16_D [1)5)]	P_12.11.109
Charge current temperature drift	$I_{CHG32,TDrift}$	-11%	-1%	9%		ICHG = 32_D [1)5)]	P_12.11.110
Charge current temperature drift	$I_{CHG48,TDrift}$	-7.5%	0.5%	8%		ICHG = 48_D [1)5)]	P_12.11.111
Charge current temperature drift	$I_{CHG63,TDrift}$	-5.5%	1.5%	8.5%		ICHG = 63_D [1)5)]	P_12.11.112
Discharge current temperature drift	$I_{DCHG0,TDrift}$	-29%	-4.5%	20%		IDCHG = 0_D [1)6)]	P_12.11.113

chanhvinh.com

Table 24 Electrical characteristics: gate drivers (cont'd)

V_{SINT} = 5.5 V to 28 V, T_j = -40°C to +150°C,
$V_{CP} > V_S + 8.5$ V, V_S = 6 to 19V, all voltages with respect to ground, positive current flowing into pin except for I_{GLx} and I_{GHx} (unless otherwise specified).

Parameter	Symbol	Values			Unit	Note or Test Condition	Number
		Min.	Typ.	Max.			
Discharge current temperature drift	$I_{DCHG8,TDrift}$	-8%	8.5%	26%		IDCHG = 8_D 1)6)	P_12.11.114
Discharge current temperature drift	$I_{DCHG16,TDrift}$	-4%	9.5%	23%		IDCHG = 16_D 1)6)	P_12.11.115
Discharge current temperature drift	$I_{DCHG32,TDrift}$	-4%	4.5%	13%		IDCHG = 32_D 1)6)	P_12.11.116
Discharge current temperature drift	$I_{DCHG48,TDrift}$	-4%	3.5%	10%		IDCHG = 48_D 1)6)	P_12.11.117
Discharge current temperature drift	$I_{DCHG63,TDrift}$	-3.5%	3.5%	9.5%		IDCHG = 63_D 1)6)	P_12.11.118
Charge current V_S drift	$I_{CHG0,VsDrift}$	3%	4.5%	6%		ICHG = 0_D 1)7)	P_12.11.143
Charge current V_S drift	$I_{CHG8,VsDrift}$	4.5%	6%	7.5%		ICHG = 8_D 1)7)	P_12.11.144
Charge current V_S drift	$I_{CHG16,VsDrift}$	4%	5.8%	7.5%		ICHG = 16_D 1)7)	P_12.11.145
Charge current V_S drift	$I_{CHG32,VsDrift}$	2%	3.8	5.8%		ICHG = 32_D 1)7)	P_12.11.146
Charge current V_S drift	$I_{CHG48,VsDrift}$	-0.5%	2%	4.5%		ICHG = 48_D 1)7)	P_12.11.147
Charge current V_S drift	$I_{CHG63,VsDrift}$	-2.3%	0.3	2.8%		ICHG = 63_D 1)7)	P_12.11.148
Discharge current V_S drift	$I_{DCHG0,VsDrift}$	-3%	-1.5%	0%		IDCHG = 0_D 1)8)	P_12.11.149
Discharge current V_S drift	$I_{DCHG8,VsDrift}$	-3%	-0.5%	2%		IDCHG = 8_D 1)8)	P_12.11.150
Discharge current V_S drift	$I_{DCHG16,VsDrift}$	-3.3%	-0.3%	2.3%		IDCHG = 16_D 1)8)	P_12.11.151
Discharge current V_S drift	$I_{DCHG32,VsDrift}$	-2%	0%	2%		IDCHG = 32_D 1)8)	P_12.11.152
Discharge current V_S drift	$I_{DCHG48,VsDrift}$	-1.5%	0%	1.5%		IDCHG = 48_D 1)8)	P_12.11.153
Discharge current V_S drift	$I_{DCHG63,VsDrift}$	-1.5%	0.2%	1.5%		IDCHG = 63_D 1)8)	P_12.11.154
Passive discharge resistance between GHx/GLx and GND	R_{GGND}	10	20	30	kΩ	1)	P_12.11.22
Resistor between SHx and GND	R_{SHGND}	10	20	30	kΩ	1)9)	P_12.11.23
Low RDSON mode	R_{ONCCP}	–	22	35	Ω	1) V_S = 13.5 V $V_{CP} = V_S$ + 14 V $I_{CHG} = I_{DCHG} = 63_D$	P_12.11.24
Gate Drivers Dynamic Parameters							
Gate Driver turn-on delay Time	t_{DGDRV_ON1}	–	–	400	ns	10) From PWM11) rising edge to 20% of I_{CHGx} , x = 0 to 63, C_{Load} = 10 nF, **BDFREQ** = 0	P_12.11.25

chanhvinh.com

Table 24 Electrical characteristics: gate drivers (cont'd)

V_{SINT} = 5.5 V to 28 V, T_j = -40°C to +150°C,
$V_{CP} > V_S + 8.5$ V, V_S = 6 to 19V, all voltages with respect to ground, positive current flowing into pin except for I_{GLx} and I_{GHx} (unless otherwise specified).

Parameter	Symbol	Values			Unit	Note or Test Condition	Number
		Min.	Typ.	Max.			
Gate Driver turn-on delay Time	t_{DGDRV_ON2}	–	–	300	ns	[10] From PWM[11] rising edge to 20% of I_{CHGx}, x = 0 to 63, C_{Load} = 10 nF, **BDFREQ** = 1	P_12.11.93
Gate Driver current turn-on rise time	$t_{GDRV_RISE(ON)}$	–	30	50	ns	[10] From 20% of I_{CHGx} to I_{CHGx}, x = 0 to 63, C_{Load} = 10 nF	P_12.11.26
Gate Driver turn-off delay Time	t_{DGDRV_OFF1}	–	–	400	ns	[10] From PWM[11] rising edge to 20% of I_{DCHGx}, x = 0 to 63, C_{Load} = 10 nF, **BDFREQ** = 0	P_12.11.27
Gate Driver turn-off delay Time	t_{DGDRV_OFF2}	–	–	300	ns	[10] From PWM[11] rising edge to 20% of I_{DCHGx}, x = 0 to 63, C_{Load} = 10 nF, **BDFREQ** = 1	P_12.11.94
Gate Driver current turn-off rise time	$t_{GDRV_RISE(OFF)}$	–	30	50	ns	[10] From 20% of I_{DCHGx} to I_{DCHGx}, x = 0 to 63, C_{Load} = 10 nF	P_12.11.28
External MOSFET gate-to-source voltage - ON	$V_{GS(ON)1}$	7	–	–	V	[1] $V_S \geq 8$ V, **FET_LVL**=1	P_12.11.29
External MOSFET gate-to-source voltage - ON	$V_{GS(ON)2}$	5.5	–	–	V	[1] $V_S \geq 8$ V, **FET_LVL**=0	P_12.11.100
External MOSFET gate-to-source voltage - OFF	$V_{GS(OFF)1}$	–	–	1.5	V	[1] IDCHGx ≤ 36_D (≤ 40 mA typ.)	P_12.11.30
External MOSFET gate-to-source voltage - OFF	$V_{GS(OFF)2}$	–	–	3.8	V	[1]IDCHGx > 36_D (> 40 mA typ.)	P_12.11.101
PWM synchronization delay	t_{PWM_SYNCH0}	80	–	200	ns	[1] **BDFREQ** = 0	P_12.11.33
PWM synchronization delay	t_{PWM_SYNCH1}	40	–	100	ns	[1] **BDFREQ**= 1	P_12.11.82
Bridge driver frequency	$t_{BDFREQ0}$	16.8	18.75	20.7	MHz	[1] **BDFREQ**= 0	P_12.11.83
Bridge driver frequency	$t_{BDFREQ1}$	33.7	37.5	42.3	MHz	[1] **BDFREQ**= 1	P_12.11.84

chanhvinh.com

Table 24 Electrical characteristics: gate drivers (cont'd)

V_{SINT} = 5.5 V to 28 V, T_j = -40°C to +150°C,
$V_{CP} > V_S + 8.5$ V, V_S = 6 to 19V, all voltages with respect to ground, positive current flowing into pin except for I_{GLx} and I_{GHx} (unless otherwise specified).

Parameter	Symbol	Values			Unit	Note or Test Condition	Number
		Min.	Typ.	Max.			
Pre-charge time	$t_{PCHG000}$	80	107	140	ns	1) TPCHG = 000, **BDFREQ**= 0 or 1	P_12.11.34
Pre-charge time	$t_{PCHG001}$	130	160	190	ns	1) TPCHG = 001, **BDFREQ**= 0 or 1	P_12.11.35
Pre-charge time	$t_{PCHG010}$	170	214	260	ns	1) TPCHG = 010, **BDFREQ**= 0 or 1	P_12.11.36
Pre-charge time	$t_{PCHG011}$	210	267	330	ns	1) TPCHG = 011, **BDFREQ**= 0 or 1	P_12.11.37
Pre-charge time	$t_{PCHG100}$	250	320	390	ns	1) TPCHG = 100, **BDFREQ**= 0 or 1	P_12.11.85
Pre-charge time	$t_{PCHG101}$	420	533	630	ns	1) TPCHG = 101, **BDFREQ**= 0 or 1	P_12.11.86
Pre-charge time	$t_{PCHG110}$	600	747	900	ns	1) TPCHG = 110, **BDFREQ**= 0 or 1	P_12.11.87
Pre-charge time	$t_{PCHG111}$	840	1067	1260	ns	1) TPCHG = 111, **BDFREQ**= 0 or 1	P_12.11.88
Pre-discharge time	$t_{PDCHG000}$	80	107	140	ns	1) TPDCHG = 000, **BDFREQ**= 0 or 1	P_12.11.38
Pre-discharge time	$t_{PDCHG001}$	130	160	190	ns	1) TPDCHG = 001, **BDFREQ**= 0 or 1	P_12.11.39
Pre-discharge time	$t_{PDCHG010}$	170	214	260	ns	1) TPDCHG = 010, **BDFREQ**= 0 or 1	P_12.11.40
Pre-discharge time	$t_{PDCHG011}$	210	267	330	ns	1) TPDCHG = 011, **BDFREQ**= 0 or 1	P_12.11.41
Pre-discharge time	$t_{PDCHG100}$	250	320	390	ns	1) TPDCHG = 100, **BDFREQ**= 0 or 1	P_12.11.89
Pre-discharge time	$t_{PDCHG101}$	420	533	630	ns	1) TPDCHG = 101, **BDFREQ**= 0 or 1	P_12.11.90
Pre-discharge time	$t_{PDCHG110}$	600	747	900	ns	1) TPDCHG = 110, **BDFREQ**= 0 or 1	P_12.11.91
Pre-discharge time	$t_{PDCHG111}$	840	1067	1260	ns	1) TPDCHG = 111, **BDFREQ**= 0 or 1	P_12.11.92
Low-side gate driver, CP off - Slam mode, parking braking and VS overvoltage braking							
LS turn-on time, CP off	t_{ON_BRAKE}	–	4.5	9	µs	C_{LOAD} = 10 nF VGLx-VSL = 5 V, $V_S > 8$ V or $V_{SINT} > 8$ V	P_12.11.42

chanhvinh.com

Table 24 Electrical characteristics: gate drivers (cont'd)

V_{SINT} = 5.5 V to 28 V, T_j = -40°C to +150°C,
$V_{CP} > V_S + 8.5$ V, V_S = 6 to 19V, all voltages with respect to ground, positive current flowing into pin except for I_{GLx} and I_{GHx} (unless otherwise specified).

Parameter	Symbol	Values			Unit	Note or Test Condition	Number
		Min.	Typ.	Max.			
LS turn-off time, CP off	t_{OFF_BRAKE}	–	0.7	2	µs	C_{LOAD} = 10 nF VGLx-VSL = 1.5 V, $V_S > 8$ V or $V_{SINT} > 8$ V	P_12.11.43
High output voltage GLx - SL	V_{GLx_BRAKE}	5	–	10	V	$V_S > 8$ V or $V_{SINT} > 8$ V	P_12.11.48
Charge pump							
Charge Pump Frequency	f_{CP}	–	250	–	kHz	1)	P_12.11.49
Output Voltage VCP vs. VS	V_{CPmin1}	8.5	–	–	V	V_S = 6 V, I_{CP} = - 6 mA, FET_LVL =1	P_12.11.50
Output Voltage VCP vs. VS	V_{CPmin2}	7.5	–	–	V	V_S = 6 V, I_{CP} = - 6 mA, FET_LVL =0	P_12.11.51
Regulated CP output voltage, VCP vs. VS	V_{CP1}	12	15	17	V	8 V < V_S < 23 V I_{CP} = - 12 mA13), CPSTGA = 0, FET_LVL =1	P_12.11.52
Regulated CP output voltage, VCP vs. VS	V_{CP2}	12	15	17	V	18 V < V_S < 23 V I_{CP} = - 12 mA13), CPSTGA = 1, FET_LVL =1	P_12.11.53
Regulated CP output voltage, VCP vs. VS	V_{CP3}	7.5	11	13	V	8 V < V_S < 23 V I_{CP} = - 12 mA13), CPSTGA = 0, FET_LVL =0	P_12.11.54
Regulated CP output voltage, VCP vs. VS	V_{CP4}	7.5	11	13	V	13 V < V_S < 23 V I_{CP} = - 12 mA13), CPSTGA = 0, FET_LVL =0	P_12.11.55
Turn-on time	t_{ON_VCP1}	5	–	60	µs	1)12)13)18 V<V_S< 23 V (25%), I_{CP} = 0 , CPSTGA = 1, FET_LVL =1	P_12.11.56
Rise time	t_{RISE_VCP1}	5	30	60	µs	1)12)13)18 V < V_S < 23 V (25%-75%) I_{CP} = 0 , CPSTGA = 1, FET_LVL =1	P_12.11.57
Turn-on time	t_{ON_VCP2}	20	60	120	µs	1)12)13) 13 V < V_S <23 V (25%), I_{CP} = 0, CPSTGA = 1, FET_LVL =0	P_12.11.58

chanhvinh.com

Table 24 Electrical characteristics: gate drivers (cont'd)

V_{SINT} = 5.5 V to 28 V, T_j = -40°C to +150°C,
$V_{CP} > V_S + 8.5$ V, V_S = 6 to 19V, all voltages with respect to ground, positive current flowing into pin except for I_{GLx} and I_{GHx} (unless otherwise specified).

Parameter	Symbol	Values			Unit	Note or Test Condition	Number
		Min.	Typ.	Max.			
Rise time	t_{RISE_VCP2}	5	30	60	µs	[1)12)13)] 13 V < V_S < 23 V (25%-75%) I_{CP} = 0 , CPSTGA = 1, FET_LVL =0	P_12.11.59
Automatic switch over dual to single stage charge pump	$V_{CPSO\ DS}$	16	17	18	V	CPSTGA = 1, FET_LVL =1, VS rising	P_12.11.60
Automatic switch over dual to single stage charge pump	$V_{CPSO\ DS}$	11.5	12.25	13	V	CPSTGA = 1, FET_LVL = 0, VS rising	P_12.11.61
Automatic switch over single to dual stage charge pump	$V_{CPSO\ SD}$	15.5	16.5	17.5	V	CPSTGA = 1, FET_LVL =1, VS falling	P_12.11.62
Automatic switch over single to dual stage charge pump	$V_{CPSO\ SD}$	11	11.75	12.5	V	CPSTGA = 1, FET_LVL = 0, VS falling	P_12.11.64
Charge pump switch over hysteresis	$V_{CPSO\ HY}$	–	0.5	–	V	[1)] CPSTGA = 1 $V_{CPSO\ DS}$ - $V_{CPSO\ SD}$	P_12.11.65
Charge pump minimum output current	I_{CPOC1}	–	–	-12	mA	[13)] 8 V < V_S < 28 V CPSTGA = 0 FET_LVL =1	P_12.11.68
Charge pump minimum output current	I_{CPOC2}	–	–	-12	mA	[13)] 8 V < V_S < 28 V CPSTGA = 0 FET_LVL =0	P_12.11.69
Digital PWMx Inputs							
High Level Input Voltage Threshold	V_{PWMH}	–	–	0.7 × V_{cc1}	V	–	P_12.11.95
Low Level Input Voltage Threshold	V_{PWML}	0.3 × V_{cc1}	–	–	V	–	P_12.11.96
PWMx Input Hysteresis	$V_{PWM,hys}$	–	0.12 × V_{cc1}	–	V	[1)]	P_12.11.97
PWMx Pull-down Resistance	R_{PD_PWM}	20	40	80	kΩ	–	P_12.11.98
CRC Select; Pin PWM1/CRC							
Config Pull-up Resistance	R_{CFG}		100		kΩ	[14)]	P_12.11.99
Config Select Filter Time	t_{CFG_F}	5	10	14	µs	[1)]	P_12.11.105

1) Not subject to production test, specified by design.
2) Independent from **CPSTGA**.
3) ICP = -12 mA for VS ≥ 8 V, ICP = 6 mA for VS = 6 V.

chanhvinh.com

4) $V_{GS(ON)}$ = **$V_{GS(ON)1}$** if **FET_LVL** = 1, $V_{GS(ON)}$ = **$V_{GS(ON)2}$** if **FET_LVL** = 0.
5) (ICHGx@Tj=150°C - ICHGx@Tj=-40°C) / ICHGx@Tj=25°C
6) (IDCHGx@Tj=150°C - IDCHGx@Tj=-40°C) / IDCHGx@Tj=25°C
7) (ICHGx@VS=19V - ICHGx@VS=8V) / ICHGx@VS=13.5V
8) (IDCHGx@VS=19V - ICHGx@VS=8V) / IDCHGx@VS=13.5V
9) This resistance is the resistance between GHx and GND connected through a diode to SHx. As a consequence, the voltage at SHx can rise up to 0.6 V typ. before it is discharged through the resistor.
10) Not subject to production test, specified by design.
11) External PWM signal.
12) Parameter dependent on the capacitance C_{CP}.
13) C_{CPC1} = C_{CPC2} = 220 nF, C_{CP} = 470 nF. Other C_{CP} values higher than 470 nF can be used. Note that this capacitor influences the charge pump rise and turn-on times, and the charge , V_{CP} ripple voltage when charging the gate of a MOSFET.
14) Config Pull-up will be only active during startup-phase for checking external pull-down. After checking, the typ. 40 kΩ Pull-down resistance will be present.

chanhvinh.com

12 Supervision Functions

12.1 Reset Function

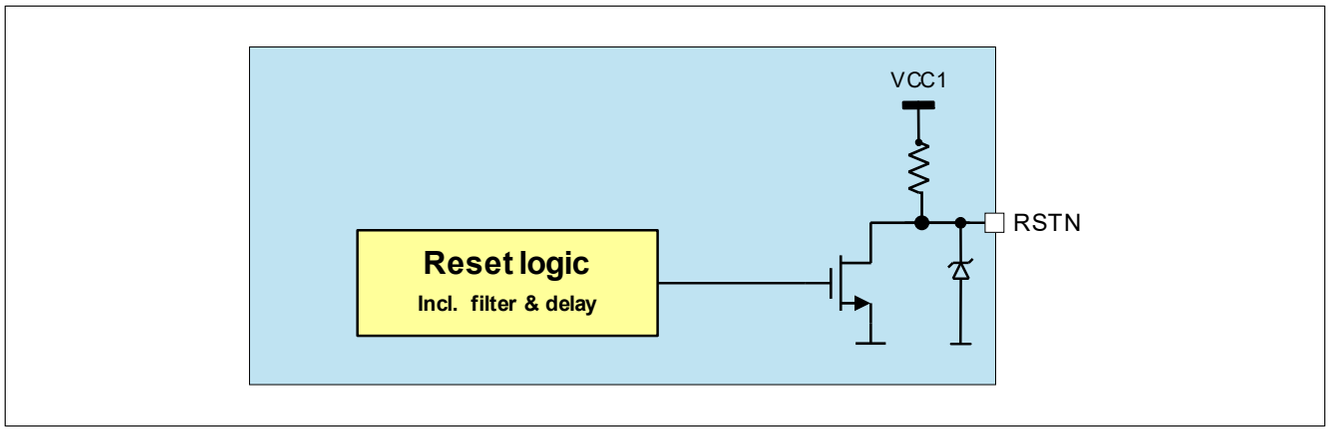


Figure 69 Reset Block Diagram

12.1.1 Reset Output Description

The reset output pin RSTN provides a reset information to the microcontroller, for example, in the event that the output voltage has fallen below the undervoltage threshold V_{RTx}. In case of a reset event, the reset output RSTN is pulled to low after the filter time **t_{RF}** and stays low as long as the reset event is present plus a reset delay time **t_{RD1}** or **t_{RD2}** depending on the value in **RSTN_DEL**. When connecting the device to battery voltage, the reset signal remains low initially. When the output voltage *V*CC1 has reached the reset default threshold $V_{RT1,r}$, the reset output RSTN is released to high after the reset delay time **t_{RD1}**. A reset can also occur due to a watchdog trigger failure. The reset threshold can be adjusted via SPI, the default reset threshold is **$V_{RT1,f}$**. The RSTN pin has an integrated pull-up resistor. In case reset is triggered, it will be pulled low for **VCC1** ≥ 1V and for VSINT ≥ **$V_{POR,f}$** (see also **Chapter 12.3**).

The timings for the RSTN triggering regarding VCC1 undervoltage and watchdog trigger is shown in **Figure 70**.

chanhvinh.com

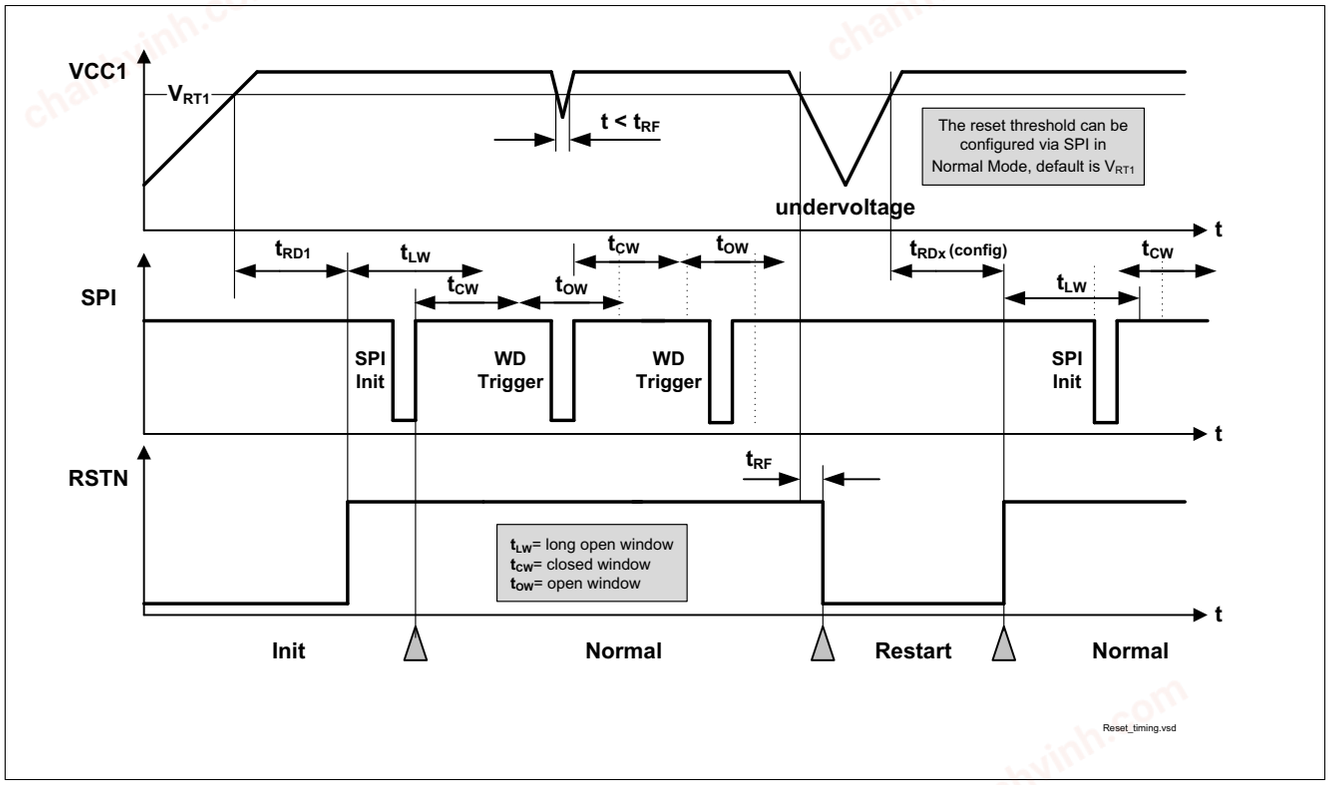


Figure 70 Reset Timing Diagram

12.1.2 Soft Reset Description

In Normal Mode and Stop Mode, it is also possible to trigger a device internal reset via a SPI command in order to bring the device into a defined state in case of failures. In this case the microcontroller must send a SPI command and set the **MODE** bits to '11' in the **M_S_CTRL** register. As soon as this command becomes valid, the device is set back to Init Mode and all SPI registers are set to their default values (see SPI **Chapter 13.5.1** and **Chapter 13.6.1**).

Two different soft reset configurations are possible via the SPI bit **SOFT_RESET_RO**:

- **SOFT_RESET_RO** = '0': The reset output (RSTN) is triggered when the soft reset is executed (default setting) The configured reset delay time **t_{RD1}** or **t_{RD2}** is applied depending on the value in **RSTN_DEL**).
- **SOFT_RESET_RO** = '1': The reset output (RSTN) is not triggered when the soft reset is executed.

Note: The device must be in Normal Mode or Stop Mode when sending this command. Otherwise, the command will be ignored.

Note: Allow CRC configuration after software-reset - or better check once again via SPI after software reset.

chanhvinh.com

12.2 Watchdog Function

The watchdog is used to monitor the software execution of the microcontroller and to trigger a reset or move the device to Fail Safe Mode, if the microcontroller stops serving the watchdog due to a lock up in the software.

Two different types of watchdog functions are implemented and can be selected via the bit **WD_CFG**:

- Time-Out Watchdog (default value)
- Window Watchdog

The respective watchdog functions can be selected and programmed in Normal Mode. The configuration stays unchanged in Stop Mode.

Please refer to **Table 25** to match the device modes with the respective watchdog modes.

Table 25 Watchdog Functionality by modes

Mode	Watchdog Mode	Remarks
Init Mode	Starts with Long Open Window	Watchdog starts with Long Open Window after RSTN is released.
Normal Mode	WD Programmable	Window Watchdog, Time-Out watchdog or switched off for Stop Mode.
Stop Mode	Watchdog is fixed or off	
Sleep Mode	Off	Device will start with Long Open Window when entering Normal Mode.
Restart Mode	Off	Device will start with Long Open Window when entering Normal Mode.

The watchdog timing is programmed via SPI command in the register **WD_CTRL**. As soon as the watchdog is programmed, the timer starts with the new setting and the watchdog must be served. The watchdog is triggered by sending a valid SPI-write command to the watchdog configuration register. The watchdog trigger command is executed when the SPI command is interpreted.

When coming from Init Mode, Restart Mode or in certain cases from Stop Mode, the watchdog timer is always started with a long open window. The long open window (t_{LW}) allows the microcontroller to run its initialization sequences and then to trigger the watchdog via SPI.

The watchdog timer period can be selected via SPI (**WD_TIMER**).The timer setting is valid for both watchdog types.

The following watchdog timer periods are available:

- WD Setting 1: 10 ms
- WD Setting 2: 20 ms
- WD Setting 3: 50 ms
- WD Setting 4: 100 ms
- WD Setting 5: 200 ms
- WD Setting 6: 500 ms
- WD Setting 7: 1 s
- WD Setting 8: 10 s

In case of a reset, Restart Mode or Fail-Safe Mode is entered according to the configuration and the SPI bits **WD_FAIL** are set. Once the RSTN goes high again the watchdog immediately starts with a long open window the device enters automatically Normal Mode.

The Watchdog behaviour in Software Development Mode is described in **Chapter 5.4.7**.

chanhvinh.com

In case a watchdog-trigger was missed in Software Development Mode, the watchdog will start with the long-open-window once again.

The **WD_FAIL** bits will be set after a watchdog trigger failure.

The **WD_FAIL** bits are cleared automatically when following conditions apply:

- After a successful watchdog trigger.
- When the watchdog is off: in Stop Mode after successfully disabling it, in Sleep Mode, or in Fail-Safe Mode (except for a watchdog failure).

12.2.1 Time-Out Watchdog

The time-out watchdog is an easier and less secure watchdog than a window watchdog as the watchdog trigger can be done at any time within the configured watchdog timer period.

A correct watchdog service immediately results in starting a new watchdog timer period. Taking the tolerances of the internal oscillator into account leads to the safe trigger area as defined in **Figure 71**.

If the time-out watchdog period elapses, a watchdog reset is created by setting the reset output RSTN low and the device switches to Restart Mode or Fail-Safe Mode.

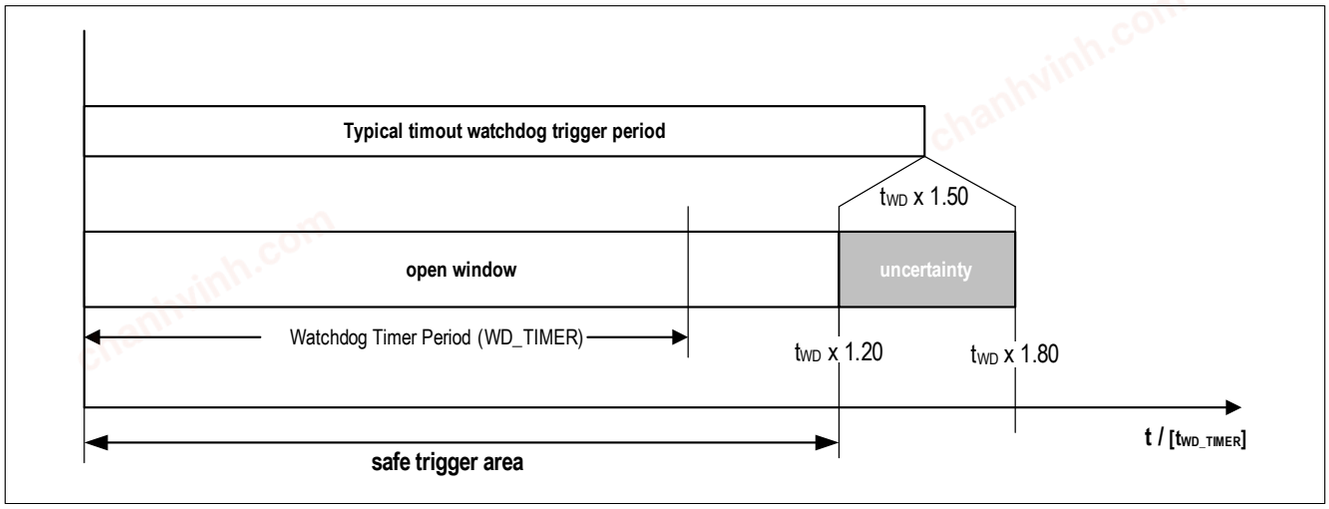


Figure 71 Time-out Watchdog Definitions

chanhvinh.com

12.2.2 Window Watchdog

Compared to the time-out watchdog the characteristic of the window watchdog is that the watchdog timer period is divided between a closed and an open window. The watchdog must be triggered within the open window.

A correct watchdog trigger results in starting the window watchdog period by a closed window followed by an open window.

The watchdog timer period is at the same time the typical trigger time and defines the middle of the open window. Taking the oscillator tolerances into account leads to a safe trigger area of:

$t_{WD} \times 0.72 <$ safe trigger area $< t_{WD} \times 1.20$.

The typical closed window is defined to a width of 60% of the selected window watchdog timer period. Taking the tolerances of the internal oscillator into account leads to the timings as defined in **Figure 72**.

A correct watchdog service immediately results in starting the next closed window.

If the trigger signal meet the closed window or if the watchdog timer period elapses, then a watchdog reset is triggered (RSTN low) and the device switches to Restart Mode or Fail-Safe Mode.

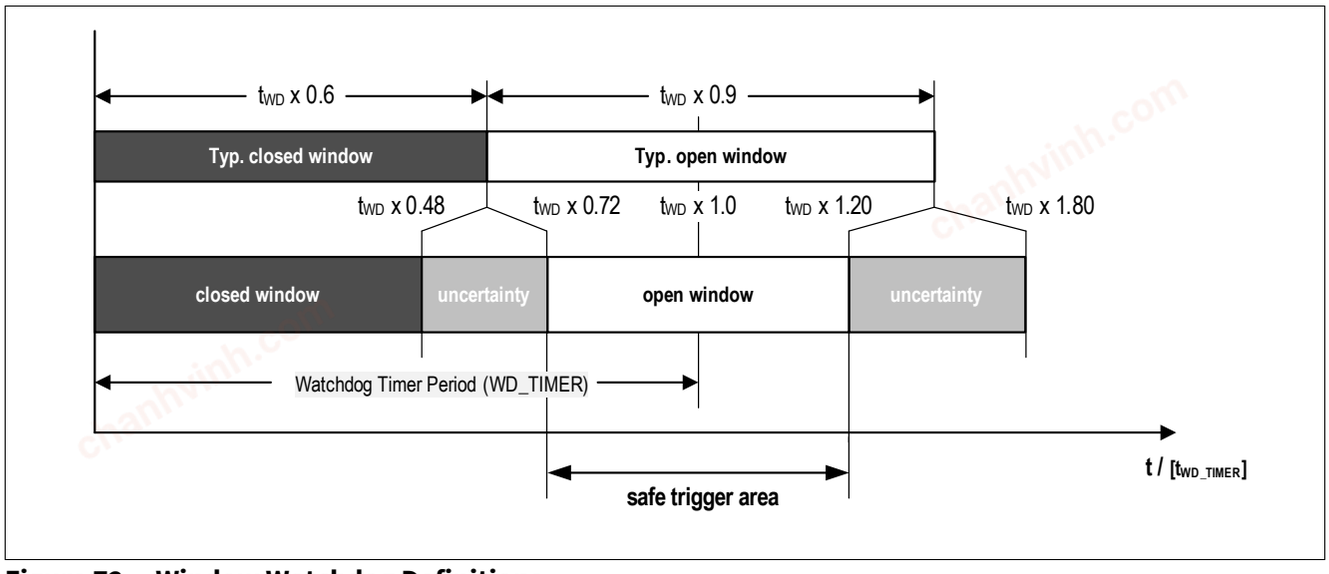


Figure 72 Window Watchdog Definitions

12.2.3 Watchdog Setting Check Sum

A check sum bit is part of the SPI command to trigger the watchdog and to set the watchdog setting.

The sum of the 16 data bits in the register **WD_CTRL** needs to have even parity (see **Equation (12.1)**). This is realized by either setting the bit **CHECKSUM** to 0 or 1. If the check sum is wrong, then the SPI command is ignored, i.e. the watchdog is not triggered or the settings are not changed and the bit SPI_FAIL is set.

The written value of the reserved bits of the **WD_CTRL** register is considered (even if read as '0' in the SPI output) for checksum calculation, i.e. if a 1 is written on the reserved bit position, then a 1 will be used in the checksum calculation.

(12.1)

$$\mathrm{Bit(CHECKSUM)} = \mathrm{Bit22} \oplus \ldots \oplus \mathrm{Bit8}$$

chanhvinh.com

12.2.4 Watchdog during Stop Mode

The watchdog can be disabled for Stop Mode in Normal Mode. For safety reasons, there is a special sequence to be followed in order to disable the watchdog as described in **Figure 73**. Two different SPI bits (**WD_STM_EN_0**, **WD_STM_EN_1**) in the registers **HW_CTRL** and **WD_CTRL** need to be set.

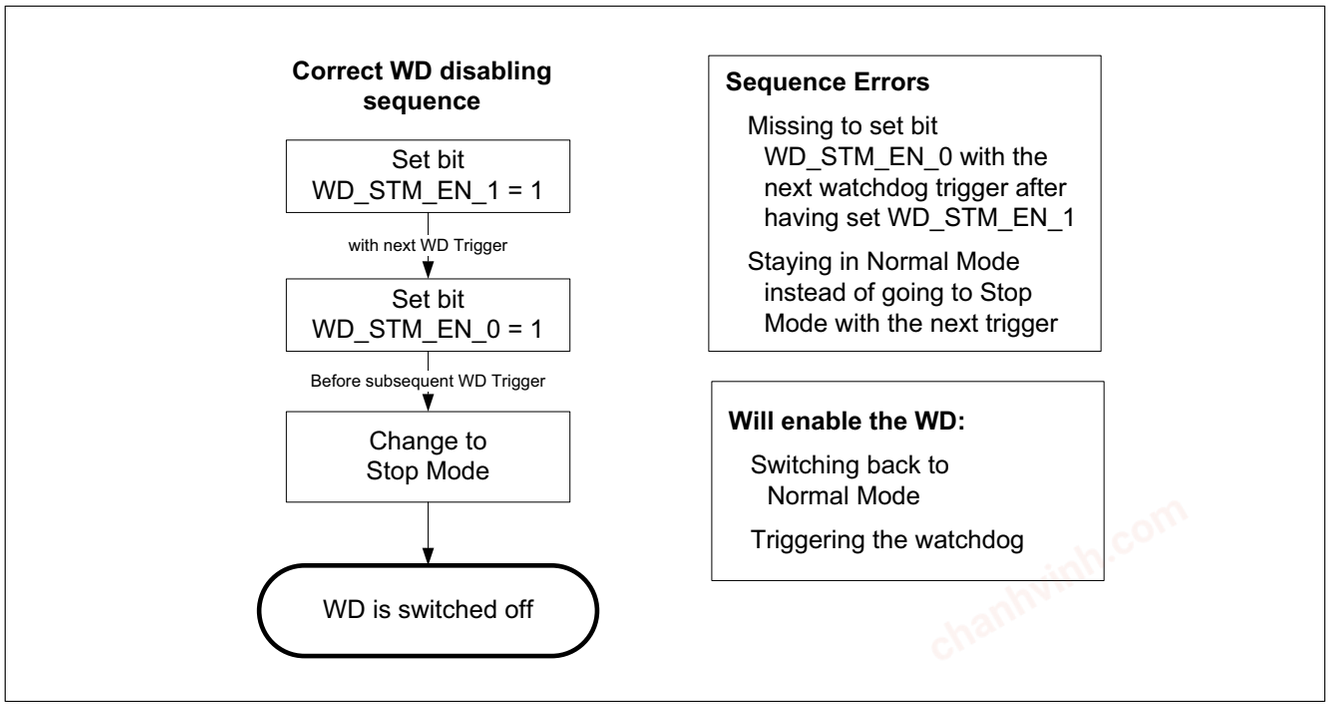


Figure 73 Watchdog disabling sequence in Stop Mode

If a sequence error occurs, then the bit **WD_STM_EN_1** will be cleared and the sequence has to be started again.

The watchdog can be enabled by triggering the watchdog in Stop Mode or by switching back to Normal Mode via SPI command. In both cases the watchdog will start with a long open window and the bits **WD_STM_EN_1** and **WD_STM_EN_0** are cleared. After the long open window the watchdog has to be served as configured in the **WD_CTRL** register.

*Note: The bit **WD_STM_EN_0** will be cleared automatically when the sequence is started and it was 1 before. **WD_STM_EN_0** can also not be set if **WD_STM_EN_1** isn't yet set.*

12.2.5 Watchdog Start in Stop Mode due to Bus Wake

In Stop Mode the Watchdog can be disabled. In addition a feature is available which will start the watchdog with any BUS wake (CAN,) during Stop Mode. The feature is enabled by setting the bit **WD_EN_ WK_BUS** = 1 (default value after POR). The bit can only be changed in Normal Mode and needs to be programmed before starting the watchdog disable sequence.

A wake on the Bus will generate an interrupt and the RXDCAN, is pulled to low. By these signals the microcontroller is informed that the watchdog is started with a long open window. After the long open window the watchdog has to be served as configured in the **WD_CTRL** register.

To disable the watchdog again, the device needs to be switched to Normal Mode and the sequence needs to be sent again.

chanhvinh.com

12.3 VSINT Power On Reset

At power up of the device, the Power on Reset is detected when VSINT > $V_{POR,r}$ and the SPI bit **POR** is set to indicate that all SPI registers are set to POR default settings. VCC1 is starting up and the reset output will be kept low and will only be released once VCC1 has crossed $V_{RT1,r}$ and after t_{RD1} has elapsed.
In case VSINT < $V_{POR,f}$, an device internal reset will be generated and the device is switched off and will restart in Init Mode at the next VSINT rising. This is shown in **Figure 74**.

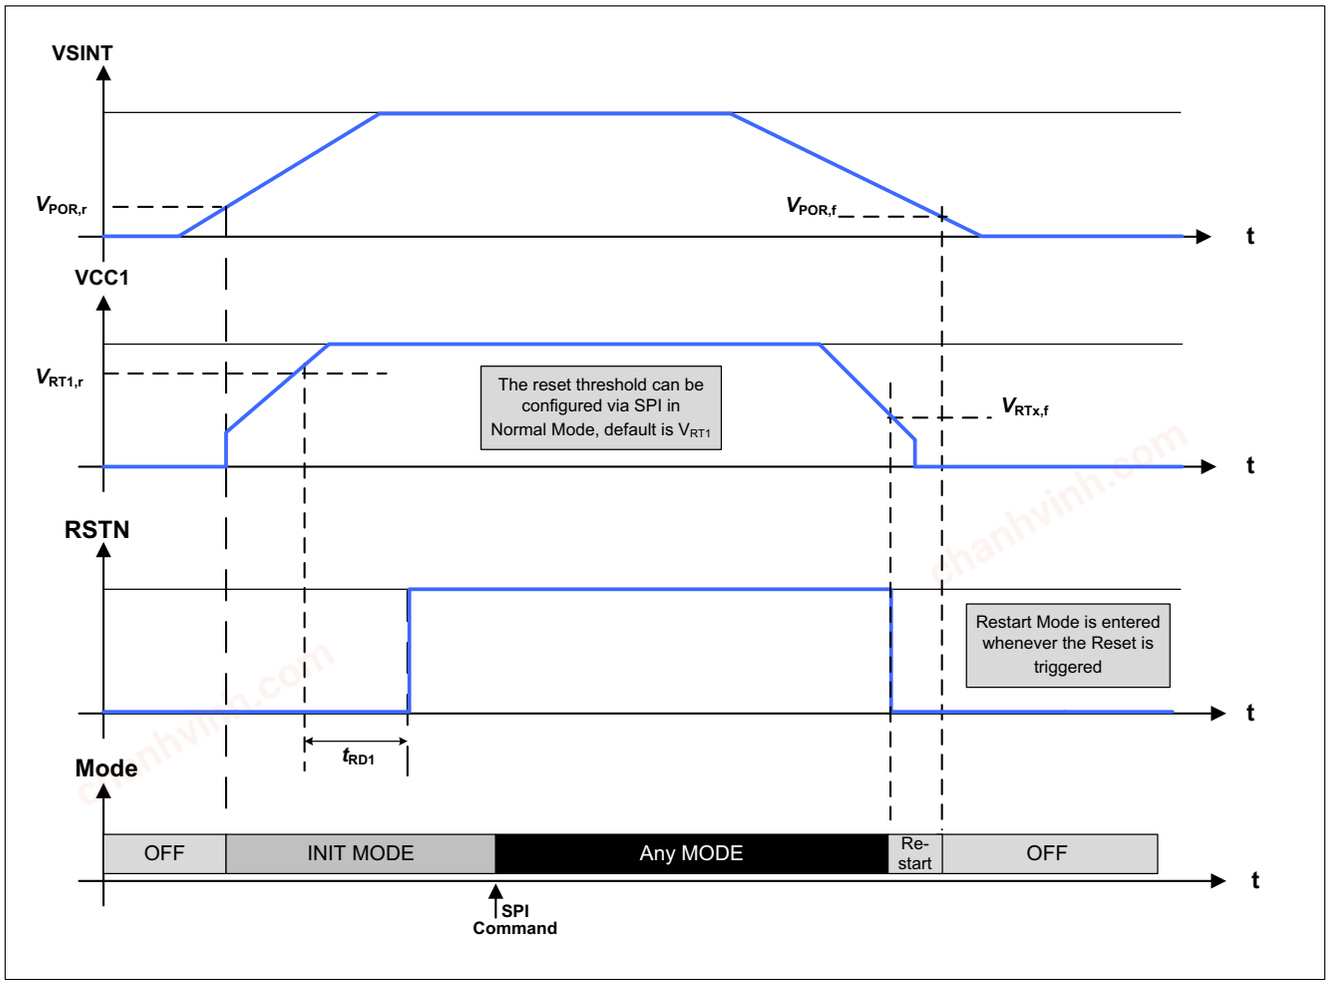


Figure 74 Ramp up / down example of Supply Voltage

chanhvinh.com

12.4 VSINT Under- and Overvoltage

12.4.1 VSINT Undervoltage

The VSINT under-voltage monitoring is always active in Init Mode, Restart Mode, Normal Mode. If the supply voltage VSINT drops below $V_{SINT,UV}$ for more than t_{VSUV_FILT}, then the device does the following measures:

- The VCC1 short circuit diagnosis becomes inactive (see **Chapter 12.8**). However, the thermal protection of the device remains active. If the undervoltage threshold is exceeded (VSINT rising) then the function will be automatically enabled again.
- The status bit **VSINT_UV** is set and latched until a clear command of **SUP_STAT** is received.

Note: VSINT under-voltage monitoring is not available in Stop Mode due to current consumption saving requirements except if the VCC1 load current is above the active peak threshold (I_PEAK_TH) or if VCC1 is below the VCC1 prewarning threshold.

12.4.2 VSINT Overvoltage

The VSINT over-voltage monitoring is always active in Init Mode, Restart Mode and Normal Mode. If VSINT rises above $V_{S,OVD1}$, $V_{S,OVD2}$ for more than t_{VSOV_FILT} then the device does the following measures:

1. If HBxMODE = 01b or 10b , then the corresponding MOSFETs are actively turned off with their static discharge current during their respective tHBxCCP Active.
2. Then the charge pump is turned off and the passive discharge is activated.
3. The status bits **VSINT_OV** is set and latched until a clear command of **SUP_STAT** is received.

If VS or VSINT fall below $V_{S,OVD1}$ or $V_{S,OVD2}$:

- If **CPEN** = 0 : the charge pumps stays and the bridge driver stay off.
- If **CPEN** = 1 :
  - If **BDOV_REC** = 0 : Then the charge pump is reactivated but the bridge driver stays off until **VS_OV** and **VSINT_OV** are cleared.
  - If **BDOV_REC** = 1 : Then the charge pump is reactivated and the bridge driver is enabled if VCP > V_{CPUVx}, even if **VS_OV** or **VSINT_OV** is set. The state of the external MOSFETs is according to the control registers.

chanhvinh.com

12.5 VS Under- and Overvoltage

12.5.1 VS Undervoltage

The VS under-voltage monitoring is always active in Init-, Restart Mode and Normal Mode. If VS drops below **$V_{S,UV}$** for more than **t_{VSUV_FILT}**, then the device does the following measures:

1. If HBxMODE = 01b or 10b , then the corresponding MOSFETs are actively turned off with their static discharge current during their respective tHBxCCP Active.
2. Then the charge pump is turned off and the passive discharge is activated .
3. The status bits **VS_UV** is set and latched until a clear command of **SUP_STAT** is received.

If VS rises above **$V_{S,UV}$**, then the charge pump is reactivated (provided that **CPEN** is set) but the bridge driver stays off until **VS_UV** is cleared. The bridge driver will be reactivated once the VS_UV bit is cleared.

12.5.2 VS Overvoltage

The VS over-voltage monitoring is always active in Init-, Restart Mode and Normal Mode or when the charge pump is enabled. If VS rises above **$V_{S,OVD1}$** or **$V_{S,OVD2}$** for more than **t_{VSOV_FILT}**, then the device does the following measures:

1. If HBxMODE = 01b or 10b , then the corresponding MOSFETs are actively turned off with their static discharge current during their respective tHBxCCP Active.
2. Then the charge pump is turned off and the passive discharge is activated.
3. The status bits **VS_OV** is set and latched until a clear command of **SUP_STAT** is received.

If VS and VSINT fall below **$V_{S,OVD1}$** or **$V_{S,OVD2}$**:

- If **CPEN** = 0 : the charge pumps and the bridge driver stay off.
- If **CPEN** = 1 :
  - If **BDOV_REC** = 0 : Then the charge pump is reactivated (provided that **CPEN** = 1 and **CP_UV** = 0) but the bridge driver stays off until **VS_OV** and **VSINT_OV** are cleared.
  - If **BDOV_REC** = 1 : Then the charge pump is reactivated and the bridge driver is enabled if VCP > V_{CPUVx}, even if **VS_OV** or **VSINT_OV** is set. The state of the external MOSFETs is according to the control registers.

chanhvinh.com

12.6 VSHS Under- Overvoltage

12.6.1 VSHS Undervoltage

If the supply voltage VSHS passes below the undervoltage threshold ($V_{SHS,UVD}$) the device does the following measures:

- HS1...4 are acting accordingly to the SPI setting (refer also to **Chapter 7.2.1**).
- SPI bit **HS_UV** is set. No other error bits are set. The bit can be cleared once the condition is not present anymore.

12.6.2 VSHS Overvoltage

If the supply voltage VSHS reaches the overvoltage threshold ($V_{SHS,OVD}$) the device triggers the following measures:

- HS1...4 are acting accordingly to the SPI setting (refer also to **Chapter 7.2.2**).
- The status bit **HS_OV** is set. No other error bits are set. The bit can be cleared once the condition is not present anymore.

chanhvinh.com

12.7 VCC1 Over-/ Undervoltage and Undervoltage Prewarning

12.7.1 VCC1 Undervoltage and Undervoltage Prewarning

This function is always active when the VCC1 voltage regulator is enabled.

A first-level voltage detection threshold is implemented as a prewarning for the microcontroller. The prewarning event is signaled with the bit **VCC1_WARN**. No other actions are taken.

As described in **Chapter 12.1** and **Figure 75**, a reset will be triggered (RSTN pulled low) when the V_{CC1} output voltage falls below the selected undervoltage threshold (V_{RTx}). The device will enter Restart Mode and the bit **VCC1_UV** is set when RSTN is released again.

The hysteresis of the VCC1 undervoltage threshold can be increased by setting the bit **RSTN_HYS**. In this case always the highest rising threshold ($V_{RT1,R}$) is used for the release of the undervoltage reset. The falling reset threshold remains as configured.

An additional safety mechanism is implemented to avoid repetitive VCC1 undervoltage resets due to high dynamic loads on VCC1:

- A counter is increased for every consecutive VCC1 undervoltage event (regardless on the selected reset threshold).
- The counter is active in Init Mode, Normal Mode and Stop Mode.
- For VS < $V_{SINT,UV}$ the counter will be stopped in Normal Mode (i.e. the VS UV comparator is always enabled in Normal Mode).
- A 4th consecutive VCC1 undervoltage event will lead to Fail-Safe Mode entry and to setting the bit **VCC1_UV_FS**.
- This counter is cleared:
  - When Fail-Safe Mode is entered.
  - When the bit VCC1_UV is cleared.
  - When a Soft-Reset is triggered.

*Note: After 4 consecutive VCC1_UV events, the device will enter Fail-Safe Mode and the **VCC1_UV_FS** bit is set.*

*Note: The **VCC1_WARN** or **VCC1_UV** bits are not set in Sleep Mode as V_{CC1} = 0 V in this case.*

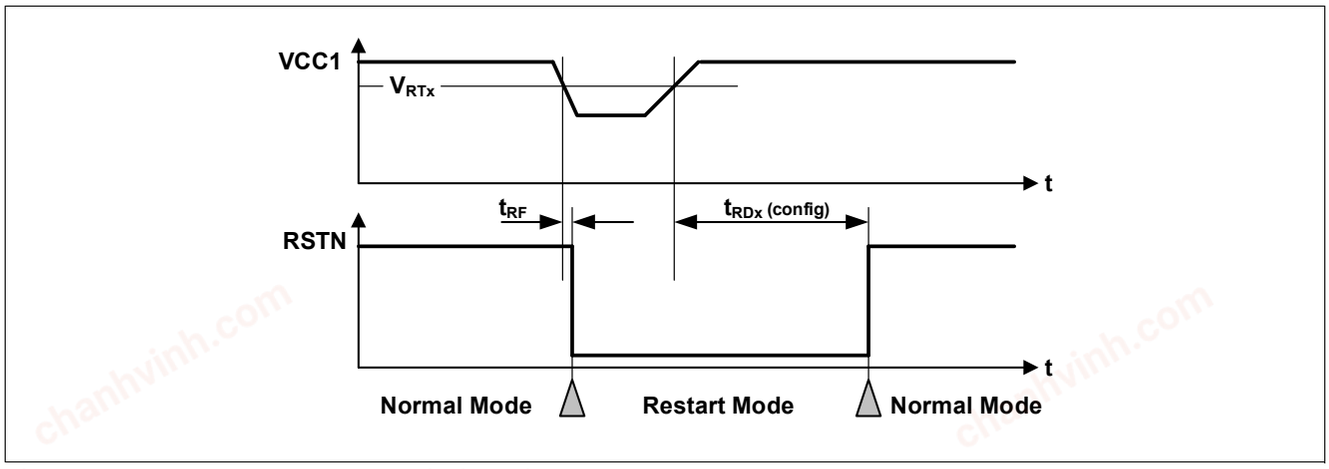


Figure 75 VCC1 Undervoltage Timing Diagram

chanhvinh.com

*Note: It is recommended to clear the **VCC1_WARN** and **VCC1_UV** bit once it is detected by the microcontroller software to verify if the undervoltage still exists or not.*

12.7.2 VCC1 Overvoltage

For fail-safe reasons a configurable VCC1 over voltage detection feature is implemented. It is active when the VCC1 voltage regulator is enabled.

In case the **$V_{CC1,OV,r}$** threshold is crossed, the device triggers following measures depending on the configuration:

- The bit **VCC1_OV** is always set.
- Based on the configuration of **VCC1_OV_MOD**, different kind of event are generated from device.
- If the **VCC1_OV_MOD**=11_B, in case of the device enters in Fail Safe Mode, the Fail Safe Output is activated (according **WK2_FO** setting).

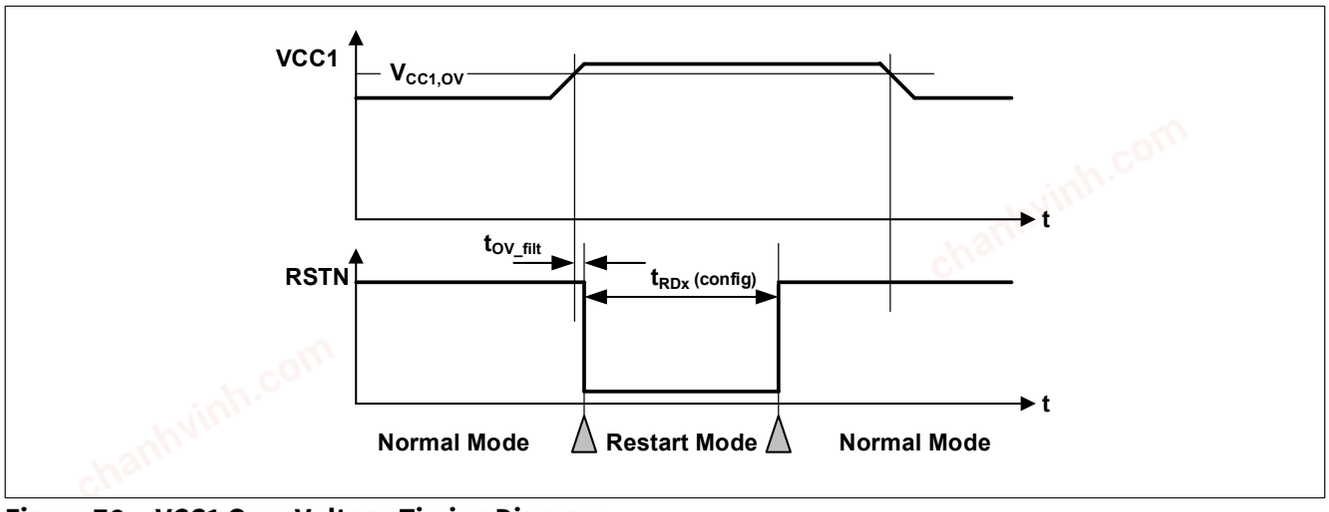


Figure 76 VCC1 Over Voltage Timing Diagram

12.8 VCC1 Short Circuit Diagnostics

The short circuit protection feature for V_{CC1} is implemented as follows:

- The short circuit detection is only enabled if VS > **$V_{SINT,UV}$**.
- If VCC1 is not above the V_{RTx} within **$t_{VCC1,SC}$** after device power up or after waking from Sleep Mode or Fail-Safe Mode (i.e. after VCC1 is enabled) then the SPI bit **VCC1_SC** bit is set, VCC1 is turned off, the FO pin is enabled, **FAILURE** is set and Fail-Safe Mode is entered. The device can be activated again via a wake-up sources.
- The same behavior applies, if V_{CC1} falls below V_{RTx} for longer than **$t_{VCC1,SC}$**.

12.9 VCAN Undervoltage

An undervoltage warning is implemented for VCAN as follows:

- V_{CAN} undervoltage detection: In case *the CAN module is enabled and the voltage on* V_{CAN} will drop below the $V_{CAN_UV,f}$ threshold, then the SPI bit **VCAN_UV** is set and can be only cleared via SPI.

chanhvinh.com

12.10 Thermal Protection

Three independent and different thermal protection features are implemented in the device according to the system impact:

- Individual thermal shutdown of specific blocks
- Temperature prewarning of VCC1 voltage regulator
- Device thermal shutdown due to VCC1 overtemperature

12.10.1 Individual Thermal Shutdown

As a first-level protection measure, CAN, HSx and the charge pump are independently switched off if the respective block reaches the temperature threshold **T_{jTSD1}**. Then the **TSD1** bit is set. This bit can only be cleared via SPI once the overtemperature is not present anymore. Independent of the device mode the thermal shutdown protection is only active if the respective block is ON.

The respective modules behave as follows:

- CAN: The transmitter is disabled and stays in CAN Normal Mode acting like CAN Receive Only Mode. The status bits **CAN_FAIL** are set to '01'. Once the overtemperature condition is not present anymore, then the CAN transmitter is automatically switched on.
- HSx: If one or more HSx switches reach the TSD1 threshold, then the HSx switches are turned OFF (depending on configuration either individually or all at once) and the control bits for HSx are cleared based on **HS_OT_SD_DIS** setting. The status bits HSx_OT are set (see register **HS_OL_OC_OT_STAT**). Once the over temperature condition is not present anymore, then HSx has to be configured again by SPI.
- Charge pump: If the charge pump reaches **T_{jTSD1}**, then **CP_OT** is set, **CPEN** is cleared and the activated MOSFETs are actively discharged with their respective static currents during their respective active cross current protection times (tHBxCCP active). When all tHBxCCP active elapsed, then the charge pump and the MOSFETs active discharge are disabled . Once the over temperature condition is not present anymore, then **CPEN** has to be configured again by SPI.

Note: The diagnosis bits are not cleared automatically and have to be cleared via SPI once the overtemperature condition is not present anymore.

12.10.2 Temperature Prewarning

As a next level of thermal protection a temperature prewarning is implemented if the main supply VCC1 reaches the thermal prewarning temperature threshold T_{jPW}. Then the status bit **TPW** is set. This bit can only be cleared via SPI once the overtemperature is not present anymore.

12.10.3 Thermal Shutdown

As a highest level of thermal protection a temperature shutdown of the device is implemented if the main supply VCC1 reaches the thermal shutdown temperature threshold T_{jTSD2}. Once a TSD2 event is detected Fail-Safe Mode is entered. Only when device temperature falls below the TSD2 threshold then the device remains in Fail-Safe Mode for **t_{TSD2}** to allow the device to cool down. After this time has expired, the device will automatically change via Restart Mode to Normal Mode (see also **Chapter 5.4.6**).

When a TSD2 event is detected, then the status bit **TSD2** is set. This bit can only be cleared via SPI in Normal Mode once the overtemperature is not present anymore.

For increased robustness requirements it is possible to extend the TSD2 waiting time by 64x of **t_{TSD2}** after 16 consecutive TSD2 events by setting the SPI bit **TSD2_DEL**. The counter is incremented with each TSD2 event even if the bit **TSD2** is not cleared. Once the counter has reached the value 16, then the bit **TSD2_SAFE** is set

chanhvinh.com

and the extended TSD2 waiting time is active. The extended waiting time will be kept until **TSD2_SAFE** is cleared. The TSD counter is cleared when **TSD2** or **TSD2_DEL** is cleared.

Note: In case a TSD2 overtemperature occurs while entering Sleep Mode then Fail-Safe Mode is still entered.

*Note: In case of a TSD2 event, the **FAILURE** bit is set to '1' and the **DEV_STAT** field is set to '01' inside the **DEV_STAT** register.*

chanhvinh.com

12.11 Bridge driver

This section describes the supervision functions related to the bridge driver.

12.11.1 Bridge driver supervision with activated charge pump

This section describes the supervision functions when the charge pump is activated.

12.11.1.1 Drain-source voltage monitoring

Voltage comparators monitor the activated MOSFETs to protect high-side MOSFETs and low-side MOSFETs against a short circuit respectively to ground and to the battery during ON-state.

A drain-source overvoltage is detected on a low-side MOSFET if the voltage difference between VSHx and SL exceeds the threshold voltage configured by **LS_VDS** (see **Table 26**). Consequently, the corresponding half-bridge is latched off with the static discharge current.

A drain-source overvoltage is detected on a high-side MOSFET if the voltage difference between VS and VSHx exceeds the threshold voltage configured by **HS_VDS** (see **Table 27**). Consequently, the corresponding half-bridge is latched off with the static discharge current.

Table 26 Low-side drain-source overvoltage threshold

LSxVDSTH[2:0]	Drain-Source overvoltage threshold for LSx (typical)
000_B	160 mV
001_B	200 mV (default)
010_B	300 mV
011_B	400 mV
100_B	500 mV
101_B	600 mV
110_B	800 mV
111_B	2 V

Table 27 High-side drain-source overvoltage threshold

HSxVDSTH[2:0]	Drain-Source overvoltage threshold for HSx (typical)
000_B	160 mV
001_B	200 mV (default)
010_B	300 mV
011_B	400 mV
100_B	500 mV
101_B	600 mV
110_B	800 mV
111_B	2 V

Attention: 2 V threshold is dedicated for the diagnostic in off-state. It is highly recommended to select another drain-source overvoltage threshold once the routine of the diagnostic in off-state has been performed to avoid additional current consumption from VS and from the charge pump.

The device reports a Drain-Source overvoltage error if both conditions are met:

chanhvinh.com

- After expiration of the blank time .
- If the Drain-Source voltage monitoring exceeds the configured threshold for a duration longer than the configured filter time (refer to **Table 28** and **LS_VDS** TFVDS bits).

Table 28 Drain-Source overvoltage filter time

TFVDS[2:0]	Drain-Source overvoltage filter time (typical)
00_B	0.5 µs (default)
01_B	1 µs
10_B	2 µs
11_B	6 µs

If a short circuit is detected by the Drain-Source voltage monitoring:

- The impacted half-bridge is latched off with the static discharge current for the configured cross-current protection time.
- The corresponding bit in the status register **DSOV** is set.
- The DSOV bit in Global Status Register **GEN_STAT** is set.

If a Drain-Source overvoltage is detected for one of the MOSFETs, then the status register **DSOV** must be cleared in order to re-enable the faulty half-bridge.

12.11.1.2 Cross-current protection and drain-source overvoltage blank time

All gate drivers feature a cross-current protection time and a Drain-Source overvoltage blank time.

The cross-current protection avoids the simultaneous activation of the high-side and the low-side MOSFETs of the same half-bridge.

During the blank time, the drain-source overvoltage detection is disabled, to avoid a wrong fault detection during the activation phase of a MOSFET.

Note: The setting of the cross-current protection and of the blank times may be changed by the microcontroller only if all HBx_PWM_EN bits are reset.

Note: Changing the Drain-Source overvoltage of a half-bridge x (HBx) in on-state (HBxMODE[1:0]=(0,1) or (1,0)) may result in a wrong VDS overvoltage detection on HBx. Therefore it is highly recommended to change this threshold when HBxMODE[1:0]=(0,0) or (1,1)

12.11.1.2.1 Cross-current protection

The active and freewheeling cross-current protection times of each half-bridge is configured individually with the control register **CCP_BLK**.

The typical cross-current protection time applied to the freewheeling MOSFET of the half-bridge x is 587 ns + 266 ns x $TCCP[3:0]_D$, where $TCCP[3:0]_D$ is the decimal value of the control bits TCCP.

12.11.1.2.2 Drain-source overvoltage blank time

A configurable blank time for the Drain-Source monitoring is applied at the turn-on of the MOSFETs. During the blank time, a Drain-Source overvoltage error is masked.

chanhvinh.com

For Half-Bridges in PWM mode with AFWx = 1:

- the blank time of the PWM MOSFET starts at the expiration of the cross-current protection time of the PWM MOSFET. Refer to **Figure 77**.
- the blank time of the free-wheeling MOSFET starts after expiration of the cross-current protection time at turn-off of the PWM MOSFET. Refer to **Figure 77**.

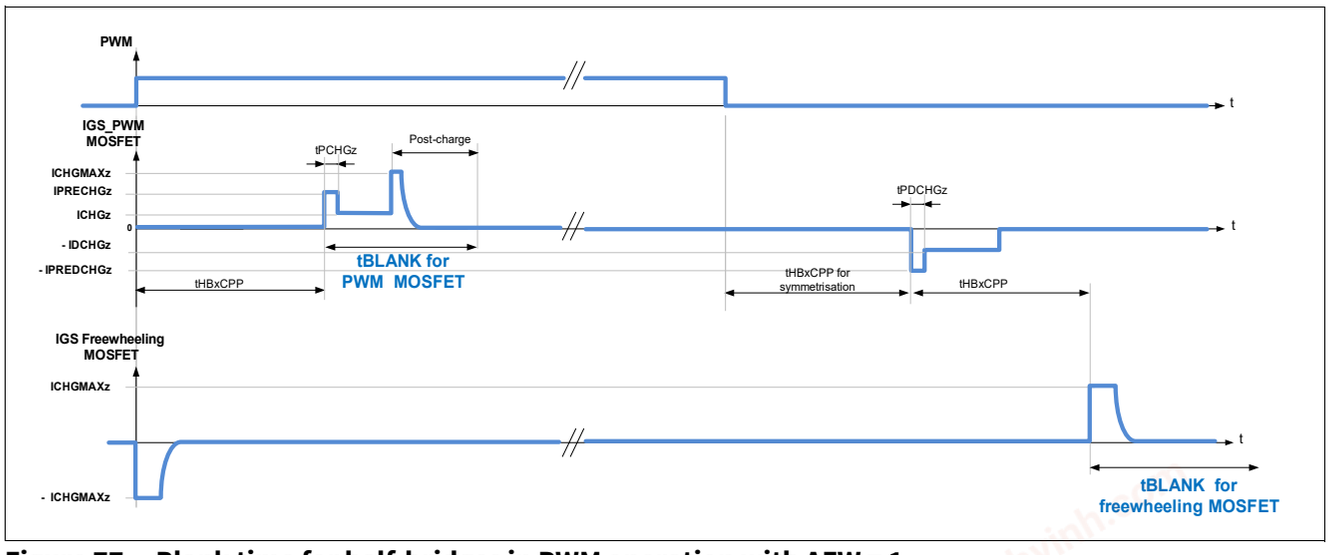


Figure 77 Blank time for half-bridges in PWM operation with AFW = 1

For statically activated half-bridges, the blank time starts:

- Case1: at expiration of the cross-current protection (**Figure 37**), if the opposite MOSFET was previously activated.
- Case 2: right after the decoding of the SPI command to turn on a MOSFET, if the half-bridge was in high impedance (**Figure 38**).

The blank times of the active and FW MOSFETs can be configured with the control register **CCP_BLK**.

The typical blank is 587 ns + 266 ns x $TBLK[3:0]_D$).

Note: The blank time is implemented at every new activation of a MOSFET, including a recovery from VS undervoltage, VS overvoltage, VSINT overvoltage, CP UV, CP OT.

12.11.1.3 OFF-state diagnostic

In order to support the off-state diagnostic (HBxMODE= 11 and **CPEN** = 1), the gate driver of each MOSFET provides pull-up (I_{PUDiag}) and a pull-down currents (I_{PDDiag}) at the SHx pins. This function requires an activated charge pump.

The pull-up current source of a given half-bridge is on when the half-bridge is active: HBxMODE= 01, 10 or 11 and **CPEN** = 1.

The pull-down current of each low-side gate driver is activated by the control bits HBx (**HB_ICHG_MAX** register).

During the off-state diagnostic routine performed by the microcontroller, the drain-source overvoltage threshold of the relevant half-bridges must be set to 2V nominal. Refer to **Table 26**. Once the routine is finished, it is highly recommended to decrease the drain-source overvoltage threshold to a lower value, avoiding additional current consumption from the VS input.

chanhvinh.com

The following failures can be detected:

- MOSFET short circuit to GND
- MOSFET short circuit the battery
- Open load (disconnected motor)

The status of the output voltages VOUTx, can be read back with status bit HBxVOUT (register **GEN_STAT**) when the corresponding half-bridge is in off-state (HBxMODE[1:0] = 11).

*Note: HBxVOUT = 0 if the half-bridge x is not actively off (HBxMODE[1:0] = (0,0), (0,1) or (1,0) and **CPEN**=1) or when the charge pump is deactivated (**CPEN**=0).*

12.11.1.4 Charge pump undervoltage

The voltage of the charge pump output (VCP) is monitored in order to ensure a correct control of the external MOSFETs.

The charge pump undervoltage threshold is configurable by the control bits **FET_LVL** and **CPUVTH**.

Table 29 Charge pump undervoltage thresholds

	FET_LVL = 0	**FET_LVL = 1**
CPUVTH = 0	V_{CPUV1} (6 V typ. referred to VS)	V_{CPUV3} (7.5 V typ. referred to VS)
CPUVTH = 1	V_{CPUV2} (6.5 V typ. referred to VS)	V_{CPUV4} (8 V typ. referred to VS)

If VCP falls below the configured charge pump undervoltage threshold while **CPEN** = 1:

- If one of the MOSFET is on, then all MOSFETs are actively turned off with their configured static discharge current during their respective tHBxCCP active.
- Then the gate drivers are turned off .
- **CP_UV** is set and latched.

The **CP_UV** is reset and the normal operation is resumed once **SUP_STAT** is cleared and VCP > VCPUV.

The charge pump undervoltage detection is blanked ($t_{CPUVBLANK}$) during each new activation of the charge pump[1)].

12.11.1.5 Switching parameters of MOSFETs in PWM mode

The effective switching parameters of the active MOSFETs (**EN_GEN_CHECK**=1), respectively PWM MOSFET (**EN_GEN_CHECK**=0)can be read out with dedicated status registers:

- The turn-on and turn off delays, noted tDON and tDOFF are reported by the status register **EFF_TDON_OFF1**, **EFF_TDON_OFF2**, **EFF_TDON_OFF3**, **EFF_TDON_OFF4**.
- The rise and fall times, noted tRISE and tFALL, are reported by the status register **TRISE_FALL1**, **TRISE_FALL2**, **TRISE_FALL3**, **TRISE_FALL4**.

Refer to **Chapter 11.3** for the definition of tDON, tDOFF, tRISE and tFALL for high-side PWM and low-side PWM operations.

1) Including **CPEN** set to 1, recovery from VS under/overvoltage, VSINT overvoltage and CP_ OT

chanhvinh.com

12.11.2 Low-side drain-source voltage monitoring during braking

The low-side MOSFETs are turned-on while the charge pump is deactivated in the following conditions:

- The slam mode is activated and PWM1/CRC is High.
- The parking braking mode is activated and the device is in Sleep Mode or Stop Mode.
- VS overvoltage brake is activated and (VS > VS Overvoltage braking or VSINT > VSINT Overvoltage braking) in all device modes if **OV_BRK_EN** is set.

Under these conditions, the drain-source voltage of the low-sides are monitored and the applied drain-source overvoltage thresholds are according to **VDSTH_BRK**.

The applied blank time, which starts at the beginning of the brake activation, is:

- t_{BLK_BRAKE1} if **TBLK_BRK** = 0
- t_{BLK_BRAKE2} if **TBLK_BRK** = 1

During the blank time, a drain-source overvoltage of the low-sides is masked.

The applied filter time is t_{FVDS_BRAKE}.

If a drain-source overvoltage is detected during braking , then all low-side MOSFETs are turned off (latched) within t_{OFF_BRAKE}. SLAM_LSx_DIS (**BRAKE**, **SLAM**, **PARK_BRK_EN**, **OV_BRK_EN** are unchanged. The corresponding status bit LSxDSOV_BRK is set in **DSOV**.

The low-sides can be reactivated only if all LSxDSOV_BRK bits (**DSOV**) are cleared (even in slam mode with the respective LSx disabled by the SLAM_LSx_DIS bit).

If any of the status bits LSxDSOV_BRK is set, then the charge pump stays off (**CPEN**=1 command is accepted but the charge pump stays disabled until all LSxDSOV_BRK are cleared).

12.11.3 VS or VSINT Overvoltage braking

The VS and VSINT overvoltage braking is activated if the **OV_BRK_EN** bit in **BRAKE** register is set regardless of the device mode.

If VS, respectively VSINT, exceeds $V_{OVBR,cfgx,r}$ (x = 0 to 7), then all low-sides MOSFETs are turned-on within t_{ON_BRAKE}. The status bits **VSOVBRAKE_ST**, respectively **VSINTOVBRAKE_ST**, is set and latched (see **DSOV** register).

If VS and VSINT decrease below $V_{OVBR,cfgx,r}$ - $V_{HYS,cfgx}$ (x = 0 to 7), then all low-sides MOSFETs are turned-off within t_{OFF_BRAKE} after the filter time $t_{OV_BR_FILT}$.

If (VSHx - VSL) exceeds the configured threshold, then all low-sides MOSFETs are turned-off within t_{OFF_BRAKE} after the filter time t_{FVDS_BRAKE}. The threshold is:

- $V_{VDSMONTH0_BRAKE}$ if **VDSTH_BRK** = 0
- $V_{VDSMONTH1_BRAKE}$ if **VDSTH_BRK** = 1

chanhvinh.com

12.12 Electrical Characteristics

Table 30 Electrical Characteristics

V_{SINT} = 5.5 V to 28 V; T_j = -40°C to +150°C; Normal Mode; all voltages with respect to ground; positive current defined flowing into pin; unless otherwise specified.

Parameter	Symbol	Values			Unit	Note or Test Condition	Number
		Min.	Typ.	Max.			
VCC1 Monitoring; VCC1 = 5.0V Version							
Undervoltage Prewarning Threshold Voltage PW,f	$V_{PW,f}$	4.53	4.70	4.84	V	VCC1 falling, SPI bit is set	P_13.12.1
Undervoltage Prewarning Threshold Voltage PW,r	$V_{PW,r}$	4.60	4.75	4.90	V	VCC1 rising	P_13.12.2
Undervoltage Prewarning Threshold Voltage hysteresis	$V_{PW,hys}$	30	50	90	mV	4)	P_13.12.3
VCC1 UV Prewarning Detection Filter Time	t_{VCC1,PW_F}	5	10	14	us	2) rising and falling	P_13.12.4
Reset Threshold Voltage RT1,f	$V_{RT1,f}$	4.45	4.6	4.75	V	default setting; VCC1 falling	P_13.12.5
Reset Threshold Voltage RT1,r	$V_{RT1,r}$	4.58	4.74	4.90	V	default setting; VCC1 rising	P_13.12.6
Reset Threshold Voltage RT2,f	$V_{RT2,f}$	3.70	3.85	4.00	V	VCC1 falling	P_13.12.7
Reset Threshold Voltage RT2,r	$V_{RT2,r}$	3.85	4.0	4.15	V	VCC1 rising	P_13.12.8
Reset Threshold Voltage RT3,f	$V_{RT3,f}$	3.24	3.40	3.55	V	VS ≥ 4 V; VCC1 falling	P_13.12.9
Reset Threshold Voltage RT3,r	$V_{RT3,r}$	3.39	3.54	3.70	V	VS ≥ 4 V; VCC1 rising	P_13.12.10
Reset Threshold Voltage RT4,f	$V_{RT4,f}$	2.49	2.65	2.8	V	VS ≥ 4 V; VCC1 falling	P_13.12.11
Reset Threshold Voltage RT4,r	$V_{RT4,r}$	2.65	2.76	2.95	V	VS ≥ 4 V; VCC1 rising	P_13.12.12
Reset Threshold Hysteresis	$V_{RT,hys}$	70	140	220	mV	4)	P_13.12.13
VCC1 Over Voltage Detection Threshold Voltage	$V_{CC1,OV,r}$	5.5	5.65	5.8	V	1)4) rising VCC1	P_13.12.26
VCC1 Over Voltage Detection Threshold Voltage	$V_{CC1,OV,f}$	5.4	5.55	5.7	V	4) falling VCC1	P_13.12.27
VCC1 OV Detection Filter Time	t_{VCC1,OV_F}	51	64	80	us	2)	P_13.12.31

chanhvinh.com

Table 30 Electrical Characteristics (cont'd)

V_{SINT} = 5.5 V to 28 V; T_j = -40°C to +150°C; Normal Mode; all voltages with respect to ground; positive current defined flowing into pin; unless otherwise specified.

Parameter	Symbol	Values			Unit	Note or Test Condition	Number
		Min.	Typ.	Max.			
VCC1 Short to GND Filter Time	$t_{VCC1,SC}$	3.2	4	4.8	ms	2) blanking time during power-up, short circuit detection for VS ≥ VS,UV	P_13.12.32
Reset Generator; Pin RSTN							
Reset Low Output Voltage	$V_{RSTN,L}$	–	0.2	0.4	V	I_{RSTN} = 1 mA for V_{CC1} ≥ 1 V & $V_S \geq V_{POR,f}$	P_13.12.33
Reset High Output Voltage	$V_{RSTN,H}$	0.8 x V_{CC1}	–	V_{CC1} + 0.3 V	V	I_{RSTN} = -20 µA	P_13.12.34
Reset Pull-up Resistor	R_{RSTN}	10	20	40	kΩ	V_{RSTN} = 0 V	P_13.12.35
Reset Filter Time	t_{RF}	4	10	26	µs	2) $V_{CC1} < V_{RT1x}$ to RSTN = L see also **Chapter 12.3**	P_13.12.36
Reset Delay Time 1	t_{RD1}	8	10	12	ms	2) **RSTN_DEL** = 0	P_13.12.37
Reset Delay Time 2	t_{RD2}	1.6	2	2.4	ms	2) **RSTN_DEL** = 1	P_13.12.64
VCAN Monitoring							
CAN Supply undervoltage detection threshold (falling)	$V_{CAN_UV,f}$	4.5	–	4.75	V	VCAN falling	P_13.12.38
CAN Supply undervoltage detection threshold (rising)	$V_{CAN_UV,r}$	4.6	–	4.85	V	VCAN rising	P_13.12.39
V_{CAN} Undervoltage detection hysteresis	$V_{CAN,UV,\ hys}$	50	90	130	mV	4)	P_13.12.40
VCAN UV detection Filter Time	t_{VCAN,UV_F}	5	10	14	µs	2) VCAN rising and falling	P_13.12.41
Watchdog Generator / Internal Oscillator							
Long Open Window	t_{LW}	160	200	240	ms	2)	P_13.12.42
Internal Clock Generator Frequency	$f_{CLKSBC,1}$	0.8	1.0	1.2	MHz	–	P_13.12.43
Minimum Waiting time during Fail-Safe Mode							
Min. waiting time Fail-Safe	$t_{FS,min}$	80	100	120	ms	2)3)	P_13.12.45
Power-on Reset, Over / Undervoltage Protection							
VSINT Power on reset rising	$V_{POR,r}$	–	–	4.5	V	VSINT increasing	P_13.12.46
VSINT Power on reset falling	$V_{POR,f}$	–	–	3	V	VSINT decreasing	P_13.12.47

chanhvinh.com

Table 30 Electrical Characteristics (cont'd)

V_{SINT} = 5.5 V to 28 V; T_j = -40°C to +150°C; Normal Mode; all voltages with respect to ground; positive current defined flowing into pin; unless otherwise specified.

Parameter	Symbol	Values			Unit	Note or Test Condition	Number
		Min.	Typ.	Max.			
VSINT Undervoltage Detection Threshold	$V_{SINT,UV}$	5.3	–	6.0	V	Supply UV threshold for VCC1 SC detection; hysteresis included; includes rising and falling threshold	P_13.12.48
VSHS Overvoltage Detection Threshold	$V_{SHS,OVD}$	20	–	22	V	Supply OV supervision for HSx; hysteresis included	P_13.12.55
VSHS Overvoltage Detection hysteresis	$V_{SHS,OVD,hys}$	100	500	–	mV	4)	P_13.12.56
VSHS Undervoltage Detection Threshold	$V_{SHS,UVD}$	4.8	–	5.5	V	Supply UV supervision for HSx; hysteresis included	P_13.12.57
VSHS Undervoltage Detection hysteresis	$V_{SHS,UVD,hys}$	50	200	350	mV	4)	P_13.12.58
VSHS Undervoltage Detection Filter Time	$t_{VSHS,UV}$	5	10	14	us	2) rising and falling	P_13.12.300
VSHS Overvoltage Detection Filter Time	$t_{VSHS,OV}$	5	10	14	us	2) rising and falling	P_13.12.301
Charge Pump Undervoltage							
Charge Pump Undervoltage Referred to VS	V_{CPUV1}	5.4	5.9	6.4	V	**FET_LVL** = 0 **CPUVTH** = 0 falling threshold, VS ≥6 V	P_13.12.59
Charge Pump Undervoltage Referred to VS	V_{CPUV2}	5.85	6.35	6.85	V	**FET_LVL** = 0 **CPUVTH** = 1 falling threshold, VS ≥ 6 V	P_13.12.60
Charge Pump Undervoltage Referred to VS	V_{CPUV3}	6.85	7.35	7.85	V	**FET_LVL** = 1 **CPUVTH** = 0 falling threshold, VS ≥ 6 V	P_13.12.61

chanhvinh.com

Table 30 Electrical Characteristics (cont'd)

V_{SINT} = 5.5 V to 28 V; T_j = -40°C to +150°C; Normal Mode; all voltages with respect to ground; positive current defined flowing into pin; unless otherwise specified.

Parameter	Symbol	Values			Unit	Note or Test Condition	Number
		Min.	Typ.	Max.			
Charge Pump Undervoltage Referred to VS	V_{CPUV4}	7.5	8	8.5	V	**FET_LVL** = 1 **CPUVTH** = 1 falling threshold, VS ≥ 6 V	P_13.12.62
Charge Pump Undervoltage Filter Time	t_{CPUV}	51	64	80	µs	4) VS ≥ 6 V	P_13.12.63
Charge Pump Undervoltage Blank Time	$t_{CPUVBLANK}$	400	500	600	µs	4) VS ≥ 6 V	P_13.12.175
VS monitoring							
VS undervoltage threshold	$V_{S,UV}$	4.7	–	5.4	V	hysteresis included	P_13.12.66
VS overvoltage threshold detection 1	$V_{S,OVD1}$	19	–	22.5	V	hysteresis included, **VS_OV_SEL** = 0	P_13.12.68
VS overvoltage threshold detection 2	$V_{S,OVD2}$	27.75	–	31.25	V	hysteresis included, **VS_OV_SEL** = 1	P_13.12.65
VS undervoltage filter time	t_{VSUV_FILT}	5	10	14	µs	2) rising and falling	P_13.12.71
VS overvoltage filter time	t_{VSOV_FILT}	5	10	14	µs	2) rising and falling	P_13.12.72
Off-state open load diagnosis							
Pull-up diagnosis current	I_{PUDiag}	-600	-400	-270	µA	VS ≥ 6 V	P_13.12.73
Pull-down diagnosis current	I_{PDDiag}	1600	2200	2800	µA	VS ≥ 6 V	P_13.12.74
Diagnosis current ratio	I_{Diag_ratio}	4.25	5.25	6.25		Ratio I_{PDDiag} / I_{PUDiag}	P_13.12.302
Drain-source monitoring CP activated							
Blank time	t_{BLANK}	typ-20%	587 +266 xTBLK	typ+20 %	ns	4) TBLK: decimal value of TBLK[3:0], VS ≥ 6 V	P_13.12.75
Cross-current protection time	t_{CCP}	typ-20%	587 +266 xTCCP	typ+20 %	ns	4) TCCP: decimal value of TCCPx[3:0], VS ≥ 6 V	P_13.12.76
HS/LS Drain-source overvoltage 0	$V_{VDSMONTH0_CPON}$	0.115	0.16	0.195	V	VDSTH[2:0] = 000_B, VS≥6 V, TFVDS=00_B	P_13.12.77
HS/LS Drain-source overvoltage 1	$V_{VDSMONTH1_CPON}$	0.16	0.2	0.25	V	VDSTH[2:0] = 001_B, VS≥6 V, TFVDS=00_B	P_13.12.78
HS/LS Drain-source overvoltage 2	$V_{VDSMONTH2_CPON}$	0.24	0.3	0.36	V	VDSTH[2:0] = 010_B, VS≥6 V, TFVDS=00_B	P_13.12.79

chanhvinh.com

Table 30 Electrical Characteristics (cont'd)

V_{SINT} = 5.5 V to 28 V; T_j = -40°C to +150°C; Normal Mode; all voltages with respect to ground; positive current defined flowing into pin; unless otherwise specified.

Parameter	Symbol	Values			Unit	Note or Test Condition	Number
		Min.	Typ.	Max.			
HS/LS Drain-source overvoltage 3	$V_{VDSMONTH3_CPON}$	0.32	0.4	0.48	V	VDSTH[2:0] = 011_B, VS≥6 V, TFVDS=00_B	P_13.12.80
HS/LS Drain-source overvoltage 4	$V_{VDSMONTH4_CPON}$	0.4	0.5	0.6	V	VDSTH[2:0] = 100_B, VS≥6 V, TFVDS=00_B	P_13.12.81
HS/LS Drain-source overvoltage 5	$V_{VDSMONTH5_CPON}$	0.48	0.6	0.72	V	VDSTH[2:0] = 101_B, VS≥6 V, TFVDS=00_B	P_13.12.82
HS/LS Drain-source overvoltage 6	$V_{VDSMONTH6_CPON}$	0.64	0.8	0.96	V	VDSTH[2:0] = 110_B, VS≥6 V, TFVDS=00_B	P_13.12.83
HS/LS Drain-source overvoltage 7	$V_{VDSMONTH7_CPON}$	1.75	2.0	2.25	V	VDSTH[2:0] = 111_B, VS≥6 V, TFVDS=00_B	P_13.12.84
Drain-Source monitoring - Slam mode, parking braking and VS overvoltage braking, VS or VSINT ≥ 8V							
Blank time	t_{BLK_BRAKE1}	4.5	7	9.5	µs	**TBLK_BRK** = 0, VS or VSINT ≥ 8 V	P_13.12.85
Blank time	t_{BLK_BRAKE2}	9	11	13	µs	**TBLK_BRK** = 1, VS or VSINT ≥ 8 V	P_13.12.86
VDS Filter time	t_{FVDS_BRAKE}	0.5	1	2.5	µs	VS or VSINT ≥ 8 V	P_13.12.87
LS Drain-source monitoring thresholds	$V_{VDSMONTH0_BRAKE}$	0.56	0.8	1.05	V	VS or VSINT ≥ 8 V **VDSTH_BRK** = 0	P_13.12.89
LS Drain-source monitoring thresholds	$V_{VDSMONTH1_BRAKE}$	0.15	0.22	0.29	V	VS or VSINT ≥ 8 V **VDSTH_BRK** = 1	P_13.12.90
VS Overvoltage Braking Mode							
VS Overvoltage braking config 0 rising	$V_{OVBR,cfg0,r}$	25.65	27	28.35	V	**OV_BRK_TH**=000_B	P_13.12.97
VS Overvoltage braking config 1 rising	$V_{OVBR,cfg1,r}$	26.60	28	29.40	V	**OV_BRK_TH**=001_B	P_13.12.98
VS Overvoltage braking config 2 rising	$V_{OVBR,cfg2,r}$	27.55	29	30.45	V	**OV_BRK_TH**=010_B	P_13.12.99
VS Overvoltage braking config 3 rising	$V_{OVBR,cfg3,r}$	28.50	30	31.50	V	**OV_BRK_TH**=011_B	P_13.12.100
VS Overvoltage braking config 4 rising	$V_{OVBR,cfg4,r}$	29.45	31	32.55	V	**OV_BRK_TH**=100_B	P_13.12.101
VS Overvoltage braking config 5 rising	$V_{OVBR,cfg5,r}$	30.40	32	33.60	V	**OV_BRK_TH**=101_B	P_13.12.102
VS Overvoltage braking config 6 rising	$V_{OVBR,cfg6,r}$	31.35	33	34.65	V	**OV_BRK_TH**=110_B	P_13.12.103
VS Overvoltage braking config 7 rising	$V_{OVBR,cfg7,r}$	32.30	34	35.70	V	**OV_BRK_TH**=111_B	P_13.12.104
VS Overvoltage braking config 0	$V_{HYS,cfg0}$	0.64	0.75	0.85	V	**OV_BRK_TH**=000_B	P_13.12.105

chanhvinh.com

Table 30 Electrical Characteristics (cont'd)

V_{SINT} = 5.5 V to 28 V; T_j = -40°C to +150°C; Normal Mode; all voltages with respect to ground; positive current defined flowing into pin; unless otherwise specified.

Parameter	Symbol	Values			Unit	Note or Test Condition	Number
		Min.	Typ.	Max.			
VS Overvoltage braking config 1	$V_{HYS,cfg1}$	0.74	0.82	0.9	V	**OV_BRK_TH**=001_B	P_13.12.109
VS Overvoltage braking config 2	$V_{HYS,cfg2}$	0.80	0.89	0.98	V	**OV_BRK_TH**=010_B	P_13.12.113
VS Overvoltage braking config 3	$V_{HYS,cfg3}$	0.85	0.95	1.05	V	**OV_BRK_TH**=011_B	P_13.12.117
VS Overvoltage braking config 4	$V_{HYS,cfg4}$	0.93	1.03	1.13	V	**OV_BRK_TH**=100_B	P_13.12.121
VS Overvoltage braking config 5	$V_{HYS,cfg5}$	0.97	1.08	1.19	V	**OV_BRK_TH**=101_B	P_13.12.125
VS Overvoltage braking config 6	$V_{HYS,cfg6}$	1.03	1.15	1.27	V	**OV_BRK_TH**=110_B	P_13.12.129
VS Overvoltage braking config 7	$V_{HYS,cfg7}$	1.1	1.23	1.36	V	**OV_BRK_TH**=111_B	P_13.12.133
VS and VSINT overvoltage braking filter time	$t_{OV_BR_FILT}$	10	15	20	µs	4)	P_13.12.200
Overtemperature Shutdown[4]							
Thermal Prewarning Temperature	T_{jPW}	125	145	165	°C	T_j rising	P_13.12.169
Thermal Shutdown TSD1	T_{jTSD1}	170	185	200	°C	T_j rising	P_13.12.170
Thermal Shutdown TSD2	T_{jTSD2}	170	185	200	°C	T_j rising	P_13.12.171
Thermal Shutdown hysteresis	$T_{jTSD,hys}$	–	25	–	°C	4)	P_13.12.172
TSD/TPW Filter Time	$t_{TSD_TPW_F}$	5	10	15	us	rising and falling, applies to all thermal sensors (TPW, TSD1, TSD2)	P_13.12.173
Deactivation time after thermal shutdown TSD2	t_{TSD2}	0.8	1	1.2	s	2)	P_13.12.174

1) It is ensured that the threshold $V_{CC1,OV,r}$ is always higher than the highest regulated V_{CC1} output voltage $V_{CC1,out4}$.
.
2) Not subject to production test, tolerance defined by internal oscillator tolerance.
3) This time applies for all failure entries except a device thermal shutdown (TSD2 has a typ. 1 s waiting time **t_{TSD2}**).
4) Not subject to production test, specified by design.

chanhvinh.com

13 Serial Peripheral Interface

The Serial Peripheral Interface is the communication link between the device and the microcontroller.
The TLE9561QX is supporting multi-slave operation in full-duplex mode with 32-bit data access.

The SPI behavior for the different device modes is as follows:

- The SPI is enabled in Init Mode, Normal Mode and Stop Mode.
- The SPI is OFF in Sleep Mode, Restart Mode and Fail-Safe Mode.

13.1 SPI Block Description

The Control Input Word is read via the data input SDI, which is synchronized with the clock input CLK provided by the microcontroller. The output word appears synchronously at the data output SDO (see **Figure 78** with a 32-bit data access example).
The transmission cycle begins when the chip is selected by the input CSN (Chip Select Not), LOW active. After the CSN input returns from LOW to HIGH, the word that has been read is interpreted according to the content. The SDO output switches to tristate status (high impedance) at this point, thereby releasing the SDO bus for other use.The state of SDI is shifted into the input register with every falling edge on CLK. The state of SDO is shifted out of the output register after every rising edge on CLK. The SPI of the device is not daisy chain capable.

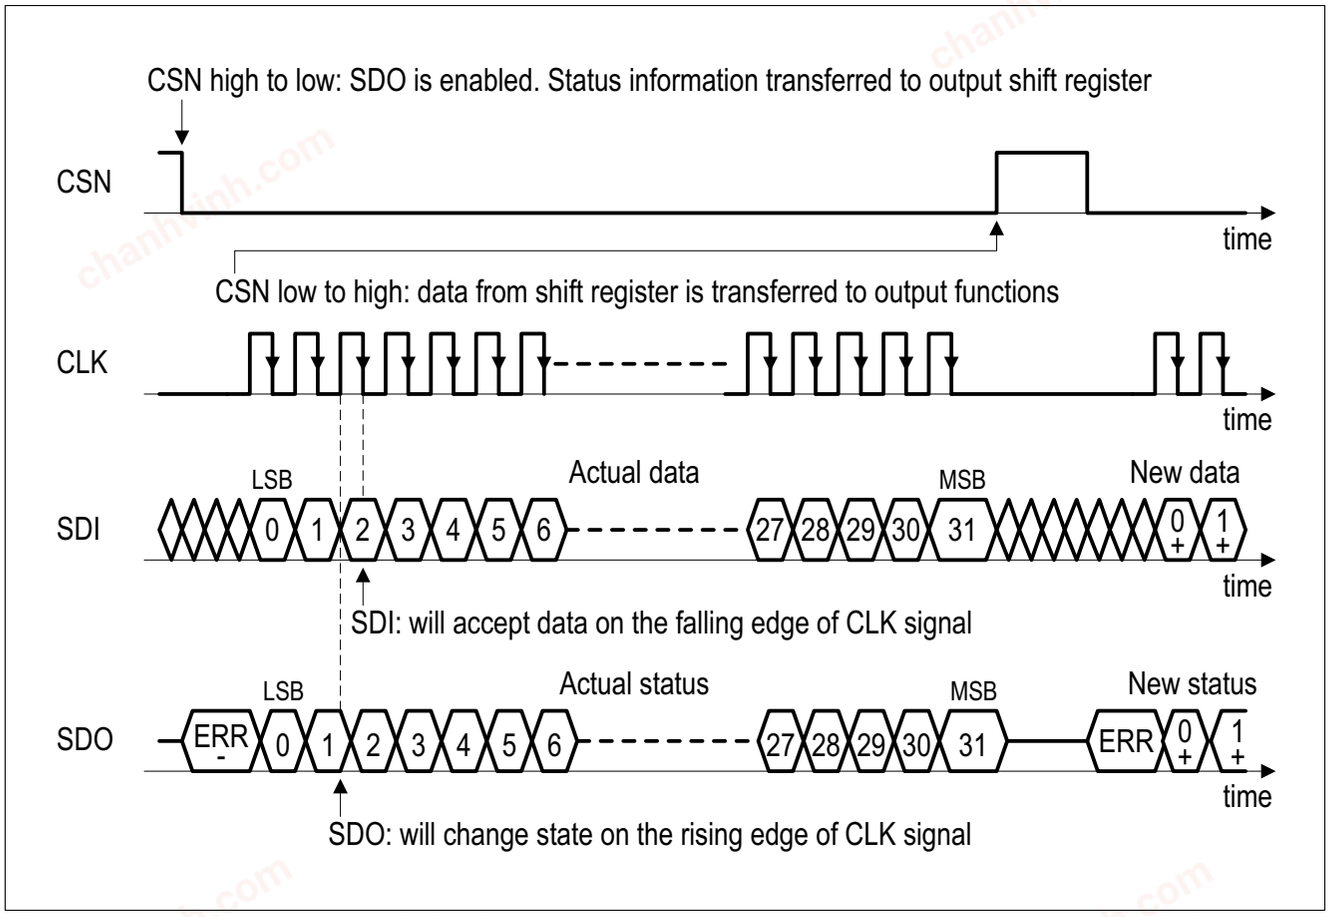


Figure 78 SPI Data Transfer Timing (note the reversed order of LSB and MSB shown in this figure compared to the register description)

chanhvinh.com

13.2 Failure Signalization in the SPI Data Output

When the microcontroller sends a wrong SPI command to the device, the device ignores the information. Wrong SPI commands are either invalid device mode commands or commands which are prohibited by the state machine to avoid undesired device or system states (see below). In this case the diagnosis bit **SPI_FAIL** is set and the SPI Write command is ignored (no partial interpretation). This bit can be only reset by actively clearing it via a SPI command.

Invalid SPI Commands leading to SPI_FAIL are listed below (in this case the SPI command is ignored):

- Illegal state transitions:
  - Going from Stop Mode to Sleep Mode. In this case the device enters Restart Mode.
  - Trying to go to Stop Mode or Sleep Mode from Init Mode[1)]. In this case Normal Mode is entered.
- Uneven parity in the data bit of the **WD_CTRL** register. In this case the watchdog trigger is ignored and/or the new watchdog settings are ignored respectively.
- In Stop Mode: attempting to change any SPI settings, e.g. changing the watchdog configuration, PWM settings and HSx configuration settings during Stop Mode, etc.;
  the SPI command is ignored in this case;
  only WD trigger, returning to Normal Mode, triggering a device soft reset, and read & clear status registers commands are valid SPI commands in Stop Mode; **Note:** No failure handling is done for the attempt to go to Stop Mode when all bits in the registers **BUS_CTRL** and **WK_CTRL** are cleared because the microcontroller can leave this mode via SPI.
- When entering Stop Mode and **WK_STAT** is not cleared; **SPI_FAIL** will not be set but the INTN pin will be triggered.
- Changing from Stop Mode to Normal Mode and changing the other bits of the **M_S_CTRL** register. The other modifications will be ignored.
- Sleep Mode: attempt to go to Sleep Mode without any wake source set, i.e. when all bits in the **BUS_CTRL** and **WK_CTRL** registers are cleared. In this case the **SPI_FAIL** bit is set and the device enters Restart Mode. Even though the Sleep Mode command is not entered in this case, the rest of the command is executed but restart values apply during Restart Mode; **Note:** At least one wake source must be activated in order to avoid a deadlock situation in Sleep Mode.
  If the only wake source is a timer and the timer is OFF, then the device will wake immediately from Sleep Mode and enter Restart Mode.
- Setting a longer or equal on-time than the timer period of the respective timer.
- SDI stuck at HIGH or LOW, e.g. SDI received all ‘0’ or all ‘1’.
- Any attempt to configure again the **WK2_FO**.
- Configured the HSx controlled by SYNC when the WK4/SYNC is not configured as SYNC-input.

Note: There is no SPI fail information for unused addresses.

*Note: In case that the register or banking are accessed but they are not valid as address or banks, the **SPI_FAIL** is not triggered and the cmd is ignored.*

1) If the device is externally configured to use SPI with CRC (by PWM1/CRC pin), the attempt to go to Stop or Sleep from Init , will generate SPI_FAIL even if it is a SPI command with correct CRC. Still, the first SPI command will put the device from Init to Normal Mode even if CRC is not correct (CRC_FAIL status bit will be set).

chanhvinh.com

Signalization of the ERR Flag (high active) in the SPI Data Output (see Figure 78):

The ERR flag presents an additional diagnosis possibility for the SPI communication. The ERR flag is being set for following conditions:

- in case the number of received SPI clocks is not 0 or 32.
- in case RSTN is LOW and SPI frames are being sent at the same time.

Note: In order to read the SPI ERR flag properly, CLK must be low when CSN is triggered, i.e. the ERR bit is not valid if the CLK is high on a falling edge of CSN.

The number of received SPI clocks is not 0 or 32:

The number of received input clocks is supervised to be 0 or 32 clock cycles and the input word is discarded in case of a mismatch (0 clock cycle to enable ERR signalization). The error logic also recognizes if CLK was high during CSN edges. Both errors (0 or 32 bit CLK mismatch or CLK high during CSN edges) are flagged in the following SPI output by a “HIGH” at the data output (SDO pin, bit ERR) before the first rising edge of the clock is received. The complete SPI command is ignored in this case.

RSTN is LOW and SPI frames are being sent at the same time:

The ERR flag will be set when the RSTN pin is triggered (during device restart) and SPI frames are being sent to the device at the same time. The behavior of the ERR flag will be signalized at the next SPI command for below conditions:

- If the command begins when RSTN is HIGH and it ends when RSTN is LOW.
- If a SPI command will be sent while RSTN is LOW.
- If a SPI command begins when RSTN is LOW and it ends when RSTN is HIGH.

And the SDO output will behave as follows:

- Always when RSTN is LOW then SDO will be HIGH.
- When a SPI command begins when RSTN is LOW and ends when RSTN is HIGH, then the SDO should be ignored because wrong data will be sent.

Note: It is possible to quickly check for the ERR flag without sending any data bits. i.e. only the CSN is pulled low and SDO is observed - no SPI Clocks are sent in this case.

Note: The ERR flag could also be set after the device has entered Fail-Safe Mode because the SPI communication is stopped immediately.

chanhvinh.com

13.3 SPI Programming

For the TLE9561QX, 7 bits are used for the address selection (BIT 6...0). Bit 7 is used to decide between Read Only and Read & Clear for the status bits, and between Write and Read Only for configuration bits. For the actual configuration and status information, 16 data bits (BIT 23...8) are used.

Writing, clearing and reading is done word wise. The SPI status bits are not cleared automatically and must be cleared by the microcontroller. Some of the configuration bits will automatically be cleared by the device (refer to the respective register descriptions for detailed information). In Restart Mode, the device ignores all SPI communication, i.e. it does not interpret it.

There are two types of SPI registers:

- Control registers: These registers are used to configure the device, e.g. mode, watchdog trigger, etc.
- Status registers: These registers indicate the status of the device, e.g. wake events, warnings, failures, etc.

For the status registers, the requested information is given in the same SPI command in the data out (SDO). For the control registers, the status of each byte is shown in the same SPI command as well. However, configuration changes of the same register are only shown in the next SPI command (configuration changes inside the device become valid only after CSN changes from low to high). See **Figure 79**.

Writing of control registers is possible in Init and Normal Mode. During Stop Mode only the change to Normal Mode and triggering the watchdog is allowed as well as reading and clearing the status registers.

No status information can be lost, even if a bit changes right after the first 7 SPI clock cycles before the SPI frame ends. In this case the status information field will be updated with the next SPI command. However, the flag is already set in the relevant status register.The device status information from the SPI status registers is transmitted in a compressed format with each SPI response on SDO in the so-called Status Information Field register (see also **Table 31**). The purpose of this register is to quickly signal changes in dedicated SPI status registers to the microcontroller.

Table 31 Status Information Field

Bit in Status Information Field	Corresponding Address Bit	Status Register Description
0		SUPPLY_STAT = OR of all bits on SUP_STAT register
1		TEMP_STAT = OR of all bits on THERM_STAT register
2		BUS_STAT= OR of all bits on BUS_STAT register
3		WAKE_UP = OR of all bits on WK_STAT register
4		HS_STAT = OR of all bits on HS_OL_OC_OT_STAT register
5		DEV_STAT = OR of all bits on DEV_STAT except CRC_STAT and SW_DEV
6		BD_STAT = OR of all bits on DSOV register
7		SPI_CRC_FAIL = (SPI_FAIL) OR (CRC_FAIL)

chanhvinh.com

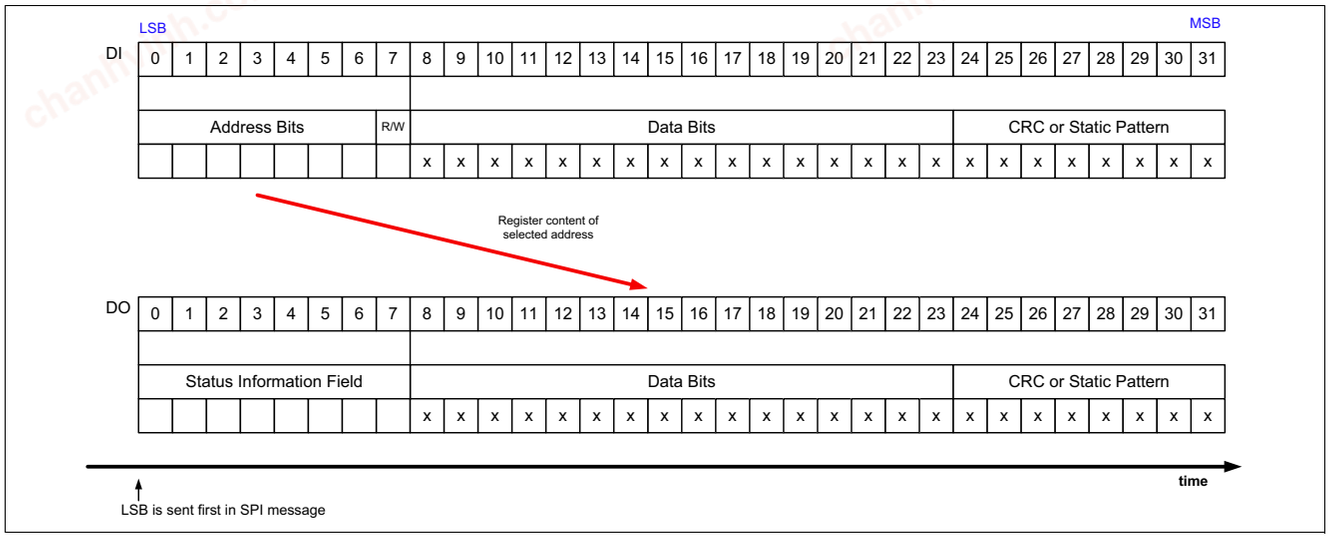


Figure 79 SPI Operation Mode

13.3.1 CRC

The SPI interface includes also 8 Bits (bits 24 to 31) used for Cyclic Redundancy Check (CRC) to ensure data integrity on sent or received SPI command.

The implemented CRC is based on Autosar specification of CRC Routines revision 4.3.0 and in particular the function CRC8-2FH.

The specification are based on the follow table:

Table 32 CRC8x2FH definition

CRC result width:	8 bits
Polynomial	$2F_H$
Initial Value	FF_H
Input data reflected	No
Result data reflected	No
XOR value	FF_H
Check	DF_H
Magic check	42_H

Some examples of CRC calculation are shown in the follow table:

Table 33 CRC8x2FH calculation example

Data Bytes (hexadecimal)									CRC
00	00	00	00						12
F2	01	83							C2
0F	AA	00	55						C6
00	FF	55	11						77
33	22	55	AA	BB	CC	DD	EE	FF	11
92	6B	55							33
FF	FF	FF	FF						6C

chanhvinh.com

Polynominal

The polynomial is:

$$x^8 + x^5 + x^3 + x^2 + x^1 + x^0 \quad (13.1)$$

Calculation in SDI and SDO

The calculation of the CRC is done considering the first 24 bits (BIT 0..23) either of SDI or SDO.

The content of SDO Payload (BIT 8..23) is referring the previous data written at the addressed register via SDI.

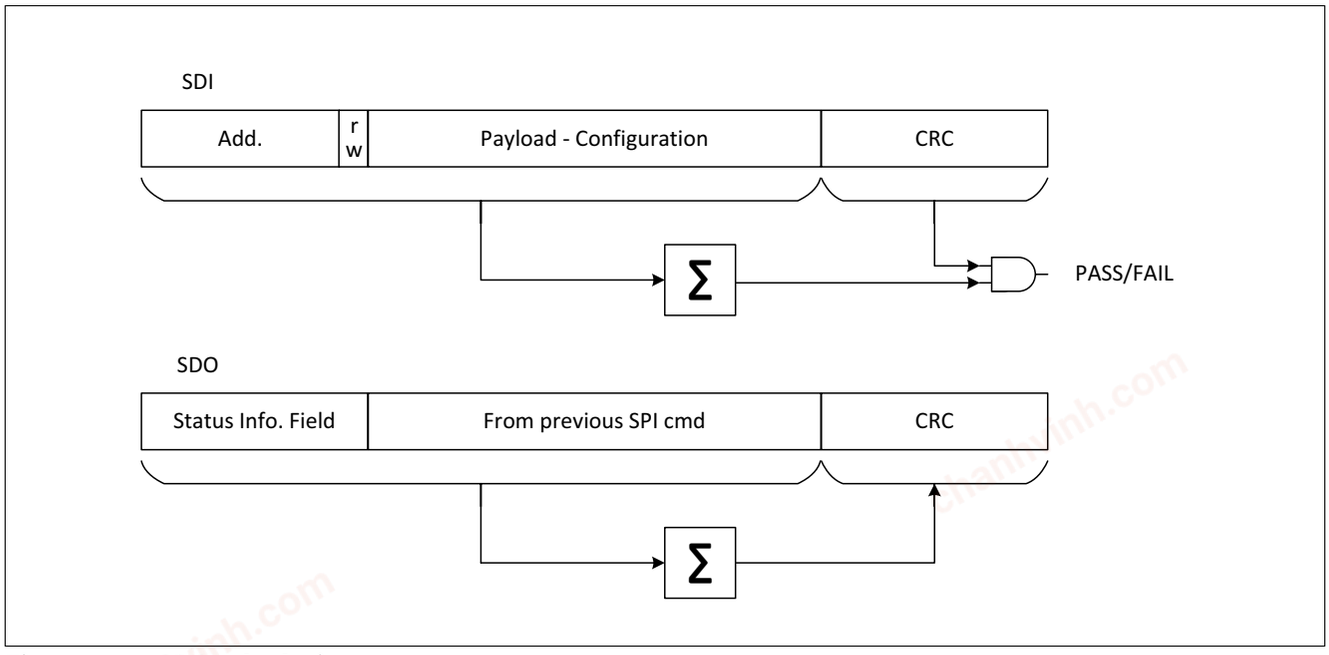


Figure 80 CRC calculation

CRC Activation and status information

For CRC activation, refer to **Chapter 5.2**.

The CRC status (**CRC_STAT**)and failure (**CRC_FAIL**) are readable on **DEV_STAT**.

Read out of the register which contains the **CRC_STAT** and **CRC_FAIL** is done ignoring the CRC field and no failure flag are set.

The **DEV_STAT** register shall be cleared considering the CRC setting (ON or OFF).

The **CRC_STAT** bit is read only.

The **CRC_FAIL** is set in the follow conditions:

- If the CRC is enabled and the µC sends wrong CRC field.
- If the CRC is disabled and the µC sends wrong static pattern (no $A5_H$).

CRC field in case of CRC disabled

In case that the CRC is not activated, the bits needed for CRC field have to be filled with static pattern.

In case of SDI, the CRC field has to be filled with $A5_H$ (bits 24:31).

In case of SDO, the device will always answer with $5A_H$ (bits 24:31).

The status of the CRC is updated accordingly in **CRC_STAT** bit.

chanhvinh.com

13.4 SPI Bit Mapping

The following figures show the mapping of the registers and the SPI bits of the respective registers.

The Control Registers are Read/Write Register with the following structure:

- Device Control Registers from 000 0001_B to 000 1011_B.
- Bridge Driver Control Registers from 001 0000_B to 001 1101_B.
- SWK Control Registers from 011 0000_B to 011 1111_B.

Depending on bit 7 the bits are only read (setting bit 7 to '0') or also written (setting bit 7 to '1'). The new setting of the bit after a write can be seen with a new read / write command.

The Status Registers are Read/Clear with the following structure:

- Device Status Registers from 100 0000_B to 100 0110_B.
- Bridge Driver Status Registers from 101 0000_B to 101 1011_B.
- Product Family is 111 0000_B.

The registers can be read or can be cleared (if clearing is possible) depending on bit 7. To clear the payload of one of the Status Registers bit 7 must be set to 1.
The registers **WK_LVL_STAT**, and **FAM_PROD_STAT** are an exception as they show the actual voltage level at the respective WKx pin (LOW/HIGH), or a fixed family/ product ID respectively and can thus not be cleared.
It is recommended for proper diagnosis to clear respective status bits for wake events or failure.

When changing to a different device mode, certain configurations bits will be cleared automatically or modified:

- The device mode bits are updated to the actual status, e.g. when returning to Normal Mode.
- When changing to a low-power mode (Stop Mode or Sleep Mode), the diagnosis bits of the integrated module are not cleared.
- When changing to Stop Mode, the CAN, control bits will not be modified.
- When changing to Sleep Mode, the CAN, control bits will be modified if they were not OFF or wake capable before.
- FO will stay activated if it was triggered before. Depending on the respective configuration, CAN, transceivers will be either OFF, woken or still wake capable.

*Note: The detailed behavior of the respective SPI bits and control functions is described in **Chapter 13.5**, **Chapter 13.6**.and in the respective module chapter. The bit type be marked as 'rwh' in case the device will modify respective control bits.*

chanhvinh.com

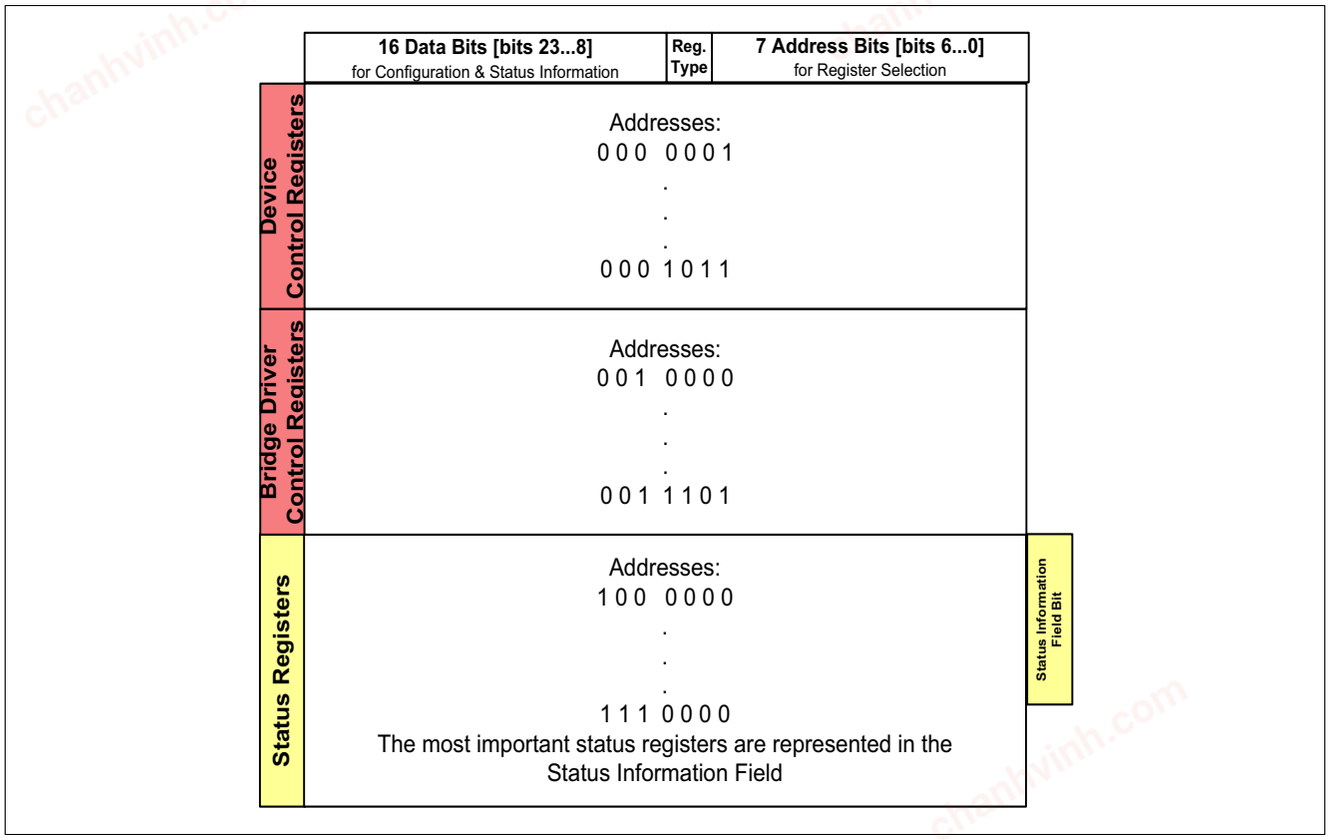


Figure 81 SPI Register Mapping Structure

The detailed register mappings for control registers and status registers are shown in **Table 34** and **Table 59** respectively.

13.4.1 Register Banking

In order to minimize the number of configuration registers, seven registers follow a bank structure.

The banked registers are:

- **WK_CTRL**
- **PWM_CTRL**
- **CCP_BLK**
- **TPRECHG**
- **HB_ICHG**
- **HB_PCHG_INIT**
- **TDON_HB_CTRL**
- **TDOFF_HB_CTRL**

In these register, the first 3 bits of the payload (bit 8 to 10) select the bank that has to be configured. The rest of the payload is used to configure the selected bank (for more details refer to the specific banked register).

In case that CRC is used, the CRC calculation is done considering the first 24 bits (from bit 0 to 23).

The banked registers can be read like the other configuration registers but in the SDO one ‘0’ is automatically added after the status information field. **Figure 82** shows the structure of SDO in banked register.

chanhvinh.com

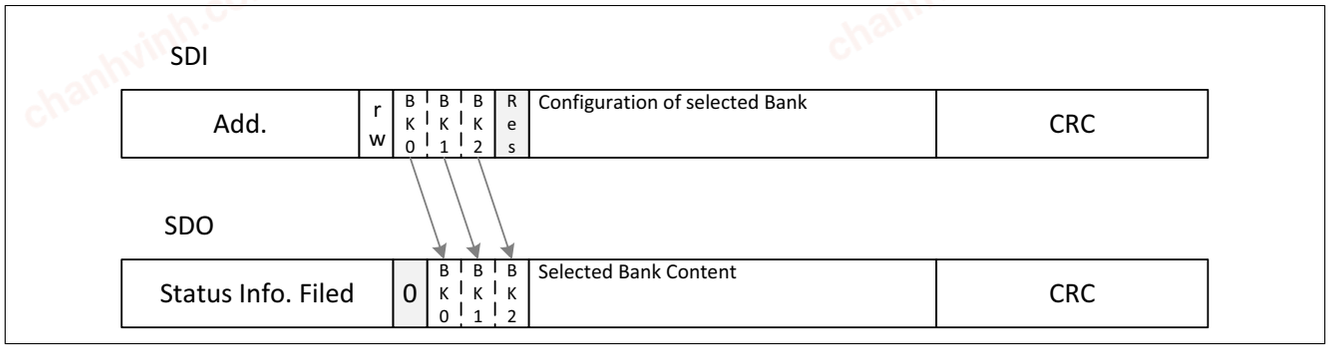


Figure 82 Register read Out of banked register (3 bit banking)

chanhvinh.com

13.5 SPI control registers

READ/WRITE Operation (see also **Chapter 13.3**):

- The ‘POR / Soft Reset Value’ defines the register content after POR or device reset.
- The ‘Restart Value’ defines the register content after device restart, where ‘x’ means the bit is unchanged.
- There are different bit types:
  - ‘r’ = READ: read only bits (or reserved bits).
  - ‘rw’ = READ/WRITE: readable and writable bits.
  - ‘rwh’ = READ/WRITE/Hardware: readable/writable bits, which can also be modified by the device hardware.
- Reserved bits are marked as “Reserved” and always read as “0”. The respective bits shall also be programmed as “0”.
- Reading a register is done word wise by setting the SPI bit 7 to “0” (= Read Only).
- SPI control bits are in general not cleared or changed automatically. This must be done by the microcontroller via SPI programming. Exceptions to this behavior are stated at the respective register description and the respective bit type is marked with a ‘h’ meaning that the device is able to change the register content.

The registers are addressed wordwise.

Table 34 Register Overview

Register Short Name	Register Long Name	Offset Address	Page Number
SPI control registers, Device Control Registers			
M_S_CTRL	Mode and Supply Control	0000001_B	**159**
HW_CTRL	Hardware Control	0000010_B	**161**
WD_CTRL	Watchdog Control	0000011_B	**163**
BUS_CTRL	CAN Control	0000100_B	**165**
WK_CTRL	Wake-up Control	0000101_B	**166**
TIMER_CTRL	Timer 1 and Timer 2 Control and Selection	0000110_B	**168**
SW_SD_CTRL	High-Side Switch Shutdown Control	0000111_B	**170**
HS_CTRL	High-Side Switch Control	0001000_B	**173**
INT_MASK	Interrupt Mask Control	0001001_B	**175**
PWM_CTRL	PWM Configuration Control	0001010_B	**177**
SYS_STAT_CTRL	System Status Control	0001011_B	**178**
SPI control registers, Control registers bridge driver			
GENCTRL	General Bridge Control	0010000_B	**179**
LS_VDS	Drain-Source monitoring threshold	0010010_B	**181**
HS_VDS	Drain-Source monitoring threshold	0010011_B	**183**
CCP_BLK	CCP and times selection	0010100_B	**185**
HBMODE	Half-Bridge MODE	0010101_B	**186**
TPRECHG	PWM pre-charge and pre-discharge time	0010110_B	**188**
ST_ICHG	Static charge/discharge current	0010111_B	**190**

chanhvinh.com

Table 34 Register Overview (cont'd)

Register Short Name	Register Long Name	Offset Address	Page Number
HB_ICHG	PWM charge/discharge current	0011000_B	191
HB_ICHG_MAX	PWM max. pre-charge/pre-discharge current and diagnostic pull-down	0011001_B	192
HB_PCHG_INIT	PWM pre-charge/pre-discharge initialization	0011010_B	194
TDON_HB_CTRL	PWM inputs TON configuration	0011011_B	195
TDOFF_HB_CTRL	PWM inputs TOFF configuration	0011100_B	196
BRAKE	Brake control	0011101_B	197

chanhvinh.com

13.5.1 Device Control Registers

Mode and Supply Control

M_S_CTRL
Mode and Supply Control **(000 0001$_B$)** **Reset Value: see Table 35**

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
MODE		RES			VCC1_OV_MOD		RES	RSTN_HYS	RES	I_PEAK_TH	RES			VCC1_RT	
rwh		r			rwh		r	rw	r	rw	r			rw	

Field	Bits	Type	Description
MODE	15:14	rwh	**Device Mode Control** 00_B **NORMAL**, Normal Mode 01_B **SLEEP**, Sleep Mode 10_B **STOP**, Stop Mode 11_B **RESET**, Device reset: Soft reset is executed (configuration of RSTN triggering in bit **SOFT_RESET_RO**)
RES	13:11	r	**Reserved, always reads as 0**
VCC1_OV_MOD	10:9	rwh	**Reaction in case of VCC1 Over Voltage** 00_B **NO**, no reaction 01_B **INTN**, INTN event is generated 10_B **RSTN**, RSTN event is generated 11_B **FAILSAFE**, Fail-Safe Mode is entered
RES	8	r	**Reserved, always reads as 0**
RSTN_HYS	7	rw	**VCC1 Undervoltage Reset Hysteresis Selection (see also Chapter 12.7.1 for more information)** 0_B **DEFAULT**, default hysteresis applies as specified in the electrical characteristics table 1_B **HIGHEST**, the highest rising threshold (VRT1,R) is always used for the release of the undervoltage reset
RES	6	r	**Reserved, always reads as 0**
I_PEAK_TH	5	rw	**VCC1 Active Peak Threshold Selection** 0_B **LOW**, low VCC1 active peak threshold selected 1_B **HIGH**, high VCC1 active peak threshold selected
RES	4:2	r	**Reserved, always reads as 0**
VCC1_RT	1:0	rw	**VCC1 Reset Threshold Control** 00_B **VRT1**, Vrt1 selected (highest threshold) 01_B **VRT2**, Vrt2 selected 10_B **VRT3**, Vrt3 selected 11_B **VRT4**, Vrt4 selected

chanhvinh.com

Table 35 Reset of M_S_CTRL

Register Reset Type	Reset Values	Reset Short Name	Reset Mode	Note
POR/Soft reset	0000 0000 0000 0000_B			
Restart	0000 0000 x0x0 $00xx_B$			

Notes

1. *It is not possible to change from Stop Mode to Sleep Mode via SPI Command. See also the State Machine Chapter.*
2. *After entering Restart Mode, the MODE bits will be automatically set to Normal Mode.*
3. *The SPI output will always show the previously written state with a Write Command (what has been programmed before) .*

chanhvinh.com

Hardware Control

HW_CTRL
Hardware Control **(000 0010$_B$)** **Reset Value: see Table 36**

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
RES			TSD2_DEL	VS_OV_SEL	SH_DISABLE	RSTN_DEL	RES		SOFT_RESET_RO	FO_ON	RES		WD_STM_EN_1	RES	
r			rw	rw	rw	rw	r		rw	rwh	r		rwh	r	

Field	Bits	Type	Description
RES	15:13	r	**Reserved, always reads as 0**
TSD2_DEL	12	rw	**TSD2 minimum Waiting Time Selection** 0_B **1s**, Minimum waiting time until TSD2 is released again is always 1 s 1_B **64s**, Minimum waiting time until TSD2 is released again is 1 s, after >16 TSD2 consecutive events, it will extended x 64
VS_OV_SEL	11	rw	**VS OV comparator threshold change** 0_B **20V**, Default threshold setting ($V_{S,OVD1}$) 1_B **30V**, increased threshold setting ($V_{S,OVD2}$)
SH_DISABLE	10	rw	**Sample and hold circuitry disable** 0_B **ENABLED**, Gate driver S&H circuitry enabled 1_B **DISABLED**, Gate driver S&H circuitry disabled
RSTN_DEL	9	rw	**Reset delay time** 0_B **10ms**, Reset delay time 10 ms (t_{RD1}) 1_B **2ms**, Reset delay time to 2 ms (t_{RD2})
RES	8:7	r	**Reserved, always reads as 0**
SOFT_RESET_RO	6	rw	**Soft Reset Configuration** 0_B **RSTN**, RSTN will be triggered (pulled low) during a Soft Reset 1_B **NO_RSTN**, no RSTN trigger during a Soft Reset
FO_ON	5	rwh	**Failure Output Activation** 0_B **DISABLED**, FO not activated by software, FO will be activated by specified failures 1_B **ENABLED**, FO activated by software (via SPI), only if WK2/FO pin is configured as Fail Safe Output
RES	4:3	r	**Reserved, always reads as 0**
WD_STM_EN_1	2	rwh	**Watchdog Deactivation during Stop Mode, bit1** 0_B **ACTIVE**, Watchdog is active in Stop Mode 1_B **INACTIVE**, Watchdog is deactivated in Stop Mode
RES	1:0	r	**Reserved, always reads as 0**

chanhvinh.com

Table 36 Reset of HW_CTRL

Register Reset Type	Reset Values	Reset Short Name	Reset Mode	Note
POR	0000 0000 0000 0000_B			
Soft reset	0000 00x0 0000 0000_B			
Restart	000x 00x0 0x00 0000_B			

Notes

1. *Clearing the FO_ON bit will not disable the FO outputs in case a failure occurred which triggered the FO outputs. In this case the FO outputs have to be disabled by clearing the FAILURE bit.*
   If the FO_ON bit is set by the software then it will be cleared by the device after Restart Mode was entered and the FO outputs will be disabled (if no failures occurred which triggered the fail outputs) .
2. *WD_STM_EN_1 will also be cleared when changing from Stop Mode to Normal Mode .*

chanhvinh.com

Watchdog Control

WD_CTRL
Watchdog Control **(000 0011$_B$)** **Reset Value: see Table 37**

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
CHECKSUM	RES								WD_STM_EN_0	WD_CFG	WD_EN_WK_BUS	RES	WD_TIMER		
rw	r								rwh	rw	rwh	r	rwh		

Field	Bits	Type	Description
CHECKSUM	15	rw	**Watchdog Setting Check Sum Bit** 0_B **0**, Counts as 0 for checksum calculation 1_B **1**, Counts as 1 for checksum calculation
RES	14:7	r	**Reserved, always reads as 0**
WD_STM_EN_0	6	rwh	**Watchdog Deactivation during Stop Mode, bit0** 0_B **ACTIVE**, Watchdog is active in Stop Mode 1_B **INACTIVE**, Watchdog is deactivated in Stop Mode
WD_CFG	5	rw	**Watchdog Configuration** 0_B **TIMEOUT**, Watchdog works as a Time-Out watchdog 1_B **WINDOW**, Watchdog works as a Window watchdog
WD_EN_ WK_BUS	4	rwh	**Watchdog Enable after Bus Wake in Stop Mode** 0_B **DISABLED**, Watchdog will not start after a CAN wake-up event 1_B **ENABLED**, Watchdog starts with a long open window after CAN Wake-up event
RES	3	r	**Reserved, always reads as 0**
WD_TIMER	2:0	rwh	**Watchdog Timer Period** 000_B **10ms**, 10ms 001_B **20ms**, 20ms 010_B **50ms**, 50ms 011_B **100ms**, 100ms 100_B **200ms**, 200ms 101_B **500ms**, 500ms 110_B **1s**, 1s 111_B **10s**, 10s

Table 37 Reset of WD_CTRL

Register Reset Type	Reset Values	Reset Short Name	Reset Mode	Note
POR/Soft reset	0000 0000 0001 0100_B			
Restart	0000 0000 000x 0100_B			

chanhvinh.com

Notes

1. *See also **Chapter 12.2.4** for more information on disabling the watchdog in Stop Mode.*
2. *See chapter **Chapter 12.2.5** for more information on the effect of the bit WD_EN_WK_BUS.*
3. *See chapter **Chapter 12.2.3** for calculation of checksum.*

chanhvinh.com

CAN Control

BUS_CTRL

CAN Control **(000 0100$_B$)** **Reset Value: see Table 38**

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
RES								RES	RES	RES	RES		CAN		
r								r	r	r	r		rwh		

Field	Bits	Type	Description
RES	15:8	r	**Reserved, always reads as 0**
RES	7	r	**Reserved, always reads as 0**
RES	6	r	**Reserved, always reads as 0**
RES	5	r	**Reserved, always reads as 0**
RES	4:3	r	**Reserved, always reads as 0**
CAN	2:0	rwh	**HS-CAN Module Modes** 000_B **OFF**, CAN OFF 001_B **WAKE**, CAN is wake capable (no SWK) 010_B **RECEIVE**, CAN Receive Only Mode (no SWK) 011_B **NORMAL**, CAN Normal Mode (no SWK) 100_B **OFF**, CAN OFF

Table 38 Reset of BUS_CTRL

Register Reset Type	Reset Values	Reset Short Name	Reset Mode	Note
POR/Soft reset	0000 0000 0010 0000			
Restart	0000 0000 0000 0xyy$_B$			

Notes

1. *The reset values for CAN, transceivers are marked with 'y' because they will vary depending on the cause of change.*
2. *See **Figure 25**, for detailed state changes of CAN, transceivers for different device modes.*
3. *The bit CAN_2 is not modified by the device but can only be changed by the user. Therefore, the bit type is 'rw' compared to bits CAN_0 and CAN_1.*
4. *In case SYSERR = 0 and the CAN transceiver is configured to 'x11' while going to Sleep Mode, it will be automatically set to wake capable ('x01'). The SPI bits will be changed to wake capable. If configured to 'x10' and Sleep Mode is entered, then the transceiver is set to wake capable, while it will stay in Receive Only Mode when it had been configured to 'x10' when going to Stop Mode. If it had been configured to wake capable or OFF then the mode will remain unchanged.The Receive Only Mode has to be selected by the user before entering Stop Mode.*
5. *Failure Handling Mechanism: When the device enters Fail-Safe Mode due to a failure, then **BUS_CTRL** is modified by the device to 0000 0000 xxx0 1001$_B$ to ensure that the device can be woken again. See also the description in **Chapter 8.1**, and **Chapter 9.2.1** for **WK_CTRL** for other wake sources when entering Fail-Safe Mode.*
6. *When in Software Development Mode the POR/Soft Reset value are: CAN=001$_B$, .*

chanhvinh.com

Serial Peripheral Interface

Wake-up Control

WK_CTRL
Wake-up Control **(000 0101$_B$)** **Reset Value: see Table 39**

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
WK2_FO	RES	WK_FILT			WK_PUPD		RES		WK_EN		RES		WK_BNK		
rw	r	rw			rw		r		rw		r		rw		

Field	Bits	Type	Description
WK2_FO	15	rw	**WK2 / FO configuration** 0_B **FAIL_SAFE**, WK2/FO pin configured as Fail Safe Output 1_B **WAKE_UP**, WK2/FO pin configured as Wake-up Input
RES	14	r	**Reserved, always reads as 0**
WK_FILT	13:11	rw	**Wake-up Filter Time Configuration** 000_B **16us**, Filter with 16 µs filter time (static sensing) 001_B **64us**, Filter with 64 µs filter time (static sensing) 010_B **TIMER1**, Filtering at the end of the on-time; filter time of 16 µs (cyclic sensing) is selected, Timer1 011_B **TIMER2**, Filtering at the end of the on-time; filter time of 16 µs (cyclic sensing) is selected, Timer2 100_B **SYNC**, Filter at the end of settle time (80 µs), filter time of 16 µs (cyclic sensing) is selected, SYNC[1)2)] 101_B , reserved 110_B , reserved 111_B , reserved
WK_PUPD	10:9	rw	**WKx Pull-Up/Pull-Down Configuration** 00_B **NO**, No pull-up/pull-down selected 01_B **PULL_DOWN**, Pull-down resistor selected 10_B **PULL_UP**, Pull-up resistor selected[3)] 11_B **AUTO**, Automatic switching to pull-up or pull-down
RES	8:7	r	**Reserved, always reads as 0**
WK_EN	6:5	rw	**WKx Enable** 00_B **WK_OFF**, WKx module OFF 01_B **WK_ON**, WKx module ON 10_B **SYNC**, OFF or (in case of WK4), it is configured as SYNC input 11_B **OFF**, OFF
RES	4:3	r	**Reserved, always reads as 0**

chanhvinh.com

Field	Bits	Type	Description
WK_BNK	2:0	rw	**WKs input Banking** 000_B **WK1**, WK1 Module (Bank 1) 001_B **WK2**, WK2 Module (Bank 2) 010_B **WK3**, WK3 Module (Bank 3) 011_B **WK4**, WK4 Module (Bank 4) 100_B **WK5**, WK5 Module (Bank 5)[3] 101_B , reserved 110_B , reserved 111_B , reserved

1) This setting is available only in case of WK4 configured as **WK_EN**=10_B.
2) The min TON time for cyclic sense with SYNC is 100 µs.
3) WK5 has a fixed pull-up resistor and is not configurable. So in Bank 5, the **WK_PUPD** field is reserved.

Table 39 Reset of WK_CTRL

Register Reset Type	Reset Values	Reset Short Name	Reset Mode	Note
POR/Soft reset	0000 0000 0010 0000_B			
Restart	x0xx xxx0 0xx0 0000_B			

Notes

1. *WK2_FO bit is accessable only if the Bank 2 is selected.*
2. *The SYNC functionality is accessable only if the Bank 4 is selected.*
3. *When selecting a filter time configuration, the user must make sure to also assign the respective timer/SYNC to at least one HS switch during cyclic sense operation.*
4. *At Fail-Safe Mode entry WK_EN will be automatically changed (by the device) in “01”. Exceptions: WK2 is configured as FO and WK4 if configured as SYNC previously*
5. *During Fail-Safe Mode the WK_FILT bits are ignored and static-sense with 16 µs filter time is used by default.*

chanhvinh.com

Timer 1 and Timer2 Control and Selection

TIMER_CTRL

Timer 1 and Timer2 Control and Selection (000 0110$_B$) **Reset Value: see Table 40**

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
TIMER2_ON			RES	TIMER2_PER			CYCWK		TIMER1_ON			RES	TIMER1_PER		
rwh			r	rwh			rwh		rwh			r	rwh		

Field	Bits	Type	Description
TIMER2_ON	15:13	rwh	**Timer2 On-Time Configuration** 000_B **OFF_LOW**, OFF / Low (timer not running, HSx output is low) 001_B **100us**, 0.1ms on-time 010_B **300us**, 0.3ms on-time 011_B **1ms**, 1.0ms on-time 100_B **10ms**, 10ms on-time 101_B **20ms**, 20ms on-time 110_B **OFF_HIGH**, OFF / HIGH (timer not running, HSx output is high) 111_B , reserved, same behaviour as 110_B
RES	12	r	**Reserved, always reads as 0**
TIMER2_PER	11:9	rwh	**Timer2 Period Configuration** 000_B **10ms**, 10ms 001_B **20ms**, 20ms 010_B **50ms**, 50ms 011_B **100ms**, 100ms 100_B **200ms**, 200ms 101_B **500ms**, 500ms 110_B **1s**, 1s 111_B **2s**, 2s
CYCWK	8:7	rwh	**Cyclic Wake Configuration** 00_B **DISABLED**, Timer1 and Timer2 disabled as wake-up sources 01_B **TIMER1**, Timer1 is enabled as wake-up source (Cyclic Wake) 10_B **TIMER2**, Timer2 is enabled as wake-up source (Cyclic Wake) 11_B , reserved

chanhvinh.com

Field	Bits	Type	Description
TIMER1_ON	6:4	rwh	**Timer1 On-Time Configuration** 000_B **OFF_LOW**, OFF / Low (timer not running, HSx output is low) 001_B **100us**, 0.1ms on-time 010_B **300us**, 0.3ms on-time 011_B **1ms**, 1.0ms on-time 100_B **10ms**, 10ms on-time 101_B **20ms**, 20ms on-time 110_B **OFF_HIGH**, OFF / HIGH (timer not running, HSx output is high) 111_B , reserved, same behaviour as 110_B
RES	3	r	**Reserved, always reads as 0**
TIMER1_PER	2:0	rwh	**Timer1 Period Configuration** 000_B **10ms**, 10ms 001_B **20ms**, 20ms 010_B **50ms**, 50ms 011_B **100ms**, 100ms 100_B **200ms**, 200ms 101_B **500ms**, 500ms 110_B **1s**, 1s 111_B **2s**, 2s

Table 40 Reset of TIMER_CTRL

Register Reset Type	Reset Values	Reset Short Name	Reset Mode	Note
POR/Soft reset	$0000\ 0000\ 0000\ 0000_B$			
Restart	$0000\ 0000\ 0000\ 0000_B$			

Notes

1. *The timer must be first assigned and is then automatically activated as soon as the on-time is configured.*
2. *If cyclic sense is selected and the HSx switch is cleared during Restart Mode then also the timer settings (period and on-time) are cleared to avoid incorrect switch detection. However, the timer settings are not cleared in case of failure not leading to Restart Mode.*
3. *In case the timer is set as wake sources and cyclic sense is running, then both cyclic sense and cyclic wake will be active at the same time.*
4. *Timer accuracy is linked to the oscillator accuracy (see Parameter P_13.12.43).*

chanhvinh.com

Serial Peripheral Interface

High-Side Switch Shutdown Control

SW_SD_CTRL
High-Side Switch Shutdown Control **(000 0111$_B$)** **Reset Value: see Table 41**

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
HS4_OV_REC	HS3_OV_REC	HS2_OV_REC	HS1_OV_REC	HS_OT_SD_DIS	HS4_OV_SDN_DIS	HS3_OV_SDN_DIS	HS2_OV_SDN_DIS	HS1_OV_SDN_DIS	HS_OV_SDS_DIS	HS_UV_SD_DIS	RES	HS_UV_REC	RES		
rw	rw	rw	rw	rw	rw	rw	rw	rw	rw	rw	r	rw	r		

Field	Bits	Type	Description
HS4_OV_REC	15	rw	**Switch recovery after removal of VSHS Overvoltage for HS4** 0_B **DISABLED**, Switch recovery is disabled 1_B **PREVIOUS**, Previous state before VSHS Overvoltage is enabled after Overvoltage considtion is removed
HS3_OV_REC	14	rw	**Switch recovery after removal of VSHS Overvoltage for HS3** 0_B **DISABLED**, Switch recovery is disabled 1_B **PREVIOUS**, Previous state before VSHS Overvoltage is enabled after Overvoltage considtion is removed
HS2_OV_REC	13	rw	**Switch recovery after removal of VSHS Overvoltage for HS2** 0_B **DISABLED**, Switch recovery is disabled 1_B **PREVIOUS**, Previous state before VSHS Overvoltage is enabled after Overvoltage considtion is removed
HS1_OV_REC	12	rw	**Switch recovery after removal of VSHS Overvoltage for HS1** 0_B **DISABLED**, Switch recovery is disabled 1_B **PREVIOUS**, Previous state before VSHS Overvoltage is enabled after Overvoltage considtion is removed
HS_OT_SD_DIS	11	rw	**Shutdown Disabling of all HS in case of Overtemperature event** 0_B **ALL**, shudown for all HSx in case of Overtemperature 1_B **INDIVIDUAL**, individual shudown in case of Overtemperature

chanhvinh.com

Field	Bits	Type	Description
HS4_OV_SDN_DIS	10	rw	**Shutdown Disabling of HS4 in case of input supply overvoltage in Normal Mode** 0_B **ENABLED**, shudown enabled in case of VSHS Overvoltage 1_B **DISABLED**, shudown disabled in case of VSHS Overvoltage
HS3_OV_SDN_DIS	9	rw	**Shutdown Disabling of HS3 in case of input supply overvoltage in Normal Mode** 0_B **ENABLED**, shudown enabled in case of VSHS Overvoltage 1_B **DISABLED**, shudown disabled in case of VSHS Overvoltage
HS2_OV_SDN_DIS	8	rw	**Shutdown Disabling of HS2 in case of input supply overvoltage in Normal Mode** 0_B **ENABLED**, shudown enabled in case of VSHS Overvoltage 1_B **DIASBLED**, shudown disabled in case of VSHS Overvoltage
HS1_OV_SDN_DIS	7	rw	**Shutdown Disabling of HS1 in case of input supply overvoltage in Normal Mode** 0_B **ENABLED**, shudown enabled in case of VSHS Overvoltage 1_B **DISABLED**, shudown disabled in case of VSHS Overvoltage
HS_OV_SDS_DIS	6	rw	**Shutdown Disabling of HSx in case of input supply overvoltage in Stop Mode or Sleep Mode** 0_B **ENABLED**, shudown enabled in case of VSHS Overvoltage 1_B **DISABLED**, shudown disabled in case of VSHS Overvoltage
HS_UV_SD_DIS	5	rw	**Shutdown Disabling of HSx in case of input supply undervoltage** 0_B **ENABLED**, shudown enabled in case of VSHS Undervoltage 1_B **DISABLED**, shudown disabled in case of VSHS Undervoltage
RES	4	r	**Reserved, always reads as 0**
HS_UV_REC	3	rw	**Switch recovery after removal of Undervoltage for HSx** 0_B **DISABLED**, Switch recovery is disabled 1_B **PREVIOUS**, Previous state before VSHS Undervoltage is enabled after Undervoltage considtion is removed
RES	2:0	r	**Reserved, always reads as 0**

chanhvinh.com

Table 41 Reset of SW_SD_CTRL


Register Reset Type	Reset Values	Reset Short Name	Reset Mode	Note
POR/Soft reset	0000 0000 0000 0000_B			
Restart	xxxx xxxx xxx0 $x000_B$			

chanhvinh.com

Serial Peripheral Interface

High-Side Switch Control

HS_CTRL
High-Side Switch Control **(000 1000$_B$)** **Reset Value: see Table 42**



Field	Bits	Type	Description
HS4	15:12	rwh	**HS4 Configuration** 0000_B**OFF**, OFF 0001_B**ON**, ON 0010_B**TIMER1**, Controlled by Timer1 0011_B**TIMER2**, Controlled by Timer2 0100_B**PWM1**, Controlled by PWM1 0101_B**PWM2**, Controlled by PWM2 0110_B**PWM3**, Controlled by PWM3 0111_B**PWM4**, Controlled by PWM4 1000_B**WK4_SYNC**, Synchronized with WK4/SYNC 1001_B, reserved 1010_B, reserved 1011_B, reserved 1100_B, reserved 1101_B, reserved 1110_B, reserved 1111_B, reserved
HS3	11:8	rwh	**HS3 Configuration** 0000_B**OFF**, OFF 0001_B**ON**, ON 0010_B**TIMER1**, Controlled by Timer1 0011_B**TIMER2**, Controlled by Timer2 0100_B**PWM1**, Controlled by PWM1 0101_B**PWM2**, Controlled by PWM2 0110_B**PWM3**, Controlled by PWM3 0111_B**PWM4**, Controlled by PWM4 1000_B**WK4_SYNC**, Synchronized with WK4/SYNC 1001_B, reserved 1010_B, reserved 1011_B, reserved 1100_B, reserved 1101_B, reserved 1110_B, reserved 1111_B, reserved

chanhvinh.com

Field	Bits	Type	Description
HS2	7:4	rwh	**HS2 Configuration** 0000_B**OFF**, OFF 0001_B**ON**, ON 0010_B**TIMER1**, Controlled by Timer1 0011_B**TIMER2**, Controlled byTimer2 0100_B**PWM1**, Controlled by PWM1 0101_B**PWM2**, Controlled by PWM2 0110_B**PWM3**, Controlled by PWM3 0111_B**PWM4**, Controlled by PWM4 1000_B**WK4_SYNC**, Synchronized with WK4/SYNC 1001_B, reserved 1010_B, reserved 1011_B, reserved 1100_B, reserved 1101_B, reserved 1110_B, reserved 1111_B, reserved
HS1	3:0	rwh	**HS1 Configuration** 0000_B**OFF**, OFF 0001_B**ON**, ON 0010_B**TIMER1**, Controlled by Timer1 0011_B**TIMER2**, Controlled by Timer2 0100_B**PWM1**, Controlled by PWM1 0101_B**PWM2**, Controlled by PWM2 0110_B**PWM3**, Controlled by PWM3 0111_B**PWM4**, Controlled by PWM4 1000_B**WK4_SYNC**, Synchronized with WK4/SYNC 1001_B, reserved 1010_B, reserved 1011_B, reserved 1100_B, reserved 1101_B, reserved 1110_B, reserved 1111_B, reserved

Table 42 Reset of HS_CTRL

Register Reset Type	Reset Values	Reset Short Name	Reset Mode	Note
POR/Soft reset	$0000\ 0000\ 0000\ 0000_B$			
Restart	$0000\ 0000\ 0000\ 0000_B$			

PWMx in this register designates the internal PWM generators for the integrated high-side switches.

chanhvinh.com

Serial Peripheral Interface

Interrupt Mask Control[1)]

INT_MASK
Interrupt Mask Control **(000 1001$_B$)** **Reset Value: see Table 43**

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
RES							INTN_CYC_EN	WD_SDM_DISABLE	WD_SDM	SPI_CRC_FAIL	BD_STAT	HS_STAT	BUS_STAT	TEMP_STAT	SUPPLY_STAT
r							rw	rw	rw	rw	rw	rw	rw	rw	rw

Field	Bits	Type	Description
RES	15:9	r	**Reserved, always reads as 0**
INTN_CYC_EN	8	rw	**Periodical INTN generation** 0_B **DISABLED**, no periodical INTN event generated in case of pending interrupts 1_B **ENABLED**, periodical INTN event generated in case of pending interrupts
WD_SDM_DISABLE	7	rw	**Disable Watchdog in Software Development Mode** 0_B **ENABLED**, WD is enabled in Software Development Mode 1_B **DISABLED**, WD is disabled in Software Development Mode
WD_SDM	6	rw	**Watchdog failure in Software Development Mode** 0_B **DISABLED**, no INTN event generated in case of WD trigger failure in Software Development Mode 1_B **ENABLED**, one INTN event is generated in case of WD trigger failure in Software Development Mode
SPI_CRC_FAIL	5	rw	**SPI and CRC interrupt generation** 0_B **DISABLED**, no INTN event generated in case of SPI_FAIL or CRC_FAIL 1_B **ENABLED**, one INTN event is generated n case of SPI_FAIL or CRC_FAIL
BD_STAT	4	rw	**Bridge Driver Interrupt generation** 0_B **DISABLED**, no INTN event generated in case BD_STAT (on Status Information Field) is set 1_B **ENABLED**, one INTN event generated in case BD_STAT (on Status Information Field) is set
HS_STAT	3	rw	**High Side Interrupt generation** 0_B **DISABLED**, no INTN event generated in case HS_STAT (on Status Information Field) is set 1_B **ENABLED**, one INTN event generated in case HS_STAT (on Status Information Field) is set

1) Every event will generate a signal on the INTN pin (when masked accordingly).
Even if the status-bit was already set in the corresponding status-register it can still trigger a signal on the INTN pin.

chanhvinh.com

Field	Bits	Type	Description
BUS_STAT	2	rw	**BUS Interrupt generation** 0_B **DISABLED**, no INTN event generated in case BUS_STAT (on Status Information Field) is set 1_B **ENABLED**, one INTN event generated in case BUS_STAT (on Status Information Field) is set
TEMP_STAT	1	rw	**Temperature Interrupt generation** 0_B **DISABLED**, no INTN event generated in case TEMP_STAT (on Status Information Field) is set 1_B **ENABLED**, one INTN event generated in case TEMP_STAT (on Status Information Field) is set
SUPPLY_STAT	0	rw	**SUPPLY Status Interrupt generation** 0_B **DISABLED**, no INTN event generated in case SUPPLY_STAT (on Status Information Field) is set 1_B **ENABLED**, one INTN event generated in case SUPPLY_STAT (on Status Information Field) is set

Table 43 Reset of INT_MASK

Register Reset Type	Reset Values	Reset Short Name	Reset Mode	Note
POR/Soft reset	0000 0001 0100 0000_B			
Restart	0000 000x xxxx $xxxx_B$			

chanhvinh.com

PWM Configuration Control

PWM_CTRL
PWM Configuration Control **(000 1010$_B$)** **Reset Value: see Table 44**

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
RES	PWM_FREQ	PWM_DC										RES	PWM_BNK		
r	rw	rw										r	rw		

Field	Bits	Type	Description
RES	15	r	**Reserved, always reads as 0**
PWM_FREQ	14	rw	**PWM generator Frequency Setting** 0_B **100Hz**, 100Hz is selected 1_B **200Hz**, 200Hz is selected
PWM_DC	13:4	rw	**PWM Duty Cycle Setting (bit4 = LSB; bit13 = MSB)** 00 0000 0000_B, 100% OFF, i.e. HS = OFF xx xxxx $xxxx_B$, ON with duty cycle fraction of 1024 11 1111 1111_B, 100% ON, i.e. HS = ON
RES	3	r	**Reserved, always reads as 0**
PWM_BNK	2:0	rw	**Internal PWM generator selection** 000_B **PWM1**, PWM1 Module 001_B **PWM2**, PWM2 Module 010_B **PWM3**, PWM3 Module 011_B **PWM4**, PWM4 Module $1xx_B$, Don't care

Table 44 Reset of PWM_CTRL

Register Reset Type	Reset Values	Reset Short Name	Reset Mode	Note
POR/Soft reset	0000 0000 0000 0000_B			
Restart	0xxx xxxx xxxx 0000_B			

PWMx in this register designates the internal PWM generators for the integrated high-side switches.


Notes

1. *0% and 100% duty cycle settings are used to have the switch turned ON or OFF respectively.*
2. *The desired duty cycle should be set first before the HSx is enabled as PWM.*
3. *The PWM signal is correct only after at least one PWM pulse.*
4. *PWM generator accuracy is linked to the oscillator accuracy (see parameter P_13.12.43).*

chanhvinh.com

System Status Control

SYS_STAT_CTRL
System Status Control **(000 1011$_B$)** **Reset Value: see Table 45**



Field	Bits	Type	Description
SYS_STAT	15:0	rw	**System Status Control (bit0=LSB; bit15=MSB)** Dedicated bytes for system configuration, access only by microcontroller. Cleared after power up and soft reset.

Table 45 Reset of SYS_STAT_CTRL

Register Reset Type	Reset Values	Reset Short Name	Reset Mode	Note
POR / Soft reset	0000 0000 0000 0000$_B$			
Restart	xxxx xxxx xxxx xxxx$_B$			

Note: This register is intended for storing system configuration of the ECU by the microcontroller and is only accessible in Normal Mode. The register is not accessible by the TLE9561QX and is also not cleared after Fail-Safe or Restart Mode. It allows the microcontroller to quickly store system configuration without loosing data.

chanhvinh.com

13.5.2 Control registers bridge driver

General Bridge Control

GENCTRL
General Bridge Control **(001 0000$_B$)** **Reset Value: see Table 46**

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
BDFREQ	PWM34MAP	PWM12MAP	CPUVTH	FET_LVL	CPSTGA	BDOV_REC	IPCHGADT	AGC		CPEN	POCHGDIS	AGCFILT	EN_GEN_CHECK	IHOLD	FMODE
rw	rw	rw	rw	rw	rw	rw	rw	rw		rw	rw	rw	rw	rw	rw

Field	Bits	Type	Description
BDFREQ	15	rw	**Bridge driver synchronization frequency** 0_B **18MHz**, typ. 18.75 MHz (default) 1_B **37MHz**, typ. 37.5 MHz
PWM34MAP	14	rw	**PWM34MAP** 0_B **PWM34_TO_HB34**, PWM3 mapped to HB3, PWM4 mapped to HB4 (default) 1_B **PWM3_TO_HB4**, PWM3 mapped to HB4
PWM12MAP	13	rw	**PWM12MAP** 0_B **PWM12_TO_HB12**, PWM1/CRC mapped to HB1, PWM2 mapped to HB2 (default) 1_B **PWM1_TO_HB2**, PWM1/CRC mapped to HB2
CPUVTH	12	rw	**Charge pump under voltage (referred to VS)** 0_B **TH1**, (default) CPUV threshold 1 for FET_LVL = 0, CPUV threshold 1 for FET_LVL = 1 1_B **TH2**, CPUV threshold 2 for FET_LVL = 0, CPUV threshold 2 for FET_LVL = 1
FET_LVL	11	rw	**External MOSFET normal / logic level selection** 0_B **LOGIC**, Logic level MOSFET selected 1_B **NORMAL**, Normal level MOSFET selected(default)
CPSTGA	10	rw	**Automatic switchover between dual and single charge pump stage** 0_B **INACTIVE**, Automatic switch over deactivated (default) 1_B **ACTIVE**, Automatic switch over activated
BDOV_REC	9	rw	**Bridge driver recover from VS and VSINT Overvoltage** 0_B **INACTIVE**, Recover deactivated (default) 1_B **ACTIVE**, Recover activated
IPCHGADT	8	rw	**Adaptation of the pre-charge and pre-discharge current** 0_B **1STEP**, 1 current step (default) 1_B **2STEPS**, 2 current steps

chanhvinh.com

Field	Bits	Type	Description
AGC	7:6	rw	**Adaptive gate control** 00_B **INACTIVE1**, (default) Adaptive gate control disabled, pre-charge and pre-discharge disabled 01_B **INACTIVE2**, Adaptive gate control disabled, precharge is enabled with IPRECHG = IPCHGINIT, predischarge is enabled with IPREDCHG = IPDCHGINIT 10_B **ACTIVE**, Adaptive gate control enabled, IPRECHG and IPREDCHG are self adapted 11_B , reserved. Adaptive gate control enabled, IPRECHG and IPREDCHG are self adapted
CPEN	5	rw	**CPEN** 0_B **DISABLED**, Charge pump disabled (default) 1_B **ENABLED**, Charge pump enabled
POCHGDIS	4	rw	**Postcharge disable bit** 0_B **ENABLED**, The postcharge phase is enabled during PWM (default) 1_B **DISABLED**, The postcharge phase is disabled during PWM
AGCFILT	3	rw	**Filter for adaptive gate control** 0_B **NO_FILT**, No filter applied (default) 1_B **FILT_APPL**, Filter applied
EN_GEN_CHECK	2	rw	**Detection of active / FW MOSFET** 0_B **DISABLED**, Detection disabled (default) 1_B **ENABLED**, Detection enabled
IHOLD	1	rw	**Gate driver hold current IHOLD** 0_B **TH1**, (default) Charge: I_{CHG19} , discharge I_{DCHG19} . 1_B **TH2**, Charge: I_{CHG25}, discharge: I_{CHG25}
FMODE	0	rw	**Frequency modulation of the charge pump** 0_B **NO**, No modulation 1_B **15KHz**, Modulation frequency 15.6 kHz (default)

Table 46 Reset of GENCTRL

Register Reset Type	Reset Values	Reset Short Name	Reset Mode	Note
POR/Soft reset	$0000\ 1000\ 0000\ 0001_B$			
Restart	$xxxx\ xxxx\ xxxx\ xxxx_B$			

chanhvinh.com

Drain-Source monitoring threshold LS1-4

LS_VDS
VDS monitoring threshold LS1-4 **(001 0010$_B$)** **Reset Value: see Table 47**

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
RES		TFVDS		LS4VDSTH			LS3VDSTH			LS2VDSTH			LS1VDSTH		
r		rw		rw			rw			rw			rw		

Field	Bits	Type	Description
RES	15:14	r	**Reserved. Always read as 0**
TFVDS	13:12	rw	**Filter time of drain-source voltage monitoring** 00_B **500ns**, 0.5 µs (default) 01_B **1us**, 1 µs 10_B **2us**, 2 µs 11_B **6us**, 6 µs
LS4VDSTH	11:9	rw	**LS4 drain-source overvoltage threshold** 000_B **160mV**, 0.16 V 001_B **200mV**, 0.20 V (default) 010_B **300mV**, 0.30 V 011_B **400mV**, 0.40 V 100_B **500mV**, 0.50 V 101_B **600mV**, 0.60 V 110_B **800mV**, 0.80 V 111_B **2V**, 2.0 V
LS3VDSTH	8:6	rw	**LS3 drain-source overvoltage threshold** 000_B **160mV**, 0.16 V 001_B **200mV**, 0.20 V (default) 010_B **300mV**, 0.30 V 011_B **400mV**, 0.40 V 100_B **500mV**, 0.50 V 101_B **600mV**, 0.60 V 110_B **800mV**, 0.80 V 111_B **2V**, 2.0 V
LS2VDSTH	5:3	rw	**LS2 drain-source overvoltage threshold** 000_B **160mV**, 0.16V 001_B **200mV**, 0.20 V (default) 010_B **300mV**, 0.30 V 011_B **400mV**, 0.40 V 100_B **500mV**, 0.50 V 101_B **600mV**, 0.60 V 110_B **800mV**, 0.80 V 111_B **2V**, 2.0 V

chanhvinh.com

Field	Bits	Type	Description
LS1VDSTH	2:0	rw	**LS1 drain-source overvoltage threshold** 000_B **160mV**, 0.16 V 001_B **200mV**, 0.20 V (default) 010_B **300mV**, 0.30 V 011_B **400mV**, 0.40 V 100_B **500mV**, 0.50 V 101_B **600mV**, 0.60 V 110_B **800mV**, 0.80 V 111_B **2V**, 2.0 V

Table 47 Reset of LS_VDS

Register Reset Type	Reset Values	Reset Short Name	Reset Mode	Note
POR/Soft reset	0000 0010 0100 1001_B	0000 0000 0000 0000		
Restart	0000 xxxx xxxx $xxxx_B$			

chanhvinh.com

Drain-Source monitoring Threshold HS1-4

HS_VDS
VDS monitoring threshold HS1-4 **(001 0011$_B$)** **Reset Value: see Table 48**

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
RES		RES	DEEP_ADAP	HS4VDSTH			HS3VDSTH			HS2VDSTH			HS1VDSTH		
r		rw	rw	rw			rw			rw			rw		

Field	Bits	Type	Description
RES	15:14	r	**Reserved. Always read as 0**
RES	13	rw	**Reserved. This bit must be programmed to ‘0‘**
DEEP_ADAP	12	rw	**Deep adaptation enable** 0_B **NO_DEEP_ADAP**, Deep adaptation disabled (default) 1_B **DEEP_ADAP**, Deep adaptation enabled
HS4VDSTH	11:9	rw	**HS4 drain-source overvoltage threshold** 000_B **160mV**, 0.16 V 001_B **200mV**, 0.20 V (default) 010_B **300mV**, 0.30 V 011_B **400mV**, 0.40 V 100_B **500mV**, 0.50 V 101_B **600mV**, 0.60 V 110_B **800mV**, 0.80 V 111_B **2V**, 2.0 V
HS3VDSTH	8:6	rw	**HS3 drain-source overvoltage threshold** 000_B **160mV**, 0.16 V 001_B **200mV**, 0.20 V (default) 010_B **300mV**, 0.30 V 011_B **400mV**, 0.40 V 100_B **500mV**, 0.50 V 101_B **600mV**, 0.60 V 110_B **800mV**, 0.80 V 111_B **2V**, 2.0 V
HS2VDSTH	5:3	rw	**HS2 drain-source overvoltage threshold** 000_B **160mV**, 0.16 V 001_B **200mV**, 0.20 V (default) 010_B **300mV**, 0.30 V 011_B **400mV**, 0.40 V 100_B **500mV**, 0.50 V 101_B **600mV**, 0.60 V 110_B **800mV**, 0.80 V 111_B **2V**, 2.0 V

chanhvinh.com

Field	Bits	Type	Description
HS1VDSTH	2:0	rw	**HS1 drain-source overvoltage threshold** 000_B **160mV**, 0.16 V 001_B **200mV**, 0.20 V (default) 010_B **300mV**, 0.30 V 011_B **400mV**, 0.40 V 100_B **500mV**, 0.50 V 101_B **600mV**, 0.60 V 110_B **800mV**, 0.80 V 111_B **2V**, 2.0 V

Table 48 Reset of HS_VDS

Register Reset Type	Reset Values	Reset Short Name	Reset Mode	Note
POR/Soft reset	0000 0010 0100 1001_B			
Restart	00xx xxxx xxxx $xxxx_B$			

chanhvinh.com

CCP and times selection

CCP_BLK
CCP and times selection **(001 0100$_B$)** **Reset Value: see Table 49**

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
TBLANK				TCCP				RES					CCP_BNK		
rw				rw				r					rw		

Field	Bits	Type	Description
TBLANK	15:12	rw	**Blank time** nom. tHBxBLANK = 587 ns + 266 x T[3:0]$_D$ The CCP_BNK bits select the blank time for the FW or active MOSFET and the half-bridge HBx Reset of active and FW tHBxBLANK: 2450 ns typ.
TCCP	11:8	rw	**Cross-current protection time** nom. tHBxCCP = 587 ns + 266 x TCCP[3:0]$_D$ The CCP_BNK bits select the cross-current protection time for the FW or active MOSFET and the half-bridge HBx Reset of all active and FW tHBxCCP: 2450 ns typ.
RES	7:3	r	**Reserved, always reads as 0**
CCP_BNK	2:0	rw	**Cross-current and time banking** 000_B **ACT_HB1**, Active blank and cross-current prot. times for HB1 (default) 001_B **ACT_HB2**, Active blank and cross-current prot. times for HB2 010_B **ACT_HB3**, Active blank and cross-current prot. times for HB3 011_B **ACT_HB4**, Active blank and cross-current prot. times for HB4 100_B **FW_HB1**, FW blank and cross-current prot. times for HB1 101_B **FW_HB2**, FW blank and cross-current prot. times for HB2 110_B **FW_HB3**, FW blank and cross-current prot. for times for HB3 111_B **FW_HB4**, FW blank and cross-current prot. for times for HB4

Table 49 Reset of CCP_BLK

Register Reset Type	Reset Values	Reset Short Name	Reset Mode	Note
POR/Soft reset	0111 0111 0000 0000$_B$			
Restart	xxxx xxxx 0000 0000$_B$			

chanhvinh.com

Half-Bridge MODE

HBMODE
Half-Bridge MODE **(001 0101$_B$)** **Reset Value: see Table 50**

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
HB4MODE		AFW4	HB4_PWM_EN	HB3MODE		AFW3	HB3_PWM_EN	HB2MODE		AFW2	HB2_PWM_EN	HB1MODE		AFW1	HB1_PWM_EN
rw		rw	rw	rw		rw	rw	rw		rw	rw	rw		rw	rw

Field	Bits	Type	Description
HB4MODE	15:14	rw	**Half-bridge 4 MODE selection** 00_B **PASSIVE_OFF**, LS4 and HS4 are off by passive discharge (default) 01_B **LS4_ON**, LS4 is ON 10_B **HS4_ON**, HS4 is ON 11_B **ACTIVE_OFF**, LS4 and HS4 kept off by the active discharge
AFW4	13	rw	**Active freewheeling for half-bridge 4 during PWM** 0_B **DISABLED**, active freewheeling disabled 1_B **ENABLED**, active freewheeling enabled (default)
HB4_PWM_EN	12	rw	**PWM mode for half-bridge 4** 0_B **INACTIVE**, PWM deactivated for HB4(default) 1_B **ACTIVE**, PWM activated for HB4
HB3MODE	11:10	rw	**Half-bridge 3 MODE selection** 00_B **PASSIVE_OFF**, LS3 and HS3 are off by passive discharge (default) 01_B **LS3_ON**, LS3 is ON 10_B **HS3_ON**, HS3 is ON 11_B **ACTIVE_OFF**, LS3 and HS3 kept off by the active discharge
AFW3	9	rw	**Active freewheeling for half-bridge 3 during PWM** 0_B **DISABLED**, active freewheeling disabled 1_B **ENABLED**, active freewheeling enabled (default)
HB3_PWM_EN	8	rw	**PWM mode for half-bridge 3 if PWM34MAP=0**[1)] 0_B **INACTIVE**, PWM deactivated for HB2(default) 1_B **ACTIVE**, PWM activated for HB2
HB2MODE	7:6	rw	**Half-bridge 2 MODE selection** 00_B **PASSIVE_OFF**, LS2 and HS2 are off by passive discharge (default) 01_B **LS2_ON**, LS2 is ON 10_B **HS2_ON**, HS2 is ON 11_B **ACTIVE_OFF**, LS2 and HS2 kept off by the active discharge

chanhvinh.com

Field	Bits	Type	Description
AFW2	5	rw	**Active freewheeling for half-bridge 2 during PWM** 0_B **DISABLED**, active freewheeling disabled 1_B **ENABLED**, active freewheeling enabled (default)
HB2_PWM_EN	4	rw	**PWM mode for half-bridge 2** 0_B **INACTIVE**, PWM deactivated for HB2(default) 1_B **ACTIVE**, PWM activated for HB2
HB1MODE	3:2	rw	**Half-bridge 1 MODE selection** 00_B **PASSIVE_OFF**, LS1 and HS1 are off by passive discharge (default) 01_B **LS1_ON**, LS1 is ON 10_B **HS1_ON**, HS1 is ON 11_B **ACTIVE_OFF**, LS1 and HS1 kept off by the active discharge
AFW1	1	rw	**Active freewheeling for half-bridge 1 during PWM** 0_B **DISABLED**, active freewheeling disabled 1_B **ENABLED**, active freewheeling enabled (default)
HB1_PWM_EN	0	rw	**PWM mode for half-bridge 1 if PWM12MAP=0**[2)] 0_B **INACTIVE**, PWM deactivated for HB1 (default) 1_B **ACTIVE**, PWM activated for HB1

1) If PWM34MAP = 1, HB3 is controlled statically according to HB3MODE independently from HB3_PWM_EN.
2) If PWM12MAP = 1, HB1 is controlled statically according to HB1MODE independently from HB1_PWM_EN.

Table 50 Reset of HBMODE

Register Reset Type	Reset Values	Reset Short Name	Reset Mode	Note
POR/Soft reset	$0010\ 0010\ 0010\ 0010_B$			
Restart	$0010\ 0010\ 0010\ 0010_B$			

chanhvinh.com

HB pre-charge and pre-discharge time

TPRECHG
HB pre-charge and pre-discharge time (001 0110$_B$) Reset Value: see Table 51

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
TPCHG4			TPCHG3			TPCHG2			TPCHG1			RES	TPCHG_BNK		
rw			rw			rw			rw			r	rw		

Field	Bits	Type	Description
TPCHG4	15:13	rw	**If TPCHG_BNK=0: precharge time of HB 4, If TPCHG_BNK=1: predischarge time of HB 4** 000_B **107ns**, $t_{PCHG000}$ / $t_{PDCHG000}$ (default) 001_B **160ns**, $t_{PCHG001}$ / $t_{PDCHG001}$ 010_B **214ns**, $t_{PCHG010}$ / $t_{PDCHG010}$ 011_B **267ns**, $t_{PCHG011}$ / $t_{PDCHG011}$ 100_B **320ns**, $t_{PCHG100}$ / $t_{PDCHG100}$ 101_B **533ns**, $t_{PCHG101}$ / $t_{PDCHG101}$ 110_B **747ns**, $t_{PCHG110}$ / $t_{PDCHG110}$ 111_B **1067ns**, $t_{PCHG111}$ / $t_{PDCHG111}$
TPCHG3	12:10	rw	**If TPCHG_BNK=0: precharge time of HB 3, If TPCHG_BNK=1: predischarge time of HB 3** 000_B **107ns**, $t_{PCHG000}$ / $t_{PDCHG000}$ (default) 001_B **160ns**, $t_{PCHG001}$ / $t_{PDCHG001}$ 010_B **214ns**, $t_{PCHG010}$ / $t_{PDCHG010}$ 011_B **267ns**, $t_{PCHG011}$ / $t_{PDCHG011}$ 100_B **320ns**, $t_{PCHG100}$ / $t_{PDCHG100}$ 101_B **533ns**, $t_{PCHG101}$ / $t_{PDCHG101}$ 110_B **747ns**, $t_{PCHG110}$ / $t_{PDCHG110}$ 111_B **1067ns**, $t_{PCHG111}$ / $t_{PDCHG111}$
TPCHG2	9:7	rw	**If TPCHG_BNK=0: precharge time of HB 2, If TPCHG_BNK=1: predischarge time of HB 2** 000_B **107ns**, $t_{PCHG000}$ / $t_{PDCHG000}$ (default) 001_B **160ns**, $t_{PCHG001}$ / $t_{PDCHG001}$ 010_B **214ns**, $t_{PCHG010}$ / $t_{PDCHG010}$ 011_B **267ns**, $t_{PCHG011}$ / $t_{PDCHG011}$ 100_B **320ns**, $t_{PCHG100}$ / $t_{PDCHG100}$ 101_B **533ns**, $t_{PCHG101}$ / $t_{PDCHG101}$ 110_B **747ns**, $t_{PCHG110}$ / $t_{PDCHG110}$ 111_B **1067ns**, $t_{PCHG111}$ / $t_{PDCHG111}$

chanhvinh.com

Field	Bits	Type	Description
TPCHG1	6:4	rw	**If TPCHG_BNK=0: precharge time of HB 1, If TPCHG_BNK=1: predischarge time of HB 1** 000_B **107ns**, $t_{PCHG000}$ / $t_{PDCHG000}$ (default) 001_B **160ns**, $t_{PCHG001}$ / $t_{PDCHG001}$ 010_B **214ns**, $t_{PCHG010}$ / $t_{PDCHG010}$ 011_B **267ns**, $t_{PCHG011}$ / $t_{PDCHG011}$ 100_B **320ns**, $t_{PCHG100}$ / $t_{PDCHG100}$ 101_B **533ns**, $t_{PCHG101}$ / $t_{PDCHG101}$ 110_B **747ns**, $t_{PCHG110}$ / $t_{PDCHG110}$ 111_B **1067ns**, $t_{PCHG111}$ / $t_{PDCHG111}$
RES	3	r	**Reserved, always read as 0**
TPCHG_BNK	2:0	rw	**Precharge/predischarge time selection** 000_B **PRECHARGE**, Precharge time selected (default) 001_B **PREDISCHARGE**, Predischarge time selected $x1x_B$, wrong setting of TPCHG_BNK $1xx_B$, wrong setting of TPCHG_BNK


Table 51 Reset of TPRECHG

Register Reset Type	Reset Values	Reset Short Name	Reset Mode	Note
POR/Soft reset	$0000\ 0000\ 0000\ 0000_B$			
Restart	$xxxx\ xxxx\ xxxx\ 0000_B$			

chanhvinh.com

Static charge/discharge current

ST_ICHG
Static charge/discharge current **(001 0111$_B$)** **Reset Value: see Table 52**



Field	Bits	Type	Description
ICHGST4	15:12	rw	**Static charge and discharge currents of HB4** Refer to **Table 20** Default: 0100$_B$ - charge: I_{CHG16}, 9.2 mA typ., discharge I_{DCHG16}, 9.2 mA typ.
ICHGST3	11:8	rw	**Static charge and discharge currents of HB3** Refer to **Table 20** Default: 0100$_B$ - charge: I_{CHG16}, 9.2 mA typ., discharge: I_{DCHG16}, 9.2 mA typ.
ICHGST2	7:4	rw	**Static charge and discharge currents of HB2** Refer to **Table 20** Default: 0100$_B$ - charge: I_{CHG16}, 9.2 mA typ., discharge I_{DCHG16}, 9.2 mA typ.
ICHGST1	3:0	rw	**Static charge and discharge currents of HB1** Refer to **Table 20** Default: 0100$_B$ - charge: I_{CHG16}, 9.2 mA typ., discharge I_{DCHG16}, 9.2 mA typ.

Table 52 Reset of ST_ICHG

Register Reset Type	Reset Values	Reset Short Name	Reset Mode	Note
POR/Soft reset	0100 0100 0100 0100$_B$			
Restart	xxxx xxxx xxxx xxxx$_B$			

chanhvinh.com

HB charge/discharge currents for PWM operation

HB_ICHG
HB charge/discharge currents for PWM operation

(001 1000$_B$) **Reset Value: see Table 53**

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
IDCHG						ICHG						RES	ICHG_BNK		
rw						rw						r	rw		

Field	Bits	Type	Description
IDCHG	15:10	rw	**If ICHG_BNK =0xx$_B$: Discharge current of HBx active MOSFET** **If ICHG_BNK=1xx$_B$: Reserved. Always read as '0'** Default value for all active MOSFETs discharge currents: 001111$_B$, I_{DCHG15} Refer to **Table 23** for the configuration of the discharge current
ICHG	9:4	rw	**If ICHG_BNK=0xx$_B$: Charge current of HBx active MOSFET** **If ICHG_BNK=1xx$_B$: Charge and discharge current of HBx FW MOSFETs** Default value for all active MOSFETs charge currents and all FW MOSFETs charge/discharge currents: 001101$_B$, I_{CHG13} Refer to **Table 22** for the configuration of the charge current of the active and FW MOSFET Refer to **Table 23** for the configuration of the discharge current of the FW MOSFET
RES	3	r	**Reserved, always read as 0**
ICHG_BNK	2:0	rw	**Banking bits for charge and discharge currents of active MOSFETs** 000$_B$ **ACT_HB1**, Active MOSFET of HB1 is selected (default) 001$_B$ **ACT_HB2**, Active MOSFET of HB2 is selected 010$_B$ **ACT_HB3**, Active MOSFET of HB3 is selected 011$_B$ **ACT_HB4**, Active MOSFET of HB4 is selected 100$_B$ **FW_HB1**, FW MOSFET of HB1 is selected 101$_B$ **FW_HB2**, FW MOSFET of HB2 is selected 110$_B$ **FW_HB3**, FW MOSFET of HB3 is selected 111$_B$ **FW_HB4**, FW MOSFET of HB4 is selected

Table 53 Reset of HB_ICHG

Register Reset Type	Reset Values	Reset Short Name	Reset Mode	Note
POR/Soft reset	0011 1100 1101 0000$_B$			POR value valid for ICHG_BNK = 0
Restart	xxxx xxxx xxxx 0000$_B$			

chanhvinh.com

HB max. pre-charge/pre-discharge in PWM operation current and diagnostic pull-down

HB_ICHG_MAX
HB max. pre-charge/pre-discharge in PWM operation current and diagnostic pull-down
(001 1001$_B$) **Reset Value: see Table 54**

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
HB4IDIAG	HB3IDIAG	HB2IDIAG	HB1IDIAG	RES				ICHGMAX4		ICHGMAX3		ICHGMAX2		ICHGMAX1	
rw	rw	rw	rw	r				rw		rw		rw		rw	

Field	Bits	Type	Description
HB4IDIAG	15	rw	**Control of HB4 off-state current source and current sink** 0_B **INACTIVE**, Pull-down deactivated (default) 1_B **ACTIVE**, Pull-down activated
HB3IDIAG	14	rw	**Control of HB3 off-state current source and current sink** 0_B **INACTIVE**, Pull-down deactivated (default) 1_B **ACTIVE**, Pull-down activated
HB2IDIAG	13	rw	**Control of HB2 pull-down for off-state diagnostic** 0_B **INACTIVE**, Pull-down deactivated (default) 1_B **ACTIVE**, Pull-down activated
HB1IDIAG	12	rw	**Control of HB1 pull-down for off-state diagnostic** 0_B **INACTIVE**, Pull-down deactivated (default) 1_B **ACTIVE**, Pull-down activated
RES	11:8	r	**Reserved, always read as 0**
ICHGMAX4	7:6	rw	**Maximum drive current of HB4 during the pre-charge phase and pre-discharge phases**[1)] 00_B **19mA**, charge I_{CHG24}: typ. 19.2 mA, discharge I_{DCHG24}: typ. 18.8 mA (default) 01_B **32mA**, charge I_{CHG32}: typ. 32.8 mA, discharge I_{DCHG32}: typ. 32.2 mA 10_B **73mA**, charge I_{CHG52}: typ. 73.2 mA, discharge I_{DCHG52}: typ. 72.4mA 11_B **100mA**, charge I_{CHG63}: typ. 100 mA, discharge I_{DCHG63}: typ. 100 mA
ICHGMAX3	5:4	rw	**Maximum drive current of HB3 during the pre-charge and pre-discharge phases**[1)] 00_B **19mA**, charge I_{CHG24}: typ. 19.2 mA, discharge I_{DCHG24}: typ. 18.8 mA (default) 01_B **32mA**, charge I_{CHG32}: typ. 32.8 mA, discharge I_{DCHG32}: typ. 32.2 mA 10_B **73mA**, charge I_{CHG52}: typ. 73.2 mA, discharge I_{DCHG52}: typ. 72.4mA 11_B **100mA**, charge I_{CHG63}: typ. 100 mA, discharge I_{DCHG63}: typ. 100 mA

chanhvinh.com

Field	Bits	Type	Description
ICHGMAX2	3:2	rw	**Maximum drive current of HB2 during the pre-charge phase and pre-discharge phases**[1)] 00_B **19mA**, charge I_{CHG24}: typ. 19.2 mA, discharge I_{DCHG24}: typ. 18.8 mA (default) 01_B **32mA**, charge I_{CHG32}: typ. 32.8 mA, discharge I_{DCHG32}: typ. 32.2 mA 10_B **73mA**, charge I_{CHG52}: typ. 73.2 mA, discharge I_{DCHG52}: typ. 72.4mA 11_B **100mA**, charge I_{CHG63}: typ. 100 mA, discharge I_{DCHG63}: typ. 100 mA
ICHGMAX1	1:0	rw	**Maximum drive current of HB1 during the pre-charge and pre-discharge phases**[1)] 00_B **19mA**, charge I_{CHG24}: typ. 19.2 mA, discharge I_{DCHG24}: typ. 18.8 mA (default) 01_B **32mA**, charge I_{CHG32}: typ. 32.8 mA, discharge I_{DCHG32}: typ. 32.2 mA 10_B **73mA**, charge I_{CHG52}: typ. 73.2 mA, discharge I_{DCHG52}: typ. 72.4mA 11_B **100mA**, charge I_{CHG63}: typ. 100 mA, discharge I_{DCHG63}: typ. 100 mA

1) ICHGMAX is also the current applied during the post-charge of the PWM MOSFET.

Table 54 Reset of HB_ICHG_MAX

Register Reset Type	Reset Values	Reset Short Name	Reset Mode	Note
POR/Soft reset	$0000\ 0000\ 0000\ 0000_B$			
Restart	$xxxx\ 0000\ xxxx\ xxxx_B$			

chanhvinh.com

HBx pre-charge/pre-dischage initialization configuration in PWM operation

HB_PCHG_INIT
HBx pre-charge/pre-discharge initialization configuration in PWM operation
(001 1010$_B$) **Reset Value: see Table 55**

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
PDCHGINIT						PCHGINIT						RES	INIT_BNK		
rw						rw						r	rw		

Field	Bits	Type	Description
PDCHGINIT	15:10	rw	**Initial predischarge current of HBx, IPDCHGINITx** The INIT_BNK bits select the addressed half-bridge Default: 001111$_B$ Refer to **Table 23**
PCHGINIT	9:4	rw	**Initial precharge current of HBx, IPCHGINITx** The INIT_BNK bits select the addressed half-bridge Default: 001101$_B$ Refer to **Table 22**
RES	3	r	**Reserved, always reads as 0**
INIT_BNK	2:0	rw	**Banking bits for Precharge an Predischarge Initial Current** 000$_B$ **HB1**, precharge/discharge init. for HB1 selected (default) 001$_B$ **HB2**, precharge/discharge init. for HB2 selected 010$_B$ **HB3**, precharge/discharge init. for HB3 selected 011$_B$ **HB4**, precharge/discharge init. for HB4 selected 1xx$_B$, wrong setting of INIT_BANK

Table 55 Reset of HB_PCHG_INIT

Register Reset Type	Reset Values	Reset Short Name	Reset Mode	Note
POR/Soft reset	0011 1100 1101 0000$_B$			
Restart	xxxx xxxx xxxx 0000$_B$			

chanhvinh.com

HBx inputs TDON configuration

TDON_HB_CTRL
HBx inputs TDON configuration **(001 1011$_B$)** **Reset Value: see Table 56**

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
RES		TDON						RES					HB_TDON_BNK		
r		rw						r					rw		

Field	Bits	Type	Description
RES	15:14	r	**Reserved, always read as 0**
TDON	13:8	rw	**Turn-on delay time of active MOSFET of HBx** The **HB_TDON_BNK** bits selects the turn-on delay time of the active MOSFET of the half-bridge HBx Nominal tDON = 53.3 ns x TDON[5:0]$_D$ Default: 00 1100$_B$: 640 ns typ.
RES	7:3	r	**Reserved, always read as 0**
HB_TDON_BNK	2:0	rw	**Banking bits for turn-on delay time** 000$_B$ **HB1**, tDON of HB1 selected (default) 001$_B$ **HB2**, tDON of HB2 selected 010$_B$ **HB3**, tDON of HB3 selected 011$_B$ **HB4**, tDON of HB4 selected 1xx$_B$, wrong setting of PWM_TDON_BNK

Table 56 Reset of TDON_HB_CTRL

Register Reset Type	Reset Values	Reset Short Name	Reset Mode	Note
POR/Soft reset	0000 1100 0000 0000$_B$			
Restart	00xx xxxx 0000 0000$_B$			

chanhvinh.com

HBx TDOFF configuration

TDOFF_HB_CTRL
HBx TDOFF configuration **(001 1100$_B$)** **Reset Value: see Table 57**

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
RES		TDOFF						RES					HB_TDOFF_BNK		
r		rw						r					rw		

Field	Bits	Type	Description
RES	15:14	r	**Reserved, always read as 0**
TDOFF	13:8	rw	**Turn-off delay time of active MOSFET of HBx** The **HB_TDOFF_BNK** bits selects the turn-off delay time of the active MOSFET of the half-bridge HBx Nominal tDOFF = 53.3 ns x TDOFF[5:0]$_D$ Default: 0000 1100$_B$: 640 ns
RES	7:3	r	**Reserved, always read as 0**
HB_TDOFF_BNK	2:0	rw	**Banking bits for turn-off delay time** 000$_B$ **HB1**, tDOFF of HB1 selected (default) 001$_B$ **HB2**, tDOFF of HB2 selected 010$_B$ **HB3**, tDOFF of HB3 selected 011$_B$ **HB4**, tDOFF of HB4 selected 1xx$_B$, wrong setting of PWM_TDOFF_BNK

Table 57 Reset of TDOFF_HB_CTRL

Register Reset Type	Reset Values	Reset Short Name	Reset Mode	Note
POR/Soft reset	0000 1100 0000 0000$_B$			
Restart	00xx xxxx 0000 0000$_B$			

chanhvinh.com

Serial Peripheral Interface

Brake control

BRAKE
Brake control **(001 1101$_B$)** **Reset Value: see Table 58**

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
RES		SLAM_LS4_DIS	SLAM_LS3_DIS	SLAM_LS2_DIS	SLAM_LS1_DIS	SLAM	VDSTH_BRK	TBLK_BRK	PARK_BRK_EN	OV_BRK_EN	RES		OV_BRK_TH		
r		rw	rw	rw	rw	rw	rw	rw	rw	rw	rw		rw		

Field	Bits	Type	Description
RES	15:14	r	**Reserved, always read as 0**
SLAM_LS4_DIS	13	rw	**LS4 output disable during SLAM mode** 0_B **ACTIVE**, LS4 control active in Slam mode (default) 1_B **DISABLED**, LS4 control disabled in Slam mode
SLAM_LS3_DIS	12	rw	**LS3 output disable during SLAM mode** 0_B **ACTIVE**, LS3 control active in Slam mode (default) 1_B **DISABLED**, LS3 control disabled in Slam mode
SLAM_LS2_DIS	11	rw	**LS2 output disable during SLAM mode** 0_B **ACTIVE**, LS2 control active in Slam mode (default) 1_B **DISABLED**, LS2 control disabled in Slam mode
SLAM_LS1_DIS	10	rw	**LS1 output disable during SLAM mode** 0_B **ACTIVE**, LS1 control active in Slam mode (default) 1_B **DISABLED**, LS1 control disabled in Slam mode
SLAM	9	rw	**Slam mode** 0_B **INACTIVE**, Slam mode deactivated (default) 1_B **AVTIVE**, Slam mode activated
VDSTH_BRK	8	rw	**VDS Overvoltage for LS1-4 during braking** 0_B **800mV**, $V_{VDSMONTH0_BRAKE}$, 0.8 V, typ. (default) 1_B **220mV**, $V_{VDSMONTH1_BRAKE}$, 0.22 V typ.
TBLK_BRK	7	rw	**Blank time of VDS overvoltage during braking** 0_B **7uS**, t_{BLK_BRAKE1},7 µs typ. 1_B **11uS**, t_{BLK_BRAKE2}, 11 µs typ. (default)
PARK_BRK_EN	6	rw	**Parking brake enable** 0_B **DISABLED**, Parking brake disabled (default) 1_B **ENABLED**, Parking brake enabled
OV_BRK_EN	5	rw	**Overvoltage brake enable** 0_B **DISABLED**, Overvoltage brake disabled 1_B **ENABLED**, Overvoltage brake enabled (default)
RES	4:3	rw	**Reserved, to be set to 0**

chanhvinh.com

Field	Bits	Type	Description
OV_BRK_TH	2:0	rw	**Overvoltage brake threshold** 000_B **27V**, typ. 27V (default) 001_B **28V**, typ. 28V 010_B **29V**, typ. 29V 011_B **30V**, typ. 30V 100_B **31V**, typ. 31V 101_B **32V**, typ. 32V 110_B **33V**, typ. 33V 111_B **34V**, typ. 34V

Table 58 Reset of BRAKE

Register Reset Type	Reset Values	Reset Short Name	Reset Mode	Note
POR/Soft reset	0000 0000 1010 0000_B			
Restart	00xx xxxx xxx0 $0xxx_B$			

*Note: For min and max values of **OV_BRK_TH**, refer to **Chapter 12.12**.*

chanhvinh.com

13.6 SPI status information registers

READ/CLEAR Operation (see also **Chapter 13.3**):

- One 32-bit SPI command consist of four bytes:
  - The 7-bit address and one additional bit for the register access mode and
  - following the two data bytes and the CRC.
  The numbering of following bit definitions refers to the data byte and correspond to the bits D0...D7 and to the SPI bits 8...23 (see also figure).
- There are two different bit types:
  - 'r' = READ: read only bits (or reserved bits).
  - 'rc' = READ/CLEAR: readable and clearable bits.
- Reading a register is done word wise by setting the SPI bit 7 to "0" (= Read Only).
- Clearing a register is done word wise by setting the SPI bit 7 to "1". No single bits can be cleared. Therefore the content of a SPI message (bit 8..23) doesn't matter.
- SPI status registers are in general not cleared or changed automatically (an exception are the x bits). This must be done by the microcontroller via SPI command.

The registers are addressed wordwise.

Table 59 Register Overview

Register Short Name	Register Long Name	Offset Address	Page Number
SPI status information registers, Device Status Registers			
SUP_STAT	Supply Voltage Fail Status	1000000_B	**201**
THERM_STAT	Thermal Protection Status	1000001_B	**203**
DEV_STAT	Device Information Status	1000010_B	**204**
BUS_STAT	Bus Communication Status	1000011_B	**206**
WK_STAT	Wake-up Source and Information Status	1000100_B	**208**
WK_LVL_STAT	WK Input Level	1000101_B	**210**
HS_OL_OC_OT_STAT	High-Side Switch Status	1000110_B	**211**
SPI status information registers, Status registers bridge driver			
GEN_STAT	GEN Status register	1010000_B	**213**
TDREG	Turn-on/off delay regulation register	1010001_B	**215**
DSOV	Drain-source overvoltage HBVOUT	1010010_B	**217**
EFF_TDON_OFF1	Effective MOSFET turn-on/off delay - PWM half-bridge 1	1010011_B	**219**
EFF_TDON_OFF2	Effective MOSFET turn-on/off delay - PWM half-bridge 2	1010100_B	**220**
EFF_TDON_OFF3	Effective MOSFET turn-on/off delay - PWM half-bridge 3	1010101_B	**221**
EFF_TDON_OFF4	Effective MOSFET turn-on/off delay - PWM half-bridge 4	1010110_B	**222**
TRISE_FALL1	MOSFET rise/fall time - PWM half-bridge 1	1010111_B	**223**
TRISE_FALL2	MOSFET rise/fall time - PWM half-bridge 2	1011000_B	**224**
TRISE_FALL3	MOSFET rise/fall time - PWM half-bridge 3	1011001_B	**225**

chanhvinh.com

Table 59 Register Overview (cont'd)

Register Short Name	Register Long Name	Offset Address	Page Number
TRISE_FALL4	MOSFET rise/fall time - PWM half-bridge 4	1011010_B	226
SPI status information registers, Family and product information register			
FAM_PROD_STAT	Family and Product Identification Register	1110000_B	227

chanhvinh.com

13.6.1 Device Status Registers

Supply Voltage Fail Status

SUP_STAT
Supply Voltage Fail Status **(100 0000$_B$)** **Reset Value: see Table 60**

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
POR	RES		CP_OT	VCC1_UV_FS	HS_UV	HS_OV	VSINT_UV	VSINT_OV	VS_UV	VS_OV	CP_UV	VCC1_SC	VCC1_UV	VCC1_OV	VCC1_WARN
rc	r		rc	rc	rc	rc	rc	rc	rc	rc	rc	rc	rc	rc	rc

Field	Bits	Type	Description
POR	15	rc	**Power-On reset detection** 0_B **NO_POR**, No POR 1_B **POR**, POR occurred
RES	14:13	r	**Reserved, always reads as 0**
CP_OT	12	rc	**Charge pump overtemperature** 0_B **NO_CP_OT**, No charge pump OT detected 1_B **CP_OT**, Charge pump OT detected
VCC1_UV_FS	11	rc	**4th consecutive VCC1 UV-Detection** 0_B **NO_FAILSAFE**, No Fail-Safe Mode entry due to 4th consecutive VCC1_UV 1_B **FAILSAFE**, Fail-Safe Mode entry due to 4th consecutive VCC1_UV
HS_UV	10	rc	**HS Supply UV-Detection** 0_B **NO_UV**, No Undervoltage 1_B **UV_EVENT**, HS Supply Undervoltage detected
HS_OV	9	rc	**HS Supply OV-Detection** 0_B **NO_OV**, No Overvoltage 1_B **OV_EVENT**, HS Supply Overvoltage detected
VSINT_UV	8	rc	**VSINT UV-Detection** 0_B **NO_UV**, No Undervoltage 1_B **UV_EVENT**, VSINT Undervoltage detected
VSINT_OV	7	rc	**VSINT OV-Detection** 0_B **NO_OV**, No Overvoltage 1_B **OV_EVENT**, VSINT Overvoltage detected
VS_UV	6	rc	**VS Undervoltage Detection ($V_{S,UV}$)** 0_B **NO_VS**, No VS undervoltage detected 1_B **VS_EVENT**, VS undervoltage detected (detection is only active when VCC1 is enabled)
VS_OV	5	rc	**VS Overvoltage Detection ($V_{S,OV}$)** 0_B **NO_OV**, No VS overvoltage detected 1_B **OV_EVENT**, VS overvoltage detected (detection is only active when VCC1 is enabled)

chanhvinh.com

Field	Bits	Type	Description
CP_UV	4	rc	**CP_UV** 0_B **NO_UV**, No CP undervoltage detected 1_B **UV_EVENT**, CP undervoltage detected
VCC1_SC	3	rc	**VCC1 SC** 0_B **NO_SC**, No VCC1 short to GND detected 1_B **SC_EVENT**, VCC1 short to GND
VCC1_UV	2	rc	**VCC1 UV-Detection (due to Vrtx reset)** 0_B **NO_UV**, No VCC1_UV detection 1_B **UV_EVENT**, VCC1 undervoltage detected
VCC1_OV	1	rc	**VCC1 Overvoltage Detection** 0_B **NO_OV**, No VCC1 overvoltage warning 1_B **OV_EVENT**, VCC1 overvoltage detected
VCC1_WARN	0	rc	**VCC1 Undervoltage Prewarning** 0_B **NO_UV**, No VCC1 undervoltage prewarning 1_B **UV_PREWARN**, VCC1 undervoltage prewarning detected

Table 60 Reset of SUP_STAT

Register Reset Type	Reset Values	Reset Short Name	Reset Mode	Note
POR/Soft reset	y000 0000 0000 0000_B			
Restart	x00x xxxx xxxx $xxxx_B$			

Notes


1. *The VCC1 undervoltage prewarning threshold $V_{PW,f}$ / $V_{PW,r}$ is a fixed threshold and independent of the VCC1 undervoltage reset thresholds.*
2. *VSINT undervoltage monitoring is not available in Stop Mode due to current consumption saving requirements. Exception: VSINT undervoltage detection is also available in Stop Mode if the VCC1 load current is above the active peak threshold (I_PEAK_TH) or if VCC1 is below the VCC1 prewarning threshold (**VCC1_WARN** is set).*
3. *The MSB of the POR/Soft Reset value is marked as 'y': the default value of the POR bit is set after Power-on reset (POR value = 1000 0000). However it will be cleared after a device Soft Reset command (Soft Reset value = 0000 0000).*
4. *During Sleep Mode, the bits VCC1_SC, VCC1_OV and VCC1_UV will not be set when VCC1 is off.*
5. *The VCC1_UV bit is never updated in Restart Mode, in Init Mode it is only updated after RSTN was released, it is always updated in Normal Mode and Stop Mode, and it is always updated in any device modes in a VCC1_SC condition (after VCC1_UV = 1 for > 2 ms).*

chanhvinh.com

Thermal Protection Status

THERM_STAT

Thermal Protection Status **(100 0001$_B$)** **Reset Value: see Table 61**

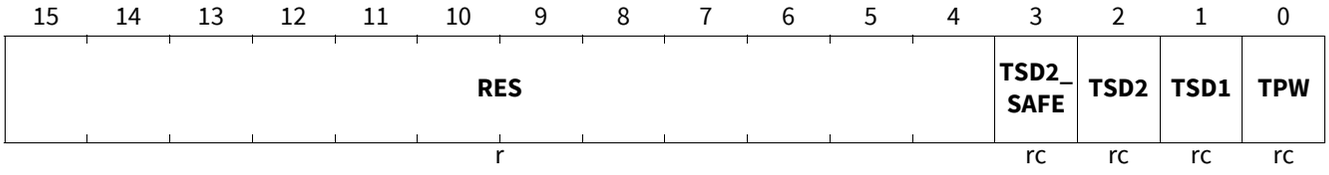

Field	Bits	Type	Description
RES	15:4	r	**Reserved, always reads as 0**
TSD2_SAFE	3	rc	**TSD2 Thermal Shut-Down Safe State Detection** 0_B **NO_TSD2_SF**, No TSD2 safe state detected 1_B **TSD2_SF**, TSD2 safe state detected: >16 consecutive TSD2 events occurred, next TSD2 waiting time will be 64s
TSD2	2	rc	**TSD2 Thermal Shut-Down Detection** 0_B **NO_TSD2**, No TSD2 event 1_B **TSD2_EVENT**, TSD2 OT detected - leading to Fail-Safe Mode
TSD1	1	rc	**TSD1 Thermal Shut-Down Detection** 0_B **NO_TSD1**, No TSD1 fail 1_B **TSD1_EVENT**, TSD1 OT detected (affected module is disabled)
TPW	0	rc	**Thermal Pre Warning** 0_B **NO_TPW**, No Thermal Pre warning 1_B **TPW**, Thermal Pre warning detected

Table 61 Reset of THERM_STAT

Register Reset Type	Reset Values	Reset Short Name	Reset Mode	Note
POR/Soft reset	0000 0000 0000 0000$_B$			
Restart	0000 0000 0000 xxxx$_B$			


Note: Temperature warning and shutdown bits are not reset automatically, even if the temperature pre warning or the TSD condition is not present anymore.

chanhvinh.com

Serial Peripheral Interface

Device Information Status

DEV_STAT
Device Information Status **(100 0010$_B$)** **Reset Value: see Table 62**

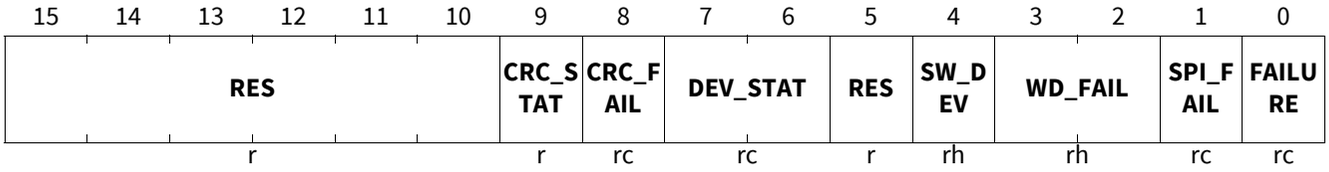

Field	Bits	Type	Description
RES	15:10	r	**Reserved, always read as 0**
CRC_STAT	9	r	**CRC STAT Information** 0_B **DISABLED**, CRC disabled 1_B **ENABLED**, CRC enabled
CRC_FAIL	8	rc	**CRC Fail Information**[1)] 0_B **NO_FAIL**, No CRC Failure 1_B **FAIL**, CRC Failure detected
DEV_STAT	7:6	rc	**Device Status before Restart Mode** 00_B **CLEARED**, Cleared (Register must be actively cleared) 01_B **RESTART**, Restart due to failure (WD fail, TSD2, VCC1_UV, trial to access Sleep Mode without any wake source activated); also after a wake from Fail-Safe Mode 10_B **SLEEP**, Sleep Mode 11_B , reserved
RES	5	r	**Reserved, always reads 0**
SW_DEV	4	rh	**Status of Operating Mode** 0_B **NORMAL**, Normal operation 1_B **SW_DEV**, Software Development Mode is enabled
WD_FAIL	3:2	rh	**Number of WD-Failure Events** 00_B **NO_FAIL**, No WD Fail 01_B **1x**, 1x WD Fail, 10_B **2x**, 2x WD Fail 11_B **3x**, more than 3xWD Fail
SPI_FAIL	1	rc	**SPI Fail Information** 0_B **NO_FAIL**, No SPI fail 1_B **INVALID**, Invalid SPI command detected
FAILURE	0	rc	**Failure detection** 0_B **NO_FAIL**, No Failure 1_B **FAIL**, Failure occured

1) The CRC_FAIL bit will not be set in case the static CRC enabling / disabling sequence is sent (see **Chapter 5.2**).

chanhvinh.com

Table 62 Reset of DEV_STAT

Register Reset Type	Reset Values	Reset Short Name	Reset Mode	Note
POR/Soft reset	$0000\ 0000\ 0000\ 0000_B$			
Restart	$0000\ 00xx\ xx0x\ xxxx_B$			


Notes

1. *The bits **DEV_STAT** show the status of the device before exiting Restart Mode. Either the device came from regular Sleep Mode or a failure (Restart Mode or Fail-Safe Mode) occurred. Coming from Sleep Mode will also be shown if there was a trial to enter Sleep Mode without having cleared all wake flags before.*
2. *The **WD_FAIL** bits are implemented as a counter and are the only status bits, which are cleared automatically by the device.*
3. *The SPI_FAIL bit can only be cleared via SPI command.*
4. *The bit **CRC_STAT** and **CRC_FAIL** can be read regardless the CRC setting. The SPI read command on **DEV_STAT** ignores the CRC field.*

chanhvinh.com

Bus Communication Status

BUS_STAT
Bus Communication Status **(100 0011$_B$)** **Reset Value: see Table 63**

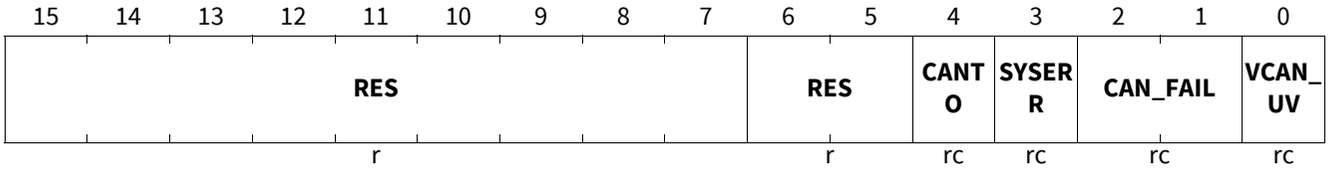

Field	Bits	Type	Description
RES	15:7	r	**Reserved, always reads as 0**
RES	6:5	r	**Reserved, always reads as 0**
CANTO	4	rc	**CAN Time Out Detection** 0_B **NO_FAIL**, Normal operation 1_B **TIME_OUT**, CAN Time Out detected
SYSERR	3	rc	**SWK System Error** 0_B **NO_FAIL**, Selective Wake Mode is possible 1_B **FAIL**, System Error detected, SWK enabling not possible
CAN_FAIL	2:1	rc	**CAN failure status** 00_B **NO_ERR**, No error 01_B **CAN_TSD**, CAN Thermal shutdown 10_B **CAN_TXD_DOM_TO**, CAN_TXD_DOM: TXD dominant time out detected 11_B **CAN_BUS_DOM_TO**, CAN_BUS_DOM: BUS dominant time out detected
VCAN_UV	0	rc	**Under Voltage CAN Bus Supply** 0_B **NORMAL**, Normal operation 1_B **UNDERVOLTAGE**, CAN Supply undervoltage detected. Transmitter disabled

Table 63 Reset of BUS_STAT

Register Reset Type	Reset Values	Reset Short Name	Reset Mode	Note
POR/Soft reset	0000 0000 0000 0000$_B$			
Restart	0000 0000 0xxx xxxx$_B$			

Notes

1. *The VCAN_UV comparator is enabled if CAN Normal or CAN Receive Only Mode.*
2. *CANTO will be set only if CAN2 = 1 (=SWK Mode enabled). It will be set as soon as CANSIL was set and will stay set even in CANSIL it is reset. An interrupt is issued in Stop Mode and Normal Mode as soon as CANTO is set and the interrupt is not masked out, i.e. CANTO_MASK must be set to 1.*
3. *The SYSERR Flag is set in case of a configuration error and in case of an error counter overflow (n > 32) It is only updated if SWK is enabled (CAN_2 = '1'). See also chapter x.*

chanhvinh.com

4. *CANTO is set asynchronously to the INTN pulse. In order to prevent undesired clearing of CANTO and thus possibly missing this interrupt, the bit will be prevented from clearing (i.e. cannot be cleared) until the next falling edge of INTN.*

chanhvinh.com

Wake-up Source and Information Status

WK_STAT
Wake-up Source and Information Status **(100 0100$_B$)** **Reset Value: see Table 64**

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
RES					RES	CAN_WU	TIMER2_WU	TIMER1_WU	RES		WK5_WU	WK4_WU	WK3_WU	WK2_WU	WK1_WU
r					r	rc	rc	rc	r		rc	rc	rc	rc	rc

Field	Bits	Type	Description
RES	15:11	r	**Reserved, always reads as 0**
RES	10	r	**Reserved, always reads as 0**
CAN_WU	9	rc	**Wake up via CAN Bus** 0_B **NO_WU**, No Wake up 1_B **WU**, Wake up detected
TIMER2_WU	8	rc	**Wake up via Timer2** 0_B **NO_WU**, No Wake up 1_B **WU**, Wake up detected
TIMER1_WU	7	rc	**Wake up via Timer1** 0_B **NO_WU**, No Wake up 1_B **WU**, Wake up detected
RES	6:5	r	**Reserved, always reads as 0**
WK5_WU	4	rc	**Wake up via WK5** 0_B **NO_WU**, No Wake up 1_B **WU**, Wake up detected
WK4_WU	3	rc	**Wake up via WK4** 0_B **NO_WU**, No Wake up 1_B **WU**, Wake up detected
WK3_WU	2	rc	**Wake up via WK3** 0_B **NO_WU**, No Wake up 1_B **WU**, Wake up detected
WK2_WU	1	rc	**Wake up via WK2** 0_B **NO_WU**, No Wake up 1_B **WU**, Wake up detected
WK1_WU	0	rc	**Wake up via WK1** 0_B **NO_WU**, No Wake up 1_B **WU**, Wake up detected

Table 64 Reset of WK_STAT

Register Reset Type	Reset Values	Reset Short Name	Reset Mode	Note
POR/Soft reset	0000 0000 0000 0000$_B$			
Restart	0000 0xxx x000 00x0$_B$			

chanhvinh.com

*Note: At Fail-Safe Mode entry, the **WK_STAT** register is automatically cleared by the device.*

chanhvinh.com

WK Input Level

WK_LVL_STAT
WK Input Level **(100 0101$_B$)** **Reset Value: see Table 65**

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
RES											WK5_LVL	WK4_LVL	WK3_LVL	WK2_LVL	WK1_LVL
r											r	r	r	r	r

Field	Bits	Type	Description
RES	15:5	r	**Reserved, always reads as 0**
WK5_LVL	4	r	**Status of WK5** 0_B **LOW**, Low Level (=0) 1_B **HIGH**, High Level (=1)
WK4_LVL	3	r	**Status of WK4** 0_B **LOW**, Low Level (=0) 1_B **HIGH**, High Level (=1)
WK3_LVL	2	r	**Status of WK3** 0_B **LOW**, Low Level (=0) 1_B **HIGH**, High Level (=1)
WK2_LVL	1	r	**Status of WK2** 0_B **LOW**, Low Level (=0) 1_B **HIGH**, High Level (=1)
WK1_LVL	0	r	**Status of WK1** 0_B **LOW**, Low Level (=0) 1_B **HIGH**, High Level (=1)

Table 65 Reset of WK_LVL_STAT

Register Reset Type	Reset Values	Reset Short Name	Reset Mode	Note
POR/Soft reset	0000 0000 0000 00x0$_B$			
Restart	0000 0000 0000 00x0$_B$			

Note: WK_LVL_STAT is updated in Normal Mode and Stop Mode and also in Init and Restart Mode. In cyclic sense or wake mode, the registers contain the sampled level, i.e. the registers are updated after every sampling.

chanhvinh.com

High-Side Switch Status

HS_OL_OC_OT_STAT

High-Side Switch Status **(100 0110$_B$)** **Reset Value: see Table 66**

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
RES		HS4_OT	HS3_OT	HS2_OT	HS1_OT	RES	HS4_OL	HS3_OL	HS2_OL	HS1_OL	RES	HS4_OC	HS3_OC	HS2_OC	HS1_OC
r		rc	rc	rc	rc	r	rc	rc	rc	rc	r	rc	rc	rc	rc

Field	Bits	Type	Description
RES	15:14	r	**Reserved, always reads as 0**
HS4_OT	13	rc	**Overtemperature Detection on HS4** 0_B **NO_OT**, No OT 1_B **OT**, OT detected
HS3_OT	12	rc	**Overtemperature Detection on HS3** 0_B **NO_OT**, No OT 1_B **OT**, OT detected
HS2_OT	11	rc	**Overtemperature Detection on HS2** 0_B **NO_OT**, No OT 1_B **OT**, OT detected
HS1_OT	10	rc	**Overtemperature Detection on HS1** 0_B **NO_OT**, No OT 1_B **OT**, OT detected
RES	9	r	**Reserved, always reads as 0**
HS4_OL	8	rc	**Open-Load Detection on HS4** 0_B **NO_OL**, No OL 1_B **OL**, OL detected
HS3_OL	7	rc	**Open-Load Detection on HS3** 0_B **NO_OL**, No OL 1_B **OL**, OL detected
HS2_OL	6	rc	**Open-Load Detection on HS2** 0_B **NO_OL**, No OL 1_B **OL**, OL detected
HS1_OL	5	rc	**Open-Load Detection on HS1** 0_B **NO_OL**, No OL 1_B **OL**, OL detected
RES	4	r	**Reserved, always reads as 0**
HS4_OC	3	rc	**Overcurrent Detection on HS4** 0_B **NO_OC**, No OC 1_B **OC**, OC detected
HS3_OC	2	rc	**Overcurrent Detection on HS3** 0_B **NO_OC**, No OC 1_B **OC**, OC detected

chanhvinh.com

Field	Bits	Type	Description
HS2_OC	1	rc	**Overcurrent Detection on HS2** 0_B **NO_OC**, No OC 1_B **OC**, OC detected
HS1_OC	0	rc	**Overcurrent Detection on HS1** 0_B **NO_OC**, No OC 1_B **OC**, OC detected

Table 66 Reset of HS_OL_OC_OT_STAT

Register Reset Type	Reset Values	Reset Short Name	Reset Mode	Note
POR/Soft reset	0000 0000 0000 0000_B			
Restart	00xx xxxx xxxx $xxxx_B$			

chanhvinh.com

13.6.2 Status registers bridge driver

General Status register

GEN_STAT
General Status register **(101 0000$_B$)** **Reset Value: see Table 67**

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
RES						HB4V OUT	HB3V OUT	HB2V OUT	HB1V OUT	RES	RES	PWM4 STAT	PWM3 STAT	PWM2 STAT	PWM1 STAT
r						r	r	r	r	r	r	r	r	r	r

Field	Bits	Type	Description
RES	15:10	r	**Reserved, always reads as 0**
HB4VOUT	9	r	**Voltage level at VSH4 when HB4MODE[1:0] = 11 and CPEN=1**[1)] 0_B **LOW**, VSH4 = Low : VS - VSH4 > $V_{HS4VDSTHx}$ 1_B **HIGH**, VSH4 = High: VS - VSH4 ≤ $V_{HS4VDSTHx}$
HB3VOUT	8	r	**Voltage level at VSH3 when HB3MODE[1:0] = 11 and CPEN=1**[1)] 0_B **LOW**, VSH3 = Low : VS - VSH3 > $V_{HS3VDSTHx}$ 1_B **HIGH**, VSH3 = High: VS - VSH3 ≤ $V_{HS3VDSTHx}$
HB2VOUT	7	r	**Voltage level at VSH2 when HB2MODE[1:0] = 11 and CPEN=1**[1)] 0_B **LOW**, VSH2 = Low : VS - VSH2 > $V_{HS2VDSTHx}$ 1_B **HIGH**, VSH2 = High: VS - VSH2 ≤ $V_{HS2VDSTHx}$
HB1VOUT	6	r	**Voltage level at VSH1 when HB1MODE[1:0] = 11 and CPEN=1**[1)] 0_B **LOW**, VSH1 = Low : VS - VSH1 > $V_{HS1VDSTHx}$ 1_B **HIGH**, VSH1 = High: VS - VSH1 ≤ $V_{HS1VDSTHx}$
RES	5	r	**Reserved, always reads as 0**
RES	4	r	**Reserved, always reads as 0**
PWM4STAT	3	r	**PWM4 Status** 0_B **LOW**, PWM4 is Low 1_B **HIGH**, PWM4 is High
PWM3STAT	2	r	**PWM3 status** 0_B **LOW**, PWM3 is Low 1_B **HIGH**, PWM3 is High
PWM2STAT	1	r	**PWM2 Status** 0_B **LOW**, PWM2 is Low 1_B **HIGH**, PWM2 is High
PWM1STAT	0	r	**PWM1/CRC status** 0_B **LOW**, PWM1/CRC is Low 1_B **HIGH**, PWM1/CRC is High

1) HBxVOUT = 0 if (**CPEN**=1 and HBxMODE ≠ 11) or **CPEN**=0.

chanhvinh.com

Table 67 Reset of GEN_STAT

Register Reset Type	Reset Values	Reset Short Name	Reset Mode	Note
POR/Soft reset	0000 0000 0000 0000_B			
Restart	0000 0000 xx00 $000x_B$			

chanhvinh.com

Turn-on/off delay regulation register

TDREG
Turn-on/off delay regulation register **(101 0001$_B$)** **Reset Value: see Table 68**

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
RES				IPDCHG4_ST	IPDCHG3_ST	IPDCHG2_ST	IPDCHG1_ST	IPCHG4_ST	IPCHG3_ST	IPCHG2_ST	IPCHG1_ST	TDREG4	TDREG3	TDREG2	TDREG1
r				r	r	r	r	r	r	r	r	r	r	r	r

Field	Bits	Type	Description
RES	15:12	r	**Reserved, always reads as 0**
IPDCHG4_ST	11	r	**HB4 predischarge status** 0_B **CLAMP**, the predischarge current is equal to 0.5 mA typ. or ICHGMAX4 if AGC[1:0] = 10_B or 11_B, and HB4_PWM_EN = 1[1)] 1_B **NO_CLAMP**, 0.5 mA < predischarge current < ICHGMAX4[1)]
IPDCHG3_ST	10	r	**HB3 predischarge status** 0_B **CLAMP**, the predischarge current is equal to 0.5 mA typ. or ICHGMAX3 if AGC[1:0] = 10_B or 11_B, and HB3_PWM_EN = 1[1)] 1_B **NO_CLAMP**, 0.5 mA < predischarge current < ICHGMAX3[1)]
IPDCHG2_ST	9	r	**HB2 predischarge status** 0_B **CLAMP**, the predischarge current is equal to 0.5 mA typ. or ICHGMAX2 if AGC[1:0] = 10_B or 11_B, and HB2_PWM_EN = 1[1)] 1_B **NO_CLAMP**, 0.5 mA < predischarge current < ICHGMAX2[1)]
IPDCHG1_ST	8	r	**HB1 predischarge status** 0_B **CLAMP**, the predischarge current is equal to the 0.5 mA typ. or ICHGMAX1 if AGC[1:0] = 10_B or 11_B, and HBx_PWM_EN = 1[1)] 1_B **NO_CLAMP**, 0.5 mA < predischarge current < ICHGMAX1[1)]
IPCHG4_ST	7	r	**HB4 discharge status** 0_B **CLAMP**, the discharge current is equal to 0.5 mA typ. or ICHGMAX4 if AGC[1:0] = 10_B or 11_B, and HB4_PWM_EN = 1[1)] 1_B **NO_CLAMP**, 0.5 mA < discharge current < ICHGMAX4[1)]

chanhvinh.com

Field	Bits	Type	Description
IPCHG3_ST	6	r	**HB3 precharge status** 0_B **CLAMP**, the precharge current is equal to 0.5 mA typ. or ICHGMAX3 if AGC[1:0] = 10_B or 11_B, and HB3_PWM_EN = 1[1)] 1_B **NO_CLAMP**, 0.5 mA < precharge current < ICHGMAX3[1)]
IPCHG2_ST	5	r	**HB2 precharge status** 0_B **CLAMP**, the precharge current is equal to 0.5 mA typ. or ICHGMAX2 if AGC[1:0] = 10_B or 11_B, and HB2_PWM_EN = 1[1)] 1_B **NO_CLAMP**, 0.5 mA < precharge current < ICHGMAX2[1)]
IPCHG1_ST	4	r	**HB1 precharge status** 0_B **CLAMP**, the precharge current is equal to the 0.5 mA typ. or ICHGMAX1 if AGC[1:0] = 10_B or 11_B, and HB1_PWM_EN = 1[1)] 1_B **NO_CLAMP**, 0.5 mA < precharge current < ICHGMAX1[1)]
TDREG4	3	r	**HB4 Regulation of turn-on/off delay** 0_B **NO_REG**, tDON4 and tDOFF4 are not in regulation 1_B **REG**, tDON4 and/or tDOFF4 are in regulation
TDREG3	2	r	**HB3 Regulation of turn-on/off delay** 0_B **NO_REG**, tDON3 and tDOFF3 are not in regulation 1_B **REG**, tDON3 and/or tDOFF3 are in regulation
TDREG2	1	r	**HB2 Regulation of turn-on/off delay** 0_B **NO_REG**, tDON2 and tDOFF2 are not in regulation 1_B **REG**, tDON2 and/or tDOFF2 are in regulation
TDREG1	0	r	**HB1 Regulation of turn-on/off delay** 0_B **NO_REG**, tDON and tDOFF are not in regulation 1_B **REG**, tDON and/or tDOFF are in regulation

1) IPCHGx_ST = 1 otherwise (PWM disabled, HB in high impedance or AGC[1:0] = 00_B or 01_B).

Table 68 Reset of TDREG

Register Reset Type	Reset Values	Reset Short Name	Reset Mode	Note
POR/Soft reset	0000 0000 0000 0000_B			
Restart	0000 0000 xx00 $000x_B$			

chanhvinh.com

Drain-source overvoltage status

DSOV
Drain-source overvoltage **($101\ 0010_B$)** **Reset Value: see Table 69**

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
RES	RES	VSINTOVBRAKE_ST	VSOVBRAKE_ST	LS4DSOV_BRK	LS3DSOV_BRK	LS2DSOV_BRK	LS1DSOV_BRK	LS4DSOV	HS4DSOV	LS3DSOV	HS3DSOV	LS2DSOV	HS2DSOV	LS1DSOV	HS1DSOV
r	r	rc	rc	rc	rc	rc	rc	rc	rc	rc	rc	rc	rc	rc	rc

Field	Bits	Type	Description
RES	15	r	**Reserved, always reads as 0**
RES	14	r	**Reserved, always reads as 0**
VSINTOVBRAKE_ST	13	rc	**VSINT Brake status** 0_B **NOT_DETECT**, VSINT overvoltage brake condition is not detected 1_B **DETECT**, VSINT overvoltage brake conditions is detected
VSOVBRAKE_ST	12	rc	**VS Brake status** 0_B **NOT_DETECT**, VS overvoltage brake conditions is not detected 1_B **DETECT**, VS overvoltage brake conditions is detected
LS4DSOV_BRK	11	rc	**Drain-source overvoltage on low-side 4 during braking** 0_B **NO_OV**, No drain-source overvoltage on LS4 1_B **OV**, Drain-source overvoltage on LS4
LS3DSOV_BRK	10	rc	**Drain-source overvoltage on low-side 3 during braking** 0_B **NO_OV**, No drain-source overvoltage on LS3 1_B **OV**, Drain-source overvoltage on LS3
LS2DSOV_BRK	9	rc	**Drain-source overvoltage on low-side 2 during braking** 0_B **NO_OV**, No drain-source overvoltage on LS2 1_B **OV**, Drain-source overvoltage on LS2
LS1DSOV_BRK	8	rc	**Drain-source overvoltage on low-side 1 during braking** 0_B **NO_OV**, No drain-source overvoltage on LS1 1_B **OV**, Drain-source overvoltage on LS1
LS4DSOV	7	rc	**Drain-source overvoltage on low-side 4** 0_B **NO_OV**, No drain-source overvoltage on LS4 1_B **OV**, Drain-source overvoltage on LS4
HS4DSOV	6	rc	**Drain-source overvoltage on high-side 4** 0_B **NO_OV**, No drain-source overvoltage on HS4 1_B **OV**, Drain-source overvoltage on HS4

chanhvinh.com

Field	Bits	Type	Description
LS3DSOV	5	rc	**Drain-source overvoltage on low-side 3** 0_B **NO_OV**, No drain-source overvoltage on LS3 1_B **OV**, Drain-source overvoltage on LS3
HS3DSOV	4	rc	**Drain-source overvoltage on high-side 3** 0_B **NO_OV**, No drain-source overvoltage on HS3 1_B **OV**, Drain-source overvoltage on HS3
LS2DSOV	3	rc	**Drain-source overvoltage on low-side 2** 0_B **NO_OV**, No drain-source overvoltage on LS2 1_B **OV**, Drain-source overvoltage on LS2
HS2DSOV	2	rc	**Drain-source overvoltage on high-side 2** 0_B **NO_OV**, No drain-source overvoltage on HS2 1_B **OV**, Drain-source overvoltage on HS2
LS1DSOV	1	rc	**Drain-source overvoltage on low-side 1** 0_B **NO_OV**, No drain-source overvoltage on LS1 1_B **OV**, Drain-source overvoltage on LS1
HS1DSOV	0	rc	**Drain-source overvoltage on high-side 1** 0_B **NO_OV**, No drain-source overvoltage on HS1 1_B **OV**, Drain-source overvoltage on HS1


Table 69 Reset of DSOV

Register Reset Type	Reset Values	Reset Short Name	Reset Mode	Note
POR/Soft reset	0000 0000 0000 0000_B			
Restart	00xx xxxx xxxx $xxxx_B$			

chanhvinh.com

Effective MOSFET turn.on/off delay - PWM half-bridge 1

EFF_TDON_OFF1
Effective MOSFET turn.on/off delay - HB1 (101 0011$_B$) **Reset Value: see Table 70**



Field	Bits	Type	Description
RES	15:14	r	**Reserved, always reads as 0**
TDOFF1EFF	13:8	r	**Effective active MOSFET turn-off delay HB1** Nominal effective tDOFF1 = 53.3 ns x TDOFF1EFF[13:8]$_D$
RES	7:6	r	**Reserved, always reads as 0**
TDON1EFF	5:0	r	**Effective active MOSFET turn-on delay HB1** Nominal effective tDON1 = 53.3 ns x TDON1EFF[5:0]$_D$


Table 70 Reset of EFF_TDON_OFF1

Register Reset Type	Reset Values	Reset Short Name	Reset Mode	Note
POR/Soft reset	0000 0000 0000 0000$_B$			
Restart	00xx xxxx 00xx xxxx$_B$			

chanhvinh.com

Effective MOSFET turn.on/off delay - PWM half-bridge 2

EFF_TDON_OFF2
Effective MOSFET turn.on/off delay - HB 2 (101 0100$_B$) **Reset Value: see Table 71**



Field	Bits	Type	Description
RES	15:14	r	**Reserved, always reads as 0**
TDOFF2EFF	13:8	r	**Effective active MOSFET turn-off delay HB2** Nominal effective tDOFF2 = 53.3 ns x TDOFF2EFF[13:8]$_D$
RES	7:6	r	**Reserved, always reads as 0**
TDON2EFF	5:0	r	**Effective active MOSFET turn-on delay HB2** Nominal effective tDON2 = 53.3 ns x TDON2EFF[5:0]$_D$


Table 71 Reset of EFF_TDON_OFF2

Register Reset Type	Reset Values	Reset Short Name	Reset Mode	Note
POR/Soft reset	0000 0000 0000 0000$_B$			
Restart	00xx xxxx 00xx xxxx$_B$			

chanhvinh.com

Effective MOSFET turn.on/off delay - PWM half-bridge 3

EFF_TDON_OFF3
Effective MOSFET turn.on/off delay - HB3 (101 0101$_B$) **Reset Value: see Table 72**



Field	Bits	Type	Description
RES	15:14	r	**Reserved, always reads as 0**
TDOFF3EFF	13:8	r	**Effective active MOSFET turn-off delay HB3** Nominal effective tDOFF3 = 53.3 ns x TDO3EFF[13:8]$_D$
RES	7:6	r	**Reserved, always reads as 0**
TDON3EFF	5:0	r	**Effective active MOSFET turn-on delay HB3** Nominal effective tDON3 = 53.3 ns x TDON3EFF[5:0]$_D$


Table 72 Reset of EFF_TDON_OFF3

Register Reset Type	Reset Values	Reset Short Name	Reset Mode	Note
POR/Soft reset	0000 0000 0000 0000$_B$			
Restart	00xx xxxx 00xx xxxx$_B$			

chanhvinh.com

Effective MOSFET turn.on/off delay - PWM half-bridge 4

EFF_TDON_OFF4
Effective MOSFET turn.on/off delay - HB4 (101 0110$_B$) **Reset Value: see Table 73**



Field	Bits	Type	Description
RES	15:14	r	**Reserved, always reads as 0**
TDOFF4EFF	13:8	r	**Effective active MOSFET turn-off delay HB4** Nominal effective tDOFF4 = 53.3 ns x TDOFF4EFF[13:8]$_D$
RES	7:6	r	**Reserved, always reads as 0**
TDON4EFF	5:0	r	**Effective active MOSFET turn-on delay HB4** Nominal effective tDON4 = 53.3 ns x TDON4EFF[5:0]$_D$


Table 73 Reset of EFF_TDON_OFF4

Register Reset Type	Reset Values	Reset Short Name	Reset Mode	Note
POR/Soft reset	0000 0000 0000 0000$_B$			
Restart	00xx xxxx 00xx xxxx$_B$			

chanhvinh.com

MOSFET rise/fall time - PWM half-bridge 1

TRISE_FALL1
MOSFET rise/fall time - HB1 **(101 0111$_B$)** **Reset Value: see Table 74**



Field	Bits	Type	Description
RES	15:14	r	**Reserved, always reads as 0**
TFALL1	13:8	r	**Active MOSFET fall time HB1** Nominal tFALL1 = 53.3 ns x TFALL1[5:0]$_D$
RES	7:6	r	**Reserved, always reads as 0**
TRISE1	5:0	r	**Active MOSFET rise time HB1** Nominal tRISE1 = 53.3 ns x TRISE1[5:0]$_D$


Table 74 Reset of TRISE_FALL1

Register Reset Type	Reset Values	Reset Short Name	Reset Mode	Note
POR/Soft reset	0000 0000 0000 0000$_B$			
Restart	00xx xxxx 00xx xxxx$_B$			

chanhvinh.com

MOSFET rise/fall time - PWM half-bridge 2

TRISE_FALL2
MOSFET rise/fall time - HB2 **(101 1000$_B$)** **Reset Value: see Table 75**



Field	Bits	Type	Description
RES	15:14	r	**Reserved, always reads as 0**
TFALL2	13:8	r	**Active MOSFET fall time HB2** Nominal tFALL2 = 53.3 ns x TFALL2[5:0]$_D$
RES	7:6	r	**Reserved, always reads as 0**
TRISE2	5:0	r	**Active MOSFET rise time HB2** Nominal tRISE2 = 53.3 ns x TRISE2[5:0]$_D$


Table 75 Reset of TRISE_FALL2

Register Reset Type	Reset Values	Reset Short Name	Reset Mode	Note
POR/Soft reset	0000 0000 0000 0000$_B$			
Restart	00xx xxxx 00xx xxxx$_B$			

chanhvinh.com

MOSFET rise/fall time - PWM half-bridge 3

TRISE_FALL3
MOSFET rise/fall time - HB3 **(101 1001$_B$)** **Reset Value: see Table 76**



Field	Bits	Type	Description
RES	15:14	r	**Reserved, always reads as 0**
TFALL3	13:8	r	**Active MOSFET fall time HB3** Nominal tFALL3 = 53.3 ns x TFALL3[5:0]$_D$
RES	7:6	r	**Reserved, always reads as 0**
TRISE3	5:0	r	**Active MOSFET rise time HB3** Nominal tRISE3 = 53.3 ns x TRISE3[5:0]$_D$


Table 76 Reset of TRISE_FALL3

Register Reset Type	Reset Values	Reset Short Name	Reset Mode	Note
POR/Soft reset	0000 0000 0000 0000$_B$			
Restart	00xx xxxx 00xx xxxx$_B$			

chanhvinh.com

MOSFET rise/fall time - PWM half-bridge 4

TRISE_FALL4
MOSFET rise/fall time - HB4 **(101 1010$_B$)** **Reset Value: see Table 77**



Field	Bits	Type	Description
RES	15:14	r	**Reserved, always reads as 0**
TFALL4	13:8	r	**Active MOSFET fall time HB4** Nominal tFALL4 = 53.3 ns x TFALL4[5:0]$_D$
RES	7:6	r	**Reserved, always reads as 0**
TRISE4	5:0	r	**Active MOSFET rise time HB4** Nominal tRISE4 = 53.3 ns x TRISE4[5:0]$_D$

Table 77 Reset of TRISE_FALL4


Register Reset Type	Reset Values	Reset Short Name	Reset Mode	Note
POR/Soft reset	0000 0000 0000 0000$_B$			
Restart	00xx xxxx 00xx xxxx$_B$			

chanhvinh.com

13.6.3 Family and product information register

Family and Product Identification Register

FAM_PROD_STAT
Family and Product Identification Register (111 0000$_B$) **Reset Value: see Table 78**

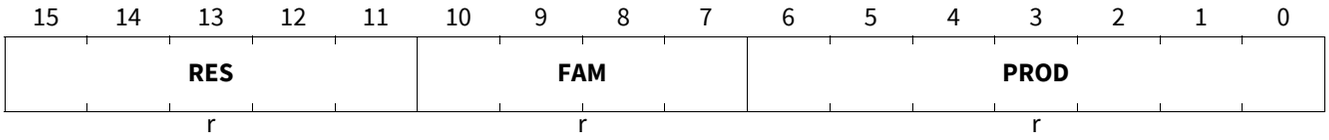

Field	Bits	Type	Description
RES	15:11	r	**Reserved, always reads as 0**
FAM	10:7	r	**Device Family Identifier** 1000$_B$, DC Motor System IC
PROD	6:0	r	**Device Product Identifier** 000 0000$_B$ **TLE9562-3QX/QX**, TLE9562-3QX/-3QXJ/QX 000 0001$_B$ **TLE9561-3QX/QX**, TLE9561-3QX/-3QXJ/QX 000 0010$_B$ **TLE9563-3QX**, TLE9563-3QX 000 0011$_B$ **TLE9564QX**, TLE9564QX,TLE9185QX 001 0000$_B$ **TLE9562-3QX V33**, TLE9562-3QX V33 001 0010$_B$ **TLE9563-3QX V33**, TLE9563-3QX V33 001 0011$_B$ **TLE9564QX V33**, TLE9564QX V33,TLE9185QX V33 001 1000$_B$ **TLE9560QX**, TLE9560-3QX/-3QXJ

Table 78 Reset of FAM_PROD_STAT

Register Reset Type	Reset Values	Reset Short Name	Reset Mode	Note
POR/Soft reset	0000 0100 0000 0001$_B$			
Restart	0000 0100 0000 0001$_B$			

chanhvinh.com

13.7 Electrical Characteristics

Table 79 Electrical Characteristics: Power Stage

V_{SINT} = 5.5 V to 28 V, T_j = -40°C to +150°C, all voltages with respect to ground, positive current flowing into pin (unless otherwise specified)

Parameter	Symbol	Values			Unit	Note or Test Condition	Number
		Min.	Typ.	Max.			
SPI frequency							
Maximum SPI frequency	$f_{SPI,max}$	–	–	6.0	MHz	1) V_{CC1} > 3 V	P_14.7.1
SPI Interface; Logic Inputs SDI, CLK and CSN							
H-input Voltage Threshold	V_{IH}	–	–	0.7 × V_{CC1}	V	–	P_14.7.2
L-input Voltage Threshold	V_{IL}	0.3 × V_{CC1}	–	–	V	–	P_14.7.3
Hysteresis of input Voltage	V_{IHY}	–	0.12 × V_{CC1}	–	V	1)	P_14.7.4
Pull-up Resistance at pin CSN	R_{ICSN}	20	40	80	kΩ	–	P_14.7.5
Pull-down Resistance at pin SDI and CLK	$R_{ICLK/SDI}$	20	40	80	kΩ	$V_{SDI/CLK}$ = 0.2 × V_{CC1}	P_14.7.6
Input Capacitance at pin CSN, SDI or CLK	C_I	–	10	–	pF	1) V_{CSN}, V_{SDI}, V_{CLK} = V_{CC1}	P_14.7.7
Logic Output SDO							
H-output Voltage Level	V_{SDOH}	0.8 × V_{CC1}	–	–	V	I_{DOH} = -2 mA	P_14.7.8
L-output Voltage Level	V_{SDOL}	–	–	0.2 × V_{CC1}	V	I_{DOL} = 2 mA	P_14.7.9
'Tri-state Input Capacitance	C_{SDO}	–	10	15	pF	1)V_{CSN}, V_{SDI}, V_{CLK} = V_{CC1}	P_14.7.11
Tri-state Leakage Current	I_{SDOLK}	–10	–	10	µA	1)V_{CSN}= V_{CC1}, 0V < V_{SDO}< V_{CC1}	P_14.7.38
Data Input Timing[1)]							
Clock Period	t_{pCLK}	160	–	–	ns	–	P_14.7.12
Clock HIGH Time	t_{CLKH}	70	–	–	ns	–	P_14.7.13
Clock LOW Time	t_{CLKL}	70	–	–	ns	–	P_14.7.14
Clock LOW before CSN LOW	t_{bef}	70	–	–	ns	–	P_14.7.15
CSN Setup Time	t_{lead}	160	–	–	ns	–	P_14.7.16
CLK Setup Time	t_{lag}	160	–	–	ns	–	P_14.7.17
Clock LOW after CSN HIGH	t_{beh}	70	–	–	ns	–	P_14.7.18
SDI Setup Time	t_{DISU}	60	–	–	ns	–	P_14.7.19
SDI Hold Time	t_{DIHO}	40	–	–	ns	–	P_14.7.20

chanhvinh.com

Table 79 Electrical Characteristics: Power Stage (cont'd)

V_{SINT} = 5.5 V to 28 V, T_j = -40°C to +150°C, all voltages with respect to ground, positive current flowing into pin (unless otherwise specified)

Parameter	Symbol	Values			Unit	Note or Test Condition	Number
		Min.	Typ.	Max.			
Input Signal Rise Time at pin SDI, CLK and CSN	t_{rIN}	–	–	20	ns	–	P_14.7.21
Input Signal Fall Time at pin SDI, CLK and CSN	t_{fIN}	–	–	20	ns	–	P_14.7.22
Delay Time for Mode Changes[2)]	$t_{Del,Mode}$	–	–	5	µs	[3)]	P_14.7.23
CSN HIGH Time	$t_{CSN(high)}$	3	–	–	µs	–	P_14.7.24
Data Output Timing[1)]							
SDO Rise Time	t_{rSDO}	–	30	40	ns	C_L = 50 pF, 0.2 × V_{CC1} to 0.8 × V_{CC1}	P_14.7.25
SDO Fall Time	t_{fSDO}	–	30	40	ns	C_L = 50 pF, 0.8 × V_{CC1} to 0.2 × V_{CC1}	P_14.7.26
SDO Enable Time	t_{ENSDO}	–	–	40	ns	LOW impedance	P_14.7.27
SDO Disable Time	t_{DISSDO}	–	–	40	ns	HIGH impedance	P_14.7.28
SDO Valid Time	t_{VASDO}	–	–	40	ns	C_L = 50 pF	P_14.7.29

1) Not subject to production test; specified by design.
2) Applies to all mode changes triggered via SPI commands.
3) Guaranteed by design.

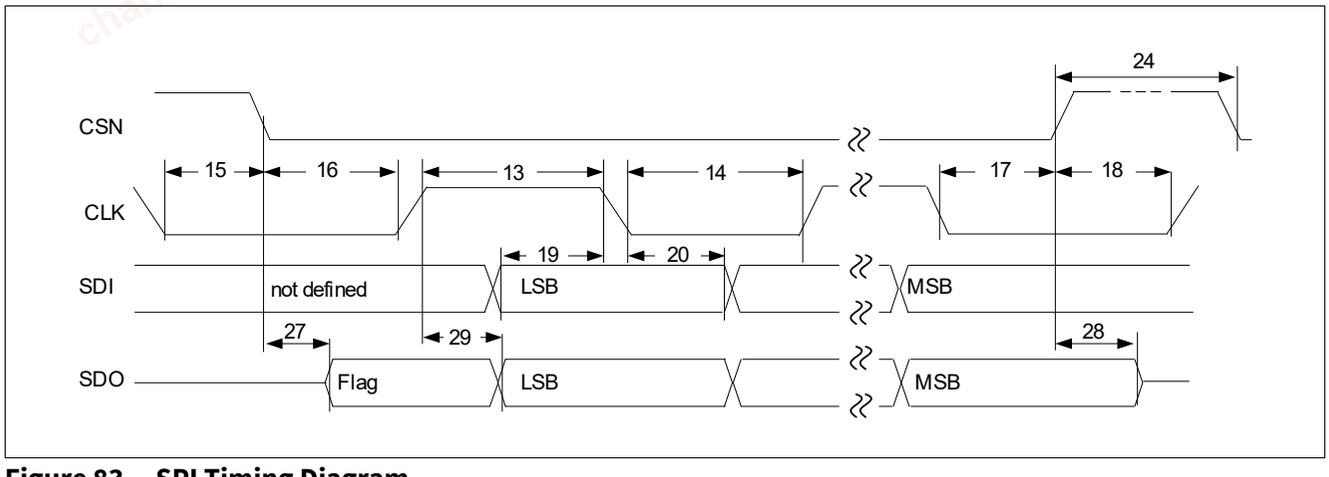


Figure 83 SPI Timing Diagram

Note: Numbers in drawing correlate with the last 2 digits of the Number field in the Electrical Characteristics table.

chanhvinh.com

14 Application Information

Note: The following information is given as a hint for the implementation of the device only and shall not be regarded as a description or warranty of a certain functionality, condition or quality of the device.

14.1 Application Diagrams

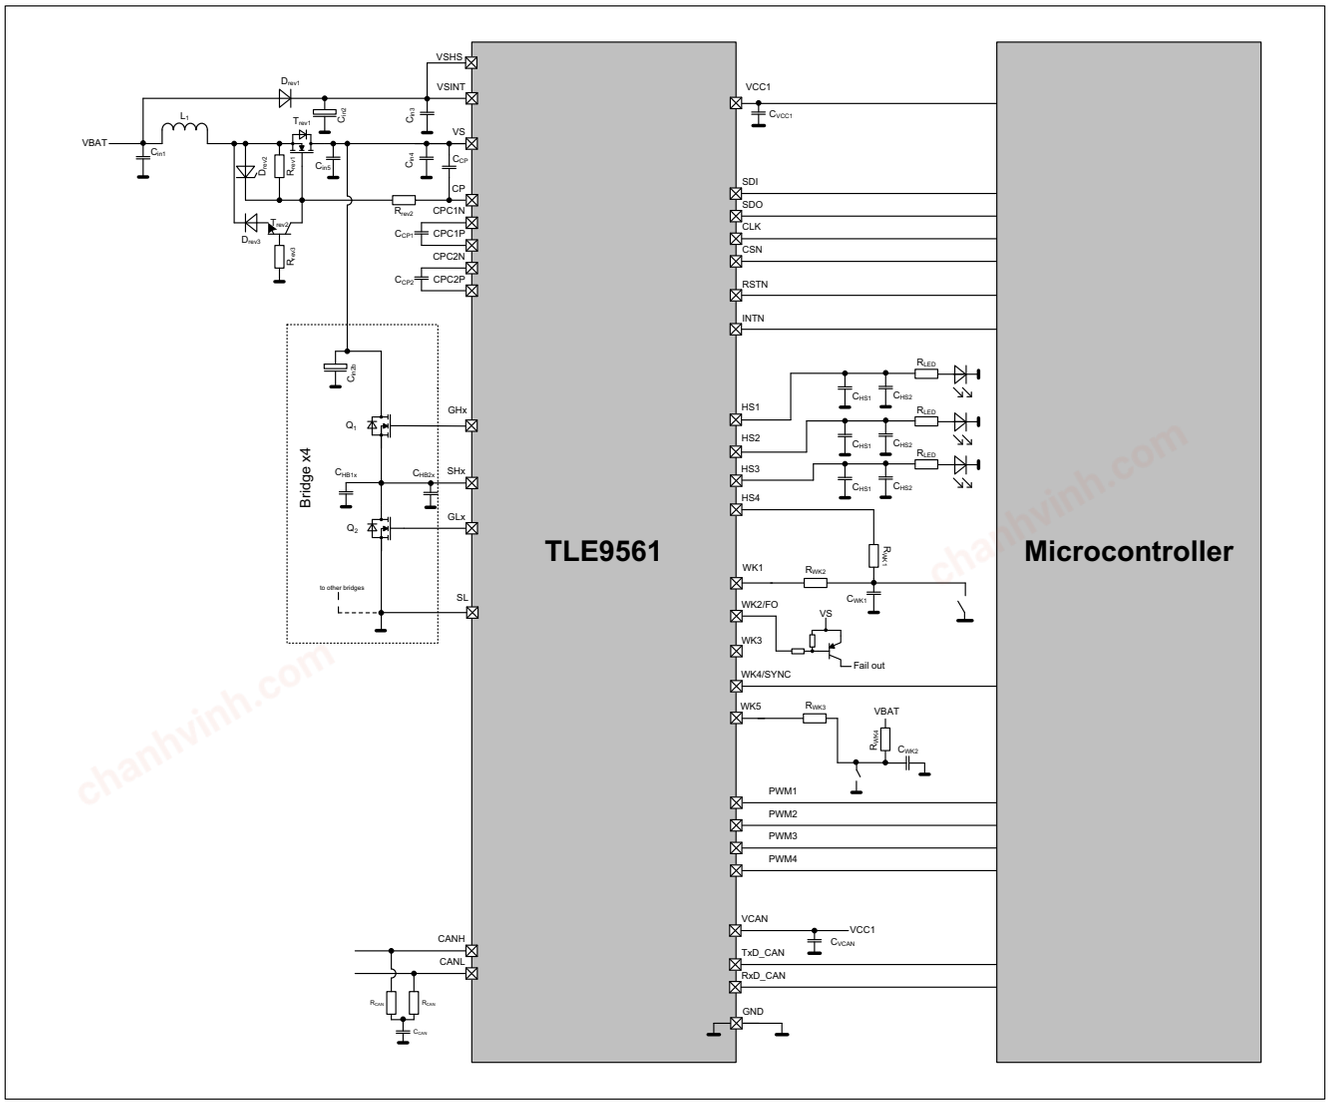


Figure 84 TLE9561QX Application Diagram

Note: This is a very simplified example of an application circuit. The function must be always verified in the real application.

chanhvinh.com

Application Information

Table 80 Bill of Material

Ref.	Typical Value	Purpose / Comment
Capacitances		
C_{in1}	100 nF ±20% ceramic	Input filter battery capacitor for optimum EMC behavior
C_{in2}	100 µF ±20%, 50 V Electrolytic	Buffering capacitor to cut off battery spikes, depending on the application
C_{in2b}	470 µF ±20%, 50 V Electrolytic	Buffering capacitor for bridges. Cut off battery spikes, depending on the application
C_{in3}	100 nF ±20%, 50 V Ceramic	Input capacitor
C_{in4}	100 nF ±20%, 50 V Ceramic	Input capacitor
C_{in5}	470 µF ±20%, 50 V Electrolytic	Buffering capacitor for bridges. Cut off battery spikes, depending on the application
C_{CP}	470 nF ±20%, 50 V Ceramic	Charge-Pump buffering capacitor
C_{CP1}/ C_{CP2}	220 nF ±20%, 50 V Ceramic	Charge-Pump flying capacitor to be placed as closed as possible to the device pins, in order to minimize the length of the PCB tracks
C_{CAN}	4.7 nF / OEM dependent	Split termination stability
C_{VCC1}	2.2 uF ±20%, 16 V	Blocking capacitor. Low ESR. Minimum 1 uF effective capacitance
C_{VCAN}	1 uF ... 4.7 uF	Input filter CAN supply. The capacitor must be placed close to the VCAN pin. For optimum EMC and CAN FD performances, the capacitor has to be ≥ 2.2 µF
C_{HB1x}	10 nF ±20%, 50 V Ceramic	Half-Bridge EME (electromagnetic emission) and ESD suppression filter to be placed close to the connector. Other capacitance values might be needed depending on application
C_{HB2x}	560 pF ±20%, 50 V Ceramic	Optional filter for EMI immunity to be placed close to the SHx pin (PCB footprints highly recommended). Other capacitance values might be needed depending on application
C_{HS1}	47 pF / OEM dependent	Only required om case of off-board connection to optimize EMC behavior, place close to pin
C_{HS2}	33 nF / OEM dependent	As required by application, mandatory protection for off-board connection
C_{WK1} / C_{WK2}	47 nF / OEM dependent	Spike filtering, as required by application, mandatory protection for off-board connections
Inductances		
L_1	4 uH ... 6 uH	Input filter for power stage - consider high current rating (application dependent)

chanhvinh.com

Application Information

Table 80 Bill of Material (cont'd)

Ref.	Typical Value	Purpose / Comment
Resistances		
R_{REV1}	100 kΩ ±5%	Other values needed depending on application
R_{REV2}	10 kΩ ±5%	Device protection against reverse battery
R_{REV3}	10 kΩ ±5%	
R_{CAN}	60 Ω / OEM dependent	CAN bus termination
R_{LED}	1 k	Limit LED-current
R_{WK1} / R_{WK2} / $R_{WK3 / RWK4}$	10 kΩ ±5%	
Active Components		
D_{REV1}	RR268MM600	Reverse polarity protection
D_{REV2}	BZX84C16	Gate protection. Limit V_{GS}
D_{REV3}	BAS21	
T_{REV1}	IPZ40N04S5L-2R8	Reverse battery protection, N-MOS
T_{REV2}	BC846	
Q_1 / Q_2	IPZ40N04S5-5R4	Main power switches

chanhvinh.com

14.2 ESD Tests

14.2.1 ESD according to IEC61000-4-2

Tests for ESD robustness according to IEC61000-4-2 “GUN test” (150 pF, 330 Ω) have been performed. The results and test condition are available in a test report. The values for the test are listed below.

Table 81 ESD “GUN test”[1)2)]

Performed Test	Result	Unit	Remarks
ESD at pin CANH, CANL, HSx, VS,VSINT,VSHS, WKx versus GND	> 6	kV	positive pulse
ESD at pin CANH, CANL, HSx, VS,VSINT,VSHS, WKx versus GND	< -6	kV	negative pulse

1) ESD susceptibility “ESD GUN” according to EMC 1.3 Test specification, Section 4.3 (IEC 61000-4-2). Tested by external test house (IBEE Zwickau, EMC Test report Nr. 20.12.20).
2) ESD Test “Gun Test” is specified with external components for pins VS, VSINT, VSHS, WKx, HSx. See the application diagram in **Chapter 14.1** for more information.

14.2.2 ESD according to SAE J2962

Tests for ESD robustness according to SAE J2962 have been performed.

Table 82 ESD according to SAE J2962

Performed Test	Result	Unit	Remarks
ESD at pin CANH, CANL, versus GND	± 4	kV	Unpowered, contact discharge
ESD at pin CANH, CANL versus GND	± 8	kV	Powered, contact discharge
ESD at pin CANH, CANL versus GND	± 15	kV	Powered, air discharge

chanhvinh.com

14.3 Thermal Behavior of Package

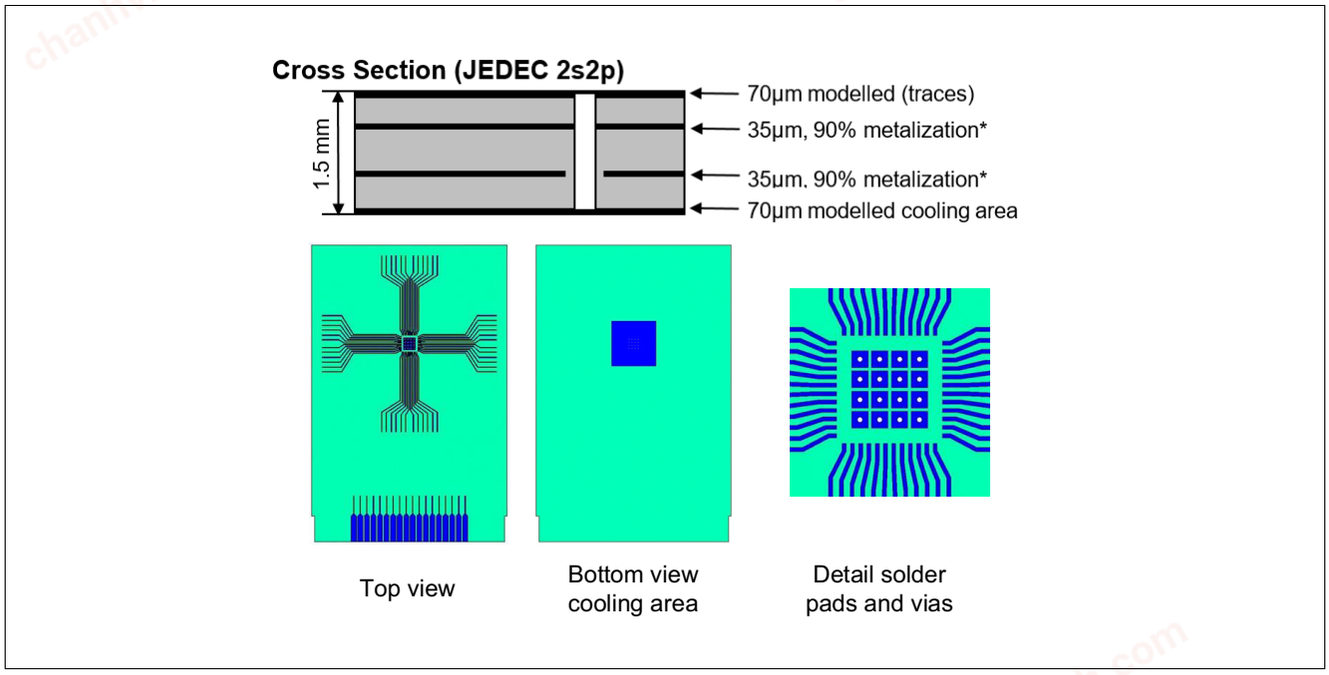


Figure 85 Board Setup


Board setup is defined according JESD 51-2, -5, -7.
Board: 76.2 × 114.3 × 1.5 mm^3 with 2 inner copper layers (35 µm thick), with thermal via array under the exposed pad contacting the first inner copper layer and 300 mm^2 cooling area on the bottom layer (70 µm).

14.4 Further Application Information

- The VS pin supplies the bridge driver and the charge pump, and is the sense pin for the high-side MOSFETs drain voltage. It is therefore highly recommended to connect a 100 nF / 50V ceramic by-pass capacitor as close as possible to the VS pin with a short PCB trace to GND.
- Please contact us for information regarding the FMEA pin
- For further information you may contact **http://www.infineon.com/**

chanhvinh.com

15 Package Outlines

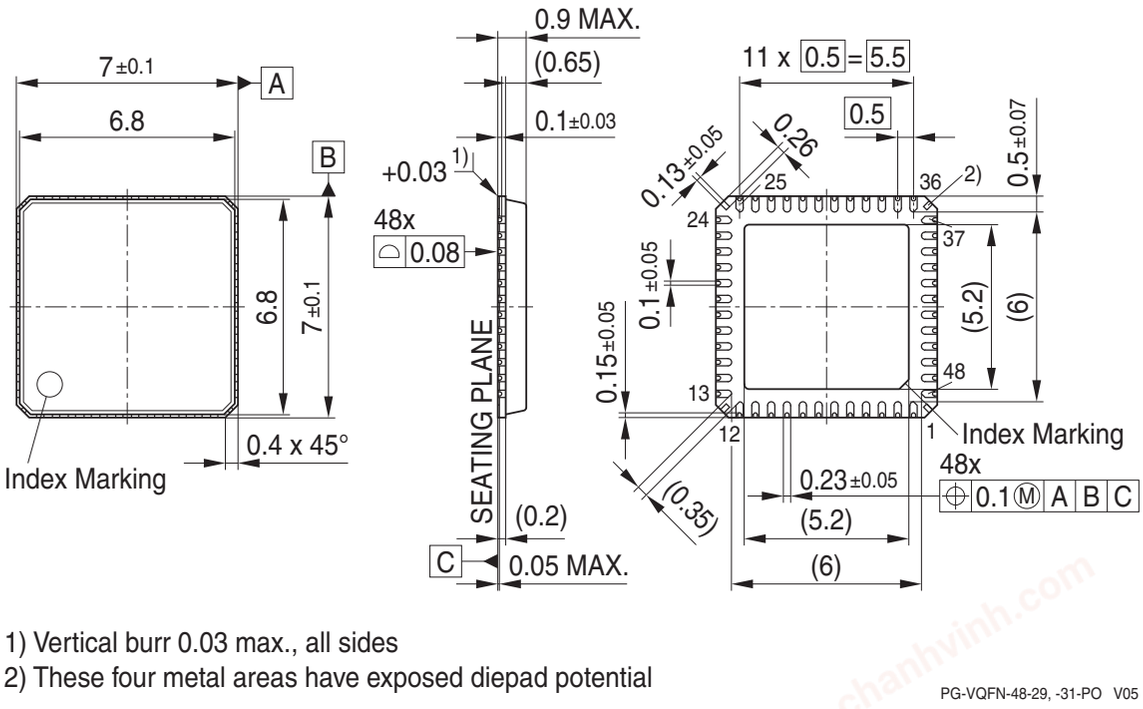

1) Vertical burr 0.03 max., all sides
2) These four metal areas have exposed diepad potential

PG-VQFN-48-29, -31-PO V05

Figure 86 PG-VQFN-48[1)]

Green Product (RoHS compliant)

To meet the world-wide customer requirements for environmentally friendly products and to be compliant with government regulations the device is available as a green product. Green products are RoHS-Compliant (i.e Pb-free finish on leads and suitable for Pb-free soldering according to IPC/JEDEC J-STD-020).

Further information on packages

https://www.infineon.com/packages

1) Dimensions in mm

chanhvinh.com

16 Revision History

Revision	Date	Changes
1.0	2021-01-21	First release

chanhvinh.com

Trademarks
All referenced product or service names and trademarks are the property of their respective owners.

Edition 2021-01-21
Published by
Infineon Technologies AG
81726 Munich, Germany

© 2021 Infineon Technologies AG.
All Rights Reserved.

Do you have a question about any aspect of this document?
Email: erratum@infineon.com

IMPORTANT NOTICE
The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics ("Beschaffenheitsgarantie").
With respect to any examples, hints or any typical values stated herein and/or any information regarding the application of the product, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation warranties of non-infringement of intellectual property rights of any third party.
In addition, any information given in this document is subject to customer's compliance with its obligations stated in this document and any applicable legal requirements, norms and standards concerning customer's products and any use of the product of Infineon Technologies in customer's applications.
The data contained in this document is exclusively intended for technically trained staff. It is the responsibility of customer's technical departments to evaluate the suitability of the product for the intended application and the completeness of the product information given in this document with respect to such application.

For further information on technology, delivery terms and conditions and prices, please contact the nearest Infineon Technologies Office (**www.infineon.com**).

WARNINGS
Due to technical requirements products may contain dangerous substances. For information on the types in question please contact your nearest Infineon Technologies office.

Except as otherwise explicitly approved by Infineon Technologies in a written document signed by authorized representatives of Infineon Technologies, Infineon Technologies' products may not be used in any applications where a failure of the product or any consequences of the use thereof can reasonably be expected to result in personal injury.