chanhvinh.com

3.3V CMOS 16-BIT BUS TRANSCEIVER WITH 3-STATE OUTPUTS, 5 VOLT TOLERANT I/O

IDT74LVC16245A

FEATURES:

- Typical $t_{SK(o)}$ (Output Skew) < 250ps
- ESD > 2000V per MIL-STD-883, Method 3015; > 200V using machine model (C = 200pF, R = 0)
- V_{CC} = 3.3V ± 0.3V, Normal Range
- V_{CC} = 2.7V to 3.6V, Extended Range
- CMOS power levels (0.4µ W typ. static)
- All inputs, outputs, and I/O are 5V tolerant
- Supports hot insertion
- Available in SSOP and TSSOP packages

DRIVE FEATURES:

- High Output Drivers: ±24mA
- Reduced system switching noise

APPLICATIONS:

- 5V and 3.3V mixed voltage systems
- Data communication and telecommunication systems


DESCRIPTION:

This 16-bit bus transceiver is built using advanced dual metal CMOS technology. This high-speed, low power transceiver is ideal for asynchronous communication between two busses (A and B). The Direction and Output Enable controls are designed to operate this device as either two independent 8-bit transceivers or one 16-bit transceiver. The direction control pin (DIR) controls the direction of data flow. The output enable pin ($\overline{OE}$) overrides the direction control and disables both ports. All inputs are designed with hysteresis for improved noise margin.

All pins can be driven from either 3.3V or 5V devices. This feature allows the use of this device as a translator in a mixed 3.3V/5V supply system.

The LVC16245A has been designed with a ±24mA output driver. This driver is capable of driving a moderate to heavy load while maintaining speed performance.

FUNCTIONAL BLOCK DIAGRAM

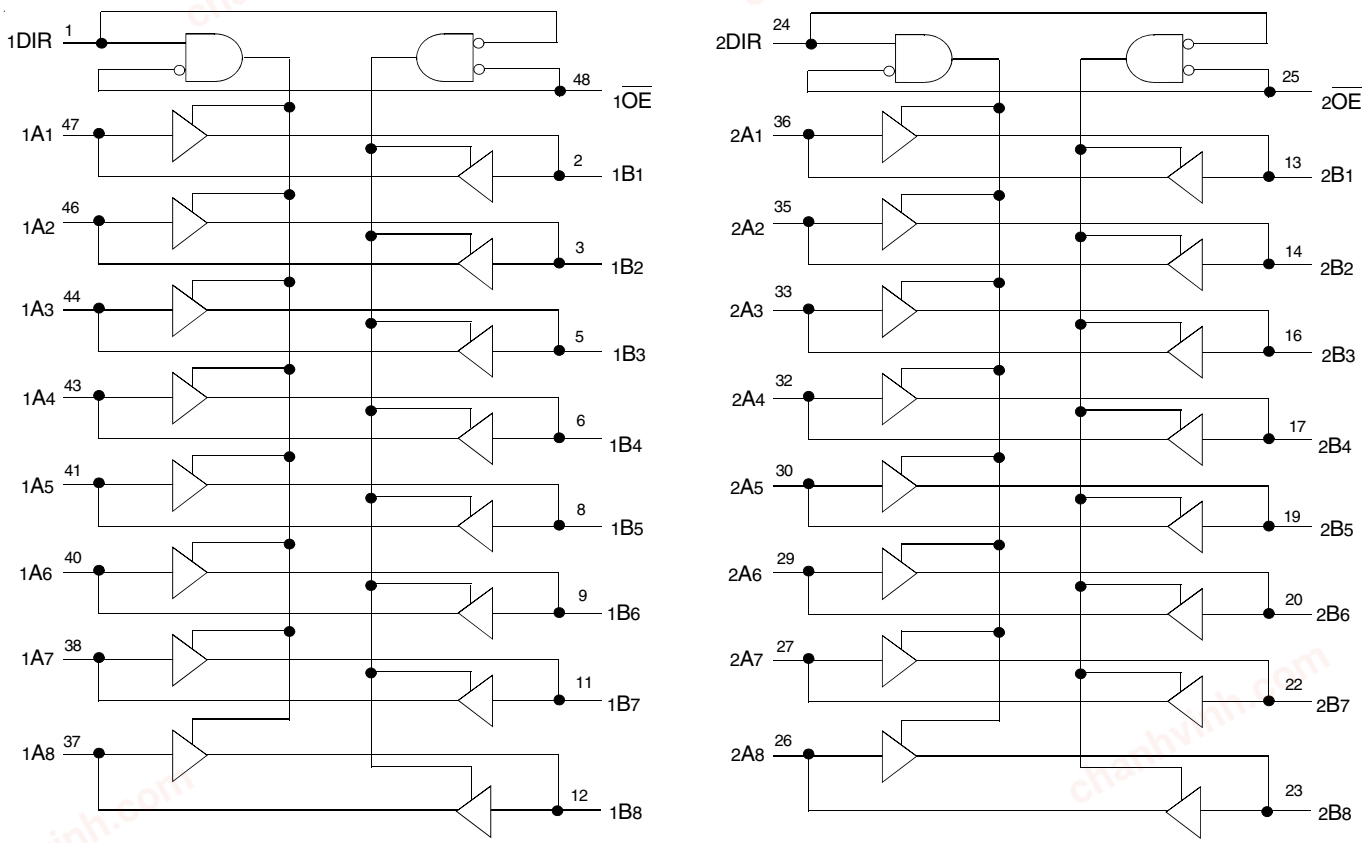


IDT and the IDT logo is a registered trademark of Integrated Device Technology, Inc.

© 2019 Renesas Electronics Corporation

chanhvinh.com

PIN CONFIGURATION

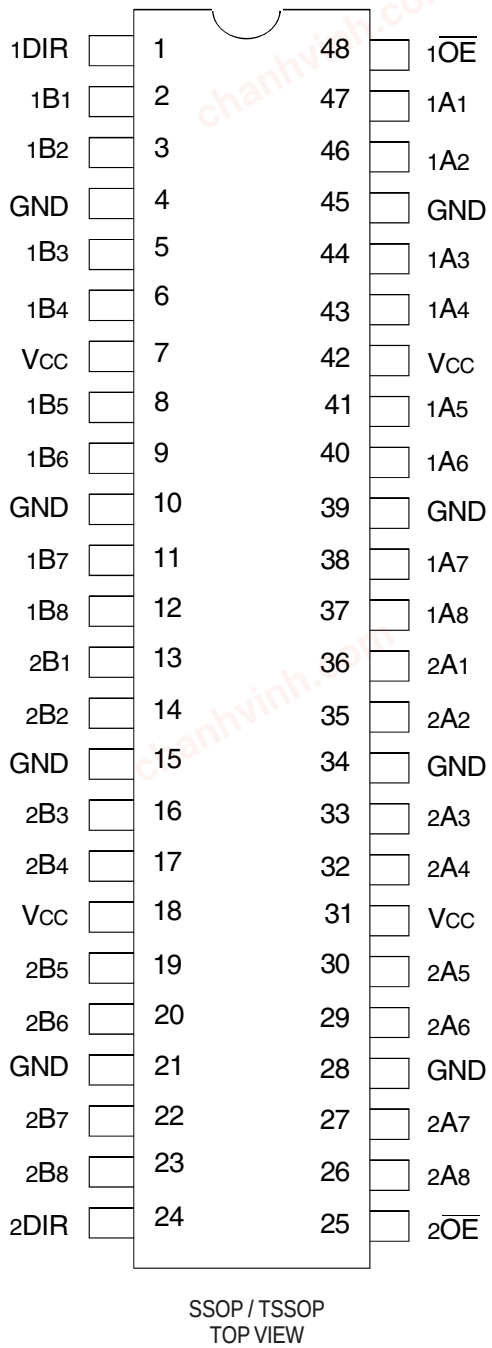

SSOP / TSSOP
TOP VIEW

ABSOLUTE MAXIMUM RATINGS(1)

Symbol	Description	Max	Unit
V_{TERM}(2)	Terminal Voltage with Respect to GND	–0.5 to +6.5	V
V_{TERM}(3)	Terminal Voltage with Respect to GND	–0.5 to +6.5	V
T_{STG}	Storage Temperature	–65 to +150	°C
I_{OUT}	DC Output Current	–50 to +50	mA
I_{IK} I_{OK}	Continuous Clamp Current, V_I < 0 or V_O < 0	–50	mA
I_{CC} I_{SS}	Continuous Current through each V_{CC} or GND	±100	mA

NOTES:
1. Stresses greater than those listed under ABSOLUTE MAXIMUM RATINGS may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect reliability.
2. V_{CC} terminals.
3. All terminals except V_{CC}.

CAPACITANCE (T_A = +25°C, F = 1.0MHz)

Symbol	Parameter(1)	Conditions	Typ.	Max.	Unit
C_{IN}	Input Capacitance	V_{IN} = 0V	4.5	6	pF
C_{OUT}	Output Capacitance	V_{OUT} = 0V	6.5	8	pF
$C_{I/O}$	I/O Port Capacitance	V_{IN} = 0V	6.5	8	pF

NOTE:
1. As applicable to the device type.

PIN DESCRIPTION

Pin Names	Description
x$\overline{OE}$	Output Enable Inputs (Active LOW)
xDIR	Direction Control Input
xAx	Side A Inputs or 3-State Outputs
xBx	Side B Inputs or 3-State Outputs

FUNCTION TABLE (EACH 8-BIT SECTION)(1)

Inputs		Outputs
x$\overline{OE}$	xDIR	
L	L	Bus B Data to Bus A
L	H	Bus A Data to Bus B
H	X	Z

NOTES:
1. H = HIGH Voltage Level
   X = Don't Care
   L = LOW Voltage Level
   Z = High-Impedance

© 2019 Renesas Electronics Corporation

chanhvinh.com

DC ELECTRICAL CHARACTERISTICS OVER OPERATING RANGE

Following Conditions Apply Unless Otherwise Specified:
Operating Condition: T_A = –40°C to +85°C

Symbol	Parameter	Test Conditions		Min.	Typ.(1)	Max.	Unit
V_{IH}	Input HIGH Voltage Level	V_{CC} = 2.3V to 2.7V		1.7	—	—	V
		V_{CC} = 2.7V to 3.6V		2	—	—	
V_{IL}	Input LOW Voltage Level	V_{CC} = 2.3V to 2.7V		—	—	0.7	V
		V_{CC} = 2.7V to 3.6V		—	—	0.8	
I_{IH} I_{IL}	Input Leakage Current	V_{CC} = 3.6V	V_I = 0 to 5.5V	—	—	±5	µA
I_{OZH} I_{OZL}	High Impedance Output Current (3-State Output pins)	V_{CC} = 3.6V	V_O = 0 to 5.5V	—	—	±10	µA
I_{OFF}	Input/Output Power Off Leakage	V_{CC} = 0V, V_{IN} or V_O ≤ 5.5V		—	—	±50	µA
V_{IK}	Clamp Diode Voltage	V_{CC} = 2.3V, I_{IN} = –18mA		—	–0.7	–1.2	V
V_H	Input Hysteresis	V_{CC} = 3.3V		—	100	—	mV
I_{CCL} I_{CCH} I_{CCZ}	Quiescent Power Supply Current	V_{CC} = 3.6V	V_{IN} = GND or V_{CC}	—	—	10	µA
			3.6 ≤ V_{IN} ≤ 5.5V(2)	—	—	10	
ΔI_{CC}	Quiescent Power Supply Current Variation	One input at V_{CC} - 0.6V, other inputs at V_{CC} or GND		—	—	500	µA

NOTES:
1. Typical values are at V_{CC} = 3.3V, +25°C ambient.
2. This applies in the disabled state only.

OUTPUT DRIVE CHARACTERISTICS

Symbol	Parameter	Test Conditions(1)		Min.	Max.	Unit
V_{OH}	Output HIGH Voltage	V_{CC} = 2.3V to 3.6V	I_{OH} = – 0.1mA	V_{CC} – 0.2	—	V
		V_{CC} = 2.3V	I_{OH} = – 6mA	2	—	
		V_{CC} = 2.3V	I_{OH} = – 12mA	1.7	—	
		V_{CC} = 2.7V		2.2	—	
		V_{CC} = 3V		2.4	—	
		V_{CC} = 3V	I_{OH} = – 24mA	2.2	—	
V_{OL}	Output LOW Voltage	V_{CC} = 2.3V to 3.6V	I_{OL} = 0.1mA	—	0.2	V
		V_{CC} = 2.3V	I_{OL} = 6mA	—	0.4	
			I_{OL} = 12mA	—	0.7	
		V_{CC} = 2.7V	I_{OL} = 12mA	—	0.4	
		V_{CC} = 3V	I_{OL} = 24mA	—	0.55	

NOTE:
1. V_{IH} and V_{IL} must be within the min. or max. range shown in the DC ELECTRICAL CHARACTERISTICS OVER OPERATING RANGE table for the appropriate V_{CC} range. T_A = – 40°C to + 85°C.

© 2019 Renesas Electronics Corporation

chanhvinh.com

OPERATING CHARACTERISTICS, V_{CC} = 3.3V ± 0.3V, T_A = 25°C

Symbol	Parameter	Test Conditions	Typical	Unit
C_{PD}	Power Dissipation Capacitance per Transceiver Outputs enabled	C_L = 0pF, f = 10Mhz	38	pF
C_{PD}	Power Dissipation Capacitance per Transceiver Outputs disabled		4	

SWITCHING CHARACTERISTICS(1)

Symbol	Parameter	V_{CC} = 2.7V		V_{CC} = 3.3V ± 0.3V		Unit
		Min.	Max.	Min.	Max.	
t_{PLH} t_{PHL}	Propagation Delay xAx to xBx, xBx to xAx	—	4.7	1	4	ns
t_{PZH} t_{PZL}	Output Enable Time x$\overline{OE}$ to xAx or xBx	—	6.7	1.5	5.5	ns
t_{PHZ} t_{PLZ}	Output Disable Time x$\overline{OE}$ to xAx or xBx	—	7.1	1.5	6.6	ns
$t_{SK(o)}$	Output Skew(2)	—	—	—	1	ns

NOTES:
1. See TEST CIRCUITS AND WAVEFORMS. T_A = – 40°C to + 85°C.
2. Skew between any two outputs of the same package and switching in the same direction.


© 2019 Renesas Electronics Corporation

chanhvinh.com

TEST CIRCUITS AND WAVEFORMS

TEST CONDITIONS

Symbol	$V_{CC}^{(1)}$=3.3V±0.3V	$V_{CC}^{(1)}$=2.7V	$V_{CC}^{(2)}$=2.5V±0.2V	Unit
V_{LOAD}	6	6	2 x Vcc	V
V_{IH}	2.7	2.7	Vcc	V
V_T	1.5	1.5	Vcc / 2	V
V_{LZ}	300	300	150	mV
V_{HZ}	300	300	150	mV
C_L	50	50	30	pF

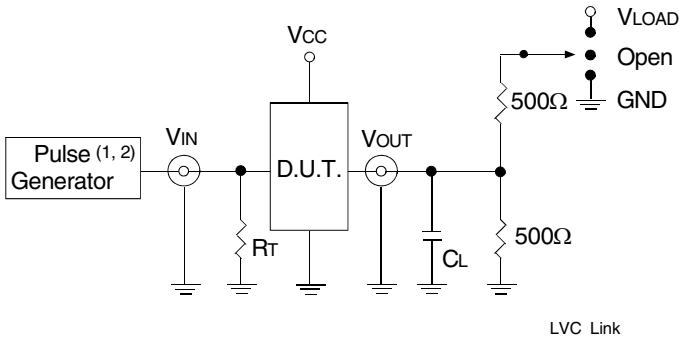


Test Circuit for All Outputs

DEFINITIONS:
C_L = Load capacitance: includes jig and probe capacitance.
R_T = Termination resistance: should be equal to Z_{OUT} of the Pulse Generator.

NOTES:
1. Pulse Generator for All Pulses: Rate ≤ 10MHz; t_F ≤ 2.5ns; t_R ≤ 2.5ns.
2. Pulse Generator for All Pulses: Rate ≤ 10MHz; t_F ≤ 2ns; t_R ≤ 2ns.

SWITCH POSITION


Test	Switch
Open Drain Disable Low Enable Low	V_{LOAD}
Disable High Enable High	GND
All Other Tests	Open

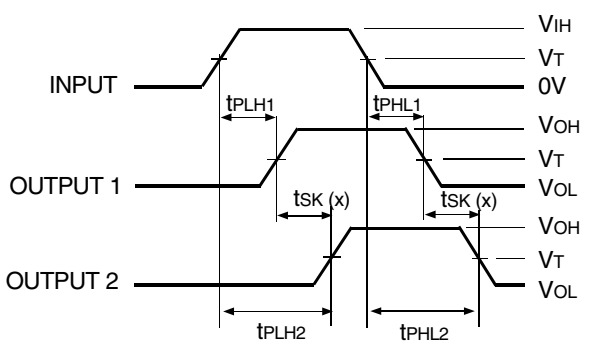


$t_{SK(x)} = |t_{PLH2} - t_{PLH1}|$ or $|t_{PHL2} - t_{PHL1}|$

Output Skew - $t_{SK(x)}$

NOTES:
1. For $t_{SK(o)}$ OUTPUT1 and OUTPUT2 are any two outputs.
2. For $t_{SK(b)}$ OUTPUT1 and OUTPUT2 are in the same bank.

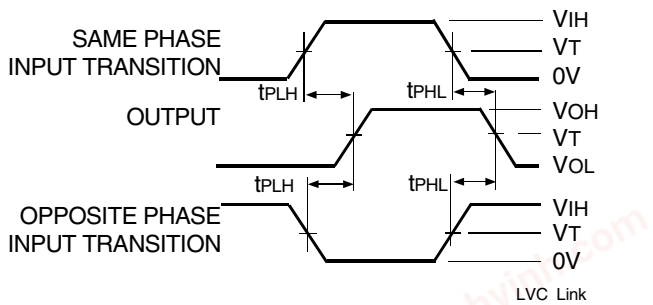


Propagation Delay

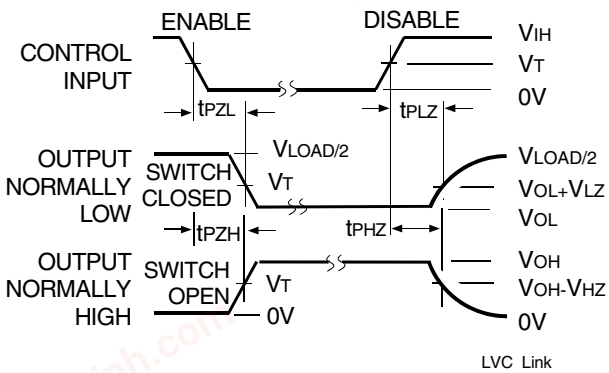


Enable and Disable Times

NOTE:
1. Diagram shown for input Control Enable-LOW and input Control Disable-HIGH.

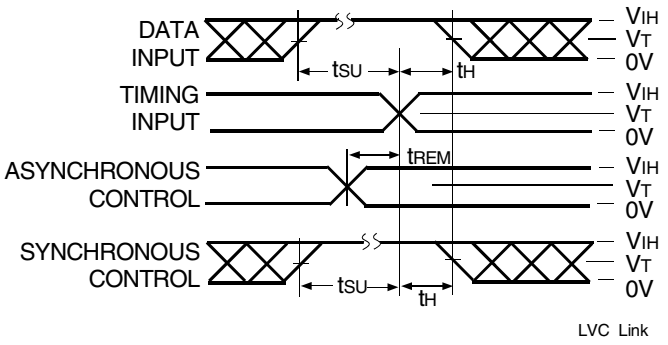

Set-up, Hold, and Release Times

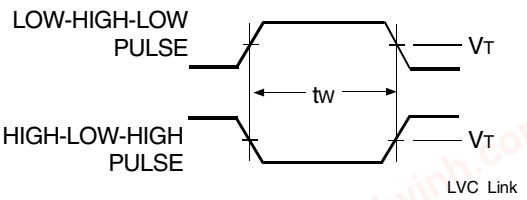


Pulse Width

© 2019 Renesas Electronics Corporation

chanhvinh.com

ORDERING INFORMATION

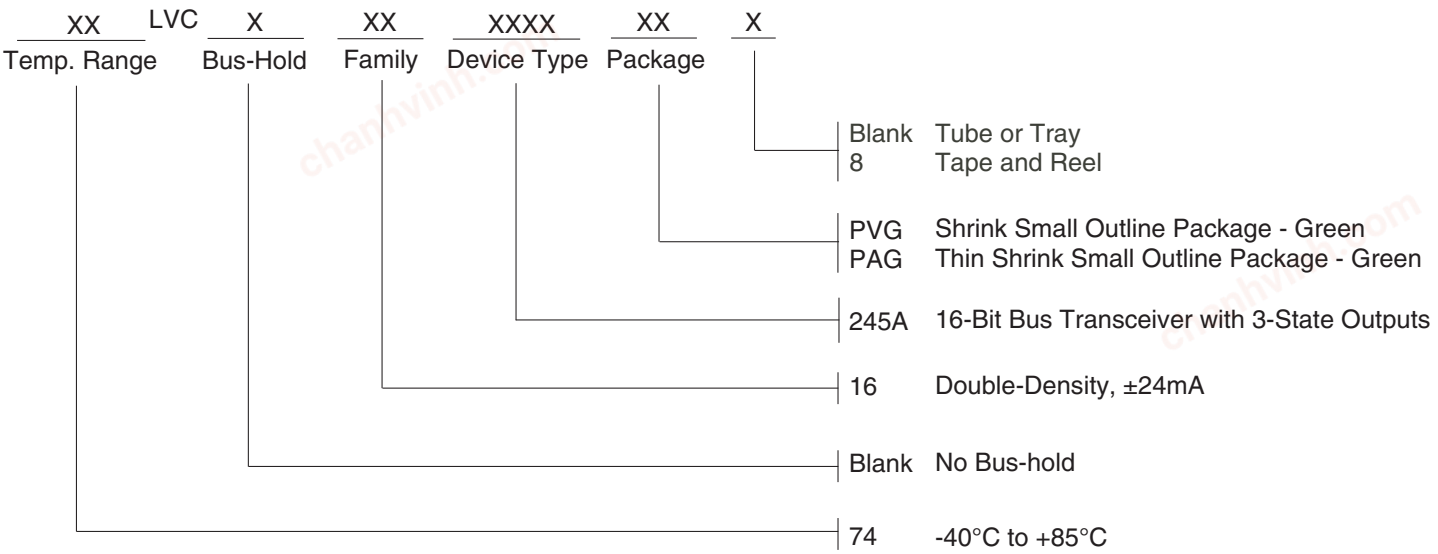

chanhvinh.com

IMPORTANT NOTICE AND DISCLAIMER

RENESAS ELECTRONICS CORPORATION AND ITS SUBSIDIARIES (“RENESAS”) PROVIDES TECHNICAL SPECIFICATIONS AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES “AS IS” AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, WITHOUT LIMITATION, ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for developers skilled in the art designing with Renesas products. You are solely responsible for (1) selecting the appropriate products for your application, (2) designing, validating, and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, or other requirements. These resources are subject to change without notice. Renesas grants you permission to use these resources only for development of an application that uses Renesas products. Other reproduction or use of these resources is strictly prohibited. No license is granted to any other Renesas intellectual property or to any third party intellectual property. Renesas disclaims responsibility for, and you will fully indemnify Renesas and its representatives against, any claims, damages, costs, losses, or liabilities arising out of your use of these resources. Renesas' products are provided only subject to Renesas' Terms and Conditions of Sale or other applicable terms agreed to in writing. No use of any Renesas resources expands or otherwise alters any applicable warranties or warranty disclaimers for these products.

(Rev.1.0 Mar 2020)

Corporate Headquarters

TOYOSU FORESIA, 3-2-24 Toyosu,
Koto-ku, Tokyo 135-0061, Japan
www.renesas.com

Contact Information

For further information on a product, technology, the most up-to-date version of a document, or your nearest sales office, please visit:
www.renesas.com/contact/

Trademarks

Renesas and the Renesas logo are trademarks of Renesas Electronics Corporation. All trademarks and registered trademarks are the property of their respective owners.

© 2020 Renesas Electronics Corporation. All rights reserved.