chanhvinh.com

TPS65910, TPS65910A, TPS65910A3, TPS659101
TPS659102, TPS659103, TPS659104, TPS659105
TPS659106, TPS659107, TPS659108, TPS659109

SWCS046U – MARCH 2010 – REVISED OCTOBER 2014

TPS65910x Integrated Power-Management Unit Top Specification

1 Device Overview

1.1 Features

- Embedded Power Controller
- Two Efficient Step-Down DC-DC Converters for Processor Cores
- One Efficient Step-Down DC-DC Converter for I/O Power
- One Efficient Step-Up 5-V DC-DC Converter
- SmartReflex™ Compliant Dynamic Voltage Management for Processor Cores
- 8 LDO Voltage Regulators and One Real-Time Clock (RTC) LDO (Internal Purpose)
- One High-Speed I^2C Interface for General-Purpose Control Commands (CTL-I^2C)
- One High-Speed I^2C Interface for SmartReflex Class 3 Control and Command (SR-I^2C)
- Two Enable Signals Multiplexed with SR-I^2C, Configurable to Control any Supply State and Processor Cores Supply Voltage
- Thermal Shutdown Protection and Hot-Die Detection
- An RTC Resource With:
  - Oscillator for 32.768-kHz Crystal or 32-kHz Built-in RC Oscillator
  - Date, Time, and Calendar
  - Alarm Capability
- One Configurable GPIO
- DC-DC Switching Synchronization Through Internal or External 3-MHz Clock

1.2 Applications

- Portable and Handheld Systems
- Industrial Systems

1.3 Description

The TPS65910 device is an integrated power-management IC available in 48-QFN package and dedicated to applications powered by one Li-Ion or Li-Ion polymer battery cell or 3-series Ni-MH cells, or by a 5-V input; it requires multiple power rails. The device provides three step-down converters, one step-up converter, and eight LDOs and is designed to support the specific power requirements of OMAP-based applications.

Two of the step-down converters provide power for dual processor cores and are controllable by a dedicated class-3 SmartReflex interface for optimum power savings. The third converter provides power for the I/Os and memory in the system.

The device includes eight general-purpose LDOs providing a wide range of voltage and current capabilities. The LDOs are fully controllable by the I^2C interface. The use of the LDOs is flexible; they are intended to be used as follows: Two LDOs are designated to power the PLL and video DAC supply rails on the OMAP-based processors, four general-purpose auxiliary LDOs are available to provide power to other devices in the system, and two LDOs are provided to power DDR memory supplies in applications requiring these memories.

In addition to the power resources, the device contains an embedded power controller (EPC) to manage the power sequencing requirements of the OMAP systems and an RTC.

Table 1-1. Device Information(1)

PART NUMBER	PACKAGE (PIN)	BODY SIZE
TPS65910	PVQFN (48)	6.00 mm × 6.00 mm

(1) For more information, see Section 8, *Mechanical Packaging and Orderable Information*.

An IMPORTANT NOTICE at the end of this data sheet addresses availability, warranty, changes, use in safety-critical applications, intellectual property matters and other important disclaimers. PRODUCTION DATA.

chanhvinh.com

1.4 Functional Block Diagram

Figure 1-1 shows the top-level diagram of the device.

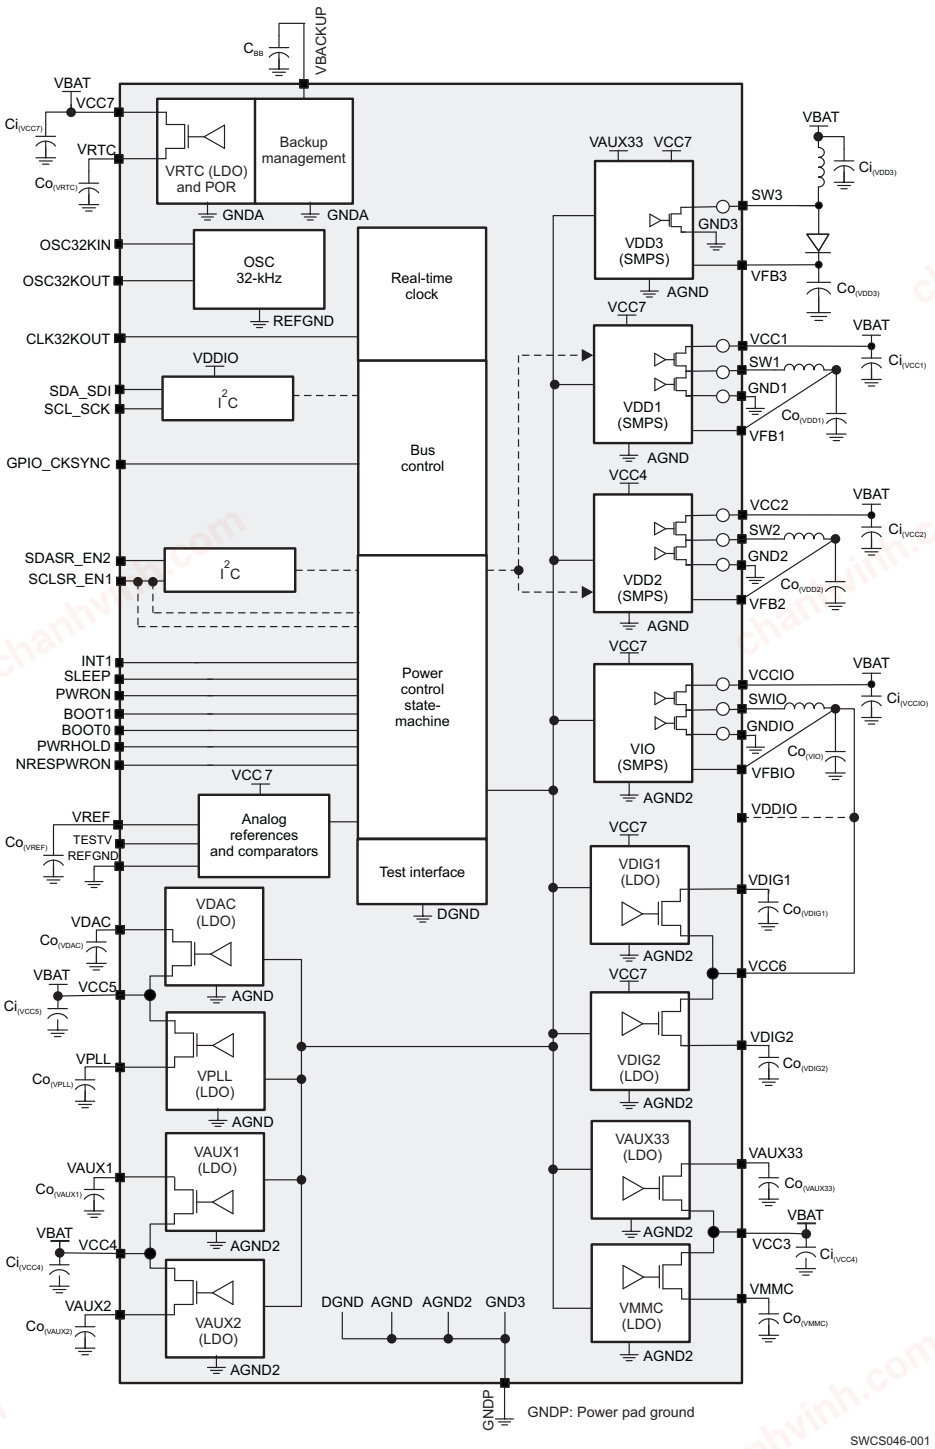


Figure 1-1. 48-QFN Top-Level Diagram

Copyright © 2010–2014, Texas Instruments Incorporated

chanhvinh.com

Table of Contents

1 Device Overview **1**
1.1 Features 1
1.2 Applications 1
1.3 Description 1
1.4 Functional Block Diagram 2
2 Revision History **4**
3 Device Comparison **6**
4 Terminal Configuration and Functions **7**
4.1 Signal Descriptions 8
5 Specifications **10**
5.1 Absolute Maximum Ratings 10
5.2 Handling Ratings 10
5.3 Recommended Operating Conditions 11
5.4 Thermal Resistance Characteristics for RSL Package 13
5.5 I/O Pullup and Pulldown Characteristics 14
5.6 Digital I/O Voltage Electrical Characteristics 15
5.7 I²C Interface and Control Signals 16
5.8 Power Consumption 17
5.9 Power References and Thresholds 17
5.10 Thermal Monitoring and Shutdown 18
5.11 32-kHz RTC Clock 18
5.12 Backup Battery Charger 19
5.13 VRTC LDO 19
5.14 VIO SMPS 20
5.15 VDD1 SMPS 22
5.16 VDD2 SMPS 24
5.17 VDD3 SMPS 26
5.18 VDIG1 and VDIG2 LDO 27
5.19 VAUX33 and VMMC LDO 29
5.20 VAUX1 and VAUX2 LDO 31
5.21 VDAC and VPLL LDO 33
5.22 Timing and Switching Characteristics 35
6 Detailed Description **45**
6.1 Power Reference 45
6.2 Power Sources 45
6.3 Embedded Power Controller 45
6.4 32-kHz RTC Clock 52
6.5 RTC 53
6.6 Backup Battery Management 55
6.7 Backup Registers 56
6.8 I²C Interface 56
6.9 Thermal Monitoring and Shutdown 56
6.10 Interrupts 57
6.11 Package Description 57
6.12 Functional Registers 58
7 Device and Documentation Support **95**
7.1 Device Support 95
7.2 Documentation Support 96
7.3 Related Links 96
7.4 Community Resources 97
7.5 Trademarks 97
7.6 Electrostatic Discharge Caution 97
7.7 Export Control Notice 97
7.8 Glossary 97
7.9 Additional Acronyms 98
8 Mechanical Packaging and Orderable Information **99**
8.1 Packaging Information 99

Copyright © 2010–2014, Texas Instruments Incorporated

chanhvinh.com

2 Revision History

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

VERSION	DATE	NOTES
*	03/2010	See (1)
A	05/2010	See (2)
B	06/2010	See (3)
C	06/2010	See (4)
D	11/2010	See (5)
E	01/2011	See (6)
F	01/2011	See (7)
G	05/2011	See (8)
H	06/2011	See (9)
I	07/2011	See (10)
J	10/2011	See (11)
K	10/2011	See (12)
L	01/2012	See (13)
M	03/2012	See (14)
N	04/2012	See (15)
O	06/2012	See (16)
P	09/2012	See (17)
Q	09/2012	See (18)
R	02/2013	See (19)
S	08/2013	See (20)

(1) Initial release
(2) SWCS046A: Updated register tables VMMC_REG and VDAC_REG. Added register table VPLL_REG
(3) SWCS046B: Updated Absolute Maximum Ratings, Recommended Operating Conditions, I/O Pullup and Pulldown Characteristics, Digital I/Os Voltage Electrical Characteristics, Power Consumption, Power References and Thresholds, Thermal Monitoring and Shutdown, 32-kHz RTC Clock, VRTC LDO, VIO SMPS, VDD1 SMPS, VDD2 SMPS, VDD3 SMPS, Switch-On/-Off Sequences and Timing
(4) SWCS046C: Associate parts; no change.
(5) SWCS046D: Updated Recommended Operating Conditions - Backup Battery, I/O Pullup and Pulldown Characteristics, Backup Battery Charger. Update Rated output current, PMOS current limit (High-Side), NMOS current limit (Low-Side), and Conversion Efficiency for VIO SMPS, VDD1/VDD2/VDD3 SMPS and VDIG1/VDIG2 LDO. Update Input Voltage for VIO/VDD1/VDD2 SMPS. Update DC and Transient Load and Line Regulation and Internal Resistance for VDIG1/VDIG2 LDO, VAUX33/VMMC LDO, VAUX1,VAUX2, LDO, and VDAC/VPLL LDO. Update DC Load Regulation for VAUX3/VMMC/VDAC. Update Power Control Timing. Add Device SLEEP State Control. Add SMPS Switching Synchronization. Update VIO_REG, VDD1_REG, and VDD2_REG.
(6) SWCS046E: Manually added Thermal Pad Mechanical Data.
(7) SWCS046F: UpdatedTable 3-1, *SUPPORTED PROCESSORS AND CORRESPONDING PART NUMBERS*.
(8) SWCS046G: Updated Section 6.11, Section 5.3, Section 5.6, and Section 6.3.3.6.
(9) SWCS046H: Updated Table 6-29, PUADEN_REG, Table 6-61, RESERVED, and Table 6-62, RESERVED.
(10) SWCS046I: Updated DC Output voltage V_{OUT} in Section 5.20.
(11) SWCS046J: UpdatedTable 3-1, *SUPPORTED PROCESSORS AND CORRESPONDING PART NUMBERS*.
(12) SWCS046K: UpdateTable 3-1, *SUPPORTED PROCESSORS AND CORRESPONDING PART NUMBERS* - Add AM335x.
(13) SWCS046L: Updated Table 3-1, *SUPPORTED PROCESSORS AND CORRESPONDING PART NUMBERS* - Add AM335x with DDR2 and AM335x with DDR3.
(14) SWCS046M: Updated Section 6.3.1, - Update Device Sleep enable conditions control information.
(15) SWCS046N:
- Section 5.14 - Updated PMOS current limit (high side) conditions
- Table 6-63 - Updated INT_STS_REG register - VMBHI_IT description
- Updated Input voltage: Section 5.18

(16) SWCS046O: Updated Table 5-5, *Power Control Timing Characteristics*
- Replace unit of µs for $t_{dbPWRONF}$ by ms

(17) SWCS046P: Updated Table 3-1, *SUPPORTED PROCESSORS AND CORRESPONDING PART NUMBERS* -
- Add AM335x with DDR3 - TPS65910A31A1RSL
- Add Rockchip - RK30xx

(18) SWCS046Q: Updated Table 3-1, *SUPPORTED PROCESSORS AND CORRESPONDING PART NUMBERS* -
- Refer to SWCU093 document: Updated document reference from TBD to SWCU093

(19) SWCS046R: Updated Section 5.13, *VRTC LDO* - Changed Input Voltage - Back-up mode - Max from 3V to 5.5V.
(20) SWCS046S: Updated Section 5.20, *VAUX1 AND VAUX2 LDO* - Changed VAUX2 - Rated Output Current I_{OUTmax} - On mode from 150 mA to 300 mA

Copyright © 2010–2014, Texas Instruments Incorporated

chanhvinh.com

VERSION	DATE	NOTES
T	09/2013	See (21)
U	10/2014	See (22)

(21) SWCS046T: Updated
- Table 6-23, *RTC_Reset_Status_Reg*, Changed Reserved bits to 7:1 and changed RESET_STATUS's reset value to 0x0.
- Table 6-34, *VDD1_OP_REG*, Changed SEL Vout to Vout = (SEL[6:0] × 12.5 mV + 0.5625 V) × G.
- Table 6-35, *VDD1_SR_REG*, Changed SEL Vout to Vout = (SEL[6:0] × 12.5 mV + 0.5625 V) × G.
- Table 6-37, *VDD2_OP_REG*, Changed SEL Vout to Vout = (SEL[6:0] × 12.5 mV + 0.5625 V) × G.
- Table 6-38, *VDD2_SR_REG*, Changed SEL Vout to Vout = (SEL[6:0] × 12.5 mV + 0.5625 V) × G.

(22) SWCS046U: Updated data sheet to latest TI standards
- Updated Section 1.2, *Applications*
- Added Table 1-1, *Device Information*
- Moved Section 4, *Terminal Configuration and Functions*
- Moved appropriate data to Section 5.2
- Added Section 5.4, *Thermal Resistance Characteristics for RSL Package*

chanhvinh.com

chanhvinh.com

3 Device Comparison

Table 3-1. Supported Processors and Corresponding Part Numbers

Compatible Processor(1)	Part Number(1)
TI processor - AM335x with DDR2	TPS65910AA1RSL
TI processor - AM335x with DDR3	TPS65910A3A1RSL
TI processor - AM335x with DDR3(2)	TPS65910A31A1RSL
TI processors - AM1705/07, AM1806/08, AM3505/17, AM3703/15, DM3730/25, OMAP-L137/38, OMAP3503/15/25/30, TMS320C6742/6/8	TPS65910A1RSL
Samsung - S5PV210, S5PC110	TPS659101A1RSL
Rockchip - RK29xx, RK30xx	TPS659102A1RSL
Samsung - S5PC100	TPS659103A1RSL
Samsung - S5P6440	TPS659104A1RSL
TI processors - DM643x, DM644x	TPS659105A1RSL
Reserved	TPS659106A1RSL
Freescale - i.MX27, Freescale - i.MX35	TPS659107A1RSL
Freescale - i.MX508	TPS659108A1RSL
Freescale - i.MX51	TPS659109A1RSL

(1) The RSL package is available in tape and reel. See for details for corresponding part numbers, quantities and ordering information.
(2) Refer to SWCU093, *TPS65910Ax User's Guide For AM335x Processors*

Copyright © 2010–2014, Texas Instruments Incorporated

chanhvinh.com

4 Terminal Configuration and Functions

Figure 4-1 shows the pin assignments.

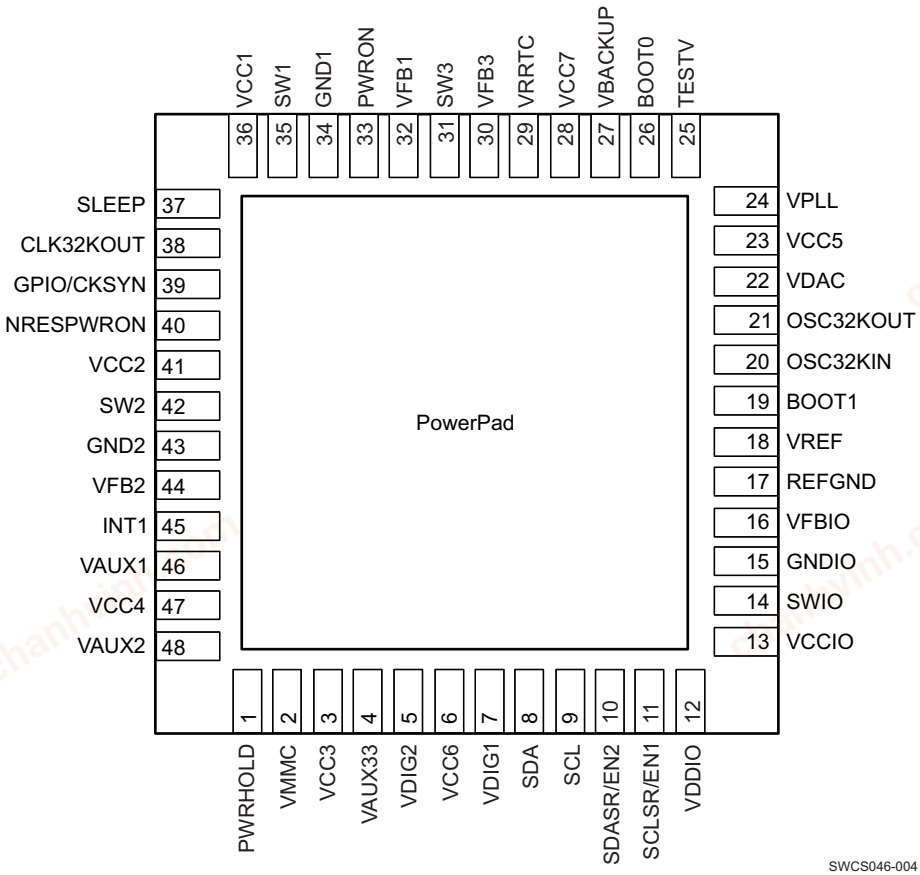


Figure 4-1. 48-QFN Top-View Pin Assignment

chanhvinh.com

4.1 Signal Descriptions

Table 4-1. Signal Descriptions

NAME	QFN PIN	SUPPLIES	TYPE	I/O	DESCRIPTION	PU/PD
VDDIO		VDDIO/DGND	Power	I	Digital I/Os supply	No
SDA_SDI		VDDIO/DGND	Digital	I/O	I^2C bidirectional data signal/serial peripheral interface data input (multiplexed)	External PU
SCL_SCK		VDDIO/DGND	Digital	I/O	I^2C bidirectional clock signal/serial peripheral interface Clock Input (multiplexed)	External PU
SDASR_EN2		VDDIO/DGND	Digital	I/O	I^2C SmartReflex bidirectional data signal/enable of supplies (multiplexed)	External PU
SCLSR_EN1		VDDIO/DGND	Digital	I/O	I^2C SmartReflex bidirectional clock signal/enable of supplies (multiplexed)	External PU
SLEEP		VDDIO/DGND	Digital	I	Active-sleep state transition control signal	Programmable PD (default active)
GPIO_CKSYNC		VDDIO/DGND	Digital	I/O	Configurable general-purpose I/O or DC-DCs synchronization clock input signal	Programmable PD (default active)
PWRHOLD		VRTC/DGND	Digital	I	Switch-on/-off control signal	Programmable PD (default active)
PWRON		VBAT/DGND	Digital	I	External switch-on control (ON button)	Programmable PU (default active)
NRESPWRON		VDDIO/DGND	Digital	O	Power off reset	PD active during device OFF state
INT1		VDDIO/DGND	Digital	O	Interrupt flag	No
BOOT0		VRTC/DGND	Digital	I	Power-up sequence selection	Programmable PD (default active)
BOOT1		VRTC/DGND	Digital	I	Power-up sequence selection	Programmable PD (default active)
CLK32KOUT		VDDIO/DGND	Digital	O	32-kHz clock output	PD disable in ACTIVE or SLEEP state
OSC32KIN		VRTC/REFGND	Analog	I	32-kHz crystal oscillator	No
OSC32KOUT		VRTC/REFGND	Analog	I	32-kHz crystal oscillator	No
VREF		VCC7/REFGND	Analog	O	Bandgap voltage	No
REFGND		REFGND	Analog	I/O	Reference ground	No
TESTV		VCC7/AGND	Analog	O	Analog test output (DFT)	No
VBACKUP		VBACKUP/AGND	Power	I	Backup battery input (short to VCC5 if not used)	No
VCC1		VCC1/GND1	Power	I	VDD1 DC-DC power input	No
GND1		VCC1/GND1	Power	I/O	VDD1 DC-DC power ground	No
SW1		VCC1/GND1	Power	O	VDD1 DC-DC switched output	No
VFB1		VCC7/AGND	Analog	I	VDD1 feedback voltage	PD
VCC2		VCC2/GND2	Power	I	VDD2 DC-DC power input	No
GND2		VCC2/GND2	Power	I/O	VDD2 DC-DC power ground	No
SW2		VCC2/GND2	Power	O	VDD2 DC-DC switched output	No
VFB2		VCC4/AGND2	Analog	I	VDD2 DC-DC feedback voltage	PD
VCCIO		VCCIO/GNDIO	Power	I	VIO DC-DC power input	No
GNDIO		VCCIO/GNDIO	Power	I/O	VIO DC-DC power ground	No
SWIO		VCCIO/GNDIO	Power	O	VIO DC-DC switched output	No
VFBIO		VCC7/AGND	Analog	I	VIO feedback voltage	PD
VCC3		VCC3/AGND2	Power	I	VMMC VAUX33 power input	No
VMMC		VCC3/REFGND	Power	O	LDO regulator output	PD

Copyright © 2010–2014, Texas Instruments Incorporated

chanhvinh.com

Table 4-1. Signal Descriptions (continued)

NAME	QFN PIN	SUPPLIES	TYPE	I/O	DESCRIPTION	PU/PD
VAUX33		VCC3/REFGND	Power	O	LDO regulator output, VDD3 internal regulated supply	PD
VCC4		VCC4/AGND2	Power	I	VAUX1, VAUX2 power input	No
VAUX1		VCC4/REFGND	Power	O	LDO regulator output	PD
VAUX2		VCC4/REFGND	Power	O	LDO regulator output	PD
VCC5		VCC5/AGND	Power	I	VDAC, VPLL power input	No
VDAC		VCC5/REFGND	Power	O	LDO regulator output	PD
VPLL		VCC5/REFGND	Power	O	LDO regulator output	PD
VRTC		VCC7/REFGND	Power	O	LDO regulator output	PD
VCC6		VCC6/AGND2	Power	I	VDIG1, VDIG2 power input	No
VDIG1		VCC6/REFGND	Power	O	LDO regulator output	No
VDIG2		VCC6/REFGND	Power	O	LDO regulator output	No
VCC7		VCC7/REFGND	Power	I	VRTC power input, VDD3 internal and analog references supply	No
VFB3		VCC7/AGND	Analog	I	VDD3 feedback voltage	No
SW3		VCC7/GND3	Power	O	VDD3 DC-DC switched output	No
GND3	Power PAD	AGND	Power	I/O	VDD3 DC-DC power ground	No
AGND	Power PAD	AGND	Power	I/O	Analog ground	No
AGND2	Power PAD	AGND	Power	I/O	Analog ground	No
DGND	Power PAD	DGND	Power	I/O	Digital ground	No

Copyright © 2010–2014, Texas Instruments Incorporated

chanhvinh.com

5 Specifications

5.1 Absolute Maximum Ratings(1)(2)

over operating free-air temperature range (unless otherwise noted)

	MIN	MAX	UNIT
Voltage range on pins/balls VCC1, VCC2, VCCIO, VCC3, VCC4, VCC5, VCC6, VCC7	–0.3	7	V
Voltage range on pins/balls VDDIO	–0.3	3.6	V
Voltage range on pins/balls OSC32KIN, OSC32KOUT, BOOT1, BOOT0	–0.3	$VRTC_{MAX}$ + 0.3	V
Voltage range on pins/balls SDA_SDI, SCL_SCK, SDASR_EN2, SCLSR_EN1, SLEEP, INT1, CLK32KOUT, NRESPWRON	–0.3	$VDDIO_{MAX}$ + 0.3	V
Voltage range on pins/balls PWRON	–0.3	7	V
Voltage range on pins/balls PWRHOLD(3) GPIO_CKSYNC(4)	–0.3	7	V
Peak output current on all other terminals than power resources	–5	5	mA

(1) Stresses beyond those listed under absolute maximum ratings may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under recommended operating conditions is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.
(2) All voltage values are with respect to V_{SS}, unless otherwise noted.
(3) I/O supplied from VDDIO but which can be driven from to a VBAT voltage level
(4) I/O supplied from VRTC but can be driven to a VBAT voltage level

5.2 Handling Ratings

				MIN	MAX	UNIT
T_{stg}	Storage temperature range			–45	150	°C
V_{ESD}	Electrostatic discharge (ESD) performance:	Human Body Model (HBM), per ANSI/ESDA/JEDEC JS001(1)		–2	2	kV
		Charged Device Model (CDM), per JESD22-C101(2)	All pins	–500	500	V

(1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.
(2) JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.

Copyright © 2010–2014, Texas Instruments Incorporated

chanhvinh.com

5.3 Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted)

Note 1: VCC7 should be connected to the highest supply that is connected to the device VCCx pin. The exception is that VCC2 and VCC4 can be higher than VCC7.

Note 2: VCC2 and VCC4 must be connected together (to the same voltage).

Note 3: If VDD3 boost is used, VAUX33 must be set to 2.8 V or higher and enabled before VDD3.

PARAMETER	TEST CONDITIONS	MIN	NOM	MAX	UNIT
V_{CC}: Input voltage range on pins/balls VCC1, VCC2, VCCIO, VCC3, VCC4, VCC5, VCC7		2.7	3.6	5.5	V
V_{CCP}: Input voltage range on pins/balls VCC6		1.7	3.6	5.5	V
Input voltage range on pins/balls VDDIO		1.65	1.8/3.3	3.45	V
Input voltage range on pins/balls PWRON		0	3.6	5.5	V
Input voltage range on pins/balls SDA_SDI, SCL_SCK, SDASR_EN2, SCLSR_EN1, SLEEP		1.65	VDDIO	3.45	V
Input voltage range on pins/balls PWRHOLD, GPIO_CKSYNC		1.65	VDDIO	5.5	V
Input voltage range on balls BOOT1, BOOT0, OSC32KIN		1.65	VRTC	1.95	V
Operating free-air temperature, T_A		–40	27	85	°C
Junction temperature, T_J		–40	27	125	°C
Storage temperature range		–65	27	150	°C
Lead temperature (soldering, 10 s)			260		°C
Power References					
VREF filtering capacitor $C_{O(VREF)}$	Connected from VREF to REFGND		100		nF
VDD1 SMPS					
Input capacitor $C_{I(VCC1)}$	X5R or X7R dielectric		10		µF
Filter capacitor $C_{O(VDD1)}$	X5R or X7R dielectric	4	10	12	µF
C_O filter capacitor ESR	f = 3 MHz		10	300	mΩ
Inductor $L_{O(VDD1)}$			2.2		µH
L_O inductor dc resistor DCR_L				125	mΩ
VDD2 SMPS					
Input capacitor $C_{I(VCC2)}$	X5R or X7R dielectric		10		µF
Filter capacitor $C_{O(VDD2)}$	X5R or X7R dielectric	4	10	12	µF
C_O filter capacitor ESR	f = 3 MHz		10	300	mΩ
Inductor $L_{O(VDD2)}$			2.2		µH
L_O inductor dc resistor DCR_L				125	mΩ
VIO SMPS					
Input capacitor $C_{I(VIO)}$	X5R or X7R dielectric		10		µF
Filter capacitor $C_{O(VIO)}$	X5R or X7R dielectric	4	10	12	µF
C_O filter capacitor ESR	f = 3 MHz		10	300	mΩ
Inductor $L_{O(VIO)}$			2.2		µH
L_O inductor dc resistor DCR_L				125	mΩ
VDIG1 LDO					
Input capacitor $C_{I(VCC6)}$	X5R or X7R dielectric		4.7		µF
Filtering capacitor $C_{O(VDIG1)}$		0.8	2.2	2.64	µF
C_O filtering capacitor ESR		0		500	mΩ
VDIG2 LDO					
Filtering capacitor $C_{O(VDIG2)}$		0.8	2.2	2.64	µF
C_O filtering capacitor ESR		0		500	mΩ
VPLL LDO					
Input capacitor $C_{I(VCC5)}$	X5R or X7R dielectric		4.7		µF
Filtering capacitor $C_{O(VPLL)}$		0.8	2.2	2.64	µF
C_O filtering capacitor ESR		0		500	mΩ

Copyright © 2010–2014, Texas Instruments Incorporated

chanhvinh.com

Recommended Operating Conditions *(continued)*

over operating free-air temperature range (unless otherwise noted)
Note 1: VCC7 should be connected to the highest supply that is connected to the device VCCx pin. The exception is that VCC2 and VCC4 can be higher than VCC7.
Note 2: VCC2 and VCC4 must be connected together (to the same voltage).
Note 3: If VDD3 boost is used, VAUX33 must be set to 2.8 V or higher and enabled before VDD3.

PARAMETER	TEST CONDITIONS	MIN	NOM	MAX	UNIT
VDAC LDO					
Filtering capacitor $C_{O(VDAC)}$		0.8	2.2	2.64	µF
C_O filtering capacitor ESR		0		500	mΩ
VMMC LDO					
Input capacitor $C_{I(VCC4)}$	X5R or X7R dielectric		4.7		µF
Filtering capacitor $C_{O(VMMC)}$		0.8	2.2	2.64	µF
C_O filtering capacitor ESR		0		500	mΩ
VAUX33 LDO					
Filtering capacitor $C_{O(VAUX33)}$		0.8	2.2	2.64	µF
C_O filtering capacitor ESR		0		500	mΩ
VAUX1 LDO					
Input capacitor $C_{I(VCC3)}$	X5R or X7R dielectric		4.7		µF
Filtering capacitor $C_{O(VAUX1)}$		0.8	2.2	2.64	µF
C_O filtering capacitor ESR		0		500	mΩ
VAUX2 LDO					
Filtering capacitor $C_{O(VAUX2)}$		0.8	2.2	2.64	µF
C_O filtering capacitor ESR		0		500	mΩ
VRTC LDO					
Input capacitor $C_{I(VCC7)}$	X5R or X7R dielectric		4.7		µF
Filtering capacitor $C_{O(VRTC)}$		0.8	2.2	2.64	µF
C_O filtering capacitor ESR		0		500	mΩ
VDD3 SMPS					
Input capacitor $C_{I(VDD3)}$	X5R or X7R dielectric		4.7		µF
Filter capacitor $C_{O(VDD3)}$	X5R or X7R dielectric	4	10	12	µF
C_O filter capacitor ESR	f = 1 MHz		10	300	mΩ
Inductor $L_{O(VDD3)}$		2.8	4.7	6.6	µH
L_O inductor DC resistor DCR_L			50	500	mΩ
Backup Battery					
Backup battery capacitor C_{BB}	Battery or superCap supplying VBACKUP	5	10	2000	mF
	Capacitor supplying VBACKUP	1		40	µF
Series resistors	5 to 15 mF	10		1500	Ω
	100 to 2000 mF	5		15	
I^2C Interfaces					
SDA_SDI, SCL_SCK, SDASR_EN2, SCLSR_EN1 external pull-up resistor	Connected to VDDIO		1.2		kΩ
Crystal Oscillator (connected from OSC32KIN to OSC32KOUT)					
Crystal frequency	at specified load cap value		32.768		kHz
Crystal tolerance	at 27°C	–20	0	20	ppm
Frequency Temperature coefficient.	Oscillator contribution (not including crystal variation)	–0.5		0.5	ppm/°C
Secondary temperature coefficient		–0.04	–0.035	–0.03	ppm/°C^2
Voltage coefficient		–2		2	ppm/V
Max crystal series resistor	at fundamental frequency			90	kΩ

Copyright © 2010–2014, Texas Instruments Incorporated

chanhvinh.com

Recommended Operating Conditions *(continued)*

over operating free-air temperature range (unless otherwise noted)
Note 1: VCC7 should be connected to the highest supply that is connected to the device VCCx pin. The exception is that VCC2 and VCC4 can be higher than VCC7.
Note 2: VCC2 and VCC4 must be connected together (to the same voltage).
Note 3: If VDD3 boost is used, VAUX33 must be set to 2.8 V or higher and enabled before VDD3.

PARAMETER	TEST CONDITIONS	MIN	NOM	MAX	UNIT
Crystal load capacitor	According to crystal data sheet	6		12.5	pF
Load crystal oscillator Coscin, Coscout	parallel mode including parasitic PCB capacitor	12		25	pF
Quality factor		8000		80000	

5.4 Thermal Resistance Characteristics for RSL Package

NAME	DESCRIPTION	°C/W(1) (2)	AIR FLOW (m/s)(3)
$R\Theta_{JC}$	Junction-to-case (top)	16.4	0.00
$R\Theta_{JB}$	Junction-to-board	5.6	0.00
$R\Theta_{JA}$ (High k PCB)	Junction-to-free air	37	0.00
Psi_{JT}	Junction-to-package top	0.2	0.00
Psi_{JB}	Junction-to-board	5.6	0.00
$R\Theta_{JC}$	Junction-to-case (bottom)	1.3	0.00

(1) °C/W = degrees Celsius per watt.
(2) These values are based on a JEDEC-defined 2S2P system (with the exception of the Theta JC [$R\Theta_{JC}$] value, which is based on a JEDEC-defined 1S0P system) and will change based on environment as well as application. For more information, see these EIA/JEDEC standards:
- JESD51-2, *Integrated Circuits Thermal Test Method Environmental Conditions - Natural Convection (Still Air)*
- JESD51-3, *Low Effective Thermal Conductivity Test Board for Leaded Surface Mount Packages*
- JESD51-7, *High Effective Thermal Conductivity Test Board for Leaded Surface Mount Packages*
- JESD51-9, *Test Boards for Area Array Surface Mount Package Thermal Measurements*

(3) m/s = meters per second.

Copyright © 2010–2014, Texas Instruments Incorporated

chanhvinh.com

5.5 I/O Pullup and Pulldown Characteristics(1)

over operating free-air temperature range (unless otherwise noted)

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
SDA_SDI, SCL_SCK, SDASR_EN2, SCLSR_EN1 Programmable pullup (DFT, default inactive)	Grounded, VDDIO = 1.8 V	–45%	8	+45%	kΩ
SLEEP programmable pulldown (default active)	at 1.8 V, VRTC = 1.8 V	2	4.5	10	µA
PWRHOLD programmable pulldown (default active)	at 1.8 V, VRTC = 1.8 V, VCC7 = 2.7 V	2	4.5	10	µA
	at 5.5 V, VRTC = 1.8 V, VCC7 = 5.5 V	7	14	30	
BOOT0, BOOT1 programmable pulldown (default active)	at 1.8 V, VRTC = 1.8 V	2	4.5	10	µA
NRESPWRON pulldown	at 1.8 V, VCC7 = 5.5 V, OFF state	2	4.5	10	µA
32KCLKOUT pulldown (disabled in active-sleep state)	at 1.8 V, VRTC = 1.8 V, OFF state	2	4.5	10	µA
PWRON programmable pullup (default active)	Grounded, VCC7 = 5.5 V	–40	–31	–15	µA
GPIO_CKSYNC programmable pullup (default active)	Grounded, VRTC = 1.8 V	–27	–18	–9	µA

(1) The internal pullups on the CTL-I^2C and SR-I^2C balls are used for test purposes or when the SR-I^2C interface is not used. Discrete pullups to the VIO supply must be mounted on the board in order to use the I^2C interfaces. The internal I^2C pullups must not be used for functional applications

Copyright © 2010–2014, Texas Instruments Incorporated

chanhvinh.com

5.6 Digital I/O Voltage Electrical Characteristics

over operating free-air temperature range (unless otherwise noted)

PARAMETER		MIN	TYP	MAX	UNIT
Related I/O: PWRON					
Low-level input voltage, V_{IL}				0.3 x VCC7	V
High-level input voltage, V_{IH}		0.7 x VCC7			V
Related I/Os: PWRHOLD, GPIO_CKSYNC					
Low-level input voltage, V_{IL}				0.45	V
High-level input voltage, V_{IH}		1.3	VDDIO/VCC7	VCC7	V
Related I/Os: BOOT0, BOOT1, OSC32KIN					
Low-level input voltage, V_{IL}				0.35 x VRTC	V
High-level input voltage, V_{IH}		0.65 x VRTC			V
Related I/Os: SLEEP					
Low-level input voltage, V_{IL}				0.35 x VDDIO	V
High-level input voltage, V_{IH}		0.65 x VDDIO			V
Related I/Os: NRESPWRON, INT1, 32KCLKOUT					
Low-level output voltage, V_{OL}	I_{OL} = 100 µA			0.2	V
	I_{OL} = 2 mA			0.45	V
High-level output voltage, V_{OH}	I_{OH} = 100 µA	VDDIO – 0.2			V
	I_{OH} = 2 mA	VDDIO – 0.45			V
Related Open-Drain I/Os: GPIO0					
Low-level output voltage, V_{OL}	I_{OL} = 100 µA			0.2	V
	I_{OL} = 2 mA			0.45	V
I^2C-Specific Related I/Os: SCL, SDA, SCLSR_EN1, SDASR_EN2					
Low-level input voltage, V_{IL}		–0.5		0.3 x VDDIO	V
High-level input voltage, V_{IH}		0.7 x VDDIO			V
Hysteresis		0.1 x VDDIO			V
Low-level output voltage, V_{OL} at 3 mA (sink current), VDDIO = 1.8 V				0.2 × VDDIO	V
Low-level output voltage, V_{OL} at 3 mA (sink current), VDDIO = 3.3 V				0.4 x VDDIO	V

Copyright © 2010–2014, Texas Instruments Incorporated

chanhvinh.com

5.7 I²C Interface and Control Signals

over operating free-air temperature range (unless otherwise noted)

NO.	PARAMETER	TEST CONDITIONS	MIN	TYP	MAX
		INT1 rise and fall times, C_L = 5 to 35 pF	5	10	ns
		NRESPWRON rise and fall times, C_L = 5 to 35 pF	5	10	ns
SLAVE HIGH–SPEED MODE					
		SCL/SCLSR_EN1 and SDA/SDASR_EN2 rise and fall time, C_L = 10 to 100 pF	10	80	ns
		Data rate		3.4	Mbps
I3	$t_{su(SDA-SCLH)}$	Setup time, SDA valid to SCL high	10		ns
I4	$t_{h(SCLL-SDA)}$	Hold time, SDA valid from SCL low	0	70	ns
I7	$t_{su(SCLH-SDAL)}$	Setup time, SCL high to SDA low	160		ns
I8	$t_{h(SDAL-SCLL)}$	Hold time, SCL low from SDA low	160		ns
I9	$t_{su(SDAH-SCLH)}$	Setup time, SDA high to SCL high	160		ns
SLAVE FAST MODE					
		SCL/SCLSR_EN1 and SDA/SDASR_EN2 rise and fall time, C_L = 10 to 400 pF	20 + 0.1 × C_L	250	ns
		Data rate		400	Kbps
I3	$t_{su(SDA-SCLH)}$	Setup time, SDA valid to SCL high	100		ns
I4	$t_{h(SCLL-SDA)}$	Hold time, SDA valid from SCL low	0	0.9	µs
I7	$t_{su(SCLH-SDAL)}$	Setup time, SCL high to SDA low	0.6		µs
I8	$t_{h(SDAL-SCLL)}$	Hold time, SCL low from SDA low	0.6		µs
I9	$t_{su(SDAH-SCLH)}$	Setup time, SDA high to SCL high	0.6		µs
SLAVE STANDARD MODE					
		SCL/SCLSR_EN1 and SDA/SDASR_EN2 rise and fall time, C_L = 10 to 400 pF		250	ns
		Data rate		100	Kbps
I3	$t_{su(SDA-SCLH)}$	Setup time, SDA valid to SCL high			ns
I4	$t_{h(SCLL-SDA)}$	Hold time, SDA valid from SCL low	0		µs
I7	$t_{su(SCLH-SDAL)}$	Setup time, SCL high to SDA low	4.7		µs
I8	$t_{h(SDAL-SCLL)}$	Hold time, SCL low from SDA low	4		µs
I9	$t_{su(SDAH-SCLH)}$	Setup time, SDA high to SCL high	4		µs
SWITCHING CHARACTERISTICS					
SLAVE HIGH–SPEED MODE					
I1	$t_{w(SCLL)}$	Pulse duration, SCL low	160		ns
I2	$t_{w(SCLH)}$	Pulse duration, SCL high	60		ns
SLAVE FAST MODE					
I1	$t_{w(SCLL)}$	Pulse duration, SCL low	1.3		µs
I2	$t_{w(SCLH)}$	Pulse duration, SCL high	0.6		µs
SLAVE STANDARD MODE					
I1	$t_{w(SCLL)}$	Pulse duration, SCL low	4.7		µs
I2	$t_{w(SCLH)}$	Pulse duration, SCL high	4		µs

Copyright © 2010–2014, Texas Instruments Incorporated

chanhvinh.com

5.8 Power Consumption

over operating free-air temperature range (unless otherwise noted)
All current consumption measurements are relative to the FULL chip, all VCC inputs set to VBAT voltage.

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Device BACKUP state	VBAT = 2.4 V, VBACKUP = 0 V,		11	16	µA
	VBAT = 0 V, VBACKUP = 3.2 V		6	9	
Device OFF state	VBAT = 3.6 V, CK32K clock running				µA
	BOOT[1:0] = 00: 32-kHz RC oscillator		16.5	23	
	BOOT[1:0] = 01: 32-kHz quartz or bypass oscillator, BOOT0P = 0		15	20	
	BOOT[1:0] = 01, Backup Battery Charger on, VBACKUP = 3.2 V		32	42	
	VBAT = 5 V, CK32K clock running:		20	28	
	BOOT[1:0] = 00: RC oscillator				
Device SLEEP state	VBAT = 3.6 V, CK32K clock running, PWRHOLDP = 0				µA
	BOOT[1:0] = 00, 3 DC-DCs on, 5 LDOs and VRTC on, no load		295		
	BOOT[1:0] = 01, 3 DC-DCs on, 3 LDOs and VRTC on, no load, BOOT0P = 0		279		
Device ACTIVE state	VBAT = 3.6 V, CK32K clock running, PWRHOLDP = 0				mA
	BOOT[1:0] = 00, 3 DC-DCs on, 5 LDOs and VRTC on, no load		1		
	BOOT[1:0] = 01, 3 DC-DCs on, 3 LDOs and VRTC on, no load, BOOT0P = 0		0.9		
	BOOT[1:0] = 00, 3 DC-DCs on PWM mode (VDD1_PSKIP = VDD2_PSKIP = VIO_PSKIP = 0), 5 LDOs and VRTC on, no load		21		

5.9 Power References and Thresholds

over operating free-air temperature range (unless otherwise noted)

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output reference voltage (VREF terminal)	Device in active or low-power mode	–1%	0.85	+1%	V
Main battery charged threshold VMBCH (programmable)	Measured on VCC7 terminal Triggering monitored through NRESPRWON				V
	VMBCH_VSEL = 11, BOOT[1:0] = 11 or 00		3		
	VMBCH_VSEL = 10		2.9		
	VMBCH_VSEL = 01		2.8		
	VMBCH_VSEL = 00		bypassed		
Main battery discharged threshold VMBDCH (programmable)	Measured on VCC7 terminal (MTL prg) Triggering monitored through INT1		VMBCH – 100 mV		V
Main battery low threshold VMBLO (MB comparator)	Measured on VCC7 terminal (Triggering monitored on terminal NRESPWRON)	2.5	2.6	2.7	V
Main battery high threshold VMBHI	VBACKUP = 0 V, measured on terminal VCC7 (MB comparator)	2.6	2.75	3	V
	VBACKUP = 3.2 V, measured on terminal VCC7	2.5	2.55	3	
Main battery not present threshold VBNPR	Measured on terminal VCC7 (Triggering monitored on terminal VRTC)	1.9	2.1	2.2	V
Ground current (analog references + comparators + backup battery switch)	V_{CC} = 3.6 V				µA
	Device in OFF state		8		
	Device in ACTIVE or SLEEP state		20		

Copyright © 2010–2014, Texas Instruments Incorporated

chanhvinh.com

5.10 Thermal Monitoring and Shutdown

over operating free-air temperature range (unless otherwise noted)

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Hot-die temperature rising threshold	THERM_HDSEL[1:0] = 00	113	117	136	°C
	THERM_HDSEL[1:0] = 01		121		
	THERM_HDSEL[1:0] = 10		125		
	THERM_HDSEL[1:0] = 11		130		
Hot-die temperature hysteresis			10		°C
Thermal shutdown temperature rising threshold		136	148	160	°C
Thermal shutdown temperature hysteresis			10		°C
Ground current	Device in ACTIVE state, Temp = 27°C, VCC7 = 3.6 V		6		µA

5.11 32-kHz RTC Clock

over operating free-air temperature range (unless otherwise noted)

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
CLK32KOUT rise and fall time	C_L = 35 pF			10	ns
Bypass Clock (OSC32KIN: input, OSC32KOUT floating)					
Input bypass clock frequency	OSCKIN input		32		kHz
Input bypass clock duty cycle	OSCKIN input	40%		60%	
Input bypass clock rise and fall time	10% – 90%, OSC32KIN input		10	20	ns
CLK32KOUT duty cycle	Logic output signal	40%		60%	
Bypass clock setup time	32KCLKOUT output			1	ms
Ground current	Bypass mode			1.5	µA
Crystal oscillator (connected from OSC32KIN to OSC32KOUT)					
Output frequency	CK32KOUT output		32.768		kHz
Oscillator startup time	On power on			2	s
Ground current			1.5		µA
RC oscillator (OSC32KIN: grounded, OSC32KOUT floating)					
Output frequency	CK32KOUT output		32		kHz
Output frequency accuracy	at 25°C	–15%	0%	+15%	
Cycle jitter (RMS)	Oscillator contribution			+10%	
Output duty cycle		+40%	+50%	+60%	
Settling time				150	µs
Ground current	Active at fundamental frequency		4		µA

Copyright © 2010–2014, Texas Instruments Incorporated

chanhvinh.com

5.12 Backup Battery Charger

over operating free-air temperature range (unless otherwise noted)

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Backup battery charging current	VBACKUP = 0 to 2.4 V, BBCHEN = 1	350	500	700	µA
End-of-charge backup battery voltage(1)	VCC7 = 3.6 V, BBSEL = 10	–3%	3.15	+3%	V
	VCC7 = 3.6 V, BBSEL = 00	–3%	3	+3%	
	VCC7 = 3.6 V, BBSEL = 01	–3%	2.52	+3%	
	VCC7 = 3.6 V, BBSEL = 11	VBAT – 0.3 V		VBAT	
Ground current	On mode		10		µA

(1) Note:
- BBSEL = 10, 00, or 01 intended to charge battery or superCap
- BBSEL = 11 intended to charge capacitor

5.13 VRTC LDO

over operating free-air temperature range (unless otherwise noted)

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Input voltage V_{IN}	On mode	2.5		5.5	V
	Back-up mode	1.9		5.5	
DC output voltage V_{OUT}	On mode, 3.0 V < V_{IN} < 5.5 V	1.78	1.83	1.88	V
	Back-up mode, 2.3 V ≤ V_{IN} ≤ 2.6 V	1.72	1.78	1.84	
Rated output current I_{OUTmax}	On mode	20			mA
	Back-up mode	0.1			
DC load regulation	On mode, I_{OUT} = I_{OUTmax} to 0			50	mV
	Back-up mode, I_{OUT} = I_{OUTmax} to 0			50	
DC line regulation	On mode, V_{IN} = 3.0 V to V_{INmax} at I_{OUT} = I_{OUTmax}			2.5	mV
	Back-up mode, V_{IN} = 2.3 V to 5.5 V at I_{OUT} = I_{OUTmax}			25	
Transient load regulation	On mode, V_{IN} = V_{INmin} + 0.2 V to V_{INmax} I_{OUT} = I_{OUTmax}/2 to I_{OUTmax} in 5 µs and I_{OUT} = I_{OUTmax} to I_{OUTmax}/2 in 5 µs			50(1)	mV
Transient line regulation	On mode, V_{IN} = V_{INmin} + 0.5 V to V_{INmin} in 30 µs And V_{IN} = V_{INmin} to V_{INmin} + 0.5 V in 30 µs, I_{OUT} = I_{OUTmax}/2			25(1)	mV
Turn-on time	I_{OUT} = 0, V_{IN} rising from 0 up to 3.6 V, at V_{OUT} = 0.1 V up to V_{OUTmin}		2.2		ms
Ripple rejection	V_{IN} = V_{INDC} + 100 mV_{pp} tone, V_{INDC+} = V_{INmin} + 0.1 V to V_{INmax} at I_{OUT} = I_{OUTmax}/2				dB
	f = 217 Hz		55		
	f = 50 kHz		35		
Ground current	Device in ACTIVE state		23		µA
	Device in BACKUP or OFF state		3		

(1) These parameters are not tested. They are used for design specification only.

Copyright © 2010–2014, Texas Instruments Incorporated

chanhvinh.com

5.14 VIO SMPS

over operating free-air temperature range (unless otherwise noted)

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Input voltage (VCCIO and VCC7) V_{IN}	I_{OUT} ≤ 800 mA	2.7		5.5	V
	V_{OUT} = 1.5 V or 1.8 V, I_{OUT} > 800 mA	3.2		5.5	
	V_{OUT} = 2.5 V, I_{OUT} > 800 mA	4.0		5.5	
	V_{OUT} = 3.3 V, I_{OUT} > 800 mA	4.4		5.5	
DC output voltage (V_{OUT})	PWM mode (VIO_PSKIP = 0) or pulse skip mode I_{OUT} to I_{MAX}				V
	VSEL=00	–3%	1.5	+3%	
	VSEL = 01, default BOOT[1:0] = 00 and 01	–3%	1.8	+3%	
	VSEL = 10	–3%	2.5	+3%	
	VSEL = 11	–3%	3.3	+3%	
	Power down		0		
Rated output current I_{OUTmax}	ILMAX[1:0] = 00, default	500			mA
	ILMAX[1:0] = 01	1000			
P-channel MOSFET On-resistance $R_{DS(ON)_PMOS}$	V_{IN} = V_{INmin}		300		mΩ
	V_{IN} = 3.8 V		250	400	
P-channel leakage current I_{LK_PMOS}	V_{IN} = V_{INMAX}, SWIO = 0 V			2	µA
N-channel MOSFET On-resistance $R_{DS(ON)_NMOS}$	V_{IN} = V_{MIN}		300		mΩ
	V_{IN} = 3.8 V		250	400	
N-channel leakage current I_{LK_NMOS}	V_{IN} = V_{INmax}, SWIO = V_{INmax}			2	µA
PMOS current limit (high-side)	V_{IN} = V_{INmin} to V_{INmax}, ILMAX[1:0] = 00	650			mA
	V_{IN} = V_{INmin} to V_{INmax}, ILMAX[1:0] = 01	1200			
	V_{IN} = V_{INmin} to V_{INmax}, ILMAX[1:0] = 10	1700			
NMOS current limit (low-side)	Source current load:				mA
	V_{IN} = V_{INmin} to V_{INmax}, ILMAX[1:0] = 00	650			
	V_{IN} = V_{INmin} to V_{INmax}, ILMAX[1:0] = 01	1200			
	V_{IN} = V_{INmin} to V_{INmax}, ILMAX[1:0] = 10	1700			
	Sink current load:				
	V_{IN} = V_{INmin} to V_{INmax}, ILMAX[1:0] = 00	800			
	V_{IN} = V_{INmin} to V_{INmax}, ILMAX[1:0] = 01	1200			
	V_{IN} = V_{INmin} to V_{INmax}, ILMAX[1:0] = 10	1700			
DC load regulation	On mode, I_{OUT} = 0 to I_{OUTmax}			20	mV
DC line regulation	On mode, V_{IN} = V_{INmin} to V_{INmax}			20	mV
Transient load regulation	V_{IN} = 3.8 V, V_{OUT} = 1.8 V I_{OUT} = 0 to 500 mA , Max slew = 100 mA/µs I_{OUT} = 700 to 1200 mA , Max slew = 100 mA/µs			50	mV
t on, off to on	I_{OUT} = 200 mA		350		µs
Overshoot	SMPS turned on		3%		
Power-save mode Ripple voltage	Pulse skipping mode, I_{OUT} = 1 mA		0.025 × V_{OUT}		V_{PP}
Switching frequency			3		MHz
Duty cycle				100	%
Minimum On Time $T_{ON(MIN)}$ P-channel MOSFET			35		ns
VFBIO internal resistance		0.5	1		MΩ
Discharge resistor for power-down sequence R_{DIS}	During device switch-off sequence Note: No discharge resistor is applied if VIO is turned off while the device is on.		30	50	Ω

Copyright © 2010–2014, Texas Instruments Incorporated

chanhvinh.com

VIO SMPS *(continued)*

over operating free-air temperature range (unless otherwise noted)

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Ground current (I_Q)	Off			1	µA
	PWM mode, I_{OUT} = 0 mA, V_{IN} = 3.8 V, VIO_PSKIP = 0		7500		
	Pulse skipping mode, no switching, 3-MHz clock on		250		
	Low-power (pulse skipping) mode, no switching				
	ST[1:0]=11		63		
Conversion efficiency	PWM mode, DCR_L < 50 mΩ, V_{OUT} = 1.8 V, V_{IN} = 3.6 V:				
	I_{OUT} = 10 mA		44%		
	I_{OUT} = 100 mA		87%		
	I_{OUT} = 400 mA		86%		
	I_{OUT} = 800 mA		76%		
	I_{OUT} = 1000 mA		72%		
	Pulse Skipping mode, DCR_L < 50 mΩ, V_{OUT} = 1.8 V, V_{IN} = 3.6 V:				
	I_{OUT} = 1 mA		71%		
	I_{OUT} = 10 mA		80%		
	I_{OUT} = 200 mA		87%		

Copyright © 2010–2014, Texas Instruments Incorporated

chanhvinh.com

5.15 VDD1 SMPS

over operating free-air temperature range (unless otherwise noted)

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Input voltage (VCC1 and VCC7) V_{IN}	I_{OUT} ≤ 1200 mA	2.7		5.5	V
	V_{OUT} = 0.6 V to 1.5 V, VGAIN_SEL = 00, I_{OUT} > 1200 mA	V_{OUT} + 2 V		5.5	
	2.5 V ≤ V_{OUT} ≤ 3.3 V, VGAIN_SEL = 10 or 11, I_{OUT} > 1200 mA	4.5		5.5	
DC output voltage (V_{OUT})	VGAIN_SEL = 00, I_{OUT} = 0 to I_{OUTmax}:				V
	max programmable voltage, SEL[6:0] = 1001011		1.5		
	default voltage, BOOT[1:0] = 00	–3%	1.2	+3%	
	default voltage, BOOT[1:0] = 01	–3%	1.2	+3%	
	min programmable voltage, SEL[6:0] = 0000011		0.6		
	SEL[6:0] = 000000: power down		0		
	VGAIN_SEL = 10, SEL = 0101011 = 43, I_{OUT} = 0 to I_{OUTmax}	–3%	2.2	+3%	V
	VGAIN_SEL = 11, SEL = 0101000 = 40, I_{OUT} = 0 to I_{OUTmax}	–3%	3.2	+3%	V
DC output voltage programmable step ($V_{OUTSTEP}$)	VGAIN_SEL = 00, 72 steps		12.5		mV
Rated output current I_{OUTmax}	ILMAX = 0, default	1000			mA
	ILMAX = 1	1500			
P-channel MOSFET On-resistance $R_{DS(ON)_PMOS}$	V_{IN} = V_{INmin}		300		mΩ
	V_{IN} = 3.8 V		250	400	
P-channel leakage current I_{LK_PMOS}	V_{IN} = V_{INmax}, SW1 = 0 V			2	µA
N-channel MOSFET On-resistance $R_{DS(ON)_NMOS}$	V_{IN} = V_{MIN}		300		mΩ
	V_{IN} = 3.8 V		250	400	
N-channel leakage current I_{LK_NMOS}	V_{IN} = V_{INmax}, SW1 = V_{INmax}			2	µA
PMOS current limit (high-side)	V_{IN} = V_{INmin} to V_{INmax}, ILMAX = 0	1150			mA
	V_{IN} = V_{INmin} to V_{INmax}, ILMAX = 1	2000			
NMOS current limit (low-side)	Source current load:				mA
	V_{IN} = V_{INmin} to V_{INmax}, ILMAX = 0	1150			
	V_{IN} = V_{INmin} to V_{INmax}, ILMAX = 1	2000			
	Sink current load:				
	V_{IN} = V_{INmin} to V_{INmax}, ILMAX = 0	1200			
	V_{IN} = V_{INmin} to V_{INmax}, ILMAX = 1	2000			
DC load regulation	On mode, I_{OUT} = 0 to I_{OUTmax}			20	mV
DC line regulation	On mode, V_{IN} = V_{INmin} to V_{INmax}			20	mV
Transient load regulation	V_{IN} = 3.8 V, V_{OUT} = 1.2 V				mV
	I_{OUT} = 0 to 500 mA , Max slew = 100 mA/µs			50	
	I_{OUT} = 700 mA to 1.2A , Max slew = 100 mA/µs				
t on, off to on	I_{OUT} = 200 mA		350		µs
Output voltage transition rate	From V_{OUT} = 0.6 V to 1.5 V and V_{OUT} = 1.5 V to 0.6 V I_{OUT} = 500 mA				mV/µs
	TSTEP[2:0] = 001		12.5		
	TSTEP[2:0] = 011 (default)		7.5		
	TSTEP[2:0] = 111		2.5		
Overshoot	SMPS turned on		3%		
Power-save mode ripple voltage	Pulse skipping mode, I_{OUT} = 1 mA		0.025 × V_{OUT}		V_{PP}
Switching frequency			3		MHz

Copyright © 2010–2014, Texas Instruments Incorporated

chanhvinh.com

VDD1 SMPS *(continued)*

over operating free-air temperature range (unless otherwise noted)

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Duty cycle				100	%
Minimum on time $t_{ON(MIN)}$ P-channel MOSFET			35		ns
VFB1 internal resistance		0.5	1		MΩ
Discharge resistor for power-down sequence R_{DIS}			30	50	Ω
Ground current (I_Q)	Off			1	µA
	PWM mode, I_{OUT} = 0 mA, V_{IN} = 3.8 V, VDD1_PSKIP = 0		7500		
	Pulse skipping mode, no switching		78		
	Low-power (pulse skipping) mode, no switching ST[1:0] = 11		63		
Conversion efficiency	PWM mode, DCR_L < 0.1 Ω, V_{OUT} = 1.2 V, V_{IN} = 3.6 V:				
	I_{OUT} = 10 mA		35%		
	I_{OUT} = 200 mA		82%		
	I_{OUT} = 400 mA		81%		
	I_{OUT} = 800 mA		74%		
	I_{OUT} = 1500 mA		62%		
	Pulse skipping mode, DCR_L < 0.1Ω, V_{OUT} = 1.2 V, V_{IN} = 3.6 V:				
	I_{OUT} = 1 mA		59%		
	I_{OUT} = 10 mA		70%		
	I_{OUT} = 200 mA		82%		

Copyright © 2010–2014, Texas Instruments Incorporated

chanhvinh.com

5.16 VDD2 SMPS

over operating free-air temperature range (unless otherwise noted)

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Input voltage (VCC2 and VCC4) V_{IN}	I_{OUT} ≤ 1200 mA	2.7		5.5	V
	V_{OUT} = 0.6 V to 1.5 V, VGAIN_SEL = 00, I_{OUT} > 1200 mA	V_{OUT} + 2 V		5.5	
	2.5 V ≤ V_{OUT} ≤ 3.3 V, VGAIN_SEL = 10 or 11, I_{OUT} > 1200 mA	4.5		5.5	
DC output voltage (V_{OUT})	VGAIN_SEL = 00, I_{OUT} = 0 to I_{OUTmax}:				V
	max programmable voltage, SEL[6:0] = 1001011		1.5		
	default, BOOT[1:0] = 01	–3%	1.2	+3%	
	min programmable voltage, SEL[6:0] = 0000011		0.6		
	SEL[6:0] = 000000: power down		0		
	VGAIN_SEL = 10, SEL = 0101011 = 43	–3%	2.2	+3%	
	VGAIN_SEL = 11, default, BOOT[1:0] = 00	–3%	3.3	+3%	
DC output voltage programmable step ($V_{OUTSTEP}$)	VGAIN_SEL = 00, 72 steps		12.5		mV
Rated output current I_{OUTmax}	ILMAX = 0, default	1000			mA
	ILMAX = 1	1500			
P-channel MOSFET	V_{IN} = V_{INmin}		300		mΩ
On-resistance $R_{DS(ON)_PMOS}$	V_{IN} = 3.8 V		250	400	
P-channel leakage current I_{LK_PMOS}	V_{IN} = V_{INmax}, SW2 = 0 V			2	µA
N-channel MOSFET	V_{IN} = V_{MIN}		300		mΩ
On-resistance $R_{DS(ON)_NMOS}$	V_{IN} = 3.8 V		250	400	
N-channel leakage current I_{LK_NMOS}	V_{IN} = V_{INmax}, SW2 = V_{INmax}			2	µA
PMOS current limit (high-side)	V_{IN} = V_{INmin} to V_{INmax}, ILMAX = 0	1150			mA
	V_{IN} = V_{INmin} to V_{INmax}, ILMAX = 1	2200			
NMOS current limit (low-side)	Source current load:	1150			mA
	V_{IN} = V_{INmin} to V_{INmax}, ILMAX = 0	2000			
	V_{IN} = V_{INmin} to V_{INmax}, ILMAX = 1				
	Sink current load:				
	V_{IN} = V_{INmin} to V_{INmax}, ILMAX = 0	1200			
	V_{IN} = V_{INmin} to V_{INmax}, ILMAX = 1	2000			
DC load regulation	On mode, I_{OUT} = 0 to I_{OUTmax}			20	mV
DC line regulation	On mode, V_{IN} = V_{INmin} to V_{INmax} at I_{OUT} = I_{OUTmax}			20	mV
Transient load regulation	V_{IN} = 3.8 V, V_{OUT} = 1.2 V			50	mV
	I_{OUT} = 0 to 500 mA , Max slew = 100 mA/µs				
	I_{OUT} = 700 mA to 1.2 A , Max slew = 100 mA/µs				
t on, off to on	I_{OUT} = 200 mA		350		µs
Output voltage transition rate	From V_{OUT} = 0.6 V to 1.5 V and V_{OUT} = 1.5 V to 0.6 V I_{OUT} = 500 mA				µs
	TSTEP[2:0] = 001		12.5		
	TSTEP[2:0] = 011 (default)		7.5		
	TSTEP[2:0] = 111		2.5		
Power-save mode ripple voltage	Pulse skipping mode, I_{OUT} = 1 mA		0.025 V_{OUT}		V_{PP}
Overshoot			3%		
Switching frequency			3		MHz
Duty cycle				100	%
Minimum On time P-Channel MOSFET			35		ns

Copyright © 2010–2014, Texas Instruments Incorporated

chanhvinh.com

VDD2 SMPS *(continued)*

over operating free-air temperature range (unless otherwise noted)

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
VFB2 internal resistance		0.5	1		MΩ
Discharge resistor for power-down sequence R_{DIS}			30	50	Ω
Ground current (I_Q)	Off			1	µA
	PWM mode, I_{OUT} = 0 mA, V_{IN} = 3.8 V, VDD2_PSKIP = 0		7500		
	Pulse skipping mode, no switching		78		
	Low-power (pulse skipping) mode, no switching				
	ST[1:0] = 11		63		
Conversion efficiency	PWM mode, DCR_L < 50 mΩ, V_{OUT} = 1.2 V, V_{IN} = 3.6 V:				
	I_{OUT} = 10 mA		35%		
	I_{OUT} = 200 mA		82%		
	I_{OUT} = 400 mA		81%		
	I_{OUT} = 800 mA		74%		
	I_{OUT} = 1200 mA		66%		
	I_{OUT} = 1500 mA		62%		
	Pulse skipping mode mode, DCR_L < 50 mΩ, V_{OUT} = 1.2 V, V_{IN} = 3.6 V:				
	I_{OUT} = 1 mA		59%		
	I_{OUT} = 10 mA		70%		
	I_{OUT} = 200 mA		82%		
	PWM mode, DCR_L < 50 mΩ, V_{OUT} = 3.3 V, V_{IN} = 5 V:				
	I_{OUT} = 10 mA		44%		
	I_{OUT} = 200 mA		90%		
	I_{OUT} = 400 mA		91%		
	I_{OUT} = 800 mA		88%		
	I_{OUT} = 1200 mA		84%		
	I_{OUT} = 1500 mA		81%		
	Pulse skipping mode mode, DCR_L < 50 mΩ, V_{OUT} = 3.3 V, V_{IN} = 5 V:				
	I_{OUT} = 1 mA		75%		
	I_{OUT} = 10 mA		83%		
	I_{OUT} = 200 mA		90%		

Copyright © 2010–2014, Texas Instruments Incorporated

chanhvinh.com

5.17 VDD3 SMPS

over operating free-air temperature range (unless otherwise noted)

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Input voltage V_{IN}		3		5.5	V
DC output voltage (V_{OUT})		4.65	5	5.25	V
Rated output current I_{OUTmax}		100			mA
N-channel MOSFET On-resistance $R_{DS(ON)_NMOS}$	V_{IN} = 3.6 V		500		mΩ
N-channel MOSFET leakage current I_{LK_NMOS}	$V_{IN} = V_{INmax}$, SW3 = V_{INmax}			2	µA
N-channel MOSFET DC current limit	$V_{IN} = V_{INmin}$ to V_{INmax}, sink current load	430	550		mA
Turn-on inrush current	$V_{IN} = V_{INmin}$ to V_{INmax}			850	mA
Ripple voltage			20		mV
DC load regulation	On mode, I_{OUT} = 0 to I_{OUTmax}			100	mV
DC line regulation	On mode, $V_{IN} = V_{INmin}$ to 5 V at $I_{OUT} = I_{OUTmax}$			100	mV
Turn-on time	I_{OUT} = 8 mA, V_{OUT} = 0 to 4.4 V		200		µs
Overshoot			3%		
Switching frequency			1		MHz
VFB3 internal resistance			088		MΩ
Ground current (I_Q)	Off I_{OUT} = 0 mA to I_{OUTmax}, V_{IN} = 3.6 V		 360	1	µA
Conversion efficiency	V_{IN} = 3.6 V: I_{OUT} = 10 mA I_{OUT} = 50 mA I_{OUT} = 100 mA		 81% 85% 85%		

Copyright © 2010–2014, Texas Instruments Incorporated

chanhvinh.com

5.18 VDIG1 and VDIG2 LDO

over operating free-air temperature range (unless otherwise noted)

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Input voltage (VCC6) V_{IN}	V_{OUT} (VDIG1) = 1.2 V at 300 mA / 1.5 V at 100 mA and				V
	V_{OUT} (VDIG2) = 1.2 V / 1.1 V / 1.0 V at 300 mA	1.7		5.5	
	V_{OUT} (VDIG1) = 1.5 V and V_{OUT} (VDIG2) = 1.8 V at 200mA	2.1		5.5	
	V_{OUT} (VDIG1) = 1.8 V and V_{OUT} (VDIG2) = 1.8 V	2.7		5.5	
	V_{OUT} (VDIG1) = 2.7 V	3.2		5	
VDIG1					
DC output voltage V_{OUT}	On and Low-power mode, V_{IN} = V_{INmin} to V_{INmax}				V
	SEL = 11, I_{OUT} = 0 to I_{OUTmax}	–3%	2.7	+3%	
	SEL = 10 I_{OUT} = 0 to I_{OUTmax}	–3%	1.8	+3%	
	SEL = 01 I_{OUT} = 0 to 100 mA/I_{OUTmax}	–3%	1.5	+3%	
	SEL = 00, I_{OUT} = 0 to I_{OUTmax}, V_{IN} = V_{INmin} to 4 V, default BOOT[1:0] = 00 or 01	–3%	1.2	+3%	
Rated output current I_{OUTmax}	On mode	300			mA
	Low-power mode	1			
Load current limitation (short-circuit protection)	On mode, V_{OUT} = V_{OUTmin} – 100 mV	350	600		mA
Dropout voltage V_{DO}	On mode, VDO = V_{IN} – V_{OUT}				mV
	V_{OUTtyp} = 2.7 V, V_{IN} = 2.8 V, I_{OUT} = I_{OUTmax}, T = 25°C		150		
	V_{OUTtyp} = 1.5 V, V_{IN} = 1.7 V, I_{OUT} = I_{OUTmax}, T = 25°C		300		
DC load regulation	On mode, I_{OUT} = I_{OUTmax} to 0			25	mV
DC line regulation	On mode, V_{IN} = V_{INmin} to V_{INmax} at I_{OUT} = I_{OUTmax}			3	mV
Transient load regulation	On mode, V_{IN} = 3.8 V		10		mV
	I_{OUT} = 20 mA to 180 mA in 5µs and I_{OUT} = 180 mA to 20 mA in 5 µs				
Transient line regulation	On mode, V_{IN} = 2.7 + 0.5 V to 2.7 in 30 µs,		2		mV
	And V_{IN} = 2.7 to 2.7 + 0.5 V in 30 µs, I_{OUT} = I_{OUTmax}/2				
Turn-on time	I_{OUT} = 0, at V_{OUT} = 0.1 V up to V_{OUTmin}		100		µs
Turn-on inrush current			300		mA
Ripple rejection	V_{IN} = V_{INDC} + 100 mV_{pp} tone, $_{VINDC+}$= 3.8 V, I_{OUT} = I_{OUTmax}/2				dB
	f = 217 Hz		70		
	f = 50 kHz		40		
VDIG1 internal resistance	LDO off		400		Ω
Ground current	On mode, I_{OUT} = 0, VCC6 = VBAT, V_{OUT} = 2.7 V		54		µA
	On mode, I_{OUT} = 0, VCC6 = 1.8 V, V_{OUT} = 1.2 V		67		
	On mode, I_{OUT} = I_{OUTmax}, VCC6 = VBAT, V_{OUT} = 2.7 V		1870		
	On mode, I_{OUT} = I_{OUTmax}, VCC6 = 1.8 V, V_{OUT} = 1.2 V		1300		
	Low-power mode, VCC6 = VBAT, V_{OUT} = 2.7 V		13		
	Low-power mode, VCC6 = 1.8 V, V_{OUT} = 1.2 V		10		
	Off mode			1	

Copyright © 2010–2014, Texas Instruments Incorporated

chanhvinh.com

VDIG1 and VDIG2 LDO *(continued)*

over operating free-air temperature range (unless otherwise noted)

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
	VDIG2				
DC output voltage V_{OUT}	On and low-power mode, V_{IN} = V_{INmin} to V_{INmax}				
	SEL = 11, I_{OUT} = 0 to I_{OUTmax}	–3%	1.8	+3%	
	SEL = 10 I_{OUT} = 0 to I_{OUTmax}, V_{IN} = V_{INmin} to 4 V	–3%	1.2	+3%	
	SEL = 01 I_{OUT} = 0 to 100 mA/I_{OUTmax}, V_{IN}= V_{INmin} to 4 V	–3%	1.1	+3%	V
	SEL = 00, I_{OUT} = 0 to I_{OUTmax}, V_{IN} = V_{INmin} to 4 V, default BOOT[1:0] = 00 or 01	–3%	1	+3%	
Rated output current I_{OUTmax}	On mode	300			mA
	Low-power mode	1			
Load current limitation (short-circuit protection)	On mode, V_{OUT} = V_{OUTmin} – 100 mV	350	600		mA
Dropout voltage V_{DO}	On mode, V_{DO} = V_{IN} – V_{OUT},				
	V_{OUTtyp} = 1.8 V, V_{IN} = 2.1 V, IOUT=I_{OUTmax}, T = 25°C		250		mV
DC load regulation	On mode, I_{OUT} = I_{OUTmax} to 0			25	mV
DC line regulation	On mode, V_{IN} = V_{INmin} to V_{INmax} at I_{OUT} = I_{OUTmax}			3	mV
Transient load regulation	On mode, V_{IN} = 3.8 V		10		mV
	I_{OUT} = 20 mA to 180 mA in 5 µs and I_{OUT} = 180 mA to 20 mA in 5 µs				
Transient line regulation	On mode, V_{IN} = 2.7 + 0.5 V to 2.7 in 30 µs,		2		mV
	And V_{IN} = 2.7 to 2.7 + 0.5 V in 30 µs, I_{OUT} = I_{OUTmax}/2				
Turn-on time	I_{OUT} = 0, at V_{OUT} = 0.1 V up to V_{OUTmin}		100		µs
Turn-on inrush current			300		mA
Ripple rejection	V_{IN} = V_{INDC} + 100 mV_{pp} tone, V_{INDC+}= 3.8 V, I_{OUT} = I_{OUTmax}/2				
	f = 217 Hz		70		dB
	f = 50 kHz		40		
VDIG2 internal resistance	LDO off		400		Ω
Ground current	On mode, I_{OUT} = 0, VCC6 = VBAT, V_{OUT} = 1.8 V		52		
	On mode, I_{OUT} = 0, VCC6 = 1.8 V, V_{OUT} = 1.0 V		67		
	On mode, I_{OUT} = I_{OUTmax}, VCC6 = VBAT, V_{OUT} = 1.8 V		1750		
	On mode, I_{OUT} = I_{OUTmax}, VCC6 = 1.8 V, V_{OUT} = 1.0 V		1300		µA
	Low-power mode, VCC6 = VBAT, V_{OUT} = 1.8 V		11		
	Low-power mode, VCC6 = 1.8 V, V_{OUT} = 1.0 V		10		
	Off mode			1	

Copyright © 2010–2014, Texas Instruments Incorporated

chanhvinh.com

5.19 VAUX33 and VMMC LDO

over operating free-air temperature range (unless otherwise noted)

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Input voltage (VCC3) V_{IN}	V_{OUT} (VAUX33) = 1.8 V / 2 V and V_{OUT} (VMMC) = 1.8 V	2.7		5.5	V
	V_{OUT} (VAUX33) = 2.8 V	3.2		5.5	
	V_{OUT} (VAUX33) = 3.3 V	3.6		5.5	
	V_{OUT} (VMMC) = 2.8 V at 200 mA	3.2		5.5	
	V_{OUT} (VMMC) = 3.0 V	3.6		5.5	
	V_{OUT} (VMMC) = 3.3 V at 200 mA	3.6		5.5	
VAUX33					
DC output voltage V_{OUT}	On and low-power mode, V_{IN} = V_{INmin} to V_{INmax}				V
	SEL = 11, I_{OUT} = 0 to I_{OUTmax}, Default BOOT[1:0] = 01	–3%	3.3	+3%	
	SEL = 10, I_{OUT} = 0 to I_{OUTmax}	–3%	2.8	+3%	
	SEL = 01, I_{OUT} = 0 to I_{OUTmax}	–3%	2.0	+3%	
	SEL = 00, I_{OUT} = 0 to I_{OUTmax}, default BOOT[1:0] = 00	–3%	1.8	+3%	
Rated output current I_{OUTmax}	On mode	150			mA
	Low-power mode	1			
Load current limitation (short-circuit protection)	On mode, V_{OUT} = V_{OUTmin} – 100 mV	350	500		mA
Dropout Voltage V_{DO}	On mode, V_{OUTtyp} = 2.8 V, V_{DO} = V_{IN} – V_{OUT},				mV
	V_{IN} = 2.9 V, I_{OUT} = I_{OUTmax}, T = 25°C		150		
DC load regulation	On mode, I_{OUT} = I_{OUTmax} to 0			20	mV
DC line regulation	On mode, I_{OUT} = I_{OUTmax}			3	mV
Transient load regulation	On mode, V_{IN} = 3.8 V		12		mV
	I_{OUT} = 0.1 × I_{OUTmax} to 0.9 × I_{OUTmax} in 5 µs and I_{OUT} = 0.9 × I_{OUTmax} to 0.1 × I_{OUTmax} in 5 µs				
Transient line regulation	On mode, I_{OUT} = I_{OUTmax},V_{IN} = V_{INmin} + 0.5 V to V_{INmin} in 30 µs		2		mV
	and V_{IN} = V_{INmin} to V_{INmin} + 0.5 V in 30 µs, I_{OUT} = I_{OUTmax}/2				
Turn-on time	I_{OUT} = 0, at V_{OUT} = 0.1 V up to V_{OUTmin}		100		µs
Turn-on inrush current			600		mA
Ripple Rejection	V_{IN} = V_{INDC} + 100 mV_{pp} tone, V_{INDC+} = 3.8 V, I_{OUT} = I_{OUTmax}/2				dB
	f = 217 Hz		70		
	f = 50 kHz		40		
VAUX33 internal resistance	LDO off		70		Ω
Ground current	On mode, I_{OUT} = 0		55		µA
	On mode, I_{OUT} = I_{OUTmax}		1600		
	Low-power mode		15		
	Off mode			1	
VMMC					
DC output voltage V_{OUT}	On and low-power mode, V_{IN} = V_{INmin} to V_{INmax}				V
	SEL = 11, I_{OUT} = 0 to 200 mA, default BOOT[1:0] = 00	–3%	3.3	+3%	
	SEL = 10, I_{OUT} = 0 to I_{OUTmax}	–3%	3.0	+3%	
	SEL = 01, I_{OUT} = 0 to 200 mA	–3%	2.8	+3%	
	SEL = 00, I_{OUT} = 0 to I_{OUTmax}, default BOOT[1:0] = 01	–3%	1.8	+3%	

Copyright © 2010–2014, Texas Instruments Incorporated

chanhvinh.com

VAUX33 and VMMC LDO *(continued)*

over operating free-air temperature range (unless otherwise noted)

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Rated output current I_{OUTmax}	On mode	300			mA
	Low-power mode	1			
Load current limitation (short-circuit protection)	On mode, $V_{OUT} = V_{OUTmin} - 100$ mV	350	500		mA
Dropout voltage V_{DO}	Dropout voltage V_{DO}				
	V_{IN} = 3.0 V, I_{OUT} = 200 mA, T = 25°C		200		mV
DC load regulation	On mode, $I_{OUT} = I_{OUTmax}$ to 0			25	mV
DC line regulation	On mode, $V_{IN} = V_{INmin}$ to V_{INmax} at $I_{OUT} = I_{OUTmax}$			3	mV
Transient load regulation	On mode, V_{IN} = 3.8 V		12		mV
	I_{OUT} = 20 mA to 180 mA in 5 µs and I_{OUT} = 180 mA to 20 mA in 5 µs				
Transient line regulation	On mode, I_{OUT} = 200 mA, $V_{IN} = V_{INmin}$ + 0.5 V to V_{INmin} in 30 µs		2		mV
	And $V_{IN} = V_{INmin}$ to V_{INmin} + 0.5 V in 30 µs, $I_{OUT} = I_{OUTmax}/2$				
Turn-on time	I_{OUT} = 0, at V_{OUT} = 0.1 V up to V_{OUTmin}		100		µs
Ripple rejection	$V_{IN} = V_{INDC}$ + 100 mV_{pp} tone, V_{INDC+}= 3.8 V, $I_{OUT} = I_{OUTmax}/2$				
	f = 217 Hz		70		dB
	f = 50 kHz		40		
VMMC internal resistance	LDO Off		70		Ω
Ground current	On mode, I_{OUT} = 0		55		µA
	On mode, $I_{OUT} = I_{OUTmax}$		2700		
	Low-power mode		15		
	Off mode			1	

Copyright © 2010–2014, Texas Instruments Incorporated

chanhvinh.com

5.20 VAUX1 and VAUX2 LDO

over operating free-air temperature range (unless otherwise noted)

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Input voltage (VCC4) V_{IN}	V_{OUT} (VAUX1) = 1.8 V and V_{OUT} (AUX2) = 1.8 V	2.7		5.5	V
	V_{OUT} (VAUX1) = 2.5 V	3.2		5.5	
	V_{OUT} (VAUX1) = 2.8 V at I_{load} = 200 mA and 2.85 V at I_{load} = 200mA	3.2		5.5	
	V_{OUT} (VAUX2) = 2.8 V	3.2		5.5	
	V_{OUT} (VAUX2) = 2.9 V at I_{load} = 100mA	3.2		5.5	
	V_{OUT} (VAUX2) = 3.3 V	3.6		5.5	
VAUX1					
DC output voltage V_{OUT}	On and low-power mode, V_{IN} = V_{INmin} to V_{INmax}				V
	SEL = 11, I_{OUT} = 0 to 200 mA	–3%	2.85	+3%	
	SEL = 10, I_{OUT} = 0 to 200 mA	–3%	2.8	+3%	
	SEL = 01, I_{OUT} = 0 to I_{OUTmax}	–3%	2.5	+3%	
	SEL = 00, I_{OUT} = 0 to I_{OUTmax}, default BOOT[1:0] = 00 or 01	–3%	1.8	+3%	
Rated output current I_{OUTmax}	On mode	300			mA
	Low-power mode	1			
Load current limitation (short-circuit protection)	On mode, V_{OUT} = V_{OUTmin} – 100 mV	350	500		mA
Dropout voltage V_{DO}	On mode, V_{OUTtyp} = 2.8 V, V_{DO} = V_{IN} – V_{OUT},				
	V_{IN} = 3.0 V, I_{OUT} = 200 mA, T = 25°C		200		mV
DC load regulation	On mode, I_{OUT} = 200 mA to 0			15	mA
DC line regulation	On mode, I_{OUT} = 200 mA			5	V
Transient load regulation	On mode, V_{IN} = 3.8 V, I_{OUT} = 20 mA to 180 mA in 5 µs		15		mV
	and I_{OUT} = 180 mA to 20 mA in 5µs				
Transient line regulation	On mode, I_{OUT} = 200 mA, V_{IN}= V_{INmin} + 0.5 V to V_{INmin} in 30 µs		2		mV
	and V_{IN} = V_{INmin} to V_{INmin} + 0.5v in 30 µs, I_{OUT} = I_{OUTmax}/2				
Turn-on time	I_{OUT} = 0, at V_{OUT} = 0.1 V up to V_{OUTmin}, no load		100		µs
Turn-on inrush current			600		mA
Ripple Rejection	V_{IN} = V_{INDC} + 100 mV_{pp} tone, V_{INDC+} = 3.8 V, I_{OUT} = I_{OUTmax}/2				dB
	f = 217 Hz		70		
	f = 50 kHz		40		
VAUX1 internal resistance	LDO Off		80		Ω
Ground current	On mode, I_{OUT} = 0		60		µA
	On mode, I_{OUT} = I_{OUTmax}		2700		
	Low-power mode		12		
	Off mode			1	
VAUX2					
	On and low-power mode, V_{IN} = V_{INmin} to V_{INmax}				V
	SEL = 11, I_{OUT} = 0 to I_{OUTmax}	–3%	3.3	+3%	
	SEL = 10, I_{OUT} = 0 to 100 mA	–3%	2.9	+3%	
	SEL = 01, I_{OUT} = 0 to I_{OUTmax}	–3%	2.8	+3%	
	SEL = 00, I_{OUT} = 0 to I_{OUTmax}, default BOOT[1:0] = 00 or 01	–3%	1.8	+3%	
Rated output current I_{OUTmax}	On mode	300			mA
	Low-power mode	1			

Copyright © 2010–2014, Texas Instruments Incorporated

chanhvinh.com

VAUX1 and VAUX2 LDO *(continued)*

over operating free-air temperature range (unless otherwise noted)

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Load current limitation (short-circuit protection)	On mode, $V_{OUT} = V_{OUTmin} - 100$ mV	350	500		mA
Dropout voltage V_{DO}	On mode, $V_{OUTtyp} = 2.8$ V, $V_{DO} = V_{IN} - V_{OUT}$ $V_{IN} = 2.9$ V, $I_{OUT} = I_{OUTmax}$, T = 25°C		150		mV
DC load regulation	On mode, $I_{OUT} = I_{OUTmax}$ to 0			15	mV
DC line regulation	On mode, $V_{IN} = V_{INmin}$ to V_{INmax} at $I_{OUT} = I_{OUTmax}$			2	mV
Transient load regulation	On mode, $V_{IN} = 3.8$ V, $I_{OUT} = 0.1 \times I_{OUTmax}$ to $0.9 \times I_{OUTmax}$ in 5µs And $I_{OUT} = 0.9 \times$ IOUTmax to $0.1 \times$ IOUTmax in 5us		12		mV
Transient line regulation	On mode, $I_{OUT} = I_{OUTmax}$, $V_{IN} = V_{INmin} + 0.5$ V to V_{INmin} in 30 µs And $V_{IN} = V_{INmin}$ to $V_{INmin} + 0.5$ V in 30 µs, $I_{OUT} = I_{OUTmax}/2$		2		mV
Turn-on time	$I_{OUT} = 0$, at $V_{OUT} = 0.1$ V up to V_{OUTmin}		100		µs
Turn-on Inrush current			600		mA
Ripple rejection	$V_{IN} = V_{INDC} + 100$ mV_{pp} tone, $V_{INDC+} = 3.8$ V, $I_{OUT} = I_{OUTmax}/2$ f = 217 Hz f = 50 kHz		 70 40		dB
VAUX2 internal resistance	LDO off		80		Ω
Ground current	On mode, $I_{OUT} = 0$ On mode, $I_{OUT} = I_{OUTmax}$ Low-power mode Off mode		60 1600 12	 1	µA

Copyright © 2010–2014, Texas Instruments Incorporated

chanhvinh.com

5.21 VDAC and VPLL LDO

over operating free-air temperature range (unless otherwise noted)

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Input voltage (VCC5) V_{IN}	V_{OUT}(VDAC) = 1.8 V and V_{OUT}(VPLL) = 1.8 V / 1.1 V / 1.0 V	2.7		5.5	V
	V_{OUT}(VDAC) = 2.6 V and V_{OUT}(VPLL) = 2.5 V	3.0		5.5	
	V_{OUT}(VDAC) = 2.8 V / 2.85 V	3.2		5.5	
VDAC					
DC Output voltage V_{OUT}	On and low-power mode, V_{IN} = V_{INmin} to V_{INmax}				V
	SEL = 11, I_{OUT} = 0 to I_{OUTmax}	–3%	2.85	+3%	
	SEL = 10, I_{OUT} = 0 to I_{OUTmax}	–3%	2.8	+3%	
	SEL = 01, I_{OUT} = 0 to I_{OUTmax}	–3%	2.6	+3%	
	SEL = 00, I_{OUT} = 0 to I_{OUTmax}, default BOOT[1:0] = 00 or 01	–3%	1.8	+3%	
Rated output current I_{OUTmax}	On mode	150			mA
	Low-power mode	1			
Load current limitation (short-circuit protection)	On mode, V_{OUT} = V_{OUTmin} – 100 mV	350	500		mA
Dropout Voltage V_{DO}	On mode, V_{OUTtyp} = 2.8 V, V_{DO} = V_{IN} – V_{OUT}, V_{IN} = 2.9 V, I_{OUT} = I_{OUTmax}, T = 25°C		150		mV
DC load regulation	On mode, V_{OUT} = V_{OUTmin} – 100 mV			15	mV
DC line regulation	On mode, V_{OUT} = 1.8 V, I_{OUT} = I_{OUTmax}			2	mV
Transient load regulation	On mode, V_{IN} = 3.8 V, I_{OUT} = 0.1 × I_{OUTmax} to 0.9 × I_{OUTmax} in 5 µs		15		mV
	And I_{OUT} = 0.9 × I_{OUTmax} to 0.1 × I_{OUTmax} in 5 µs				
Transient line regulation	On mode, I_{OUT} = I_{OUTmax}, V_{IN} = V_{INmin} + 0.5 V to V_{INmin} in 30 µs		0.5		mV
	And V_{IN} = V_{INmin} to V_{INmin} + 0.5 V in 30 µs, I_{OUT} = I_{OUTmax}/2				
Turn-on time	I_{OUT} = 0, at V_{OUT} = 0.1 V up to V_{OUTmin}		100		µs
Turn-on Inrush current			600		mA
Ripple Rejection	V_{IN} = V_{INDC} + 100 mV_{pp} tone, V_{INDC+} = 3.8 V, I_{OUT} = I_{OUTmax}/2				dB
	f = 217 Hz		70		
	f = 50 kHz		40		
VDAC internal resistance	LDO off		360		kΩ
Ground current	On mode, I_{OUT} = 0		60		µA
	On mode, I_{OUT} = I_{OUTmax}		1600		
	Low-power mode		12		
	Off mode			1	

Copyright © 2010–2014, Texas Instruments Incorporated

chanhvinh.com

VDAC and VPLL LDO *(continued)*

over operating free-air temperature range (unless otherwise noted)

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
VPLL					
DC output voltage V_{OUT}	On and low-power mode, V_{IN} = V_{INmin} to V_{INmax}				
	SEL = 11, I_{OUT} = 0 to I_{OUTmax}	–3%	2.5	+3%	V
	SEL = 10, I_{OUT} = 0 to I_{OUTmax}, default BOOT[1:0 = 00 or 01	–3%	1.8	+3%	
	SEL = 01, I_{OUT} = 0 to I_{OUTmax}	–3%	1.1	+3%	
	SEL = 00, I_{OUT} = 0 to I_{OUTmax}	–3%	1.0	+3%	
Rated output current I_{OUTmax}	On mode	50			mA
	Low-power mode	1			
Load current limitation (short-circuit protection)	On mode, V_{OUT} = V_{OUTmin} – 100 mV	200	400		mA
Dropout voltage V_{DO}	On mode, V_{OUTtyp} = 2.5 V, V_{DO} = V_{IN} – V_{OUT}, V_{IN} = 2.5 V, I_{OUT} = I_{OUTmax}, T = 25°C		100		mV
DC load regulation	On mode, I_{OUT} = I_{OUTmax} to 0			10	mV
DC line regulation	On mode, V_{IN} = V_{INmin} to V_{INmax} at I_{OUT} = I_{OUTmax}			1	mV
Transient load regulation	On mode, V_{IN} = 3.8 V, I_{OUT} = 0.1 × I_{OUTmax} to 0.9 × I_{OUTmax} in 5 µs And I_{OUT} = 0.9 × I_{OUTmax} to 0.1 × I_{OUTmax} in 5 µs		9		mV
Transient line regulation	On mode, V_{IN} = V_{INmin} + 0.5 V to V_{INmin} in 30 µs And V_{IN} = V_{INmin} to V_{INmin} + 0.5 V in 30 µs, I_{OUT} = I_{OUTmax}/2		0.5		mV
Turn-on time	I_{OUT} = 0, at V_{OUT} = 0.1 V up to V_{OUTmin}		100		µs
Turn-on in rush current			300		mA
Ripple rejection	V_{IN} = V_{INDC} + 100 mV_{pp} tone, V_{INDC+} = 3.8 V, I_{OUT} = I_{OUTmax}/2				
	f = 217 Hz		70		dB
	f = 50 kHz		40		
VPLL internal resistance	LDO off		535		kΩ
Ground current	On mode, I_{OUT} = 0		60		µA
	On mode, I_{OUT} = I_{OUTmax}		1600		
	Low-power mode		12		
	Off mode			1	

Copyright © 2010–2014, Texas Instruments Incorporated

chanhvinh.com

5.22 Timing and Switching Characteristics

5.22.1 Switch-On/-Off Sequences and Timing

Time slot length can be selected to be 0.5 ms or 2 ms through the EEPROM for an OFF-to-ACTIVE transition or through the value programmed in the register DEVCTRL2_REG for a SLEEP-to-ACTIVE transition.

5.22.1.1 BOOT1 = 0, BOOT0 = 0

Table 5-1 provides details about the EEPROM setting for the BOOT modes. The power-up sequence for this boot mode is provided in Figure 5-1.

Table 5-1. Fixed Boot Mode: 00

Register	Bit	Description	TPS65910 Boot 00
VDD1_OP_REG	SEL	VDD1 voltage level selection for boot	1.2 V
VDD1_REG	VGAIN_SEL	VDD1 gain selection, x1 or x2	x1
EEPROM		VDD1 time slot selection	3
DCDCCTRL_REG	VDD1_PSKIP	VDD1 pulse skip mode enable	skip enabled
VDD2_OP_REG/VDD2_SR_REG	SEL	VDD2 voltage level selection for boot	1.1 V
VDD2_REG	VGAIN_SEL	VDD2 Gain selection, x1 or x3	x3
EEPROM		VDD2 time slot selection	2
DCDCCTRL_REG	VDD2_PSKIP	VDD2 pulse skip mode enable	skip enabled
VIO_REG	SEL	VIO voltage selection	1.8 V
EEPROM		VIO time slot selection	1
DCDCCTRL_REG	VIO_PSKIP	VIO pulse skip mode enable	skip enabled
EEPROM		VDD3 time slot	OFF
VDIG1_REG	SEL	LDO voltage selection	1.2 V
EEPROM		LDO time slot	OFF
VDIG2_REG	SEL	LDO voltage selection	1.0 V
EEPROM		LDO time slot	OFF
VDAC_REG	SEL	LDO voltage selection	1.8 V
EEPROM		LDO time slot	5
VPLL_REG	SEL	LDO voltage selection	1.8 V
EEPROM		LDO time slot	4
VAUX1_REG	SEL	LDO voltage selection	1.8 V
EEPROM		LDO time slot	1
VMMC_REG	SEL	LDO voltage selection	3.3 V
EEPROM		LDO time slot	6
VAUX33_REG	SEL	LDO voltage selection	1.8 V
EEPROM		LDO time slot	OFF
VAUX2_REG	SEL	LDO voltage selection	1.8 V
EEPROM		LDO time slot	5
CLK32KOUT pin		CLK32KOUT time slot	7
NRESPWRON pin		NRESPWRON time slot	7 + 1
VRTC_REG	VRTC_OFFMASK	0: VRTC LDO will be in low-power mode during OFF state	Low-power mode
		1: VRC LDO will be in full-power mode during OFF state	
DEVCTRL_REG	RTC_PWDN	0: RTC in normal power mode	1
		1: Clock gating of RTC register and logic, low-power mode	
DEVCTRL_REG	CK32K_CTRL	0: Clock source is crystal/external clock	RC
		1: Clock source is internal RC oscillator	

Copyright © 2010–2014, Texas Instruments Incorporated

chanhvinh.com

Table 5-1. Fixed Boot Mode: 00 (continued)

Register	Bit	Description	TPS65910 Boot 00
DEVCTRL2_REG	TSLOT_LENGTH [0]	Boot sequence time slot duration:	2 ms
		0: 0.5 ms	
		1: 2 ms	
DEVCTRL2_REG	IT_POL	0: INT1 signal will be active-low	Active-low
		1: INT1 signal will be active-high	
INT_MSK_REG	VMBHI_IT_MSK	0: Device will automatically switch-on at NOSUPPLY to OFF or BACKUP to OFF transition	0: Automatic switch-on from supply insertion
		1: Startup reason required before switch-on	
VMBCH_REG	VMBCH_SEL[1:0]	Select threshold for main battery comparator threshold VMBCH.	3 V

Figure 5-1 shows the 00 Boot mode timing characteristics.

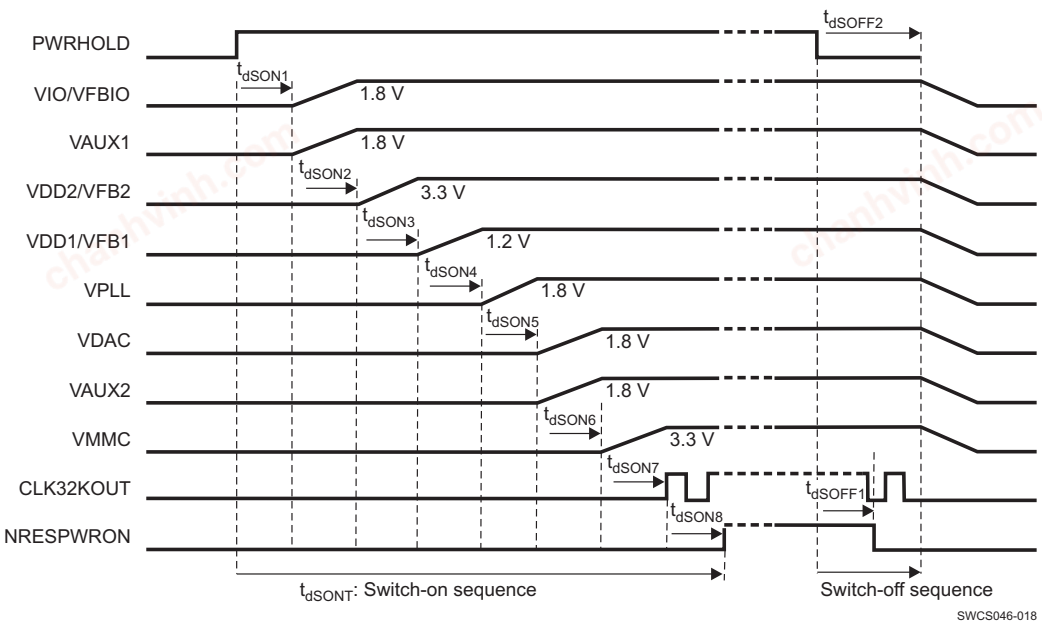


Figure 5-1. Boot Mode: BOOT1 = 0, BOOT0 = 0

Copyright © 2010–2014, Texas Instruments Incorporated

chanhvinh.com

Table 5-2 lists the 00 Boot mode timing characteristics.

Table 5-2. Boot Mode: BOOT1 = 0, BOOT0 = 0 Timing Characteristics

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
t_{dSON1}	PWRHOLD rising edge to VIO, VAUX1 enable delay		66 × t_{CK32k} = 2060		µs
t_{dSON2}	VIO to VDD2 enable delay		64 × t_{CK32k} = 2000		µs
t_{dSON3}	VDD2 to VDD1 enable delay		64 × t_{CK32k} = 2000		µs
t_{dSON4}	VDD1 to VPLL enable delay		64 × t_{CK32k} = 2000		µs
t_{dSON5}	VPLL to VDAC,VAUX2 enable delay		64 × t_{CK32k} = 2000		µs
t_{dSON6}	VDAC to VMMC enable delay		64 × t_{CK32k} = 2000		µs
	VMMC to CLK32KOUT rising edge delay		64 × t_{CK32k} = 2000		µs
t_{dSON8}	CLK32KOUT to NRESPWRON rising edge delay		64 × t_{CK32k} = 2000		µs
t_{dSONT}	Total switch-on delay		16		ms
t_{dSOFF1}	PWRHOLD falling edge to NRESPWRON falling edge delay		2 × t_{CK32k} = 62.5		µs
$t_{dSOFF1B}$	NRESPWRON falling edge to CLK32KOUT low delay		3 × t_{CK32k} = 92		µs
t_{dSOFF2}	PWRHOLD falling edge to supplies and reference disable delay		5 × t_{CK32k} = 154		µs

Registers default setting: CK32K_CTRL = 1 (32-kHz RC oscillator is used), RTC_PWDN = 1 (RTC domain off), IT_POL = 0 (INt2 interrupt flag active low), VMBHI_IT_MSK = 0 (automatic switch-on on Battery plug), VMBCH_SEL = 11.

Copyright © 2010–2014, Texas Instruments Incorporated

chanhvinh.com

5.22.1.2 BOOT1 = 0, BOOT0 = 1

Table 5-3 provides details about the EEPROM setting for the BOOT modes. The power-up sequence for this boot mode is provided in Figure 5-2.

Table 5-3. Fixed Boot Mode: 01

Register	Bit	Description	TPS65910 Boot 01
VDD1_OP_REG	SEL	VDD1 voltage level selection for boot	1.2 V
VDD1_REG	VGAIN_SEL	VDD1 Gain selection, x1 or x2	x1
EEPROM		VDD1 time slot selection	3
DCDCCTRL_REG	VDD1_PSKIP	VDD1 pulse skip mode enable	Skip enabled
VDD2_OP_REG/VDD2_SR_REG	SEL	VDD2 voltage level selection for boot	1.2 V
VDD2_REG	VGAIN_SEL	VDD2 Gain selection, x1 or x3	x1
EEPROM		VDD2 time slot selection	4
DCDCCTRL_REG	VDD2_PSKIP	VDD2 pulse skip mode enable	Skip enabled
VIO_REG	SEL	VIO voltage selection	1.8 V
EEPROM		VIO time slot selection	1
DCDCCTRL_REG	VIO_PSKIP	VIO pulse skip mode enable	Skip enabled
EEPROM		VDD3 time slot	OFF
VDIG1_REG	SEL	LDO voltage selection	1.2 V
EEPROM		LDO time slot	OFF
VDIG2_REG	SEL	LDO voltage selection	1.0 V
EEPROM		LDO time slot	OFF
VDAC_REG	SEL	LDO voltage selection	1.8 V
EEPROM		LDO time slot	OFF
VPLL_REG	SEL	LDO voltage selection	1.8 V
EEPROM		LDO time slot	2
VAUX1_REG	SEL	LDO voltage selection	1.8 V
EEPROM		LDO time slot	OFF
VMMC_REG	SEL	LDO voltage selection	1.8 V
EEPROM		LDO time slot	OFF
VAUX33_REG	SEL	LDO voltage selection	3.3 V
EEPROM		LDO time slot	6
VAUX2_REG	SEL	LDO voltage selection	1.8 V
EEPROM		LDO time slot	5
CLK32KOUT pin		CLK32KOUT time slot	7
NRESPWRON pin		NRESPWRON time slot	7+1
VRTC_REG	VRTC_OFFMASK	0: VRTC LDO will be in low-power mode during OFF state 1: VRC LDO will be in full-power mode during OFF state	low-power mode
DEVCTRL_REG	RTC_PWDN	0: RTC in normal power mode 1: Clock gating of RTC register and logic, low-power mode	1
DEVCTRL_REG	CK32K_CTRL	0: Clock source is crystal/external clock 1: Clock source is internal RC oscillator	Crystal
DEVCTRL2_REG	TSLOT_LENGTH [0]	Boot sequence time slot duration: 0: 0.5 ms 1: 2 ms	2 ms
DEVCTRL2_REG	IT_POL	0: INT1 signal will be active-low 1: INT1 signal will be active-high	Active-low

Copyright © 2010–2014, Texas Instruments Incorporated

chanhvinh.com

Table 5-3. Fixed Boot Mode: 01 (continued)

Register	Bit	Description	TPS65910 Boot 01
INT_MSK_REG	VMBHI_IT_MSK	0: Device will automatically switch-on at NOSUPPLY to OFF or BACKUP to OFF transition 1: Startup reason required before switch-on	0: Automatic switch-on from supply insertion
VMBCH_REG	VMBCH_SEL[1:0]	Select threshold for main battery comparator threshold VMBCH.	3 V

Figure 5-2 shows the 01 Boot mode timing characteristics.

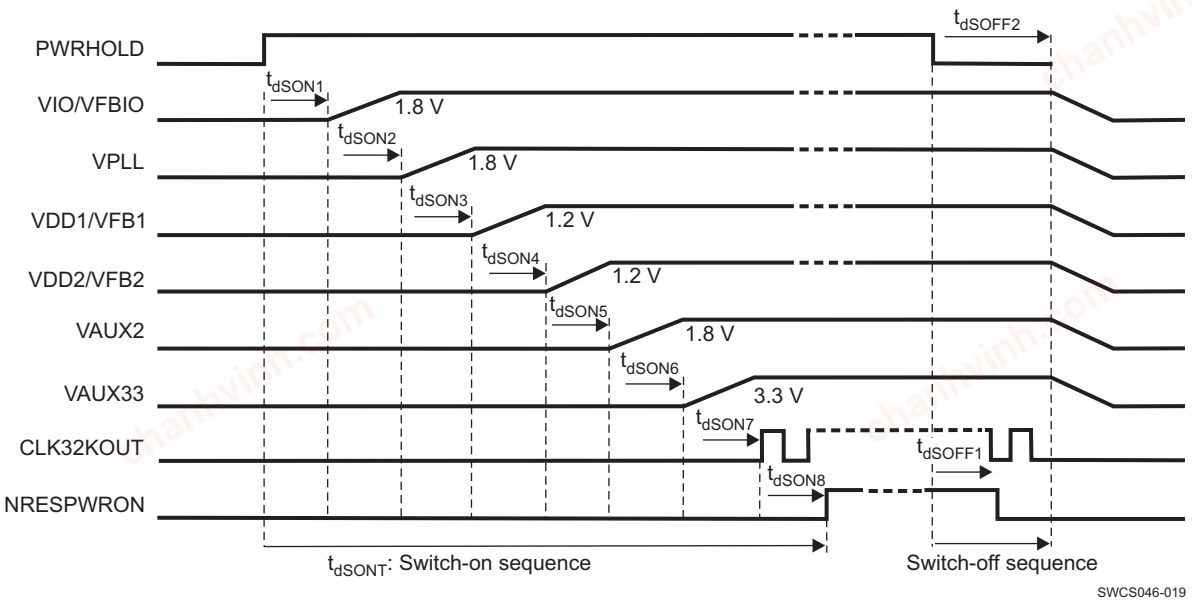


Figure 5-2. Boot Mode: BOOT1 = 0, BOOT0 = 1

Table 5-4 lists the 01 Boot mode timing characteristics.

Table 5-4. Boot Mode: BOOT1 = 0, BOOT0 = 1 Timing Characteristics

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
t_{dSON1}	PWRHOLD rising edge to VIO enable delay		66 × t_{CK32k} = 2060		µs
t_{dSON2}	VIO to VPLL enable delay		64 × t_{CK32k} = 2000		µs
t_{dSON3}	VPLL to VDD1 enable delay		64 × t_{CK32k} = 2000		µs
t_{dSON4}	VDD1 to VDD2 enable delay		64 × t_{CK32k} = 2000		µs
t_{dSON5}	VDD2 to VAUX2 enable delay		64 × t_{CK32k} = 2000		µs
t_{dSON6}	VAUX2 to VAUX33 enable delay		64 × t_{CK32k} = 2000		µs
t_{dSON7}	VAUX33 to CLK32KOUT enable delay		64 × t_{CK32k} = 2000		µs
t_{dSON8}	CLK32KOUT to NRESPWRON enable delay		64 × t_{CK32k} = 2000		µs
t_{dSONT}	Total switch-on delay		16		ms
t_{dSOFF1}	PWRHOLD falling edge to NRESPWRON falling edge		2 × t_{CK32k} = 62.5		µs
$t_{dSOFF1B}$	NRESPWRON falling edge to CLK32KOUT low delay		3 × t_{CK32k} = 92		µs
t_{dSOFF2}	PWRHOLD falling edge to supplies disable delay		5 × t_{CK32k} = 154		µs

Registers default setting: CK32K_CTRL = 0 (32-kHz quartz or external bypass clock is used), RTC_PWDN = 1 (RTC domain off), IT_POL = 0 (INt2 interrupt flag active low), VMBHI_IT_MSK = 0 (automatic switch-on on battery plug), VMBCH_SEL = 11.


Copyright © 2010–2014, Texas Instruments Incorporated

chanhvinh.com

5.22.2 Power Control Timing

5.22.2.1 Device Turn-On/Off With Rising/Falling Input Voltage

Figure 5-3 shows the device turn-on/-off with rising/falling input voltage.

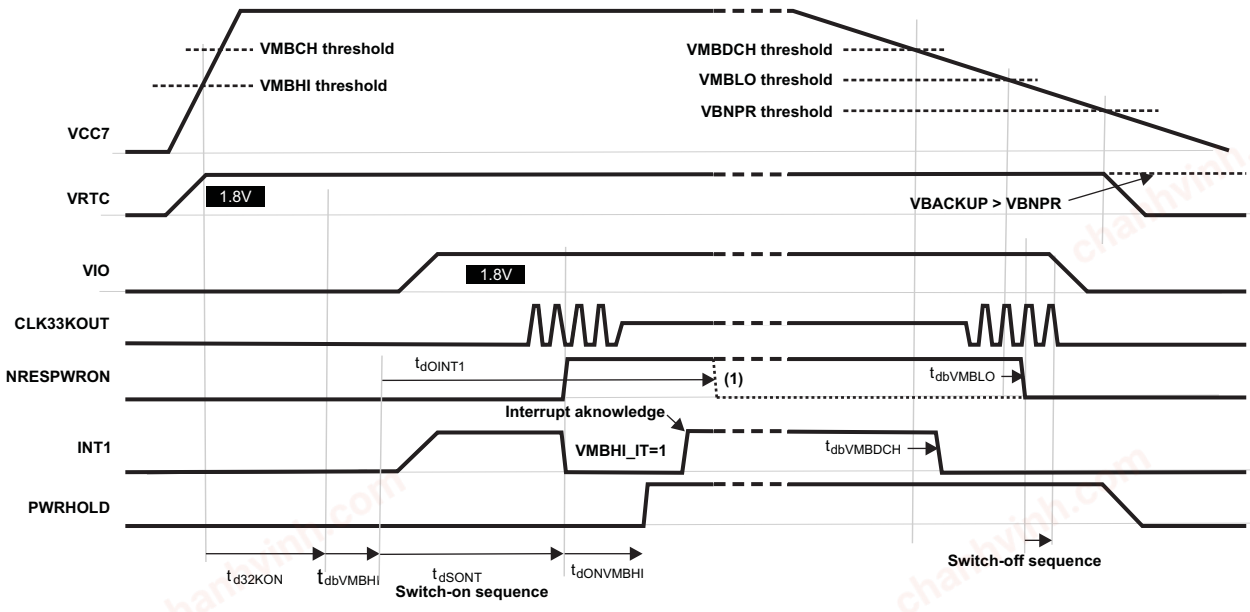


NOTE: (1) The DEV_ON control bit (set to 1) or the PWRHOLD signal (set high) can be used to maintain supplies on after the switch-on sequence. If none of these devices Power-on enable conditions are set, the supplies will be turned off after t_{dOINT1} delay.

Figure 5-3. Device Turn-On/Off with Rising/Falling Input Voltage

5.22.2.2 Device State Control Through PWRON Signal

Figure 5-4 shows the device state control through PWRON signal.

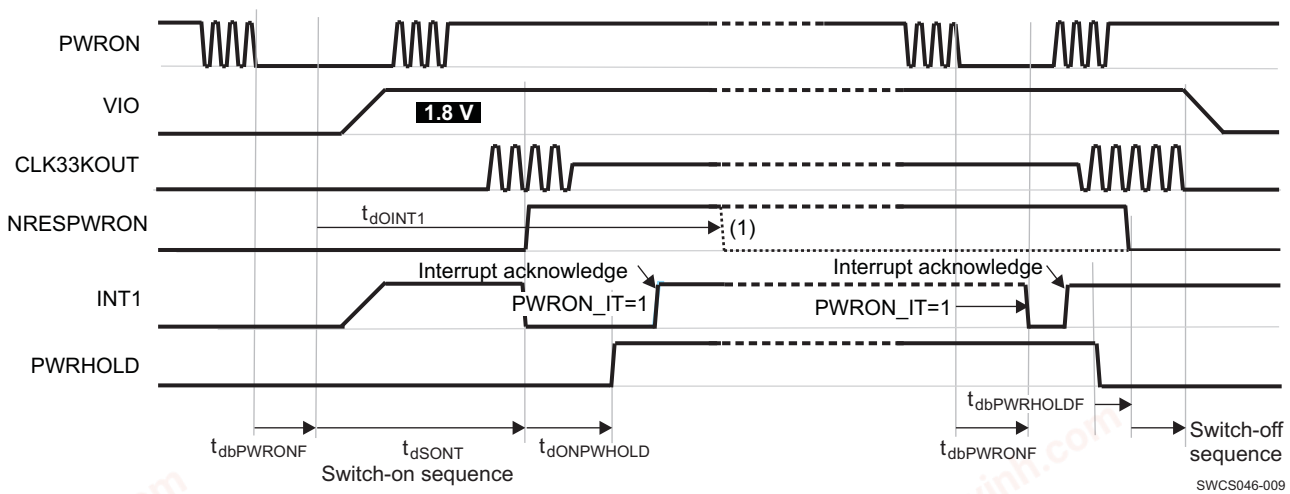


NOTE: (1) The DEV_ON control bit (set to 1) or the PWRHOLD signal (set high) can be used to maintain supplies on after switch-on sequence, If none of these devices POWER-ON enable condition are set the supplies will be turned off after T_{dOINT1} delay.

Figure 5-4. PWRON Turn-On/Turn-Off

Copyright © 2010–2014, Texas Instruments Incorporated

chanhvinh.com

Figure 5-5 shows the long-press turn-off timing characteristics.

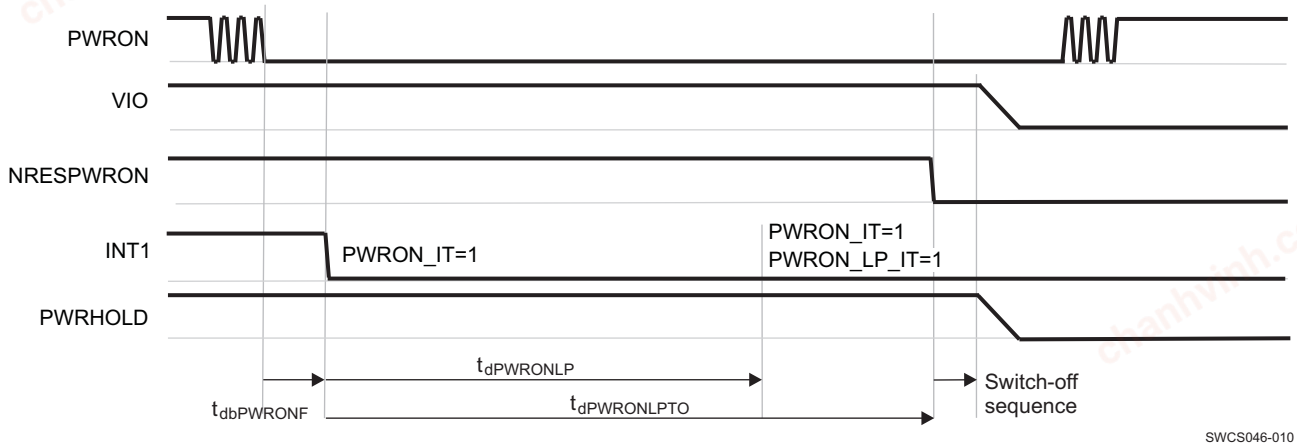

NOTE: If the DEV_ON control bit is set to 1 or PWRHOLD is kept high, the device will be turned on again after PWRON long press turn-off and PWRON released.

Figure 5-5. PWRON Long-Press Turn-Off

Table 5-5 lists the power control timing characteristics.

Table 5-5. Power Control Timing Characteristics


PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
t_{d32KON}: 32-kHz Oscillator turn-on time	BOOT[1:0] = 00, RC oscillator BOOT[1:0] = 01, Quartz oscillator BOOT[1:0] = 01, Bypass clock		0.1 400 0.1	2000	ms
$t_{dbVMBHI}$: VMBHI rising-edge debouncing delay		3 × t_{CK32k} = 94		4 × t_{CK32k} = 125	µs
$t_{dbVMBDCH}$: Main Battery voltage = VMBDCH threshold to INT1 falling-edge delay		3 × t_{CK32k} = 94		4 × t_{CK32k} = 125	s
$t_{dbVMBLO}$: Main Battery voltage = VMBLO threshold to NRESPWRON falling-edge delay		3 × t_{CK32k} = 94		4 × t_{CK32k} = 125	s
$t_{dbPWRONF}$: PWRON falling-edge debouncing delay		500		550	ms
$t_{dbPWRONR}$: PWRON rising-edge debouncing delay		3 × t_{CK32k}= 94		4 × t_{CK32k} = 125	µs
$t_{dbPWRHOLD}$: PWRON rising-edge debouncing delay		2 × t_{CK32k} = 63		3 × t_{CK32k}= 94	µs
t_{dOINT}: INT1 (internal) Power-on pulse duration after PWRON low-level (debounced) event			1		s
$t_{dONPWHOLD}$: delay to set high PWRHOLD signal or DEV_ON control bit after NRESPWRON released to keep on the supplies			984		ms
$t_{dPWRONLP}$: PWRON long-press delay to interrupt	PWRON falling edge to PWON_LP_IT = 1		6		s
$t_{dPWRONLPTO}$: PWRON long-press delay to turn-off	PWRON falling edge to NRESPWRON falling edge		8		s

Copyright © 2010–2014, Texas Instruments Incorporated

chanhvinh.com

5.22.2.3 Device SLEEP State Control

Figure 5-6 shows the device SLEEP state control timing characteristics.

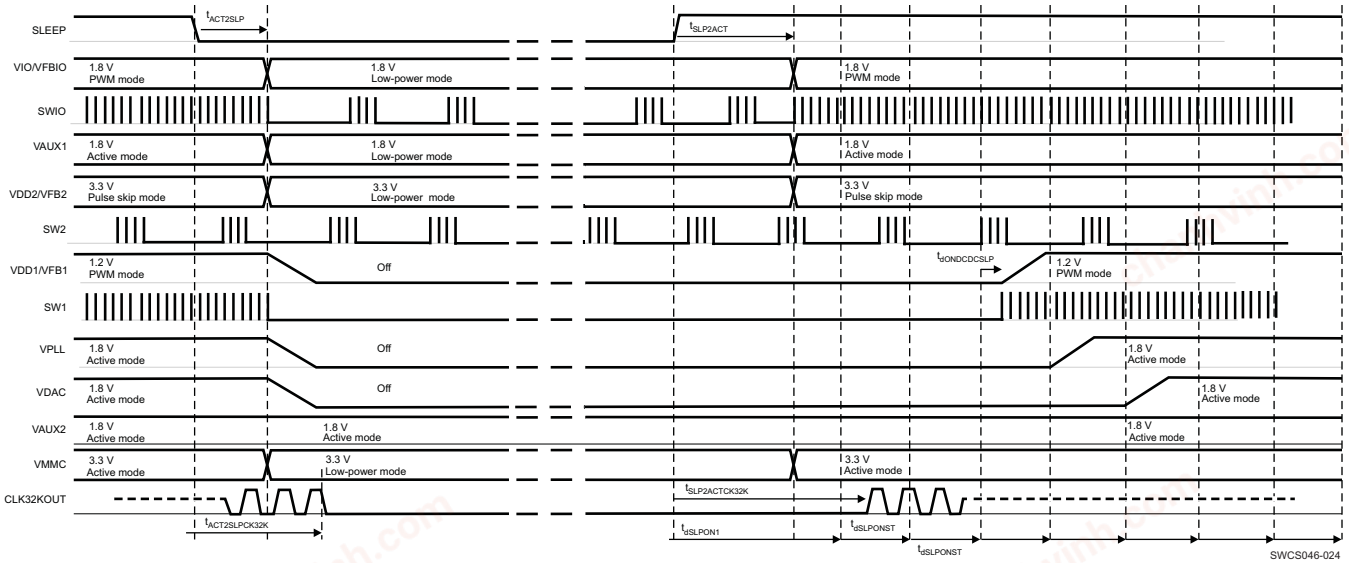

NOTE: Registers programming: VIO_PSKIP = 0, VDD1_PSKIP = 0, VDD1_SETOFF = 1, VDAC_SETOFF = 1, VPLL_SETOFF = 1, VAUX2_KEEPON = 1

Figure 5-6. Device SLEEP State Control

Table 5-6. Device SLEEP State Control Timing Characteristics


PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
$t_{ACT2SLP}$	SLEEP falling edge to supply in low power mode (SLEEP resynchronization delay)	$2 \times t_{CK32k}$ = 62		$3 \times t_{CK32k}$ = 94	µs
$t_{ACT2SLP}$	SLEEP falling edge to CLK32KOUT low	156	$t_{ACT2SLP} + 3 \times t_{CK32k}$	188	µs
$t_{SLP2ACT}$	SLEEP rising edge to supply in high power mode	$8 \times t_{CK32k}$ = 250		$9 \times t_{CK32k}$ = 281	µs
$t_{SLP2ACTCK32K}$	SLEEP rising edge to CLK32KOUT running	344	$t_{SLP2ACT} + 3 \times t_{CK32k}$	375	µs
$t_{dSLPON1}$	SLEEP rising edge to time step 1 of the tun-on sequence from SLEEP state	281	$t_{SLP2ACT} + 1 \times t_{CK32k}$	312	µs
$t_{dSLPONST}$	turn-on sequence step duration, from SLEEP state				µs
	TSLOT_LENGTH[1:0] = 00		0		
	TSLOT_LENGTH[1:0] = 01		200		
	TSLOT_LENGTH[1:0] = 10		500		
	TSLOT_LENGTH[1:0] = 11		2000		
$t_{dSLPONDCDC}$	VDD1, VDD2 or VIO tun-on delay from tun-on sequence time step		$2 \times t_{CK32k}$ = 62		us

Copyright © 2010–2014, Texas Instruments Incorporated

chanhvinh.com


5.22.2.4 Power Supplies State Control Through the SCLSR_EN1 and SDASR_EN2 Signals

Figure 5-7 andFigure 5-8 show the power supplies state control through the SCLSR_EN1 and SDASR_EN2 signals timing characteristics.

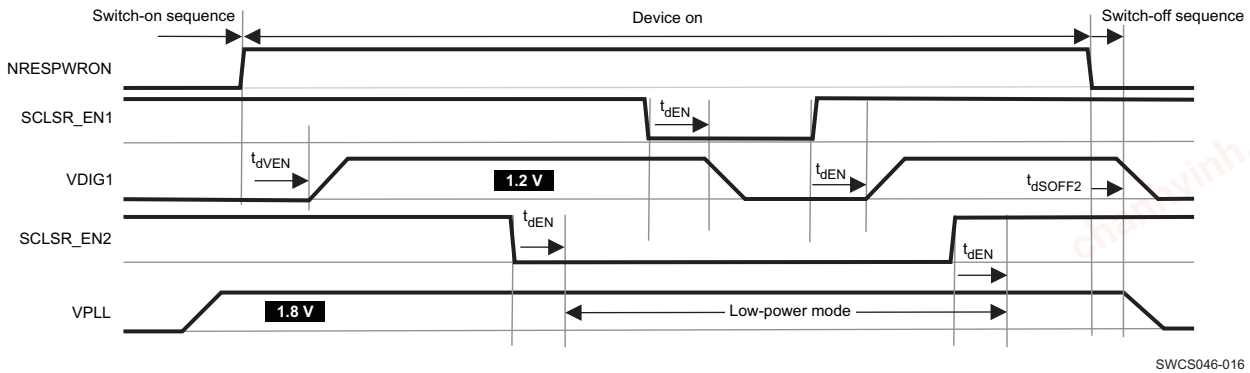

NOTE: Register setting: VDIG1_EN1 = 1, VPLL_EN2 = 1, and VPLL_KEEPON = 1

Figure 5-7. LDO Type Supplies State Control Through SCLSR_EN1 and SCLSR_EN2

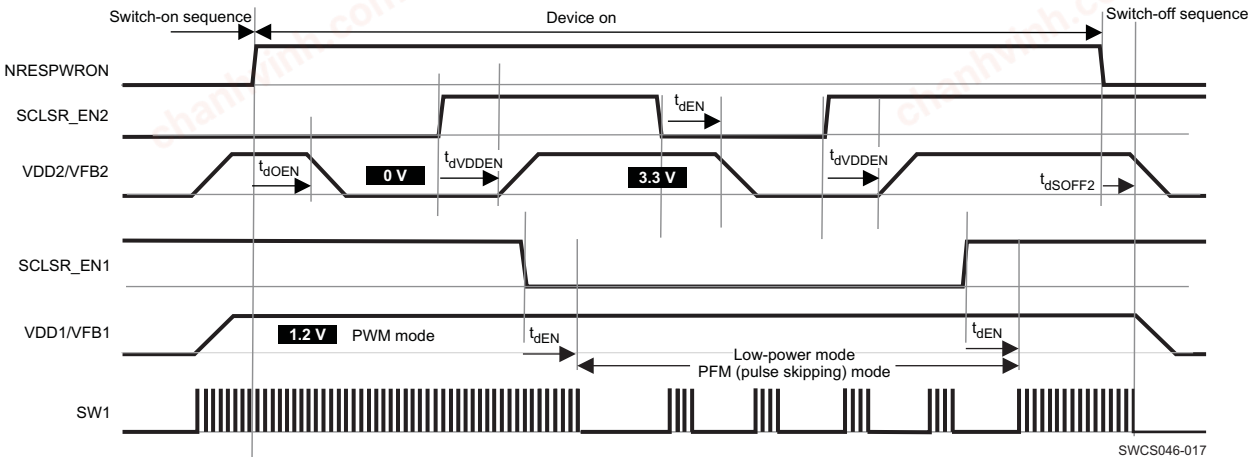

NOTE: Register setting: VDD2_EN2 = 1, VDD1_EN1 = 1, VDD1_KEEPON = 1, VDD1_PSKIP = 0, and SEL[6:0] = hex00 in VDD2_SR_REG

Figure 5-8. VDD1 and VDD2 Supplies State Control Through SCLSR_EN1 and SCLSR_EN2

Table 5-7. Supplies State Control Though SCLSR_EN1 and SCLSR_EN2 Timing Characteristics


PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
t_{dEN}: NREPSWON to supply state change delay, SCLSR_EN1 or SCLSR_EN2 driven			0		ms
t_{dEN}: SCLSR_EN1 or SCLSR_EN2 edge to supply state change delay			$1 \times t_{CK32k} = 31$		µs
t_{dVDDEN}: SCLSR_EN1 or SCLSR_EN2 edge to VDD1 or VDD2 DC-DC turn on delay			$3 \times t_{CK32k} = 63$		µs

Copyright © 2010–2014, Texas Instruments Incorporated

chanhvinh.com

5.22.2.5 VDD1 and VDD2 Voltage Control Through SCLSR_EN1 and SDASR_EN2 Signals

Figure 5-9 shows the VDD1 and VDD2 voltage control through the SCLSR_EN1 and SDASR_EN2 signals timing characteristics.

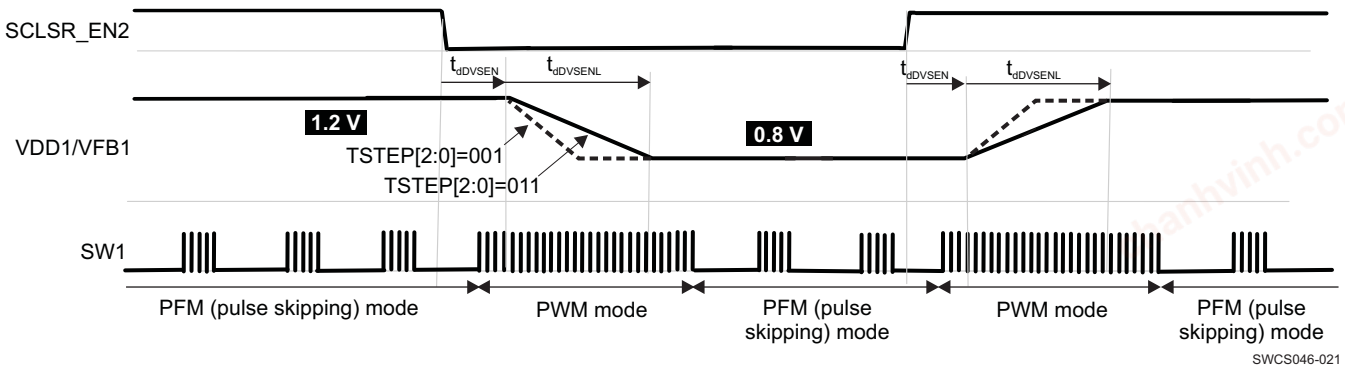

NOTE: Register setting: VDD1_EN1 = 1, SEL[6:0] = hex13 in VDD1_SR_REG


Figure 5-9. VDD1 Supply Voltage Control Though SCLSR_EN1

Table 5-8. VDD1 Supply Voltage Control Through SCLSR_EN1 Timing Characteristics

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
t_{dDVSEN}: SCLSR_EN1 or SCLSR_EN2 edge to VDD1 or VDD2 voltage change delay			2 × t_{CK32k} = 62		µs
$t_{dDVSENL}$: VDD1 or VDD2 voltage settling delay	TSTEP[2:0] = 001 TSTEP[2:0] = 011 (default) TSTEP[2:0] = 111		32 0.4/7.5 = 53 160		µs

5.22.2.6 SMPS Switching Synchronization

Figure 5-10 shows the SMPS switching synchronization timing characteristics.

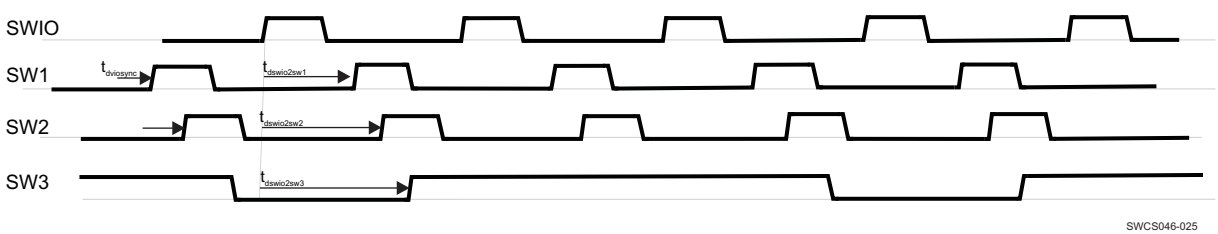

NOTE: VDD1 or VDD2 switching synchronization is available in PWM mode (VDD1_PSKIP = 0 or VDD2_PSKIP = 0). SMPS external clock (GPIO_CKSYNC) synchronization is available when VIO PWM mode is set (VIO_PSKIP = 0).

Figure 5-10. SMPS Switching Synchronization

Table 5-9. SMPS Switching Synchronization Timing Characteristics

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
$t_{dSWIO2SW1}$: delay from SWIO rising edge to SW1 rising edge	VDD1_PSKIP = 0, DCDCCKSYNC[1:0] = 11 DCDCCKSYNC[1:0] = 01		 160 220		ns
$t_{dSWIO2SW2}$: delay from SWIO rising edge to SW1 rising edge	VDD2_PSKIP = 0, DCDCCKSYNC[1:0] = 11 DCDCCKSYNC[1:0] = 01		 160 290		ns
$t_{dSWIO2SW3}$: delay from SWIO rising edge to SW3 rising edge			206		ns

Copyright © 2010–2014, Texas Instruments Incorporated

chanhvinh.com

6 Detailed Description

6.1 Power Reference

The bandgap voltage reference is filtered by using an external capacitor connected across the VREF output and the analog ground REFGND (see Section 5.3, Recommended Operating Conditions). The VREF voltage is distributed and buffered inside the device.

6.2 Power Sources

The power resources provided by the TPS65910 device include inductor-based switched mode power supplies (SMPS) and linear low drop-out voltage regulators (LDOs). These supply resources provide the required power to the external processor cores and external components, and to modules embedded in the TPS65910 device.

Two of these SMPS have DVS capability SmartReflex Class 3 compatible. These SMPS provide independent core voltage domains to the host processor. The remaining SMPS provides supply voltage for the host processor I/Os.

Table 6-1 lists the power sources provided by the TPS65910 device.

Table 6-1. Power Sources

RESOURCE	TYPE	VOLTAGES	POWER
VIO	SMPS	1.5 V / 1.8 V / 2.5 V / 3.3 V	1000 mA
VDD1	SMPS	0.6 ... 1.5 in 12.5-mV steps Programmable multiplication factor: x2, x3	1500 mA
VDD2	SMPS	0.6 ... 1.5 in 12.5-mV steps Programmable multiplication factor: x2, x3	1500 mA
VDD3	SMPS	5 V	100 mA
VDIG1	LDO	1.2 V, 1.5 V, 1.8 V, 2.7 V	300 mA
VDIG2	LDO	1 V, 1.1 V, 1.2 V, 1.8 V	300 mA
VPLL	LDO	1.0 V, 1.1 V, 1.8 V, 2.5 V	50 mA
VDAC	LDO	1.8 V, 2.6 V, 2.8 V, 2.85 V	150 mA
VAUX1	LDO	1.8 V, 2.5 V, 2.8 V, 2.85 V	300 mA
VAUX2	LDO	1.8 V, 2.8 V, 2.9 V, 3.3 V	150 mA
VAUX33	LDO	1.8 V, 2.0 V, 2.8 V, 3.3 V	150 mA
VMMC	LDO	1.8 V, 2.8 V, 3.0 V, 3.3 V	300 mA

6.3 Embedded Power Controller

The embedded power controller manages the state of the device and controls the power-up sequence.

6.3.1 State-Machine

The EPC supports the following states:

No supply: The main battery supply voltage is not high enough to power the VRTC regulator. A global reset is asserted in this case. Everything on the device is off.

Backup: The main battery supply voltage is high enough to enable the VRTC domain but not enough to switch on all the resources. In this state, the VRTC regulator is in backup mode and only the 32-K oscillator and RTC module are operating (if enabled). All other resources are off or under reset.

Off: The main battery supply voltage is high enough to start the power-up sequence but device power on is not enabled. All power supplies are in OFF state except VRTC.

Active: Device power-on enable conditions are met and regulated power supplies are on or can be enabled with full current capability.

Copyright © 2010–2014, Texas Instruments Incorporated

chanhvinh.com

Sleep: Device SLEEP enable conditions are met and some selected regulated power supplies are in low-power mode.

Figure 6-1 shows the transitions of the state-machine.

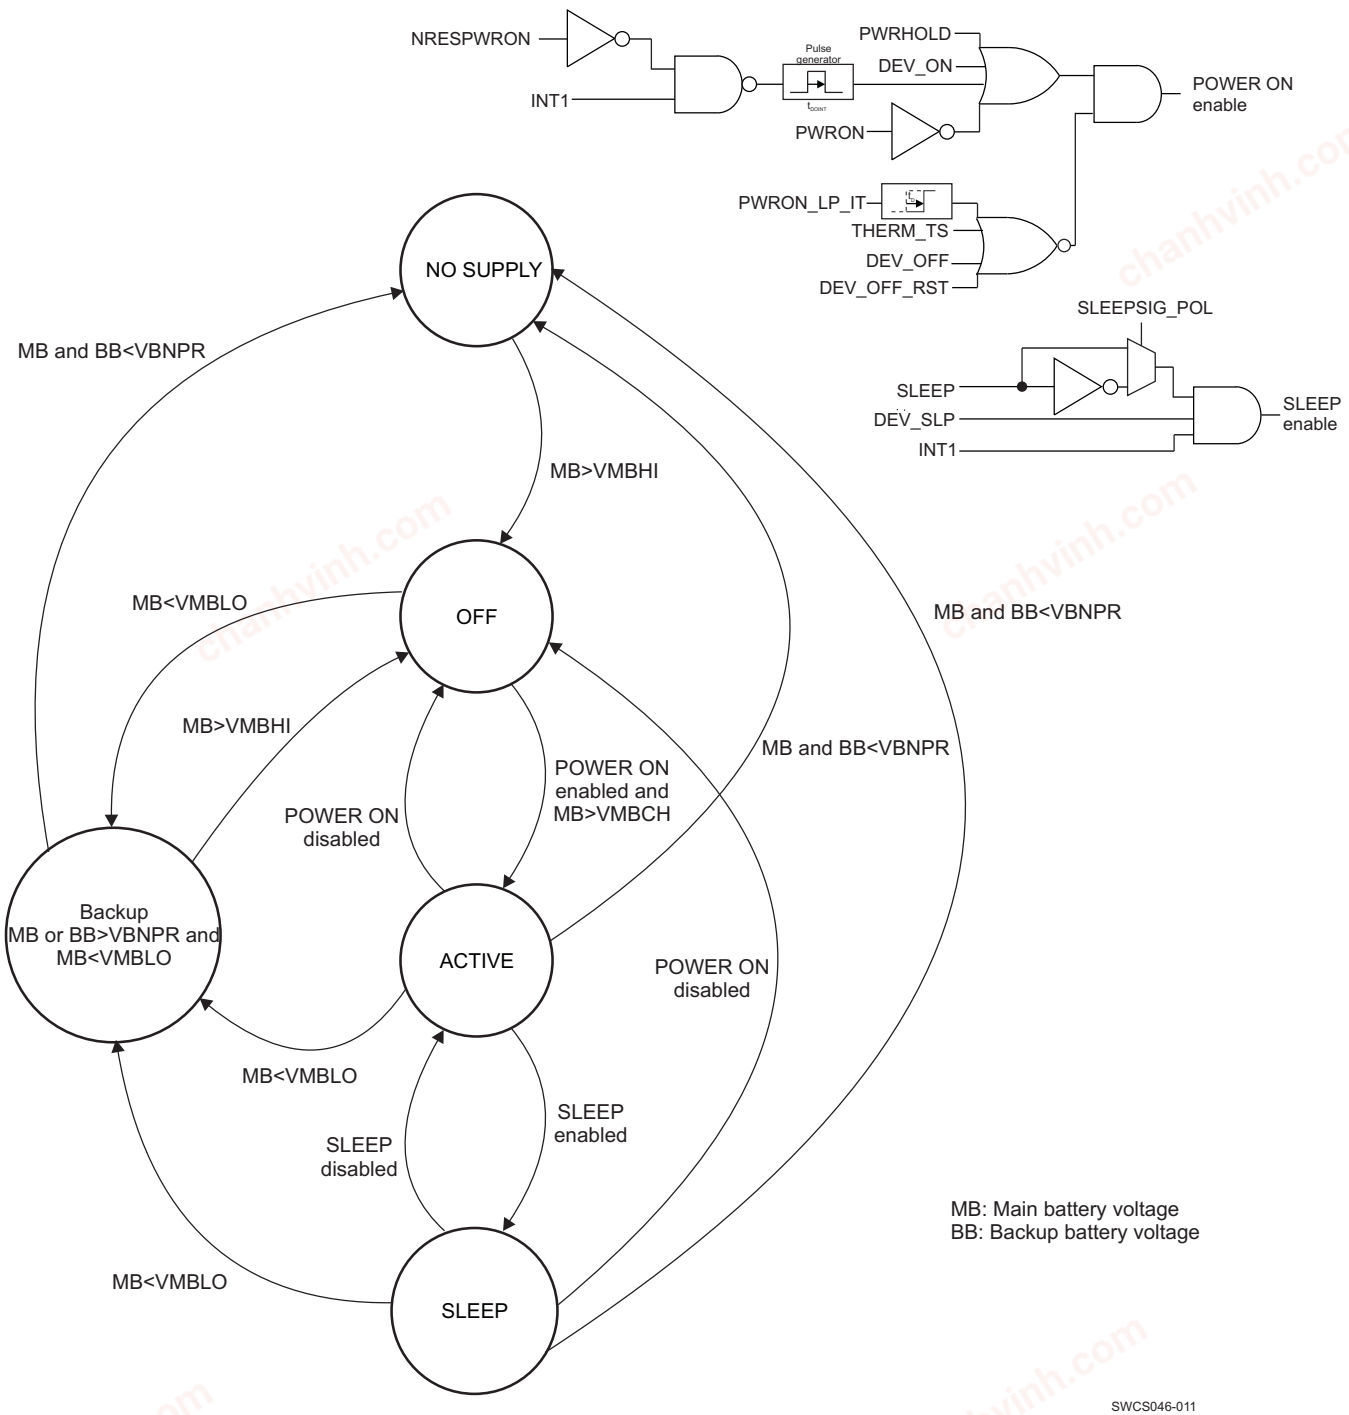


Figure 6-1. Embedded Power Control State-Machine

Copyright © 2010–2014, Texas Instruments Incorporated

chanhvinh.com

Device power-on enable conditions:

If none of the device power-on disable conditions is met, the following conditions are available to turn on and/or maintain the ON state of the device:

- PWRON signal low level.
- Or PWRHOLD signal high level.
- Or DEV_ON control bit set to 1 (default inactive).
- Or interrupt flag active (default INT1 low) while the device is off (NRESPWRON = 0) generates a power-on enable condition during a fixed delay (T_{DOINT1} pulse duration defined in Section 5.22.2, Power Control Timing).

  The power-on enable condition pulse occurs only if the interrupt status bit is initially low (no previous identical interrupt pending in the status register).

  The Interrupt sources expected when the device is off are:

  - PWRON low-level interrupt (PWRON_IT = 1 in INT_STS_REG register)
  - PWRHOLD rising-edge interrupt (PWRHOLD_IT = 1 in INT_STS_REG register)

  The Interrupt sources expected if enabled when the device is off are:

  - RTC Alarm interrupt (RTC_ALARM_IT = 1 or RTC_PERIOD_IT = 1 in INT_STS_REG register)
  - First-time input voltage rising above VMBHI threshold (Boot mode or EEPROM dependent) and input voltage > VMBCH threshold (VMBCH_IT = 1 in INT_STS_REG register).

GPIO_CKSYNC cannot be used to turn on the device (OFF-to-ACTIVE state transition), even if its associated interrupt is not masked, but can be used as an interrupt source to wake up the device from SLEEP-to-ACTIVE state.

Device power-on disable conditions:

- PWRON signal low level during more than the long-press delay: $t_{dPWRONLP}$ (can be disabled though register programming). The interrupt corresponding to this condition is PWRON_LP_IT in the INT_STS_REG register.
- Or Die temperature has reached the thermal shutdown threshold.
- Or DEV_OFF or DEV_OFF_RST control bit set to 1 (value of DEV_OFF is cleared when the device is in OFF state).

Device SLEEP enable conditions:

- SLEEP signal low level (default, or high level depending on the programmed polarity)
- And DEV_SLP control bit set to 1
- And interrupt flag inactive (default INT1 high): no nonmasked interrupt pending

The SLEEP state can be controlled by programming DEV_SLP and keeping the SLEEP signal in the active polarity state, or it can be controlled through the SLEEP signal setting the DEV_SLP bit to 1 once, after device turn-on.

Copyright © 2010–2014, Texas Instruments Incorporated

chanhvinh.com

6.3.2 Switch-On/-Off Sequences

The power sequence is the automated switching on of the device resources when an off-to-active transition takes place.

The device supports three embedded power sequences selectable by the device BOOT pins.

BOOT0	BOOT1	Processor Supported
0	0	AM3517, AM3505
1	0	OMAP3 Family, AM3715/03, DM3730/25
0	1	EEPROM sequence

Details of the boot sequence timing are given in Section 5.22.1. EEPROM sequences can be used for specific power up sequence for corresponding application processor. For details of EEPROM sequence refer to the user guides on the product folder: http://focus.ti.com/docs/prod/folders/print/tps65910.html.

6.3.3 Control Signals

6.3.3.1 SLEEP

When none of the device sleep-disable conditions are met, a falling edge (default, or rising edge, depending on the programmed polarity) of this signal causes an ACTIVE-to-SLEEP state transition of the device. A rising edge (default, or falling edge, depending on the programmed polarity) causes a transition back to ACTIVE state. This input signal is level sensitive and no debouncing is applied.

While the device is in SLEEP state, predefined resources are automatically set in their low-power mode or off. Resources can be kept in their active mode: (full-load capability), programming the SLEEP_KEEP_LDO_ON and the SLEEP_KEEP_RES_ON registers. These registers contain 1 bit per power resource. If the bit is set to 1, then that resource stays in active mode when the device is in SLEEP state. 32KCLKOUT is also included in the SLEEP_KEEP_RES_ON register and the 32-kHz clock output is maintained in SLEEP state if the corresponding mask bit is set.

6.3.3.2 PWRHOLD

When none of the device power-on disable conditions are met, a rising edge of this signal causes an OFF-to-ACTIVE state transition of the device and a falling edge causes a transition back to OFF state. Typically, this signal is used to control the device in a slave configuration. It can be connected to the SYSEN output signal from other TPS659xx devices, or the NRESPWRON signal of another TPS65910 device. This input signal is level sensitive and no debouncing is applied.

A rising edge of PWRHOLD is highlighted though an associated interrupt.

6.3.3.3 BOOT0/BOOT1

These signals determine which processor the device is working with and hence which power-up sequence is needed. See Section 5.22.1 for more details. There is no debouncing on this input signal.

6.3.3.4 NRESPWRON

This signal is used as the reset to the processor. It is held low until the ACTIVE state is reached. See Section 5.22.2 to get detailed timing.

6.3.3.5 CLK32KOUT

This signal is the output of the 32K oscillator, which can be enabled or not during the power-on sequence, depending on the Boot mode. It can be enabled and disabled by register bit, during ACTIVE state of the device. CLK32KOUT output can also be enabled or not during SLEEP state of the device depending on the SLEEPMASK register programming.

Copyright © 2010–2014, Texas Instruments Incorporated

chanhvinh.com

6.3.3.6 PWRON

A falling edge on this signal causes after $t_{dbPWRONF}$ debouncing delay (defined in Figure 5-4 and Table 5-5) an OFF-to-ACTIVE state or SLEEP-to-ACTIVE state transition of the device and makes the corresponding interrupt (PWRON_IT) active. The PWRON input is connected to an external push-button. The built-in debouncing time defines a minimum button press duration that is required for button press detection. Any button press duration which is lower than this value is ignored, considered an accidental touch.

After an OFF-to-ACTIVE state transition, the PMIC maintains ACTIVE during t_{dOINT} delay, if the button is released. After this delay if none of the device enabling conditions is set by the processor supplied, the PMIC automatically turns off. If the button is not released, the PMIC maintains ACTIVE up to $t_{dPWRONLPTO}$, because PWRON low is a device enabling condition. After a SLEEP-to-ACTIVE state transition, the PMIC maintains ACTIVE as long as an interrupt is pending.

If the device is already in ACTIVE state, a PWRON low level makes the corresponding interrupt (PWRON_IT) active.

When the PMIC is in ACTIVE mode, if the button is pressed for longer time than $t_{dPWRONLP}$, the PMIC generates the PWON_LP_IT interrupt. If the processor does not acknowledge the long press interrupt within a period of $t_{dPWRONLPTO} - t_{dPWRONLP}$, the PMIC goes to OFF mode and shuts down the DCDCs and LDOs.

6.3.3.7 INT1

INT1 signal (default active low) warns the host processor of any event that occurred on the TPS65910 device. The host processor can then poll the interrupt from the interrupt status register through I^2C to identify the interrupt source. A low level (default setting) indicates an active interrupt, highlighted in the INT_STS_REG register. The polarity of INT1 can be set by programming the IT_POL control bit.

Any (not masked or masked) interrupt detection causes a POWER ON enable condition during a fixed delay t_{DOINT1} (only) when the device is in OFF state (when NRESPWON signal is low). Any (not masked) interrupt detection is causing a device wakeup from SLEEP state up to acknowledge of the pending interrupt. Any of the interrupt sources can be masked by programming the INT_MSK_REG register. When an interrupt is masked, its corresponding interrupt status bit is still updated, but the INT1 flag is not activated.

Interrupt source masking can be used to mask a device switch-on event. Because interrupt flag active is a POWER ON enable condition during t_{DOINT1} delay, any interrupt not masked must be cleared to allow turn off of the device after the t_{DOINT1} POWER ON enable pulse duration.. See section: Interrupts, for interrupt sources definition.

6.3.3.8 SDASR_EN2 and SCLSR_EN1

SDASR_EN2 and SCLSR_EN1 are the data and clock signals of the serial control interface (SR-I^2C) dedicated to SmartReflex applications. These signals can also be programmed to be used as enable signals of one or several supplies, when the device is on (NRESPWRON high). A resource assigned to SDASR_EN2 or SCLSR_EN1 control automatically disables the serial control interface.

Programming EN1_LDO_ASS_REG, EN2_LDO_REG, and SLEEP_KEEP_LDO_ON_REG registers: SCLSR_EN1 and SDASR_EN2 signals can be used to control the turn on/off or sleep state of any LDO type supplies.

Programming EN1_SMPS_ASS_REG, EN2_SMPS_ASS_REG, and SLEEP_KEEP_RES_ON registers: SCLSR_EN1 and SDASR_EN2 signals can be used to control the turn on/off or low-power state (PFM mode) of SMPS type supplies.

SDASR_EN2 and SCLSR_EN1 can be used to set output voltage of VDD1 and VDD2 SMPS from a roof to a floor value, preprogrammed in the VDD1_OP_REG, VDD2_OP_REG, and teh VDD1_SR_REG, VDD2_SR_REG registers. Tun-off of VDD1 and VDD2 can also be programmed either in VDD1_OP_REG, VDD2_OP_REG or in VDD1_SR_REG, VDD2_SR_REG registers.

Copyright © 2010–2014, Texas Instruments Incorporated

chanhvinh.com

When a supply is controlled through SCLSR_EN1 or SCLSR_EN2 signals, its state is no longer driven by the device SLEEP state.

6.3.3.9 GPIO_CKSYNC

GPIO_CKSYNC is a configurable open-drain digital I/O: directivity, debouncing delay and internal pullup can be programmed in the GPIO0_REG register. GPIO_CKSYNC cannot be used to turn on the device (OFF-to-ACTIVE state transition), even if its associated interrupt is not masked, but can be used as an interrupt source to wake up the device from SLEEP-to-ACTIVE state.

Programming DCDCCKEXT = 1, VDD1, VDD2, VIO, and VDD3 DC-DC switching can be synchronized using a 3-MHz clock set though the GPIO_CKSYNC pin.

6.3.4 Dynamic Voltage Frequency Scaling and Adaptive Voltage Scaling Operation

Dynamic voltage frequency scaling (DVFS) operation: a supply voltage value corresponding to a targeted frequency of the digital core supplied is programmed in VDD1_OP_REG or VDD2_OP_REG registers.

The slew rate of the voltage supply reaching a new VDD1_OP_REG or VDD2_OP_REG programmed value is limited to 12.5 mV/µs, fixed value. Adaptative voltage scaling (AVS) operation: a supply voltage value corresponding to a supply voltage adjustment is programmed in VDD1_SR_REG or VDD2_SR_REG registers. The supply voltage is then intended to be tuned by the digital core supplied, based its performance self-evaluation. The slew rate of VDD1 or VDD2 voltage supply reaching a new programmed value is programmable though the VDD1_REG or VDD2_REG register, respectively.

A serial control interface (SR-I^{2}C) is dedicated to SmartReflex applications such as DVFS and class 3 AVS, and thus gives access to the VDD1_OP_REG, VDD1_SR_REG, and VDD2_OP_REG, VDD2_SR_REG register.


A general-purpose serial control interface (CTL-I^{2}C) also gives access to these registers, if SR_CTL_I2C_SEL control bit is set to 1 in the DEVCTRL_REG register (default inactive).

Both control interfaces are compliant with HS-I^{2}C specification (100 kbps, 400 kbps, or 3.4 Mbps).

Figure 6-2 shows an example of a SmartReflex operation. To optimize power efficiency, the voltage domains of the host processor uses the DVFS and AVS features provided by SmartReflex.

Copyright © 2010–2014, Texas Instruments Incorporated

chanhvinh.com

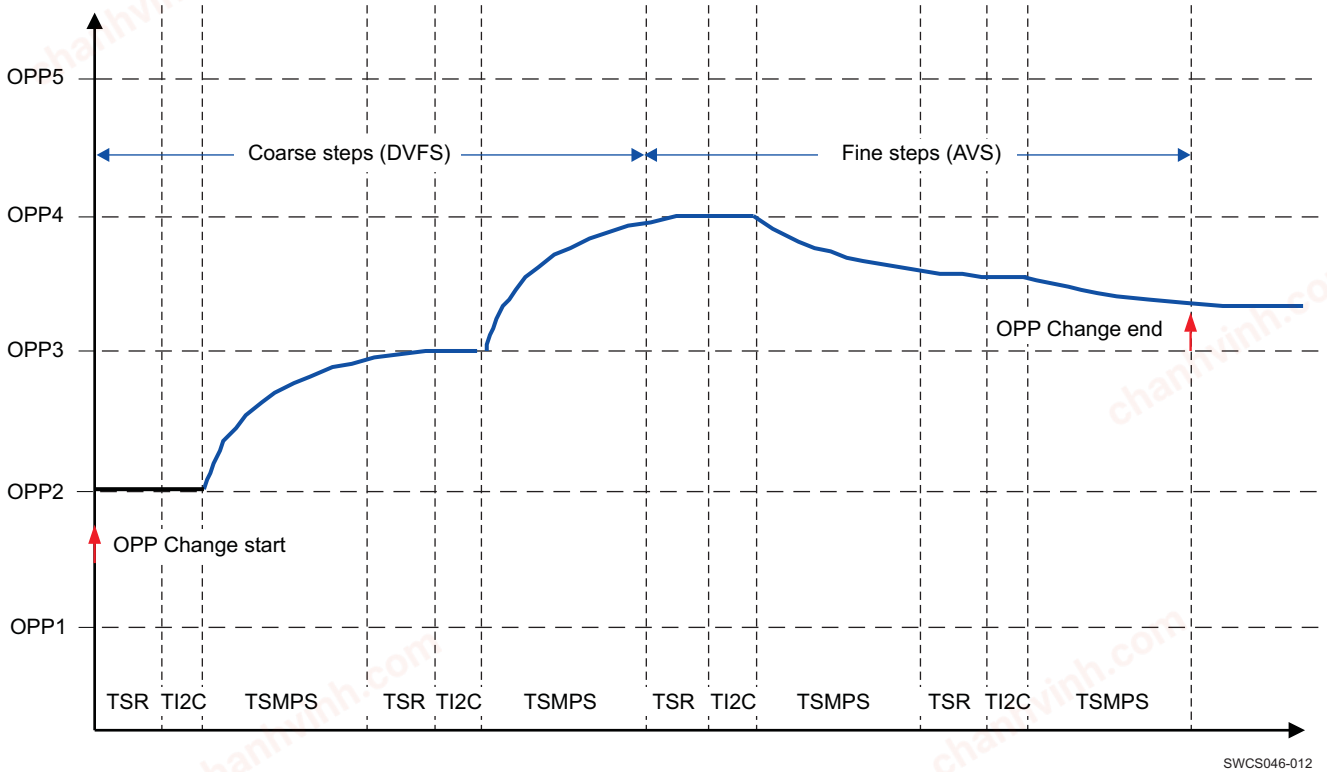

(1) T_{SR}: Time used by the SmartReflex controller
(2) T_{I2C}: Time used for data transfer through the I^2C interface
(3) T_{SMPS}: Time required by the SMPS to converge to new voltage value

Figure 6-2. SmartReflex Operation Example

chanhvinh.com

6.4 32-kHz RTC Clock

The TPS65910 device can provide a 32-kHz clock to the platform through the CLK32KOUT output, the source of this 32-kHz clock can be:

- 32-kHz crystal connected from OSC32IN to OSC32KOUT pins
- A square-wave 32-kHz clock signal applied to OSC32IN input (OSC32KOUT kept floating).
- Internal 32-kHz RC oscillator, to reduce the BOM, if an accurate clock is not needed by the system.

Default selection of a 32-kHz RC oscillator versus 32-kHz crystal oscillator or external square-wave 32-kHz clock depends on the Boot mode or device version (EEPROM programming):

- BOOT1 = 0, BOOT0 = 1: quartz oscillator or external square wave 32-kHz clock default
- BOOT1 = 0, BOOT0 = 0: 32-kHz RC oscillator default

Switching from the 32-kHz RC oscillator to the 32-kHz crystal oscillator or external square-wave 32-kHz clock can also be programmed though DEVCTRL_REG register, taking benefit of the shorter turn-on time of the internal RC oscillator.

Switching from the 32-kHz crystal oscillator or external square-wave clock to the RC oscillator is not supported.

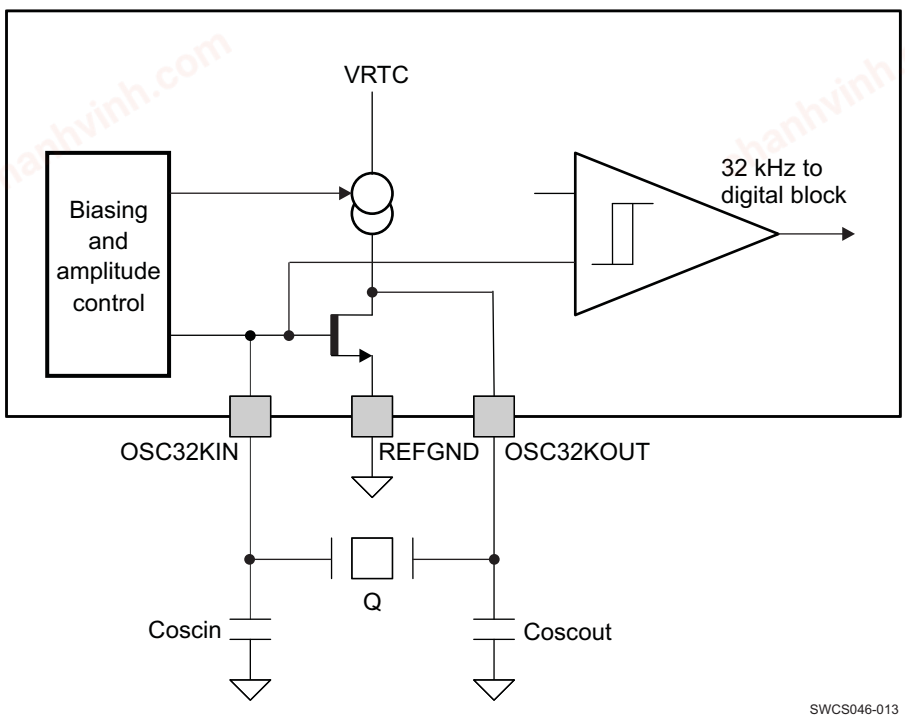


Figure 6-3. Crystal Oscillator 32-kHz Clock

Copyright © 2010–2014, Texas Instruments Incorporated

chanhvinh.com

6.5 RTC

The RTC, which is driven by the 32-kHz clock, provides the alarm and timekeeping functions. The RTC is kept supplied when the device is in the OFF or the BACKUP state.

The main functions of the RTC block are:

- Time information (seconds/minutes/hours) directly in binary-coded decimal (BCD) format
- Calendar information (Day/Month/Year/Day of the week) directly in BCD code up to year 2099
- Programmable interrupts generation: The RTC can generate two interrupts: a timer interrupt RTC_PERIOD_IT periodically (1s/1m/1h/1d period) and an alarm interrupt RTC_ALARM_IT at a precise time of the day (alarm function). These interrupts are enabled using IT_ALARM and IT_TIMER control bits. Periodically interrupts can be masked during the SLEEP period to avoid host interruption and are automatically unmasked after SLEEP wakeup (using the IT_SLEEP_MASK_EN control bit).
- Oscillator frequency calibration and time correction

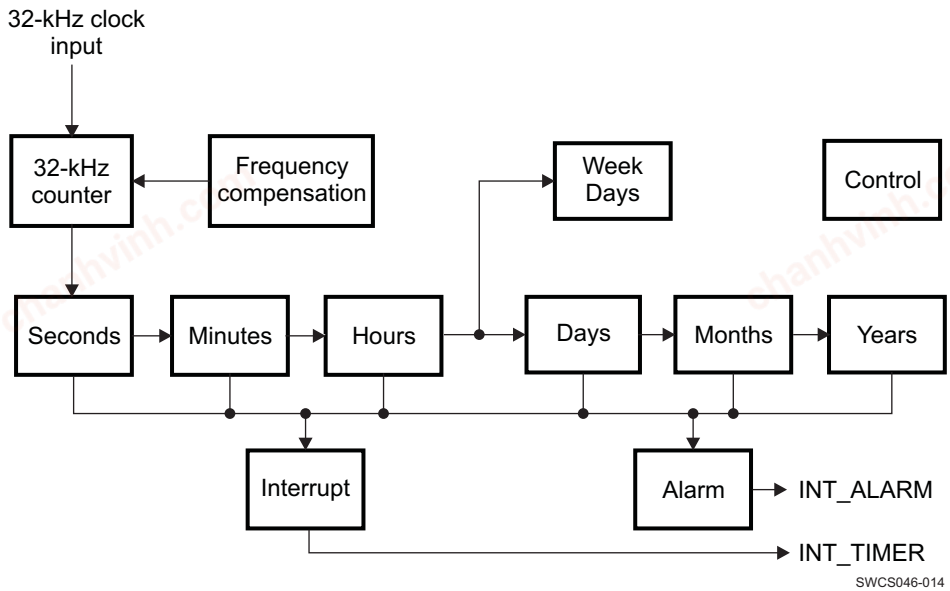


Figure 6-4. RTC Digital Section Block Diagram

NOTE

INT_ALARM can generate a wakeup of the platform.

INT_TIMER cannot generate a wakeup of the platform.

chanhvinh.com

6.5.1 Time Calendar Registers

All the time and calendar information are available in these dedicated registers, called TC registers. Values of the TC registers are written in BCD format.

1. Year data ranges from 00 to 99
   - Leap year = Year divisible by four (2000, 2004, 2008, 2012...)
   - Common year = other years
2. Month data ranges from 01 to 12
3. Day value ranges from:
   - 1 to 31 when months are 1, 3, 5, 7, 8, 10, 12
   - 1 to 30 when months are 4, 6, 9, 11
   - 1 to 29 when month is 2 and year is a leap year
   - 1 to 28 when month is 2 and year is a common year
4. Week value ranges from 0 to 6
5. Hour value ranges from 00 to 23 in 24-hour mode and ranges from 1 to 12 in AM/PM mode
6. Minutes value ranges from 0 to 59
7. Seconds value ranges from 0 to 59

To modify the current time, software writes the new time into TC registers to fix the time/calendar information. The DBB can write into TC registers without stopping the RTC. In addition, software can stop the RTC by clearing the STOP_RTC bit of the control register and check the RUN bit of the status to be sure that the RTC is frozen. Then update TC values, and then restart the RTC by setting the STOP_RTC bit.

Example: Time is 10H54M36S PM (PM_AM mode set), 2008 September 5, previous register values are:

Register	Value
SECONDS_REG	0x36
MINUTES_REG	0x54
HOURS_REG	0x90
DAYS_REG	0x05
MONTHS_REG	0x09
YEARS_REG	0x08

The user can round to the closest minute, by setting the ROUND_30S register bit. TC values are set to the closest minute value at the next second. The ROUND_30S bit is automatically cleared when the rounding time is performed.

Example:

- If current time is 10H59M45S, a round operation changes time to 11H00M00S.
- if current time is 10H59M29S, a round operation changes time to 10H59M00S.

6.5.2 General Registers

Software can access the RTC_STATUS_REG and RTC_CTRL_REG registers at any time (except for the RTC_CTRL_REG[5] bit, which must be changed only when the RTC is stopped).

6.5.3 Compensation Registers

The RTC_COMP_MSB_REG and RTC_COMP_LSB_REG registers must respect the available access period. These registers must be updated before each compensation process. For example, software can load the compensation value into these registers after each hour event, during an available access period.

Copyright © 2010–2014, Texas Instruments Incorporated

chanhvinh.com

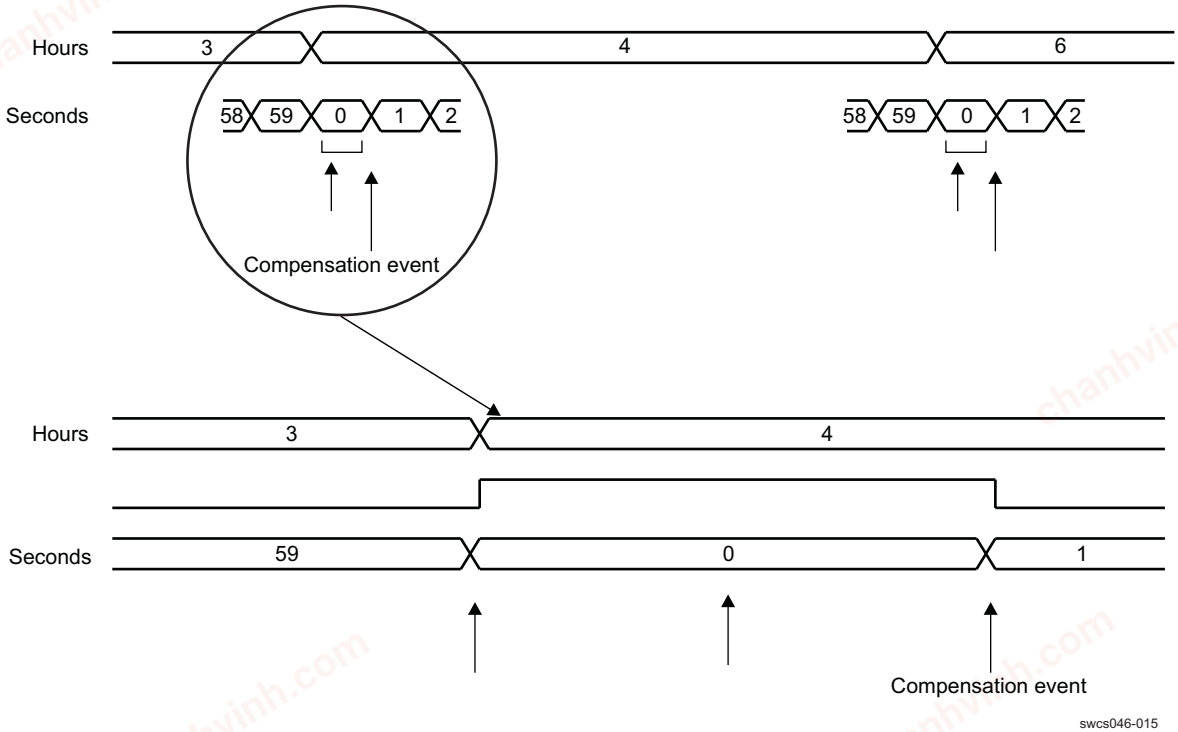


Figure 6-5. RTC Compensation Scheduling

This drift can be balanced to compensate for any inaccuracy of the 32-kHz oscillator. Software must calibrate the oscillator frequency, calculate the drift compensation versus one time hour period; and then load the compensation registers with the drift compensation value. Indeed, if the AUTO_COMP_EN bit in the RTC_CTRL_REG is enabled, the value of COMP_REG (in twos-complement) is added to the RTC 32-kHz counter at each hour and one second. When COMP_REG is added to the RTC 32-kHz counter, the duration of the current second becomes (32768 - COMP_REG)/32768s; so, the RTC can be compensated with a 1/32768 s/hour time unit accuracy.

NOTE

The compensation is considered once written into the registers.

6.6 Backup Battery Management

The device includes a back-up battery switch connecting the VRTC regulator input to a main battery (VCC7) or to a back-up battery (VBACKUP), depending on the batteries voltage value.

The VRTC supply can then be maintained during a BACKUP state as far as the input voltage is high enough (>VBNPR threshold). Below the VBNPR voltage threshold the digital core of the device is set under reset by internal signal POR (Power-on Reset).

The back-up domain functions which are always supplied from VRTC comprehend:

- The internal 32-kHz oscillator
- Backup registers

The back-up battery can be charged from the main battery through an embedded charger. The back-up battery charge voltage and enable is controlled through BBCH_REG register programming. This register content is maintained during the device Backup state.

Hence enabled the back-up battery charge is maintained as far as the main battery voltage is higher than the VMBLO threshold and the back-up battery voltage.

Copyright © 2010–2014, Texas Instruments Incorporated

chanhvinh.com

6.7 Backup Registers

As part of the RTC the device contains five 8-bit registers which can be used for storage by the application firmware when the external host is powered down. These registers retain their content as long as the VRTC is active.

6.8 I^2C Interface

A general-purpose serial control interface (CTL-I^2C) allows read and write access to the configuration registers of all resources of the system.

A second serial control interface (SR-I^2C) is dedicated to SmartReflex applications such as DVFS or AVS.

Both control interfaces are compliant with HS-I^2C specification.

These interfaces support the standard slave mode (100 Kbps), Fast mode (400 Kbps), and high-speed mode (3.4 Mbps). The general-purpose I^2C module using one slave hard-coded address (ID1 = 2Dh). The SmartReflex I^2C module uses one slave hard-coded address (ID0 = 12h). The master mode is not supported.

Addressing: Seven-bit mode addressing device

They do not support the following features:

- 10-bit addressing
- General call

6.9 Thermal Monitoring and Shutdown

A thermal protection module monitors the junction temperature of the device versus two thresholds:

- Hot-die temperature threshold
- Thermal shutdown temperature threshold

When the hot-die temperature threshold is reached an interrupt is sent to software to close the noncritical running tasks.

When the thermal shutdown temperature threshold is reached, the TPS65910 device is set under reset and a transition to OFF state is initiated. Then the power-on enable conditions of the device is not considered until the die temperature has decreased below the hot-die threshold. An hysteresis is applied to the hot-die and shutdown threshold, when detecting a falling edge of temperature, and both detection are debounced to avoid any parasitic detection. The TPS65910 device allows programming of four hot-die temperature thresholds to increase the flexibility of the system.

By default, the thermal protection is enabled in ACTIVE state, but can be disabled through programming register THERM_REG. The thermal protection can be enabled in SLEEP state programming register SLEEP_KEEP_RES_ON. The thermal protection is automatically enabled during an OFF-to-ACTIVE state transition and is kept enabled in OFF state after a switch-off sequence caused by a thermal shutdown event. Transition to OFF state sequence caused by a thermal shutdown event is highlighted in the INT_STS_REG status register. Recovery from this OFF state is initiated (switch-on sequence) when the die temperature falls below the hot-die temperature threshold.

Hot-die and thermal shutdown temperature threshold detections state can be monitored or masked by reading or programming the THERM_REG register. Hot-die interrupt can be masked by programming the INT_MSK_REG register.

Copyright © 2010–2014, Texas Instruments Incorporated

chanhvinh.com

6.10 Interrupts

Table 6-2. Interrupt Sources

Interrupt	Description
RTC_ALARM_IT	RTC alarm event: Occurs at programmed determinate date and time (running in ACTIVE, OFF, and SLEEP state, default inactive)
RTC_PERIOD_IT	RTC periodic event: Occurs at programmed regular period of time (every second or minute) (running in ACTIVE, OFF, and SLEEP state, default inactive)
HOT_DIE_IT	The embedded thermal monitoring module has detected a die temperature above the hot-die detection threshold (running in ACTIVE and SLEEP state)
	Level sensitive interrupt.
PWRHOLD_IT	PWRHOLD signal rising edge
PWRON_LP_IT	PWRON is low during more than the long-press delay: $t_{dPWRONLP}$ (can be disable though register programming).
PWRON_IT	PWRON is low while the device is on (running in ACTIVE and SLEEP state) or PWON was low while the device was off (causing a device turn-on). Level-sensitive interrupt
VMBHI_IT	The battery voltage rise above the VMBHI threshold: NOSUPPLY to Off or Backup-to-Off device states transition (first battery plug or battery voltage bounce detection). This interrupt source can be disabled through EEPROM programming (VMBHI_IT_DIS). Edge-sensitive interrupt
VMBDCH_IT	The battery voltage falls down below the VMBDCH threshold(running in ACTIVE and SLEEP state, if enabled programming VMBCH_VSEL). Edge-sensitive interrupt
GPIO0_R_IT	GPIO_CKSYNC rising-edge detection (available in ACTIVE and SLEEP state)
GPIO0_F_IT	GPIO_CKSYNC falling-edge detection (available in ACTIVE and SLEEP state)

INT1 signal (active low) warns the host processor of any event that occurred on the TPS65910 device. The host processor can then poll the interrupt from the interrupt status register via I^2C to identify the interrupt source. Each interrupt source can be individually masked via the interrupt mask register.

6.11 Package Description

The following are the package descriptions of the TPS65910 PMU devices:

- Package type:

Package	TPS65910
Type	RSL QFN-N48
Size (mm)	6x6
Substrate layers	1 layer
Pitch ball array (mm)	0.4 mm
ViP (via-in-pad)	No
Number of balls	48
Thickness (mm) (max height including balls)	1
Others	Green, ROHS-compliant

- Moisture sensitivity level target: JEDEC MSL3 at 260°C

Copyright © 2010–2014, Texas Instruments Incorporated

chanhvinh.com

6.12 Functional Registers

6.12.1 TPS65910_FUNC_REG Registers Mapping Summary

Table 6-3. TPS65910_FUNC_REG Register Summary

Register Name	Type	Register Width (Bits)	Register Reset	Address Offset
SECONDS_REG	RW	8	0x00	0x00
MINUTES_REG	RW	8	0x00	0x01
HOURS_REG	RW	8	0x00	0x02
DAYS_REG	RW	8	0x01	0x03
MONTHS_REG	RW	8	0x01	0x04
YEARS_REG	RW	8	0x00	0x05
WEEKS_REG	RW	8	0x00	0x06
ALARM_SECONDS_REG	RW	8	0x00	0x08
ALARM_MINUTES_REG	RW	8	0x00	0x09
ALARM_HOURS_REG	RW	8	0x00	0x0A
ALARM_DAYS_REG	RW	8	0x01	0x0B
ALARM_MONTHS_REG	RW	8	0x01	0x0C
ALARM_YEARS_REG	RW	8	0x00	0x0D
RTC_CTRL_REG	RW	8	0x00	0x10
RTC_STATUS_REG	RW	8	0x80	0x11
RTC_INTERRUPTS_REG	RW	8	0x00	0x12
RTC_COMP_LSB_REG	RW	8	0x00	0x13
RTC_COMP_MSB_REG	RW	8	0x00	0x14
RTC_RES_PROG_REG	RW	8	0x27	0x15
RTC_RESET_STATUS_REG	RW	8	0x00	0x16
BCK1_REG	RW	8	0x00	0x17
BCK2_REG	RW	8	0x00	0x18
BCK3_REG	RW	8	0x00	0x19
BCK4_REG	RW	8	0x00	0x1A
BCK5_REG	RW	8	0x00	0x1B
PUADEN_REG	RW	8	0x9F	0x1C
REF_REG	RW	8	0x01	0x1D
VRTC_REG	RW	8	0x01	0x1E
VIO_REG	RW	8	0x00	0x20
VDD1_REG	RW	8	0x0C	0x21
VDD1_OP_REG	RW	8	0x00	0x22
VDD1_SR_REG	RW	8	0x00	0x23
VDD2_REG	RW	8	0x04	0x24
VDD2_OP_REG	RW	8	0x00	0x25
VDD2_SR_REG	RW	8	0x00	0x26
VDD3_REG	RW	8	0x04	0x27
VDIG1_REG	RW	8	0x00	0x30
VDIG2_REG	RW	8	0x00	0x31
VAUX1_REG	RW	8	0x00	0x32
VAUX2_REG	RW	8	0x00	0x33
VAUX33_REG	RW	8	0x00	0x34
VMMC_REG	RW	8	0x00	0x35
VPLL_REG	RW	8	0x00	0x36
VDAC_REG	RW	8	0x00	0x37

Copyright © 2010–2014, Texas Instruments Incorporated

chanhvinh.com

Table 6-3. TPS65910_FUNC_REG Register Summary (continued)

Register Name	Type	Register Width (Bits)	Register Reset	Address Offset
THERM_REG	RW	8	0x0D	0x38
BBCH_REG	RW	8	0x00	0x39
DCDCCTRL_REG	RW	8	0x3B	0x3E
DEVCTRL_REG	RW	8	0x40	0x3F
DEVCTRL2_REG	RW	8	0x34	0x40
SLEEP_KEEP_LDO_ON_REG	RW	8	0x00	0x41
SLEEP_KEEP_RES_ON_REG	RW	8	0x00	0x42
SLEEP_SET_LDO_OFF_REG	RW	8	0x00	0x43
SLEEP_SET_RES_OFF_REG	RW	8	0x00	0x44
EN1_LDO_ASS_REG	RW	8	0x00	0x45
EN1_SMPS_ASS_REG	RW	8	0x00	0x46
EN2_LDO_ASS_REG	RW	8	0x00	0x47
EN2_SMPS_ASS_REG	RW	8	0x00	0x48
RESERVED	RW	8	0x00	0x49
RESERVED	RW	8	0x00	0x4A
INT_STS_REG	RW	8	0x00	0x50
INT_MSK_REG	RW	8	0x02	0x51
INT_STS2_REG	RW	8	0x00	0x52
INT_MSK2_REG	RW	8	0x00	0x53
GPIO0_REG	RW	8	0x0A	0x60
JTAGVERNUM_REG	RO	8	0x00	0x80

Copyright © 2010–2014, Texas Instruments Incorporated

chanhvinh.com

6.12.2 TPS65910_FUNC_REG Register Descriptions

Table 6-4. SECONDS_REG

Address Offset	0x00						
Physical Address				**Instance**			
Description	RTC register for seconds						
Type	RW						
7	6	5	4	3	2	1	0
Reserved	SEC1			SEC0			

Bits	Field Name	Description	Type	Reset
7	Reserved	Reserved bit	RO R returns 0s	0
6:4	SEC1	Second digit of seconds (range is 0 up to 5)	RW	0x0
3:0	SEC0	First digit of seconds (range is 0 up to 9)	RW	0x0

Table 6-5. MINUTES_REG

Address Offset	0x01						
Physical Address				**Instance**			
Description	RTC register for minutes						
Type	RW						
7	6	5	4	3	2	1	0
Reserved	MIN1			MIN0			

Bits	Field Name	Description	Type	Reset
7	Reserved	Reserved bit	RO R returns 0s	0
6:4	MIN1	Second digit of minutes (range is 0 up to 5)	RW	0x0
3:0	MIN0	First digit of minutes (range is 0 up to 9)	RW	0x0

Table 6-6. HOURS_REG

Address Offset	0x02						
Physical Address				**Instance**			
Description	RTC register for hours						
Type	RW						
7	6	5	4	3	2	1	0
PM_NAM	Reserved	HOUR1		HOUR0			

Bits	Field Name	Description	Type	Reset
7	PM_NAM	Only used in PM_AM mode (otherwise it is set to 0) 0 is AM 1 is PM	RW	0
6	Reserved	Reserved bit	RO R returns 0s	0
5:4	HOUR1	Second digit of hours (range is 0 up to 2)	RW	0x0
3:0	HOUR0	First digit of hours (range is 0 up to 9)	RW	0x0

Copyright © 2010–2014, Texas Instruments Incorporated

chanhvinh.com

Table 6-7. DAYS_REG

Address Offset	0x03						
Physical Address				**Instance**			
Description	RTC register for days						
Type	RW						

7	6	5	4	3	2	1	0
Reserved		DAY1		DAY0			

Bits	Field Name	Description	Type	Reset
7:6	Reserved	Reserved bit	RO R returns 0s	0x0
5:4	DAY1	Second digit of days (range is 0 up to 3)	RW	0x0
3:0	DAY0	First digit of days (range is 0 up to 9)	RW	0x1

Table 6-8. MONTHS_REG

Address Offset	0x04						
Physical Address				**Instance**			
Description	RTC register for months						
Type	RW						

7	6	5	4	3	2	1	0
Reserved			MONTH1	MONTH0			

Bits	Field Name	Description	Type	Reset
7:5	Reserved	Reserved bit	RO R returns 0s	0x0
4	MONTH1	Second digit of months (range is 0 up to 1)	RW	0
3:0	MONTH0	First digit of months (range is 0 up to 9)	RW	0x1

Table 6-9. YEARS_REG

Address Offset	0x05						
Physical Address				**Instance**			
Description	RTC register for day of the week						
Type	RW						

7	6	5	4	3	2	1	0
YEAR1				YEAR0			

Bits	Field Name	Description	Type	Reset
7:4	YEAR1	Second digit of years (range is 0 up to 9)	RW	0x0
3:0	YEAR0	First digit of years (range is 0 up to 9)	RW	0x0

Copyright © 2010–2014, Texas Instruments Incorporated

chanhvinh.com

Table 6-10. WEEKS_REG

Address Offset	0x06
Physical Address	**Instance**
Description	RTC register for day of the week
Type	RW

7	6	5	4	3	2	1	0
Reserved						WEEK	

Bits	Field Name	Description	Type	Reset
7:3	Reserved	Reserved bit	RO R returns 0s	0x00
2:0	WEEK	First digit of day of the week (range is 0 up to 6)	RW	0

Table 6-11. ALARM_SECONDS_REG

Address Offset	0x08
Physical Address	**Instance**
Description	RTC register for alarm programming for seconds
Type	RW

7	6	5	4	3	2	1	0
Reserved	ALARM_SEC1				ALARM_SEC0		

Bits	Field Name	Description	Type	Reset
7	Reserved	Reserved bit	RO R returns 0s	0
6:4	ALARM_SEC1	Second digit of alarm programming for seconds (range is 0 up to 5)	RW	0x0
3:0	ALARM_SEC0	First digit of alarm programming for seconds (range is 0 up to 9)	RW	0x0

Table 6-12. ALARM_MINUTES_REG

Address Offset	0x09
Physical Address	**Instance**
Description	RTC register for alarm programming for minutes
Type	RW

7	6	5	4	3	2	1	0
Reserved	ALARM_MIN1				ALARM_MIN0		

Bits	Field Name	Description	Type	Reset
7	Reserved	Reserved bit	RO R returns 0s	0
6:4	ALARM_MIN1	Second digit of alarm programming for minutes (range is 0 up to 5)	RW	0x0
3:0	ALARM_MIN0	First digit of alarm programming for minutes (range is 0 up to 9)	RW	0x0

Copyright © 2010–2014, Texas Instruments Incorporated

chanhvinh.com

Table 6-13. ALARM_HOURS_REG

Address Offset	0x0A
Physical Address	**Instance**
Description	RTC register for alarm programming for hours
Type	RW

7	6	5	4	3	2	1	0
ALARM_PM_NAM	Reserved	ALARM_HOUR1		ALARM_HOUR0			

Bits	Field Name	Description	Type	Reset
7	ALARM_PM_NAM	Only used in PM_AM mode for alarm programming (otherwise it is set to 0) 0 is AM 1 is PM	RW	0
6	Reserved	Reserved bit	RO R returns 0s	0
5:4	ALARM_HOUR1	Second digit of alarm programming for hours (range is 0 up to 2)	RW	0x0
3:0	ALARM_HOUR0	First digit of alarm programming for hours (range is 0 up to 9)	RW	0x0

Table 6-14. ALARM_DAYS_REG

Address Offset	0x0B
Physical Address	**Instance**
Description	RTC register for alarm programming for days
Type	RW

7	6	5	4	3	2	1	0
Reserved		ALARM_DAY1		ALARM_DAY0			

Bits	Field Name	Description	Type	Reset
7:6	Reserved	Reserved bit	RO R Special	0x0
5:4	ALARM_DAY1	Second digit of alarm programming for days (range is 0 up to 3)	RW	0x0
3:0	ALARM_DAY0	First digit of alarm programming for days (range is 0 up to 9)	RW	0x1

Table 6-15. ALARM_MONTHS_REG

Address Offset	0x0C
Physical Address	**Instance**
Description	RTC register for alarm programming for months
Type	RW

7	6	5	4	3	2	1	0
Reserved			ALARM_MONTH1	ALARM_MONTH0			

Bits	Field Name	Description	Type	Reset
7:5	Reserved	Reserved bit	RO R returns 0s	0x0
4	ALARM_MONTH1	Second digit of alarm programming for months (range is 0 up to 1)	RW	0
3:0	ALARM_MONTH0	First digit of alarm programming for months (range is 0 up to 9)	RW	0x1

Copyright © 2010–2014, Texas Instruments Incorporated

chanhvinh.com

Table 6-16. ALARM_YEARS_REG

Address Offset	0x0D
Physical Address	**Instance**
Description	RTC register for alarm programming for years
Type	RW

7	6	5	4	3	2	1	0
ALARM_YEAR1				ALARM_YEAR0			

Bits	Field Name	Description	Type	Reset
7:4	ALARM_YEAR1	Second digit of alarm programming for years (range is 0 up to 9)	RW	0x0
3:0	ALARM_YEAR0	First digit of alarm programming for years (range is 0 up to 9)	RW	0x0

Table 6-17. RTC_CTRL_REG

Address Offset	0x10
Physical Address	**Instance**
Description	RTC control register: NOTES: A dummy read of this register is necessary before each I^2C read in order to update the ROUND_30S bit value.
Type	RW

7	6	5	4	3	2	1	0
RTC_V_OPT	GET_TIME	SET_32_COUNTER	TEST_MODE	MODE_12_24	AUTO_COMP	ROUND_30S	STOP_RTC

Bits	Field Name	Description	Type	Reset
7	RTC_V_OPT	RTC date / time register selection: 0: Read access directly to dynamic registers (SECONDS_REG, MINUTES_REG, HOURS_REG, DAYS_REG, MONTHS_REG, YEAR_REG, WEEKS_REG) 1: Read access to static shadowed registers: (see GET_TIME bit).	RW	0
6	GET_TIME	When writing a 1 into this register, the content of the dynamic registers (SECONDS_REG, MINUTES_REG, HOURS_REG, DAYS_REG, MONTHS_REG, YEAR_REG and WEEKS_REG) is transferred into static shadowed registers. Each update of the shadowed registers needs to be done by re-asserting GET_TIME bit to 1 (that is, reset it to 0 and then re-write it to 1)	RW	0
5	SET_32_COUNTER	0: No action 1: set the 32-kHz counter with COMP_REG value. It must only be used when the RTC is frozen.	RW	0
4	TEST_MODE	0: functional mode 1: test mode (Auto compensation is enable when the 32kHz counter reaches at its end)	RW	0
3	MODE_12_24	0: 24 hours mode 1: 12 hours mode (PM-AM mode) It is possible to switch between the two modes at any time without disturbed the RTC, read or write are always performed with the current mode.	RW	0
2	AUTO_COMP	0: No auto compensation 1: Auto compensation enabled	RW	0
1	ROUND_30S	0: No update 1: When a one is written, the time is rounded to the closest minute. This bit is a toggle bit, the micro-controller can only write one and RTC clears it. If the micro-controller sets the ROUND_30S bit and then read it, the micro-controller will read one until the rounded to the closet.	RW	0
0	STOP_RTC	0: RTC is frozen 1: RTC is running	RW	0

Copyright © 2010–2014, Texas Instruments Incorporated

chanhvinh.com

Table 6-18. RTC_STATUS_REG

Address Offset	0x11
Physical Address	**Instance**
Description	RTC status register: NOTES: A dummy read of this register is necessary before each I^2C read in order to update the status register value.
Type	RW

7	6	5	4	3	2	1	0
POWER_UP	ALARM	EVENT_1D	EVENT_1H	EVENT_1M	EVENT_1S	RUN	Reserved

Bits	Field Name	Description	Type	Reset
7	POWER_UP	Indicates that a reset occurred (bit cleared to 0 by writing 1). POWER_UP is set by a reset, is cleared by writing one in this bit.	RW	1
6	ALARM	Indicates that an alarm interrupt has been generated (bit clear by writing 1). The alarm interrupt keeps its low level, until the micro-controller write 1 in the ALARM bit of the RTC_STATUS_REG register. The timer interrupt is a low-level pulse (15 µs duration).	RW	0
5	EVENT_1D	One day has occurred	RO	0
4	EVENT_1H	One hour has occurred	RO	0
3	EVENT_1M	One minute has occurred	RO	0
2	EVENT_1S	One second has occurred	RO	0
1	RUN	0: RTC is frozen 1: RTC is running This bit shows the real state of the RTC, indeed because of STOP_RTC signal was resynchronized on 32-kHz clock, the action of this bit is delayed.	RO	0
0	Reserved	Reserved bit	RO R returns 0s	0

Table 6-19. RTC_INTERRUPTS_REG

Address Offset	0x12
Physical Address	**Instance**
Description	RTC interrupt control register
Type	RW

7	6	5	4	3	2	1	0
Reserved			IT_SLEEP_MASK_EN	IT_ALARM	IT_TIMER	EVERY	

Bits	Field Name	Description	Type	Reset
7:5	Reserved	Reserved bit	RO R returns 0s	0x0
4	IT_SLEEP_MASK_EN	1: Mask periodic interrupt while the TPS65910 device is in SLEEP mode. Interrupt event is back up in a register and occurred as soon as the TPS65910 device is no more in SLEEP mode. 0: Normal mode, no interrupt masked	RW	0
3	IT_ALARM	Enable one interrupt when the alarm value is reached (TC ALARM registers) by the TC registers	RW	0
2	IT_TIMER	Enable periodic interrupt 0: interrupt disabled 1: interrupt enabled	RW	0

Copyright © 2010–2014, Texas Instruments Incorporated

chanhvinh.com

Bits	Field Name	Description	Type	Reset
1:0	EVERY	Interrupt period 00: every second 01: every minute 10: every hour 11: every day	RW	0x0

Table 6-20. RTC_COMP_LSB_REG

Address Offset	0x13
Physical Address	**Instance**
Description	RTC compensation register (LSB) Notes: This register must be written in 2-complement. This means that to add one 32kHz oscillator period every hour, micro-controller needs to write FFFF into RTC_COMP_MSB_REG & RTC_COMP_LSB_REG. To remove one 32-kHz oscillator period every hour, micro-controller needs to write 0001 into RTC_COMP_MSB_REG & RTC_COMP_LSB_REG. The 7FFF value is forbidden.
Type	RW

7	6	5	4	3	2	1	0
RTC_COMP_LSB							

Bits	Field Name	Description	Type	Reset
7:0	RTC_COMP_LSB	This register contains the number of 32-kHz periods to be added into the 32-kHz counter every hour [LSB]	RW	0x00

Table 6-21. RTC_COMP_MSB_REG

Address Offset	0x14
Physical Address	**Instance**
Description	RTC compensation register (MSB) Notes: See RTC_COMP_LSB_REG Notes.
Type	RW

7	6	5	4	3	2	1	0
RTC_COMP_MSB							

Bits	Field Name	Description	Type	Reset
7:0	RTC_COMP_MSB	This register contains the number of 32-kHz periods to be added into the 32-kHz counter every hour [MSB]	RW	0x00

Table 6-22. RTC_RES_PROG_REG

Address Offset	0x15
Physical Address	**Instance**
Description	RTC register containing oscillator resistance value
Type	RW

7	6	5	4	3	2	1	0
Reserved		SW_RES_PROG					

Bits	Field Name	Description	Type	Reset
7:6	Reserved	Reserved bit	RO R returns 0s	0x0
5:0	SW_RES_PROG	Value of the oscillator resistance	RW	0x27

Copyright © 2010–2014, Texas Instruments Incorporated

chanhvinh.com

Table 6-23. RTC_RESET_STATUS_REG

Address Offset	0x16
Physical Address	**Instance**
Description	RTC register for reset status
Type	RW

7	6	5	4	3	2	1	0
Reserved							RESET_STATUS

Bits	Field Name	Description	Type	Reset
7:1	Reserved	Reserved bit	RO R returns 0s	0x0
0	RESET_STATUS		RW	0x0

Table 6-24. BCK1_REG

Address Offset	0x17
Physical Address	**Instance**
Description	Backup register which can be used for storage by the application firmware when the external host is powered down. These registers will retain their content as long as the VRTC is active.
Type	RW

7	6	5	4	3	2	1	0
BCKUP							

Bits	Field Name	Description	Type	Reset
7:0	BCKUP	Backup bit	RW	0x00

Table 6-25. BCK2_REG

Address Offset	0x18
Physical Address	**Instance**
Description	Backup register which can be used for storage by the application firmware when the external host is powered down. These registers will retain their content as long as the VRTC is active.
Type	RW

7	6	5	4	3	2	1	0
BCKUP							

Bits	Field Name	Description	Type	Reset
7:0	BCKUP	Backup bit	RW	0x00

Copyright © 2010–2014, Texas Instruments Incorporated

chanhvinh.com

Table 6-26. BCK3_REG

Address Offset	0x19
Physical Address	**Instance**
Description	Backup register which can be used for storage by the application firmware when the external host is powered down. These registers will retain their content as long as the VRTC is active.
Type	RW

7	6	5	4	3	2	1	0
BCKUP							

Bits	Field Name	Description	Type	Reset
7:0	BCKUP	Backup bit	RW	0x00

Table 6-27. BCK4_REG

Address Offset	0x1A
Physical Address	**Instance**
Description	Backup register which can be used for storage by the application firmware when the external host is powered down. These registers will retain their content as long as the VRTC is active.
Type	RW

7	6	5	4	3	2	1	0
BCKUP							

Bits	Field Name	Description	Type	Reset
7:0	BCKUP	Backup bit	RW	0x00

Table 6-28. BCK5_REG

Address Offset	0x1B
Physical Address	**Instance**
Description	Backup register which can be used for storage by the application firmware when the external host is powered down. These registers will retain their content as long as the VRTC is active.
Type	RW

7	6	5	4	3	2	1	0
BCKUP							

Bits	Field Name	Description	Type	Reset
7:0	BCKUP	Backup bit	RW	0x00

Copyright © 2010–2014, Texas Instruments Incorporated

chanhvinh.com

Table 6-29. PUADEN_REG

Address Offset	0x1C
Physical Address	**Instance**
Description	Pull-up/pull-down control register.
Type	RW

7	6	5	4	3	2	1	0
RESERVED	I2CCTLP	I2CSRP	PWRONP	SLEEPP	PWRHOLDP	BOOT1P	BOOT0P

Bits	Field Name	Description	Type	Reset
7	RESERVED	Reserved bit	RW	1
6	I2CCTLP	SDACTL and SCLCTL pull-up control: 1: Pull-up is enabled 0: Pull-up is disabled	RW	0
5	I2CSRP	SDASR and SCLSR pull-up control: 1: Pull-up is enabled 0: Pull-up is disabled	RW	0
4	PWRONP	PWRON pad pull-up control: 1: Pull-up is enabled 0: Pull-up is disabled	RW	1
3	SLEEPP	SLEEP pad pull-down control: 1: Pull-down is enabled 0: Pull-down is disabled	RW	1
2	PWRHOLDP	PWRHOLD pad pull-down control: 1: Pull-down is enabled 0: Pull-down is disabled	RW	1
1	BOOT1P	BOOT1 pad control: 1: Pull-down is enabled 0: Pull-down is disabled	RW	1
0	BOOT0P	BOOT0 pad control: 1: Pull-down is enabled 0: Pull-down is disabled	RW	1

Table 6-30. REF_REG

Address Offset	0x1D
Physical Address	**Instance**
Description	Reference control register
Type	RW

7	6	5	4	3	2	1	0
Reserved				VMBCH_SEL		ST	

Bits	Field Name	Description	Type	Reset
7:4	Reserved	Reserved bit	RO R returns 0s	0x0
3:2	VMBCH_SEL	Main Battery comparator VMBCH programmable threshold (EEPROM bits): VMBCH_SEL[1:0] = 00 : bypass VMBCH_SEL[1:0] = 01 : VMBCH = 2.8 V VMBCH_SEL[1:0] = 10 : VMBCH = 2.9 V VMBCH_SEL[1:0] = 11 : VMBCH = 3.0 V	RW	0x0
1:0	ST	Reference state: ST[1:0] = 00 : Off ST[1:0] = 01 : On high power (ACTIVE) ST[1:0] = 10 : Reserved ST[1:0] = 11 : On low power (SLEEP) (Write access available in test mode only)	RO	0x1

Copyright © 2010–2014, Texas Instruments Incorporated

chanhvinh.com

Table 6-31. VRTC_REG

Address Offset	0x1E
Physical Address	**Instance**
Description	VRTC internal regulator control register
Type	RW

7	6	5	4	3	2	1	0
Reserved				VRTC_OFFMASK	Reserved	ST	

Bits	Field Name	Description	Type	Reset
7:4	Reserved	Reserved bit	RO R returns 0s	0x0
3	VRTC_OFFMASK	VRTC internal regulator off mask signal: when 1, the regulator keeps its full-load capability during device OFF state. when 0, the regulator will enter in low-power mode during device OFF state.(EEPROM bit)	RW	0
2	Reserved	Reserved bit	RO R returns 0s	0
1:0	ST	Reference state: ST[1:0] = 00 : Reserved ST[1:0] = 01 : On high power (ACTIVE) ST[1:0] = 10 : Reserved ST[1:0] = 11 : On low power (SLEEP) (Write access available in test mode only)	RO	0x1

Table 6-32. VIO_REG

Address Offset	0x20
Physical Address	**Instance**
Description	VIO control register
Type	RW

7	6	5	4	3	2	1	0
ILMAX		Reserved		SEL		ST	

Bits	Field Name	Description	Type	Reset
7:6	ILMAX	Select maximum load current: when 00: 0.5 A when 01: 1.0 A when 10: 1.0 A when 11: 1.0 A	RW	0x0
5:4	Reserved	Reserved bit	RO R returns 0s	0x0
3:2	SEL	Output voltage selection (EEPROM bits): SEL[1:0] = 00 : 1.5 V SEL[1:0] = 01 : 1.8 V SEL[1:0] = 10 : 2.5 V SEL[1:0] = 11 : 3.3 V	RW	See (1)
1:0	ST	Supply state (EEPROM bits): ST[1:0] = 00 : Off ST[1:0] = 01 : On high power (ACTIVE) ST[1:0] = 10 : Off ST[1:0] = 11 : On low power (SLEEP) (Write access available in test mode only)	RW	0x0

(1) The reset value for this field varies with boot mode selection and the processor support. Please refer to the corresponding processor user guide to find the correct default value.

Copyright © 2010–2014, Texas Instruments Incorporated

chanhvinh.com

Table 6-33. VDD1_REG

Address Offset	0x21
Physical Address	**Instance**
Description	VDD1 control register
Type	RW

7	6	5	4	3	2	1	0
VGAIN_SEL		ILMAX	TSTEP			ST	

Bits	Field Name	Description	Type	Reset
7:6	VGAIN_SEL	Select output voltage multiplication factor: G (EEPROM bits): when 00: x1 when 01: x1 when 10: x2 when 11: x3	RW	0x0
5	ILMAX	Select maximum load current: when 0: 1.0 A when 1: 1.5 A	RW	0
4:2	TSTEP	Time step: when changing the output voltage, the new value is reached through successive 12.5 mV voltage steps (if not bypassed). The equivalent programmable slew rate of the output voltage is then: TSTEP[2:0] = 000 : step duration is 0, step function is bypassed TSTEP[2:0] = 001 : 12.5 mV/µs (sampling 3 MHz) TSTEP[2:0] = 010 : 9.4 mV/µs (sampling 3 MHz × 3/4) TSTEP[2:0] = 011 : 7.5 mV/µs (sampling 3 MHz × 3/5) (default) TSTEP[2:0] = 100 : 6.25 mV/µs (sampling 3 MHz/2) TSTEP[2:0] = 101 : 4.7 mV/µs (sampling 3 MHz/3) TSTEP[2:0] = 110 : 3.12 mV/µs (sampling 3 MHz/4) TSTEP[2:0] = 111 : 2.5 mV/µs (sampling 3 MHz/5)	RW	0x3
1:0	ST	Supply state (EEPROM bits): ST[1:0] = 00 : Off ST[1:0] = 01 : On, high power mode ST[1:0] = 10 : Off ST[1:0] = 11 : On, low power mode	RW	0x0

Copyright © 2010–2014, Texas Instruments Incorporated

chanhvinh.com

Table 6-34. VDD1_OP_REG

Address Offset	0x22
Physical Address	**Instance**
Description	VDD1 voltage selection register. This register can be accessed by both control and smartreflex I^2C interfaces depending on SR_CTL_I2C_SEL register bit value.
Type	RW

7	6	5	4	3	2	1	0
CMD	SEL						

Bits	Field Name	Description	Type	Reset
7	CMD	Smart-Reflex command: when 0: VDD1_OP_REG voltage is applied when 1: VDD1_SR_REG voltage is applied	RW	0
6:0	SEL	Output voltage (EEPROM bits) selection with GAIN_SEL = 00 (G = 1, 12.5 mV per LSB): SEL[6:0] = 1001011 to 1111111 : 1.5 V ... SEL[6:0] = 0111111 : 1.35 V ... SEL[6:0] = 0110011 : 1.2 V ... SEL[6:0] = 0000001 to 0000011 : 0.6 V SEL[6:0] = 0000000 : Off (0.0 V) Note: from SEL[6:0] = 3 to 75 (dec) Vout = (SEL[6:0] × 12.5 mV + 0.5625 V) × G	RW	See (1)

(1) The reset value for this field varies with boot mode selection and the processor support. Please refer to the corresponding processor user guide to find the correct default value.

Table 6-35. VDD1_SR_REG

Address Offset	0x23
Physical Address	**Instance**
Description	VDD1 voltage selection register for smartreflex. This register can be accessed by both control and smartreflex I^2C interfaces depending on SR_CTL_I2C_SEL register bit value.
Type	RW

7	6	5	4	3	2	1	0
Reserved	SEL						

Bits	Field Name	Description	Type	Reset
7	Reserved	Reserved bit	RO R returns 0s	0
6:0	SEL	Output voltage (EEPROM bits) selection with GAIN_SEL = 00 (G = 1, 12.5 mV per LSB): SEL[6:0] = 1001011 to 1111111 : 1.5V ... SEL[6:0] = 0111111 : 1.35V ... SEL[6:0] = 0110011 : 1.2V ... SEL[6:0] = 0000001 to 0000011 : 0.6V SEL[6:0] = 0000000 : Off (0.0V) Note: from SEL[6:0] = 3 to 75 (dec) Vout = (SEL[6:0] × 12.5 mV + 0.5625 V) × G	RW	See (1)

(1) The reset value for this field varies with boot mode selection and the processor support. Please refer to the corresponding processor user guide to find the correct default value.

Copyright © 2010–2014, Texas Instruments Incorporated

chanhvinh.com

Table 6-36. VDD2_REG

Address Offset	0x24
Physical Address	**Instance**
Description	VDD2 control register
Type	RW

7	6	5	4	3	2	1	0
VGAIN_SEL		ILMAX	TSTEP			ST	

Bits	Field Name	Description	Type	Reset
7:6	VGAIN_SEL	Select output voltage multiplication factor: G (EEPROM bits): when 00: x1 when 01: x1 when 10: x2 when 11: x3	RW	0x0
5:4	ILMAX	Select maximum load current: when 0: 1.0 A when 1: 1.5 A	RW	0
3:2	TSTEP	Time step: when changing the output voltage, the new value is reached through successive 12.5 mV voltage steps (if not bypassed). The equivalent programmable slew rate of the output voltage is then: TSTEP[2:0] = 000: step duration is 0, step function is bypassed TSTEP[2:0] = 001: 12.5 mV/µs (sampling 3 MHz) TSTEP[2:0] = 010: 9.4 mV/µs (sampling 3 MHz × 3/4) TSTEP[2:0] = 011: 7.5 mV/µs (sampling 3 MHz × 3/5) (default) TSTEP[2:0] = 100: 6.25 mV/µs(sampling 3 MHz/2) TSTEP[2:0] = 101: 4.7 mV/µs(sampling 3 MHz/3) TSTEP[2:0] = 110: 3.12 mV/µs(sampling 3 MHz/4) TSTEP[2:0] = 111: 2.5 mV/µs(sampling 3 MHz/5)	RW	0x1
1:0	ST	Supply state (EEPROM bits): ST[1:0] = 00 : Off ST[1:0] = 01 : On, high power mode ST[1:0] = 10 : Off ST[1:0] = 11 : On, low power mode	RW	0x0

Copyright © 2010–2014, Texas Instruments Incorporated

chanhvinh.com

Table 6-37. VDD2_OP_REG

Address Offset	0x25
Physical Address	**Instance**
Description	VDD2 voltage selection register. This register can be accessed by both control and smartreflex I^2C interfaces depending on SR_CTL_I2C_SEL register bit value.
Type	RW

7	6	5	4	3	2	1	0
CMD	SEL						

Bits	Field Name	Description	Type	Reset
7	CMD	Smart-Reflex command: when 0: VDD2_OP_REG voltage is applied when 1: VDD2_SR_REG voltage is applied	RW	0
6:0	SEL	Output voltage (EEPROM bits) selection with GAIN_SEL = 00 (G = 1, 12.5 mV per LSB): SEL[6:0] = 1001011 to 1111111 : 1.5 V ... SEL[6:0] = 0111111 : 1.35 V ... SEL[6:0] = 0110011 : 1.2 V ... SEL[6:0] = 0000001 to 0000011 : 0.6 V SEL[6:0] = 0000000 : Off (0.0 V) Note: from SEL[6:0] = 3 to 75 (dec) Vout= (SEL[6:0] × 12.5 mV + 0.5625 V) × G	RW	See (1)

(1) The reset value for this field varies with boot mode selection and the processor support. Please refer to the corresponding processor user guide to find the correct default value.

Table 6-38. VDD2_SR_REG

Address Offset	0x26
Physical Address	**Instance**
Description	VDD2 voltage selection register for smartreflex. This register can be accessed by both control and smartreflex I^2C interfaces depending on SR_CTL_I2C_SEL register bit value.
Type	RW

7	6	5	4	3	2	1	0
Reserved	SEL						

Bits	Field Name	Description	Type	Reset
7	Reserved	Reserved bit	RO R returns 0s	0
6:0	SEL	Output voltage (EEPROM bits) selection with GAIN_SEL = 00 (G = 1, 12.5 mV per LSB): SEL[6:0] = 1001011 to 1111111: 1.5 V ... SEL[6:0] = 0111111: 1.35V ... SEL[6:0] = 0110011: 1.2V ... SEL[6:0] = 0000001 to 0000011: 0.6V SEL[6:0] = 0000000: Off (0.0V) Note: from SEL[6:0] = 3 to 75 (dec) Vout= (SEL[6:0] × 12.5 mV + 0.5625 V) ×G	RW	See (1)

(1) The reset value for this field varies with boot mode selection and the processor support. Please refer to the corresponding processor user guide to find the correct default value.

Copyright © 2010–2014, Texas Instruments Incorporated

chanhvinh.com

Table 6-39. VDD3_REG

Address Offset	0x27
Physical Address	**Instance**
Description	VDD2 voltage selection register for smartreflex. This register can be accessed by both control and smartreflex I^2C interfaces depending on SR_CTL_I2C_SEL register bit value.
Type	RW

7	6	5	4	3	2	1	0
Reserved					CKINEN	ST	

Bits	Field Name	Description	Type	Reset
7:3	Reserved	Reserved bit	RO R returns 0s	0x00
2	CKINEN	Enable 1MHz clock synchronization	RW	1
1:0	ST	Supply state (EEPROM bits): ST[1:0] = 00 : Off ST[1:0] = 01 : On high power (ACTIVE) ST[1:0] = 10 : Off ST[1:0] = 11 : On low power (SLEEP)	RW	0x0

Table 6-40. VDIG1_REG

Address Offset	0x30
Physical Address	**Instance**
Description	VDIG1 regulator control register
Type	RW

7	6	5	4	3	2	1	0
Reserved				SEL		ST	

Bits	Field Name	Description	Type	Reset
7:4	Reserved	Reserved bit	RO R returns 0s	0x0
3:2	SEL	Supply voltage (EEPROM bits): SEL[1:0] = 00 : 1.2 V SEL[1:0] = 01 : 1.5 V SEL[1:0] = 10 : 1.8 V SEL[1:0] = 11 : 2.7 V	RW	See (1)
1:0	ST	Supply state (EEPROM bits): ST[1:0] = 00 : Off ST[1:0] = 01 : On high power (ACTIVE) ST[1:0] = 10 : Off ST[1:0] = 11 : On low power (SLEEP)	RW	0x0

(1) The reset value for this field varies with boot mode selection and the processor support. Please refer to the corresponding processor user guide to find the correct default value.

Copyright © 2010–2014, Texas Instruments Incorporated

chanhvinh.com

Table 6-41. VDIG2_REG

Address Offset	0x31
Physical Address	**Instance**
Description	VDIG2 regulator control register
Type	RW

7	6	5	4	3	2	1	0
Reserved				SEL		ST	

Bits	Field Name	Description	Type	Reset
7:4	Reserved	Reserved bit	RO R returns 0s	0x0
3:2	SEL	Supply voltage (EEPROM bits): SEL[1:0] = 00 : 1.0 V SEL[1:0] = 01 : 1.1 V SEL[1:0] = 10 : 1.2 V SEL[1:0] = 11 : 1.8 V	RW	See (1)
1:0	ST	Supply state (EEPROM bits): ST[1:0] = 00 : Off ST[1:0] = 01 : On high power (ACTIVE) ST[1:0] = 10 : Off ST[1:0] = 11 : On low power (SLEEP)	RW	0x0

(1) The reset value for this field varies with boot mode selection and the processor support. Please refer to the corresponding processor user guide to find the correct default value.

Table 6-42. VAUX1_REG

Address Offset	0x32
Physical Address	**Instance**
Description	VAUX1 regulator control register
Type	RW

7	6	5	4	3	2	1	0
Reserved				SEL		ST	

Bits	Field Name	Description	Type	Reset
7:4	Reserved	Reserved bit	RO R returns 0s	0x0
3:2	SEL	Supply voltage (EEPROM bits): SEL[1:0] = 00 : 1.8 V SEL[1:0] = 01 : 2.5 V SEL[1:0] = 10 : 2.8 V SEL[1:0] = 11 : 2.85 V	RW	See (1)
1:0	ST	Supply state (EEPROM bits): ST[1:0] = 00 : Off ST[1:0] = 01 : On high power (ACTIVE) ST[1:0] = 10 : Off ST[1:0] = 11 : On low power (SLEEP)	RW	0x0

(1) The reset value for this field varies with boot mode selection and the processor support. Please refer to the corresponding processor user guide to find the correct default value.

Copyright © 2010–2014, Texas Instruments Incorporated

chanhvinh.com

Table 6-43. VAUX2_REG

Address Offset	0x33
Physical Address	**Instance**
Description	VAUX2 regulator control register
Type	RW

7	6	5	4	3	2	1	0
Reserved				SEL		ST	

Bits	Field Name	Description	Type	Reset
7:4	Reserved	Reserved bit	RO R returns 0s	0x0
3:2	SEL	Supply voltage (EEPROM bits): SEL[1:0] = 00 : 1.8 V SEL[1:0] = 01 : 2.8 V SEL[1:0] = 10 : 2.9 V SEL[1:0] = 11 : 3.3 V	RW	See (1)
1:0	ST	Supply state (EEPROM bits): ST[1:0] = 00 : Off ST[1:0] = 01 : On high power (ACTIVE) ST[1:0] = 10 : Off ST[1:0] = 11 : On low power (SLEEP)	RW	0x0

(1) The reset value for this field varies with boot mode selection and the processor support. Please refer to the corresponding processor user guide to find the correct default value.

Table 6-44. VAUX33_REG

Address Offset	0x34
Physical Address	**Instance**
Description	VAUX33 regulator control register
Type	RW

7	6	5	4	3	2	1	0
Reserved				SEL		ST	

Bits	Field Name	Description	Type	Reset
7:4	Reserved	Reserved bit	RO R returns 0s	0x0
3:2	SEL	Supply voltage (EEPROM bits): SEL[1:0] = 00 : 1.8 V SEL[1:0] = 01 : 2.0 V SEL[1:0] = 10 : 2.8 V SEL[1:0] = 11 : 3.3 V	RW	See (1)
1:0	ST	Supply state (EEPROM bits): ST[1:0] = 00 : Off ST[1:0] = 01 : On high power (ACTIVE) ST[1:0] = 10 : Off ST[1:0] = 11 : On low power (SLEEP)	RW	0x0

(1) The reset value for this field varies with boot mode selection and the processor support. Please refer to the corresponding processor user guide to find the correct default value.

Copyright © 2010–2014, Texas Instruments Incorporated

chanhvinh.com

Table 6-45. VMMC_REG

Address Offset	0x35
Physical Address	**Instance**
Description	VMMC regulator control register
Type	RW

7	6	5	4	3	2	1	0
Reserved				SEL		ST	

Bits	Field Name	Description	Type	Reset
7:4	Reserved	Reserved bit	RO R returns 0s	0x0
3:2	SEL	Supply voltage (EEPROM bits): SEL[1:0] = 00 : 1.8 V SEL[1:0] = 01 : 2.8 V SEL[1:0] = 10 : 3.0 V SEL[1:0] = 11 : 3.3 V	RW	See (1)
1:0	ST	Supply state (EEPROM bits): ST[1:0] = 00: Off ST[1:0] = 01: On high power (ACTIVE) ST[1:0] = 10: Off ST[1:0] = 11: On low power (SLEEP)	RW	0x0

(1) The reset value for this field varies with boot mode selection and the processor support. Please refer to the corresponding processor user guide to find the correct default value.

Table 6-46. VPLL_REG

Address Offset	0x36
Physical Address	**Instance**
Description	VPLL regulator control register
Type	RW

7	6	5	4	3	2	1	0
Reserved				SEL		ST	

Bits	Field Name	Description	Type	Reset
7:4	Reserved	Reserved bit	RO R returns 0s	0x0
3:2	SEL	Supply voltage (EEPROM bits): SEL[1:0] = 00 : 1.0 V SEL[1:0] = 01 : 1.1 V SEL[1:0] = 10 : 1.8 V SEL[1:0] = 11 : 2.5 V	RW	See (1)
1:0	ST	Supply state (EEPROM bits): ST[1:0] = 00 : Off ST[1:0] = 01 : On high power (ACTIVE) ST[1:0] = 10 : Off ST[1:0] = 11 : On low power (SLEEP)	RW	0x0

(1) The reset value for this field varies with boot mode selection and the processor support. Please refer to the corresponding processor user guide to find the correct default value.

Copyright © 2010–2014, Texas Instruments Incorporated

chanhvinh.com

Table 6-47. VDAC_REG

Address Offset	0x37
Physical Address	**Instance**
Description	VDAC regulator control register
Type	RW

7	6	5	4	3	2	1	0
Reserved				SEL		ST	

Bits	Field Name	Description	Type	Reset
7:4	Reserved	Reserved bit	RO R returns 0s	0x0
3:2	SEL	Supply voltage (EEPROM bits): SEL[1:0] = 00 : 1.8 V SEL[1:0] = 01 : 2.6 V SEL[1:0] = 10 : 2.8 V SEL[1:0] = 11 : 2.85 V	RW	See (1)
1:0	ST	Supply state (EEPROM bits): ST[1:0] = 00 : Off ST[1:0] = 01 : On high power (ACTIVE) ST[1:0] = 10 : Off ST[1:0] = 11 : On low power (SLEEP)	RW	0x0

(1) The reset value for this field varies with boot mode selection and the processor support. Please refer to the corresponding processor user guide to find the correct default value.

Table 6-48. Therm_REG

Address Offset	0x38
Physical Address	**Instance**
Description	Thermal control register
Type	RW

7	6	5	4	3	2	1	0
Reserved		THERM_HD	THERM_TS	THERM_HDSEL		RSVD1	THERM_STATE

Bits	Field Name	Description	Type	Reset
7:6	Reserved	Reserved bit	RO R returns 0s	0x0
5	THERM_HD	Hot die detector output: when 0: the hot die threshold is not reached when 1: the hot die threshold is reached	RO	0
4	THERM_TS	Thermal shutdown detector output: when 0: the thermal shutdown threshold is not reached when 1: the thermal shutdown threshold is reached	RO	0
3:2	THERM_HDSEL	Temperature selection for Hot Die detector: when 00: Low temperature threshold … when 11: High temperature threshold	RW	0x3
1	RSVD1	Reserved bit	RW	0
0	THERM_STATE	Thermal shutdown module enable signal: when 0: thermal shutdown module is disable when 1: thermal shutdown module is enable	RW	1

Copyright © 2010–2014, Texas Instruments Incorporated

chanhvinh.com

Table 6-49. BBCH_REG

Address Offset	0x39
Physical Address	**Instance**
Description	Back-up battery charger control register
Type	RW

7	6	5	4	3	2	1	0
Reserved					BBSEL		BBCHEN

Bits	Field Name	Description	Type	Reset
7:4	Reserved	Reserved bit	RO R returns 0s	0x00
2:1	BBSEL	Back up battery charge voltage selection: BBSEL[1:0] = 00 : 3.0 V BBSEL[1:0] = 01 : 2.52 V BBSEL[1:0] = 10 : 3.15 V BBSEL[1:0] = 11 : VBAT	RW	0x0
0	BBCHEN	Back up battery charge enable	RW	0

Table 6-50. DCDCCTRL_REG

Address Offset	0x3E
Physical Address	**Instance**
Description	DCDC control register
Type	RW

7	6	5	4	3	2	1	0
Reserved		VDD2_PSKIP	VDD1_PSKIP	VIO_PSKIP	DCDCCKEXT	DCDCCKSYNC	

Bits	Field Name	Description	Type	Reset
7:6	Reserved	Reserved bit	RO R returns 0s	0x0
5	VDD2_PSKIP	VDD2 pulse skip mode enable (EEPROM bit)	RW	1
4	VDD1_PSKIP	VDD1 pulse skip mode enable (EEPROM bit)	RW	1
3	VIO_PSKIP	VIO pulse skip mode enable (EEPROM bit)	RW	1
2	DCDCCKEXT	This signal control the muxing of the GPIO0 pad: When 0: this pad is a GPIO When 1: this pad is used as input for an external clock used for the synchronisation of the DCDCs	RW	0
1:0	DCDCCKSYNC	DCDC clock configuration: DCDCCKSYNC[1:0] = 00 : no synchronization of DCDC clocks DCDCCKSYNC[1:0] = 01 : DCDC synchronous clock with phase shift DCDCCKSYNC[1:0] = 10 : no synchronization of DCDC clocks DCDCCKSYNC[1:0] = 11 : DCDC synchronous clock	RW	0x3

Copyright © 2010–2014, Texas Instruments Incorporated

chanhvinh.com

Table 6-51. DEVCTRL_REG

Address Offset	0x3F
Physical Address	**Instance**
Description	Device control register
Type	RW

7	6	5	4	3	2	1	0
Reserved	RTC_PWDN	CK32K_CTRL	SR_CTL_I2C_SEL	DEV_OFF_RST	DEV_ON	DEV_SLP	DEV_OFF

Bits	Field Name	Description	Type	Reset
7	Reserved	Reserved bit	RO R returns 0s	0
6	RTC_PWDN	When 1, disable the RTC digital domain (clock gating and reset of RTC registers and logic). This register bit is not reset in BACKUP state (EEPROM bit)	RW	1
5	CK32K_CTRL	Internal 32-kHz clock source control bit (EEPROM bit): when 0, the internal 32-kHz clock source is the crystal oscillator or an external 32-kHz clock in case the crystal oscillator is used in bypass mode when 1, the internal 32-kHz clock source is the RC oscillator.	RW	1
4	SR_CTL_I2C_SEL	Smartreflex registers access control bit: when 0: access to smartreflex registers by smartreflex I2C when 1: access to smartreflex registers by control I2C The smartreflex registers are: VDD1_OP_REG, VDD1_SR_REG, VDD2_OP_REG and VDD2_SR_REG.	RW	0
3	DEV_OFF_RST	Write 1 will start an ACTIVE to OFF or SLEEP to OFF device state transition (switch-off event) and activate reset of the digital core.	RW	0
2	DEV_ON	Write 1 will maintain the device on (ACTIVE or SLEEP device state) (if DEV_OFF = 0 and DEV_OFF_RST = 0).	RW	0
1	DEV_SLP	Write 1 allows SLEEP device state (if DEV_OFF = 0 and DEV_OFF_RST = 0). Write '0' will start an SLEEP to ACTIVE device state transition (wake-up event) (if DEV_OFF = 0 and DEV_OFF_RST = 0). This bit is cleared in OFF state.	RW	0
0	DEV_OFF	Write 1 will start an ACTIVE to OFF or SLEEP to OFF device state transition (switch-off event). This bit is cleared in OFF state.	RW	0

Copyright © 2010–2014, Texas Instruments Incorporated

chanhvinh.com

Table 6-52. DEVCTRL2_REG

Address Offset	0x40						
Physical Address				**Instance**			
Description	Device control register						
Type	RW						

7	6	5	4	3	2	1	0
Reserved		TSLOT_LENGTH		SLEEPSIG_POL	PWRON_LP_OFF	PWRON_LP_RST	IT_POL

Bits	Field Name	Description	Type	Reset
7:6	Reserved	Reserved bit	RO R returns 0s	0x0
5:4	TSLOT_LENGTH	Time slot duration programming (EEPROM bit): When 00 : 0 µs When 01 : 200 µs When 10 : 500 µs When 11 : 2 ms	RW	0x3
3	SLEEPSIG_POL	When 1, SLEEP signal active high When 0, SLEEP signal active low	RW	0
2	PWRON_LP_OFF	When 1, allows device turn-off after a PWRON long press (signal low).	RW	1
1	PWRON_LP_RST	When 1, allows digital core reset when the device is OFF after a PWRON long press (signal low).	RW	0
0	IT_POL	INT1 interrupt pad polarity control signal (EEPROM bit): When 0, active low When 1, active high	RW	0

Copyright © 2010–2014, Texas Instruments Incorporated

chanhvinh.com

Table 6-53. SLEEP_KEEP_LDO_ON_REG

Address Offset	0x41
Physical Address	**Instance**
Description	When corresponding control bit=0 in EN1/2_ LDO_ASS register (default setting): Configuration Register keeping the full load capability of LDO regulator (ACTIVE mode) during the SLEEP state of the device. When control bit=1, LDO regulator full load capability (ACTIVE mode) is maintained during device SLEEP state. When control bit=0, the LDO regulator is set or stay in low power mode during device SLEEP state(but then supply state can be overwritten programming ST[1:0]). Control bit value has no effect if the LDO regulator is off. When corresponding control bit=1 in EN1/2_ LDO_ASS register: Configuration Register setting the LDO regulator state driven by SCLSR_EN1/2 signal low level (when SCLSR_EN1/2 is high the regulator is on, full power): - The regulator is set off if its corresponding Control bit = 0 in SLEEP_KEEP_LDO_ON register (default) - The regulator is set in low power mode if its corresponding control bit = 1 in SLEEP_KEEP_LDO_ON register
Type	RW

7	6	5	4	3	2	1	0
VDAC_KEEPON	VPLL_KEEPON	VAUX33_KEEPON	VAUX2_KEEPON	VAUX1_KEEPON	VDIG2_KEEPON	VDIG1_KEEPON	VMMC_KEEPON

Bits	Field Name	Description	Type	Reset
7	VDAC_KEEPON	Setting supply state during device SLEEP state or when SCLSR_EN1/2 is low	RW	0
6	VPLL_KEEPON	Setting supply state during device SLEEP state or when SCLSR_EN1/2 is low	RW	0
5	VAUX33_KEEPON	Setting supply state during device SLEEP state or when SCLSR_EN1/2 is low	RW	0
4	VAUX2_KEEPON	Setting supply state during device SLEEP state or when SCLSR_EN1/2 is low	RW	0
3	VAUX1_KEEPON	Setting supply state during device SLEEP state or when SCLSR_EN1/2 is low	RW	0
2	VDIG2_KEEPON	Setting supply state during device SLEEP state or when SCLSR_EN1/2 is low	RW	0
1	VDIG1_KEEPON	Setting supply state during device SLEEP state or when SCLSR_EN1/2 is low	RW	0
0	VMMC_KEEPON	Setting supply state during device SLEEP state or when SCLSR_EN1/2 is low	RW	0

Copyright © 2010–2014, Texas Instruments Incorporated

chanhvinh.com

Table 6-54. SLEEP_KEEP_RES_ON_REG

Address Offset	0x42
Physical Address	**Instance**
Description	Configuration Register keeping, during the SLEEP state of the device (but then supply state can be overwritten programming ST[1:0]): - The full load capability of LDO regulator (ACTIVE mode), - The PWM mode of DCDC converter - 32KHz clock output - Register access though I2C interface (keeping the internal high speed clock on) - Die Thermal monitoring on Control bit value has no effect if the resource is off.
Type	RW

7	6	5	4	3	2	1	0
THERM_KEEPON	CLKOUT32K_KEEPON	VRTC_KEEPON	I2CHS_KEEPON	VDD3_KEEPON	VDD2_KEEPON	VDD1_KEEPON	VIO_KEEPON

Bits	Field Name	Description	Type	Reset
7	THERM_KEEPON	When 1, thermal monitoring is maintained during device SLEEP state. When 0, thermal monitoring is turned off during device SLEEP state.	RW	0
6	CLKOUT32K_KEEPON	When 1, CLK32KOUT output is maintained during device SLEEP state. When 0, CLK32KOUT output is set low during device SLEEP state.	RW	0
5	VRTC_KEEPON	When 1, LDO regulator full load capability (ACTIVE mode) is maintained during device SLEEP state. When 0, the LDO regulator is set or stays in low power mode during device SLEEP state.	RW	0
4	I2CHS_KEEPON	When 1, high speed internal clock is maintained during device SLEEP state. When 0, high speed internal clock is turned off during device SLEEP state.	RW	0
3	VDD3_KEEPON	When 1, VDD3 SMPS high power mode is maintained during device SLEEP state. No effect if VDD3 working mode is low power. When 0, VDD3 SMPS low power mode is set during device SLEEP state.	RW	0
2	VDD2_KEEPON	If VDD2_EN1&2 control bit = 0 (default setting): When 1, VDD2 SMPS PWM mode is maintained during device SLEEP state. No effect if VDD2 working mode is PFM. When 0, VDD2 SMPS PFM mode is set during device SLEEP state.	RW	0
1	VDD1_KEEPON	If VDD1_EN1&2 control bit=0 (default setting): When 1, VDD1 SMPS PWM mode is maintained during device SLEEP state. No effect if VDD1 working mode is PFM. When 0, VDD1 SMPS PFM mode is set during device SLEEP state.	RW	0
0	VIO_KEEPON	If VIO_EN1&2 control bit=0 (default setting): When 1, VIO SMPS PWM mode is maintained during device SLEEP state. No effect if VIO working mode is PFM. When 0, VIO SMPS PFM mode is set during device SLEEP state.	RW	0

Copyright © 2010–2014, Texas Instruments Incorporated

chanhvinh.com

Table 6-55. SLEEP_SET_LDO_OFF_REG

Address Offset	0x43
Physical Address	**Instance**
Description	Configuration Register turning-off LDO regulator during the SLEEP state of the device. Corresponding *_KEEP_ON control bit in SLEEP_KEEP_RES_ON register should be 0 to make this *_SET_OFF control bit effective
Type	RW

7	6	5	4	3	2	1	0
VDAC_SETOFF	VPLL_SETOFF	VAUX33_SETOFF	VAUX2_SETOFF	VAUX1_SETOFF	VDIG2_SETOFF	VDIG1_SETOFF	VMMC_SETOFF

Bits	Field Name	Description	Type	Reset
7	VDAC_SETOFF	When 1, LDO regulator is turned off during device SLEEP state. When 0, No effect	RW	0
6	VPLL_SETOFF	When 1, LDO regulator is turned off during device SLEEP state. When 0, No effect	RW	0
5	VAUX33_SETOFF	When 1, LDO regulator is turned off during device SLEEP state. When 0, No effect	RW	0
4	IVAUX2_SETOFF	When 1, LDO regulator is turned off during device SLEEP state. When 0, No effect	RW	0
3	VAUX1_SETOFF	When 1, LDO regulator is turned off during device SLEEP state. When 0, No effect	RW	0
2	VDIG2_SETOFF	When 1, LDO regulator is turned off during device SLEEP state. When 0, No effect	RW	0
1	VDIG1_SETOFF	When 1, LDO regulator is turned off during device SLEEP state. When 0, No effect	RW	0
0	VMMC_SETOFF	When 1, LDO regulator is turned off during device SLEEP state. When 0, No effect	RW	0

Copyright © 2010–2014, Texas Instruments Incorporated

chanhvinh.com

Table 6-56. SLEEP_SET_RES_OFF_REG

Address Offset	0x44
Physical Address	**Instance**
Description	Configuration Register turning-off SMPS regulator during the SLEEP state of the device. Corresponding *_KEEP_ON control bit in SLEEP_KEEP_RES_ON2 register should be 0 to make this *_SET_OFF control bit effective. Supplies voltage expected after their wake-up (SLEEP to ACTIVE state transition) can also be programmed.
Type	RW

7	6	5	4	3	2	1	0
DEFAULT_VOLT	RSVD		SPARE_SETOFF	VDD3_SETOFF	VDD2_SETOFF	VDD1_SETOFF	VIO_SETOFF

Bits	Field Name	Description	Type	Reset
7	DEFAULT_VOLT	When 1, default voltages (registers value after switch-on) will be used to turned-on supplies during SLEEP to ACTIVE state transition. When 0, voltages programmed before the ACTIVE to SLEEP state transition will be used to turned-on supplies during SLEEP to ACTIVE state transition.	RW	0
6:5	RSVD	Reserved bit	RO R returns 0s	0x0
4	SPARE_SETOFF	Spare bit	RW	0
3	VDD3_SETOFF	When 1, SMPS is turned off during device SLEEP state. When 0, No effect.	RW	0
2	VDD2_SETOFF	When 1, SMPS is turned off during device SLEEP state. When 0, No effect.	RW	0
1	VDD1_SETOFF	When 1, SMPS is turned off during device SLEEP state. When 0, No effect.	RW	0
0	VIO_SETOFF	When 1, SMPS is turned off during device SLEEP state. When 0, No effect.	RW	0

Copyright © 2010–2014, Texas Instruments Incorporated

chanhvinh.com

Table 6-57. EN1_LDO_ASS_REG

Address Offset	0x45
Physical Address	**Instance**
Description	Configuration Register setting the LDO regulators, driven by the multiplexed SCLSR_EN1 signal. When control bit = 1, LDO regulator state is driven by the SCLSR_EN1 control signal and is also defined though SLEEP_KEEP_LDO_ON register setting: When SCLSR_EN1 is high the regulator is on, When SCLSR_EN1 is low: - The regulator is off if its corresponding Control bit = 0 in SLEEP_KEEP_LDO_ON register - The regulator is working in low power mode if its corresponding control bit = 1 in SLEEP_KEEP_LDO_ON register When control bit = 0 no effect : LDO regulator state is driven though registers programming and the device state Any control bit of this register set to 1 will disable the I2C SR Interface functionality
Type	RW

7	6	5	4	3	2	1	0
VDAC_EN1	VPLL_EN1	VAUX33_EN1	VAUX2_EN1	VAUX1_EN1	VDIG2_EN1	VDIG1_EN1	VMMC_EN1

Bits	Field Name	Description	Type	Reset
7	VDAC_EN1	Setting supply state control though SCLSR_EN1 signal	RW	0
6	VPLL_EN1	Setting supply state control though SCLSR_EN1 signal	RW	0
5	VAUX33_EN1	Setting supply state control though SCLSR_EN1 signal	RW	0
4	VAUX2_EN1	Setting supply state control though SCLSR_EN1 signal	RW	0
3	VAUX1_EN1	Setting supply state control though SCLSR_EN1 signal	RW	0
2	VDIG2_EN1	Setting supply state control though SCLSR_EN1 signal	RW	0
1	VDIG1_EN1	Setting supply state control though SCLSR_EN1 signal	RW	0
0	VMMC_EN1	Setting supply state control though SCLSR_EN1 signal	RW	0

Copyright © 2010–2014, Texas Instruments Incorporated

chanhvinh.com

Table 6-58. EN1_SMPS_ASS_REG

Address Offset	0x46
Physical Address	**Instance**
Description	Configuration Register setting the SMPS Supplies driven by the multiplexed SCLSR_EN1 signal. When control bit = 1, SMPS Supply state and voltage is driven by the SCLSR_EN1 control signal and is also defined though SLEEP_KEEP_RES_ON register setting. When control bit = 0 no effect : SMPS Supply state is driven though registers programming and the device state. Any control bit of this register set to 1 will disable the I2C SR Interface functionality
Type	RW

7	6	5	4	3	2	1	0
RSVD			SPARE_EN1	VDD3_EN1	VDD2_EN1	VDD1_EN1	VIO_EN1

Bits	Field Name	Description	Type	Reset
7:5	RSVD	Reserved bit	RW	0
4	SPARE_EN1	Spare bit	Rw	0
3	VDD3_EN1	When 1: When SCLSR_EN1 is high the supply is on. When SCLSR_EN1 is low and SLEEP_KEEP_RES_ON = '0' the supply voltage is off. When SCLSR_EN1 is low and SLEEP_KEEP_RES_ON = '1' the SMPS is working in low power mode. When control bit = 0 no effect: supply state is driven though registers programming and the device state	RW	0
2	VDD2_EN1	When control bit = 1: When SCLSR_EN1 is high the supply voltage is programmed though VDD2_OP_REG register, and it can also be programmed off. When SCLSR_EN1 is low the supply voltage is programmed though VDD2_SR_REG register, and it can also be programmed off. When SCLSR_EN1 is low and VDD2_KEEPON = 1 the SMPS is working in low power mode, if not tuned off through VDD2_SR_REG register. When control bit = 0 no effect: supply state is driven though registers programming and the device state	RW	0
1	VDD1_EN1	When 1: When SCLSR_EN1 is high the supply voltage is programmed though VDD1_OP_REG register, and it can also be programmed off. When SCLSR_EN1 is low the supply voltage is programmed though VDD1_SR_REG register, and it can also be programmed off. When SCLSR_EN1 is low and VDD1_KEEPON = 1 the SMPS is working in low power mode, if not tuned off though VDD1_SR_REG register. When control bit = 0 no effect: supply state is driven though registers programming and the device state	RW	0
0	VIO_EN1	When control bit = 1, supply state is driven by the SCLSR_EN1 control signal and is also defined though SLEEP_KEEP_RES_ON register setting: When SCLSR_EN1 is high the supply is on, When SCLSR_EN1 is low: - the supply is off (default) or the SMPS is working in low power mode if VIO_KEEPON = 1 When control bit = 0 no effect: SMPS state is driven though registers programming and the device state	RW	0

Copyright © 2010–2014, Texas Instruments Incorporated

chanhvinh.com

Table 6-59. EN2_LDO_ASS_REG

Address Offset	0x47
Physical Address	**Instance**
Description	Configuration Register setting the LDO regulators, driven by the multiplexed SDASR_EN2 signal. When control bit = 1, LDO regulator state is driven by the SDASR_EN2 control signal and is also defined though SLEEP_KEEP_LDO_ON register setting: When SDASR_EN2 is high the regulator is on, When SCLSR_EN2 is low: - The regulator is off if its corresponding Control bit = 0 in SLEEP_KEEP_LDO_ON register - The regulator is working in low power mode if its corresponding control bit = 1 in SLEEP_KEEP_LDO_ON register When control bit = 0 no effect: LDO regulator state is driven though registers programming and the device state Any control bit of this register set to 1 will disable the I2C SR Interface functionality
Type	RW

7	6	5	4	3	2	1	0
VDAC_EN2	VPLL_EN2	VAUX33_EN2	VAUX2_EN2	VAUX1_EN2	VDIG2_EN2	VDIG1_EN2	VMMC_EN2

Bits	Field Name	Description	Type	Reset
7	VDAC_EN2	Setting supply state control though SDASR_EN2 signal	RW	0
6	VPLL_EN2	Setting supply state control though SDASR_EN2 signal	RW	0
5	VAUX33_EN2	Setting supply state control though SDASR_EN2 signal	RW	0
4	VAUX2_EN2	Setting supply state control though SDASR_EN2 signal	RW	0
3	VAUX1_EN2	Setting supply state control though SDASR_EN2 signal	RW	0
2	VDIG2_EN2	Setting supply state control though SDASR_EN2 signal	RW	0
1	VDIG1_EN2	Setting supply state control though SDASR_EN2 signal	RW	0
0	VMMC_EN2	Setting supply state control though SDASR_EN2 signal	RW	0

Copyright © 2010–2014, Texas Instruments Incorporated

chanhvinh.com

Table 6-60. EN2_SMPS_ASS_REG

Address Offset	0x48
Physical Address	**Instance**
Description	Configuration Register setting the SMPS Supplies driven by the multiplexed SDASR_EN2 signal. When control bit = 1, SMPS Supply state and voltage is driven by the SDASR_EN2 control signal and is also defined though SLEEP_KEEP_RES_ON register setting. When control bit = 0 no effect: SMPS Supply state is driven though registers programming and the device state Any control bit of this register set to 1 will disable the I2C SR Interface functionality
Type	RW

7	6	5	4	3	2	1	0
RSVD			SPARE_EN2	VDD3_EN2	VDD2_EN2	VDD1_EN2	VIO_EN2

Bits	Field Name	Description	Type	Reset
7:5	RSVD	Reserved bit	RO R returns 0s	0x0
4	SPARE_EN2	Spare bit	RW	0
3	VDD3_EN2	When 1: When SDASR_EN2 is high the supply is on. When SDASR_EN2 is low and SLEEP_KEEP_RES_ON = 0 the supply voltage is off. When SDASR_EN2 is low and SLEEP_KEEP_RES_ON = 1 the SMPS is working in low power mode. When control bit = 0 no effect: supply state is driven though registers programming and the device state	RW	0
2	VDD2_EN2	When control bit = 1: When SDASR_EN2 is high the supply voltage is programmed though VDD2_OP_REG register, and it can also be programmed off. When SDASR_EN2 is low the supply voltage is programmed though VDD2_SR_REG register, and it can also be programmed off. When SDASR_EN2 is low and and VDD2_KEEPON = 1 the SMPS is working in low power mode, if not tuned off though VDD2_SR_REG register. When control bit = 0 no effect: supply state is driven though registers programming and the device state	RW	0
1	VDD1_EN2	When control bit = 1: When SDASR_EN2 is high the supply voltage is programmed though VDD1_OP_REG register, and it can also be programmed off. When SDASR_EN2 is low the supply voltage is programmed though VDD1_SR_REG register, and it can also be programmed off. When SDASR_EN2 is low and and VDD1_KEEPON = 1 the SMPS is working in low power mode, if not tuned off though VDD1_SR_REG register. When control bit = 0 no effect: supply state is driven though registers programming and the device state	RW	0
0	VIO_EN2	When control bit = 1, supply state is driven by the SCLSR_EN2 control signal and is also defined though SLEEP_KEEP_RES_ON register setting: When SDASR _EN2 is high the supply is on, When SDASR _EN2 is low : - The supply is off (default) or the SMPS is working in low power mode if VIO_KEEPON = 1 When control bit = 0 no effect: SMPS state is driven though registers programming and the device state	RW	0

Copyright © 2010–2014, Texas Instruments Incorporated

chanhvinh.com

Table 6-61. RESERVED

Address Offset	0x49
Physical Address	**Instance**
Description	Reserved register
Type	RW

7	6	5	4	3	2	1	0
RESERVED							

Bits	Field Name	Description	Type	Reset
7:0	RESERVED	Reserved bit	RW	0

Table 6-62. RESERVED

Address Offset	0x4A
Physical Address	**Instance**
Description	Reserved register
Type	RW

7	6	5	4	3	2	1	0
RESERVED							

Bits	Field Name	Description	Type	Reset
7:0	RESERVED	Reserved bit	RW	0x00

Table 6-63. INT_STS_REG

Address Offset	0x50
Physical Address	**Instance**
Description	Interrupt status register: The interrupt status bit is set to 1 when the associated interrupt event is detected. Interrupt status bit is cleared by writing 1.
Type	RW

7	6	5	4	3	2	1	0
RTC_PERIOD_IT	RTC_ALARM_IT	HOTDIE_IT	PWRHOLD_IT	PWRON_LP_IT	PWRON_IT	VMBHI_IT	VMBDCH_IT

Bits	Field Name	Description	Type	Reset
7	RTC_PERIOD_IT	RTC period event interrupt status.	RW W1 to Clr	0
6	RTC_ALARM_IT	RTC alarm event interrupt status.	RW W1 to Clr	0
5	HOTDIE_IT	Hot die event interrupt status.	RW W1 to Clr	0
4	PWRHOLD_IT	PWRHOLD event interrupt status.	RW W1 to Clr	0
3	PWRON_LP_IT	PWRON Long Press event interrupt status.	RW W1 to Clr	0
2	PWRON_IT	PWRON event interrupt status.	RW W1 to Clr	0
1	VMBHI_IT	VBAT > VMBHI event interrupt status	RW W1 to Clr	0
0	VMBDCH_IT	VBAT > VMBDCH event interrupt status. Active only if Main Battery comparator VMBCH programmable threshold is not bypassed (VMBCH_SEL[1:0] ≠ 00)	RW W1 to Clr	0

Copyright © 2010–2014, Texas Instruments Incorporated

chanhvinh.com

Table 6-64. INT_MSK_REG

Address Offset	0x51
Physical Address	**Instance**
Description	Interrupt mask register: When *_IT_MSK is set to 1, the associated interrupt is masked: INT1 signal is not activated, but *_IT interrupt status bit is updated. When *_IT_MSK is set to 0, the associated interrupt is enabled: INT1 signal is activated, *_IT is updated.
Type	RW

7	6	5	4	3	2	1	0
RTC_PERIOD_IT_MSK	RTC_ALARM_IT_MSK	HOTDIE_IT_MSK	PWRHOLD_IT_MSK	PWRON_LP_IT_MSK	PWRON_IT_MSK	VMBHI_IT_MSK	VMBDCH_IT_MSK

Bits	Field Name	Description	Type	Reset
7	RTC_PERIOD_IT_MSK	RTC period event interrupt mask.	RW	0
6	RTC_ALARM_IT_MSK	RTC alarm event interrupt mask.	RW	0
5	HOTDIE_IT_MSK	Hot die event interrupt mask.	RW	0
4	PWRHOLD_IT_MSK	PWRHOLD rising edge event interrupt mask.	RW	0
3	PWRON_LP_IT_MSK	PWRON Long Press event interrupt mask.	RW	0
2	PWRON_IT_MSK	PWRON event interrupt mask.	RW	0
1	VMBHI_IT_MSK	VBAT > VMBHI event interrupt mask. When 0, enable the device automatic switch on at BACKUP to OFF or NOSUPPLY to OFF device state transition (EEPROM bit)	RW	1
0	VMBDCH_IT_MSK	VBAT < VMBDCH event interrupt status. Active only if the main battery comparator VMBCH programmable threshold is not bypassed (VMBCH_SEL[1:0] ≠ 00).	RW	0

Table 6-65. INT_STS2_REG

Address Offset	0x52
Physical Address	**Instance**
Description	Interrupt status register: The interrupt status bit is set to 1 when the associated interrupt event is detected. Interrupt status bit is cleared by writing 1.
Type	RW

7	6	5	4	3	2	1	0
Reserved						GPIO0_F_IT	GPIO0_R_IT

Bits	Field Name	Description	Type	Reset
7:2	Reserved	Reserved bit	RW W1 to Clr	0
1	GPIO0_F_IT	GPIO_CKSYNC falling edge detection interrupt status	RW W1 to Clr	0
0	GPIO0_R_IT	GPIO_CKSYNC rising edge detection interrupt status	RW W1 to Clr	0

Copyright © 2010–2014, Texas Instruments Incorporated

chanhvinh.com

Table 6-66. INT_MSK2_REG

Address Offset	0x53
Physical Address	**Instance**
Description	Interrupt mask register: When *_IT_MSK is set to 1, the associated interrupt is masked: INT1 signal is not activated, but *_IT interrupt status bit is updated. When *_IT_MSK is set to 0, the associated interrupt is enabled: INT1 signal is activated, *_IT is updated.
Type	RW

7	6	5	4	3	2	1	0
Reserved						GPIO0_F_IT_MSK	GPIO0_R_IT_MSK

Bits	Field Name	Description	Type	Reset
7:2	Reserved	Reserved bit	RW	0
1	GPIO0_F_IT_MSK	GPIO_CKSYNC falling edge detection interrupt mask.	RW	0
0	GPIO0_R_IT_MSK	GPIO_CKSYNC rising edge detection interrupt mask.	RW	0

Table 6-67. GPIO0_REG

Address Offset	0x60
Physical Address	**Instance**
Description	GPIO0 configuration register
Type	RW

7	6	5	4	3	2	1	0
Reserved			GPIO_DEB	GPIO_PUEN	GPIO_CFG	GPIO_STS	GPIO_SET

Bits	Field Name	Description	Type	Reset
7:5	Reserved	Reserved bit	RO R returns 0s	0x0
4	GPIO_DEB	GPIO_CKSYNC input debouncing time configuration: When 0, the debouncing is 91.5 µs using a 30.5 µs clock rate When 1, the debouncing is 150 ms using a 50 ms clock rate	RW	0
3	GPIO_PUEN	GPIO_CKSYNC pad pull-up control: 1: Pull-up is enabled 0: Pull-up is disabled	RW	1
2	GPIO_CFG	Configuration of the GPIO_CKSYNC pad direction: When 0, the pad is configured as an input When 1, the pad is configured as an output	RW	0
1	GPIO_STS	Status of the GPIO_CKSYNC pad	RO	1
0	GPIO_SET	Value set on the GPIO output when configured in output mode	RW	0

Copyright © 2010–2014, Texas Instruments Incorporated

chanhvinh.com

Table 6-68. JTAGVERNUM_REG

Address Offset	0x80						
Physical Address				**Instance**			
Description	Silicon version number						
Type	RO						
7	6	5	4	3	2	1	0
Reserved				VERNUM			

Bits	Field Name	Description	Type	Reset
7:4	Reserved	Reserved bit	RO R returns 0s	0x0
3:0	VERNUM	Value depending on silicon version number 0000 - Revision 1.0	RO	0x0

Copyright © 2010–2014, Texas Instruments Incorporated

chanhvinh.com

7 Device and Documentation Support

7.1 Device Support

7.1.1 Development Support

TI offers an extensive line of development tools, including tools to evaluate the performance of the processors, generate code, develop algorithm implementations, and fully integrate and debug software and hardware modules. The tool's support documentation is electronically available within the Code Composer Studio™ Integrated Development Environment (IDE).

The following products support development of the TPS65910 device applications:

Software Development Tools: Code Composer Studio™ Integrated Development Environment (IDE): including Editor C/C++/Assembly Code Generation, and Debug plus additional development tools Scalable, Real-Time Foundation Software (DSP/BIOS™), which provides the basic run-time target software needed to support any TPS65910 device application.

Hardware Development Tools: Extended Development System (XDS™) Emulator

For a complete listing of development-support tools for the TPS65910 platform, visit the Texas Instruments website at www.ti.com. For information on pricing and availability, contact the nearest TI field sales office or authorized distributor.

7.1.2 Device Nomenclature

To designate the stages in the product development cycle, TI assigns prefixes to the part numbers of all microprocessors (MPUs) and support tools. Each device has one of three prefixes: X, P, or null (no prefix) (for example, *TPS65910*). Texas Instruments recommends two of three possible prefix designators for its support tools: TMDX and TMDS. These prefixes represent evolutionary stages of product development from engineering prototypes (TMDX) through fully qualified production devices and tools (TMDS).

Device development evolutionary flow:

X Experimental device that is not necessarily representative of the final device's electrical specifications and may not use production assembly flow.

P Prototype device that is not necessarily the final silicon die and may not necessarily meet final electrical specifications.

null Production version of the silicon die that is fully qualified.

Support tool development evolutionary flow:

TMDX Development-support product that has not yet completed Texas Instruments internal qualification testing.

TMDS Fully-qualified development-support product.

X and P devices and TMDX development-support tools are shipped against the following disclaimer:

"Developmental product is intended for internal evaluation purposes."

Production devices and TMDS development-support tools have been characterized fully, and the quality and reliability of the device have been demonstrated fully. TI's standard warranty applies.

Predictions show that prototype devices (X or P) have a greater failure rate than the standard production devices. Texas Instruments recommends that these devices not be used in any production system because their expected end-use failure rate still is undefined. Only qualified production devices are to be used.

TI device nomenclature also includes a suffix with the device family name. This suffix indicates the package type (for example, *RSL*) and the temperature range (for example, blank is the default commercial temperature range).

Copyright © 2010–2014, Texas Instruments Incorporated

chanhvinh.com

For orderable part numbers of *TPS65910x* devices in the *RSL* package types, see the Package Option Addendum of this document, the TI website (www.ti.com), or contact your TI sales representative.

7.2 Documentation Support

The following documents describe the *TPS65910* device. Copies of these documents are available on the Internet at www.ti.com.

SWCZ010 TPS65910 Silicon Errata

SWCA139 TPS65910x Schematic Checklist

SWCU078 TPS65910 User Guide for OMAP3 Family of Processors

SWCU093 TPS65910Ax User's Guide for AM335x Processors

SWCU065 TPS65910 EVM User's Guide

SWCU071 TPS65910 User Guide for OMAPL137, OMAPL138 and C674x

SWCA089 TPS65910 User Guide for AM3517/AM3505 Processor

SWCU073 TPS659107 User Guide for i.MX27 and i.MX35 Processors

SWCU074 TPS659105 User Guide for DaVinci Family Processors

7.3 Related Links

The table below lists quick access links. Categories include technical documents, support and community resources, tools and software, and quick access to sample or buy.

Table 7-1. Related Links

PARTS	PRODUCT FOLDER	SAMPLE & BUY	TECHNICAL DOCUMENTS	TOOLS & SOFTWARE	SUPPORT & COMMUNITY
TPS65910	Click here	Click here	Click here	Click here	Click here
TPS65910A	Click here	Click here	Click here	Click here	Click here
TPS65910A3	Click here	Click here	Click here	Click here	Click here
TPS659101	Click here	Click here	Click here	Click here	Click here
TPS659102	Click here	Click here	Click here	Click here	Click here
TPS659103	Click here	Click here	Click here	Click here	Click here
TPS659104	Click here	Click here	Click here	Click here	Click here
TPS659105	Click here	Click here	Click here	Click here	Click here
TPS659106	Click here	Click here	Click here	Click here	Click here
TPS659107	Click here	Click here	Click here	Click here	Click here
TPS659108	Click here	Click here	Click here	Click here	Click here
TPS659109	Click here	Click here	Click here	Click here	Click here

Copyright © 2010–2014, Texas Instruments Incorporated

chanhvinh.com

7.4 Community Resources

The following links connect to TI community resources. Linked contents are provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's Terms of Use.

TI E2E™ Online Community ***TI's Engineer-to-Engineer (E2E) Community.*** Created to foster collaboration among engineers. At e2e.ti.com, you can ask questions, share knowledge, explore ideas and help solve problems with fellow engineers.

TI Embedded Processors Wiki ***Texas Instruments Embedded Processors Wiki.*** Established to help developers get started with Embedded Processors from Texas Instruments and to foster innovation and growth of general knowledge about the hardware and software surrounding these devices.

7.5 Trademarks

SmartReflex, E2E are trademarks of Texas Instruments.

7.6 Electrostatic Discharge Caution



This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

7.7 Export Control Notice

Recipient agrees to not knowingly export or re-export, directly or indirectly, any product or technical data (as defined by the U.S., EU, and other Export Administration Regulations) including software, or any controlled product restricted by other applicable national regulations, received from disclosing party under nondisclosure obligations (if any), or any direct product of such technology, to any destination to which such export or re-export is restricted or prohibited by U.S. or other applicable laws, without obtaining prior authorization from U.S. Department of Commerce and other competent Government authorities to the extent required by those laws.

7.8 Glossary

SLYZ022 — *TI Glossary*.

This glossary lists and explains terms, acronyms, and definitions.

chanhvinh.com

7.9 Additional Acronyms

Additional acronyms used in this data sheet are described below.

ACRONYM	DEFINITION
DDR	Dual-Data Rate (memory)
ES	Engineering Sample
ESD	Electrostatic Discharge
FET	Field Effect Transistor
EPC	Embedded Power Controller
FSM	Finite State Machine
GND	Ground
GPIO	General-Purpose I/O
HBM	Human Body Model
HD	Hot-Die
HS-I^2C	High-Speed I^2C
I^2C	Inter-Integrated Circuit
IC	Integrated Circuit
ID	Identification
IDDQ	Quiescent supply current
IEEE	Institute of Electrical and Electronics Engineers
IR	Instruction Register
I/O	Input/Output
JEDEC	Joint Electron Device Engineering Council
JTAG	Joint Test Action Group
LBC7	Lin Bi-CMOS 7 (360 nm)
LDO	Low Drop Output voltage linear regulator
LP	Low-Power application mode
LSB	Least Significant Bit
MMC	Multimedia Card
MOSFET	Metal Oxide Semiconductor Field Effect Transistor
NVM	Nonvolatile Memory
OMAP™	Open Multimedia Application Platform™
RTC	Real-Time Clock
SMPS	Switched Mode Power Supply
SPI	Serial Peripheral Interface
POR	Power-On Reset

Copyright © 2010–2014, Texas Instruments Incorporated

chanhvinh.com

8 Mechanical Packaging and Orderable Information

8.1 Packaging Information

The following pages include mechanical packaging and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

chanhvinh.com

chanhvinh.com

PACKAGING INFORMATION

Orderable part number	Status (1)	Material type (2)	Package | Pins	Package qty | Carrier	RoHS (3)	Lead finish/ Ball material (4)	MSL rating/ Peak reflow (5)	Op temp (°C)	Part marking (6)
2U65910A31A1RSLRG4	Active	Production	VQFN (RSL) | 48	2500 | LARGE T&R	Yes	NIPDAU	Level-3-260C-168 HR	-40 to 85	65910 A31A1
2U65910A31A1RSLRG4.B	Active	Production	VQFN (RSL) | 48	2500 | LARGE T&R	Yes	NIPDAU	Level-3-260C-168 HR	-40 to 85	65910 A31A1
TPS659101A1RSL	Active	Production	VQFN (RSL) | 48	60 | TUBE	Yes	NIPDAU	Level-3-260C-168 HR	-40 to 85	T659101 A1
TPS659101A1RSL.B	Active	Production	VQFN (RSL) | 48	60 | TUBE	Yes	NIPDAU	Level-3-260C-168 HR	-40 to 85	T659101 A1
TPS659101A1RSLR	Active	Production	VQFN (RSL) | 48	2500 | LARGE T&R	Yes	NIPDAU	Level-3-260C-168 HR	-40 to 85	T659101 A1
TPS659101A1RSLR.B	Active	Production	VQFN (RSL) | 48	2500 | LARGE T&R	Yes	NIPDAU	Level-3-260C-168 HR	-40 to 85	T659101 A1
TPS659102A1RSL	Active	Production	VQFN (RSL) | 48	60 | TUBE	Yes	NIPDAU	Level-3-260C-168 HR	-40 to 85	T659102 A1
TPS659102A1RSL.B	Active	Production	VQFN (RSL) | 48	60 | TUBE	Yes	NIPDAU	Level-3-260C-168 HR	-40 to 85	T659102 A1
TPS659102A1RSLR	Active	Production	VQFN (RSL) | 48	2500 | LARGE T&R	Yes	NIPDAU	Level-3-260C-168 HR	-40 to 85	T659102 A1
TPS659102A1RSLR.B	Active	Production	VQFN (RSL) | 48	2500 | LARGE T&R	Yes	NIPDAU	Level-3-260C-168 HR	-40 to 85	T659102 A1
TPS659106A1RSL	Active	Production	VQFN (RSL) | 48	60 | TUBE	Yes	NIPDAU	Level-3-260C-168 HR	-40 to 85	T659106 A1
TPS659106A1RSL.B	Active	Production	VQFN (RSL) | 48	60 | TUBE	Yes	NIPDAU	Level-3-260C-168 HR	-40 to 85	T659106 A1
TPS659106A1RSLR	Active	Production	VQFN (RSL) | 48	2500 | LARGE T&R	Yes	NIPDAU	Level-3-260C-168 HR	-40 to 85	T659106 A1
TPS659106A1RSLR.B	Active	Production	VQFN (RSL) | 48	2500 | LARGE T&R	Yes	NIPDAU	Level-3-260C-168 HR	-40 to 85	T659106 A1
TPS659108A1RSL	Active	Production	VQFN (RSL) | 48	60 | TUBE	Yes	NIPDAU	Level-3-260C-168 HR	-40 to 85	T659108 A1
TPS659108A1RSL.B	Active	Production	VQFN (RSL) | 48	60 | TUBE	Yes	NIPDAU	Level-3-260C-168 HR	-40 to 85	T659108 A1

chanhvinh.com

Orderable part number	Status (1)	Material type (2)	Package | Pins	Package qty | Carrier	RoHS (3)	Lead finish/ Ball material (4)	MSL rating/ Peak reflow (5)	Op temp (°C)	Part marking (6)
TPS659108A1RSLR	Active	Production	VQFN (RSL) | 48	2500 | LARGE T&R	Yes	NIPDAU	Level-3-260C-168 HR	-40 to 85	T659108 A1
TPS659108A1RSLR.B	Active	Production	VQFN (RSL) | 48	2500 | LARGE T&R	Yes	NIPDAU	Level-3-260C-168 HR	-40 to 85	T659108 A1
TPS659109A1RSL	Active	Production	VQFN (RSL) | 48	60 | TUBE	Yes	NIPDAU	Level-3-260C-168 HR	-40 to 85	T659109 A1
TPS659109A1RSL.B	Active	Production	VQFN (RSL) | 48	60 | TUBE	Yes	NIPDAU	Level-3-260C-168 HR	-40 to 85	T659109 A1
TPS659109A1RSLG4	Active	Production	VQFN (RSL) | 48	60 | TUBE	Yes	NIPDAU	Level-3-260C-168 HR	-40 to 85	T659109 A1
TPS659109A1RSLG4.B	Active	Production	VQFN (RSL) | 48	60 | TUBE	Yes	NIPDAU	Level-3-260C-168 HR	-40 to 85	T659109 A1
TPS659109A1RSLR	Obsolete	Production	VQFN (RSL) | 48	-	-	Call TI	Call TI	-40 to 85	T659109 A1
TPS65910A1RSL	Active	Production	VQFN (RSL) | 48	60 | TUBE	Yes	NIPDAU	Level-3-260C-168 HR	-40 to 85	TPS 65910A1
TPS65910A1RSL.B	Active	Production	VQFN (RSL) | 48	60 | TUBE	Yes	NIPDAU	Level-3-260C-168 HR	-40 to 85	TPS 65910A1
TPS65910A1RSLR	Active	Production	VQFN (RSL) | 48	2500 | LARGE T&R	Yes	NIPDAU	Level-3-260C-168 HR	-40 to 85	TPS 65910A1
TPS65910A1RSLR.B	Active	Production	VQFN (RSL) | 48	2500 | LARGE T&R	Yes	NIPDAU	Level-3-260C-168 HR	-40 to 85	TPS 65910A1
TPS65910A1RSLRG4	Active	Production	VQFN (RSL) | 48	2500 | LARGE T&R	Yes	NIPDAU	Level-3-260C-168 HR	-40 to 85	TPS 65910A1
TPS65910A1RSLRG4.B	Active	Production	VQFN (RSL) | 48	2500 | LARGE T&R	Yes	NIPDAU	Level-3-260C-168 HR	-40 to 85	TPS 65910A1
TPS65910A31A1RSLR	Active	Production	VQFN (RSL) | 48	2500 | LARGE T&R	Yes	NIPDAU	Level-3-260C-168 HR	-40 to 85	65910 A31A1
TPS65910A31A1RSLR.B	Active	Production	VQFN (RSL) | 48	2500 | LARGE T&R	Yes	NIPDAU	Level-3-260C-168 HR	-40 to 85	65910 A31A1
TPS65910A31A1RSLT	Active	Production	VQFN (RSL) | 48	250 | SMALL T&R	Yes	NIPDAU	Level-3-260C-168 HR	-40 to 85	65910 A31A1
TPS65910A31A1RSLT.B	Active	Production	VQFN (RSL) | 48	250 | SMALL T&R	Yes	NIPDAU	Level-3-260C-168 HR	-40 to 85	65910 A31A1

chanhvinh.com

Orderable part number	Status (1)	Material type (2)	Package | Pins	Package qty | Carrier	RoHS (3)	Lead finish/ Ball material (4)	MSL rating/ Peak reflow (5)	Op temp (°C)	Part marking (6)
TPS65910A3A1RSL	Active	Production	VQFN (RSL) | 48	60 | TUBE	Yes	NIPDAU	Level-3-260C-168 HR	-40 to 85	T65910 A3A1
TPS65910A3A1RSL.B	Active	Production	VQFN (RSL) | 48	60 | TUBE	Yes	NIPDAU	Level-3-260C-168 HR	-40 to 85	T65910 A3A1
TPS65910A3A1RSLR	Active	Production	VQFN (RSL) | 48	2500 | LARGE T&R	Yes	NIPDAU	Level-3-260C-168 HR	-40 to 85	T65910 A3A1
TPS65910A3A1RSLR.B	Active	Production	VQFN (RSL) | 48	2500 | LARGE T&R	Yes	NIPDAU	Level-3-260C-168 HR	-40 to 85	T65910 A3A1
TPS65910A3A1RSLRG4	Active	Production	VQFN (RSL) | 48	2500 | LARGE T&R	Yes	NIPDAU	Level-3-260C-168 HR	-40 to 85	T65910 A3A1
TPS65910A3A1RSLRG4.B	Active	Production	VQFN (RSL) | 48	2500 | LARGE T&R	Yes	NIPDAU	Level-3-260C-168 HR	-40 to 85	T65910 A3A1
TPS65910AA1RSL	Active	Production	VQFN (RSL) | 48	60 | TUBE	Yes	NIPDAU	Level-3-260C-168 HR	-40 to 85	T65910A A1
TPS65910AA1RSL.B	Active	Production	VQFN (RSL) | 48	60 | TUBE	Yes	NIPDAU	Level-3-260C-168 HR	-40 to 85	T65910A A1
TPS65910AA1RSLR	Active	Production	VQFN (RSL) | 48	2500 | LARGE T&R	Yes	NIPDAU	Level-3-260C-168 HR	-40 to 85	T65910A A1
TPS65910AA1RSLR.B	Active	Production	VQFN (RSL) | 48	2500 | LARGE T&R	Yes	NIPDAU	Level-3-260C-168 HR	-40 to 85	T65910A A1
TPS65910AA1RSLRG4	Active	Production	VQFN (RSL) | 48	2500 | LARGE T&R	Yes	NIPDAU	Level-3-260C-168 HR	-40 to 85	T65910A A1
TPS65910AA1RSLRG4.B	Active	Production	VQFN (RSL) | 48	2500 | LARGE T&R	Yes	NIPDAU	Level-3-260C-168 HR	-40 to 85	T65910A A1

(1) **Status:** For more details on status, see our product life cycle.

(2) **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

(3) **RoHS values:** Yes, No, RoHS Exempt. See the TI RoHS Statement for additional information and value definition.

(4) **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

chanhvinh.com

(5) MSL rating/Peak reflow: The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

(6) Part marking: There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.


In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

chanhvinh.com


PACKAGE MATERIALS INFORMATION

TAPE AND REEL INFORMATION

REEL DIMENSIONS

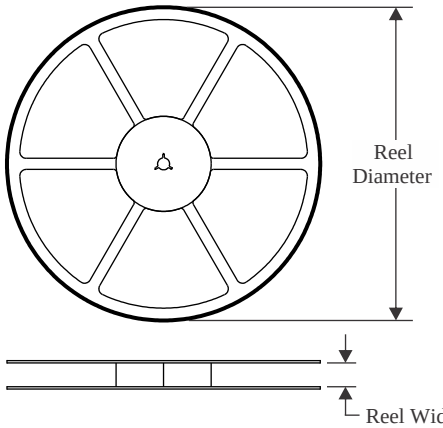


TAPE DIMENSIONS

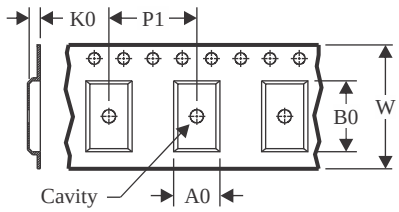

A0	Dimension designed to accommodate the component width
B0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers

QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE

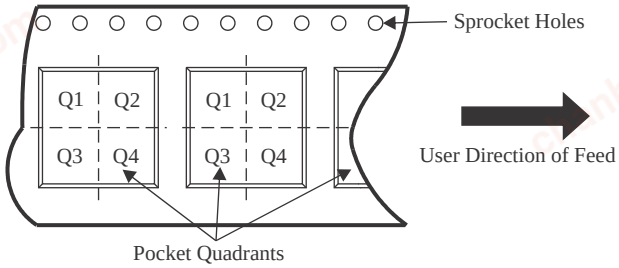

*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
2U65910A31A1RSLRG4	VQFN	RSL	48	2500	330.0	16.4	6.3	6.3	1.1	12.0	16.0	Q2
TPS659101A1RSLR	VQFN	RSL	48	2500	330.0	16.4	6.3	6.3	1.1	12.0	16.0	Q2
TPS659102A1RSLR	VQFN	RSL	48	2500	330.0	16.4	6.3	6.3	1.1	12.0	16.0	Q2
TPS659102A1RSLR	VQFN	RSL	48	2500	330.0	16.4	6.3	6.3	1.1	12.0	16.0	Q2
TPS659106A1RSLR	VQFN	RSL	48	2500	330.0	16.4	6.3	6.3	1.1	12.0	16.0	Q2
TPS659106A1RSLR	VQFN	RSL	48	2500	330.0	16.4	6.3	6.3	1.1	12.0	16.0	Q2
TPS659108A1RSLR	VQFN	RSL	48	2500	330.0	16.4	6.3	6.3	1.1	12.0	16.0	Q2
TPS659108A1RSLR	VQFN	RSL	48	2500	330.0	16.4	6.3	6.3	1.1	12.0	16.0	Q2
TPS65910A1RSLR	VQFN	RSL	48	2500	330.0	16.4	6.3	6.3	1.1	12.0	16.0	Q2
TPS65910A1RSLRG4	VQFN	RSL	48	2500	330.0	16.4	6.3	6.3	1.1	12.0	16.0	Q2
TPS65910A31A1RSLR	VQFN	RSL	48	2500	330.0	16.4	6.3	6.3	1.1	12.0	16.0	Q2
TPS65910A31A1RSLT	VQFN	RSL	48	250	180.0	16.4	6.3	6.3	1.1	12.0	16.0	Q2
TPS65910A3A1RSLR	VQFN	RSL	48	2500	330.0	16.4	6.3	6.3	1.1	12.0	16.0	Q2
TPS65910A3A1RSLR	VQFN	RSL	48	2500	330.0	16.4	6.3	6.3	1.1	12.0	16.0	Q2
TPS65910A3A1RSLRG4	VQFN	RSL	48	2500	330.0	16.4	6.3	6.3	1.1	12.0	16.0	Q2
TPS65910AA1RSLR	VQFN	RSL	48	2500	330.0	16.4	6.3	6.3	1.1	12.0	16.0	Q2

chanhvinh.com


PACKAGE MATERIALS INFORMATION

Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
TPS65910AA1RSLR	VQFN	RSL	48	2500	330.0	16.4	6.3	6.3	1.1	12.0	16.0	Q2
TPS65910AA1RSLRG4	VQFN	RSL	48	2500	330.0	16.4	6.3	6.3	1.1	12.0	16.0	Q2

chanhvinh.com

PACKAGE MATERIALS INFORMATION

TAPE AND REEL BOX DIMENSIONS

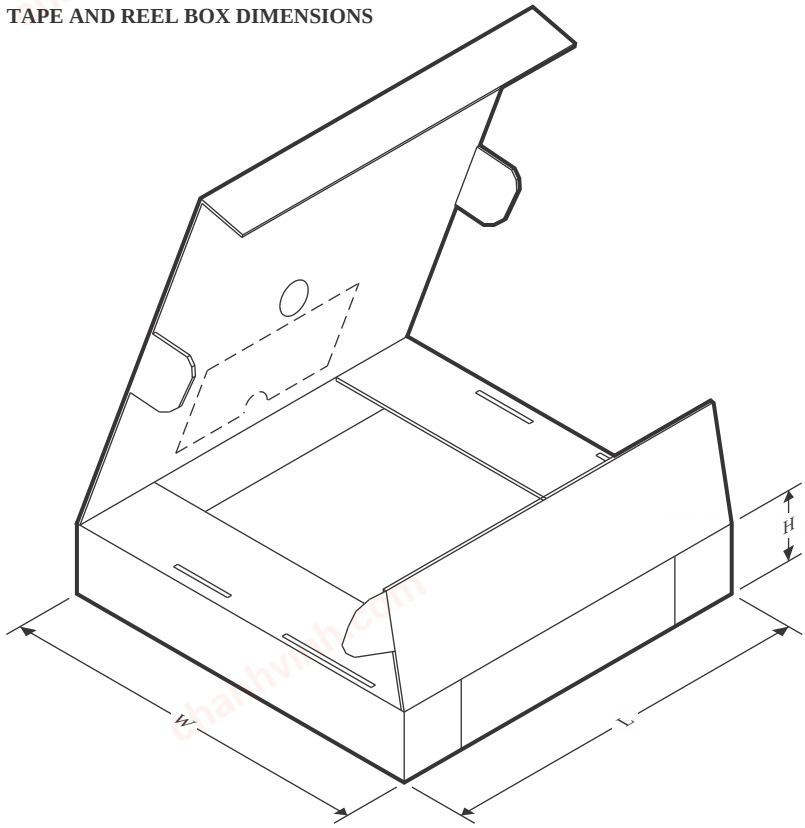


*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
2U65910A31A1RSLRG4	VQFN	RSL	48	2500	367.0	367.0	38.0
TPS659101A1RSLR	VQFN	RSL	48	2500	353.0	353.0	32.0
TPS659102A1RSLR	VQFN	RSL	48	2500	367.0	367.0	38.0
TPS659102A1RSLR	VQFN	RSL	48	2500	353.0	353.0	32.0
TPS659106A1RSLR	VQFN	RSL	48	2500	367.0	367.0	38.0
TPS659106A1RSLR	VQFN	RSL	48	2500	353.0	353.0	32.0
TPS659108A1RSLR	VQFN	RSL	48	2500	353.0	353.0	32.0
TPS659108A1RSLR	VQFN	RSL	48	2500	367.0	367.0	38.0
TPS65910A1RSLR	VQFN	RSL	48	2500	367.0	367.0	38.0
TPS65910A1RSLRG4	VQFN	RSL	48	2500	367.0	367.0	38.0
TPS65910A31A1RSLR	VQFN	RSL	48	2500	367.0	367.0	38.0
TPS65910A31A1RSLT	VQFN	RSL	48	250	210.0	185.0	35.0
TPS65910A3A1RSLR	VQFN	RSL	48	2500	367.0	367.0	38.0
TPS65910A3A1RSLR	VQFN	RSL	48	2500	353.0	353.0	32.0
TPS65910A3A1RSLRG4	VQFN	RSL	48	2500	367.0	367.0	38.0
TPS65910AA1RSLR	VQFN	RSL	48	2500	353.0	353.0	32.0
TPS65910AA1RSLR	VQFN	RSL	48	2500	367.0	367.0	38.0
TPS65910AA1RSLRG4	VQFN	RSL	48	2500	367.0	367.0	38.0

chanhvinh.com

TUBE

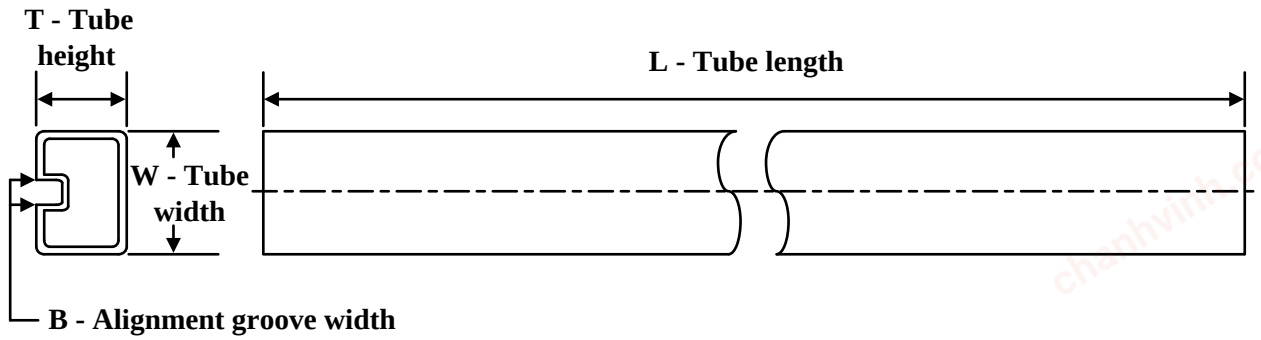

*All dimensions are nominal

Device	Package Name	Package Type	Pins	SPQ	L (mm)	W (mm)	T (µm)	B (mm)
TPS659101A1RSL	RSL	VQFN	48	60	381	7.92	2286	0
TPS659101A1RSL.B	RSL	VQFN	48	60	381	7.92	2286	0
TPS659102A1RSL	RSL	VQFN	48	60	381.5	7.92	2286	0
TPS659102A1RSL	RSL	VQFN	48	60	381	7.92	2286	0
TPS659102A1RSL.B	RSL	VQFN	48	60	381.5	7.92	2286	0
TPS659102A1RSL.B	RSL	VQFN	48	60	381	7.92	2286	0
TPS659106A1RSL	RSL	VQFN	48	60	381.5	7.92	2286	0
TPS659106A1RSL	RSL	VQFN	48	60	381	7.92	2286	0
TPS659106A1RSL.B	RSL	VQFN	48	60	381	7.92	2286	0
TPS659106A1RSL.B	RSL	VQFN	48	60	381.5	7.92	2286	0
TPS659108A1RSL	RSL	VQFN	48	60	381	7.92	2286	0
TPS659108A1RSL	RSL	VQFN	48	60	381.5	7.92	2286	0
TPS659108A1RSL.B	RSL	VQFN	48	60	381.5	7.92	2286	0
TPS659108A1RSL.B	RSL	VQFN	48	60	381	7.92	2286	0
TPS659109A1RSL	RSL	VQFN	48	60	381	7.92	2286	0
TPS659109A1RSL	RSL	VQFN	48	60	381.5	7.92	2286	0
TPS659109A1RSL.B	RSL	VQFN	48	60	381	7.92	2286	0
TPS659109A1RSL.B	RSL	VQFN	48	60	381.5	7.92	2286	0
TPS659109A1RSLG4	RSL	VQFN	48	60	381	7.92	2286	0
TPS659109A1RSLG4.B	RSL	VQFN	48	60	381	7.92	2286	0
TPS65910A1RSL	RSL	VQFN	48	60	381.5	7.92	2286	0
TPS65910A1RSL	RSL	VQFN	48	60	381	7.92	2286	0
TPS65910A1RSL.B	RSL	VQFN	48	60	381	7.92	2286	0
TPS65910A1RSL.B	RSL	VQFN	48	60	381.5	7.92	2286	0
TPS65910A3A1RSL	RSL	VQFN	48	60	381	7.92	2286	0
TPS65910A3A1RSL.B	RSL	VQFN	48	60	381	7.92	2286	0
TPS65910AA1RSL	RSL	VQFN	48	60	381.5	7.92	2286	0
TPS65910AA1RSL	RSL	VQFN	48	60	381	7.92	2286	0
TPS65910AA1RSL.B	RSL	VQFN	48	60	381	7.92	2286	0

chanhvinh.com

PACKAGE MATERIALS INFORMATION

Device	Package Name	Package Type	Pins	SPQ	L (mm)	W (mm)	T (µm)	B (mm)
TPS65910AA1RSL.B	RSL	VQFN	48	60	381.5	7.92	2286	0

chanhvinh.com

GENERIC PACKAGE VIEW


RSL 48

VQFN - 1 mm max height

6 x 6, 0.4 mm pitch


QUAD FLATPACK - NO LEAD

This image is a representation of the package family, actual package may vary.
Refer to the product data sheet for package details.

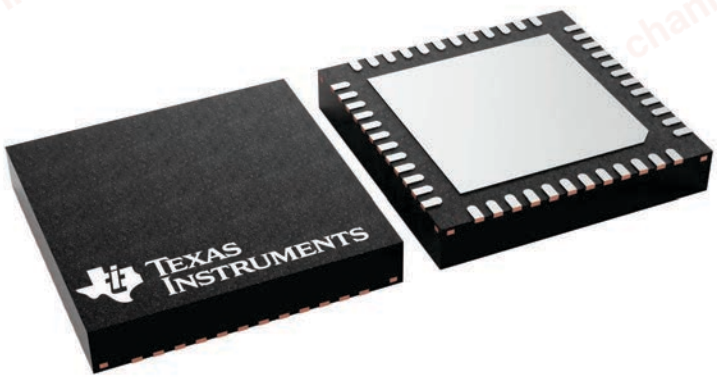

chanhvinh.com

RSL (S–PVQFN–N48) PLASTIC QUAD FLATPACK NO–LEAD

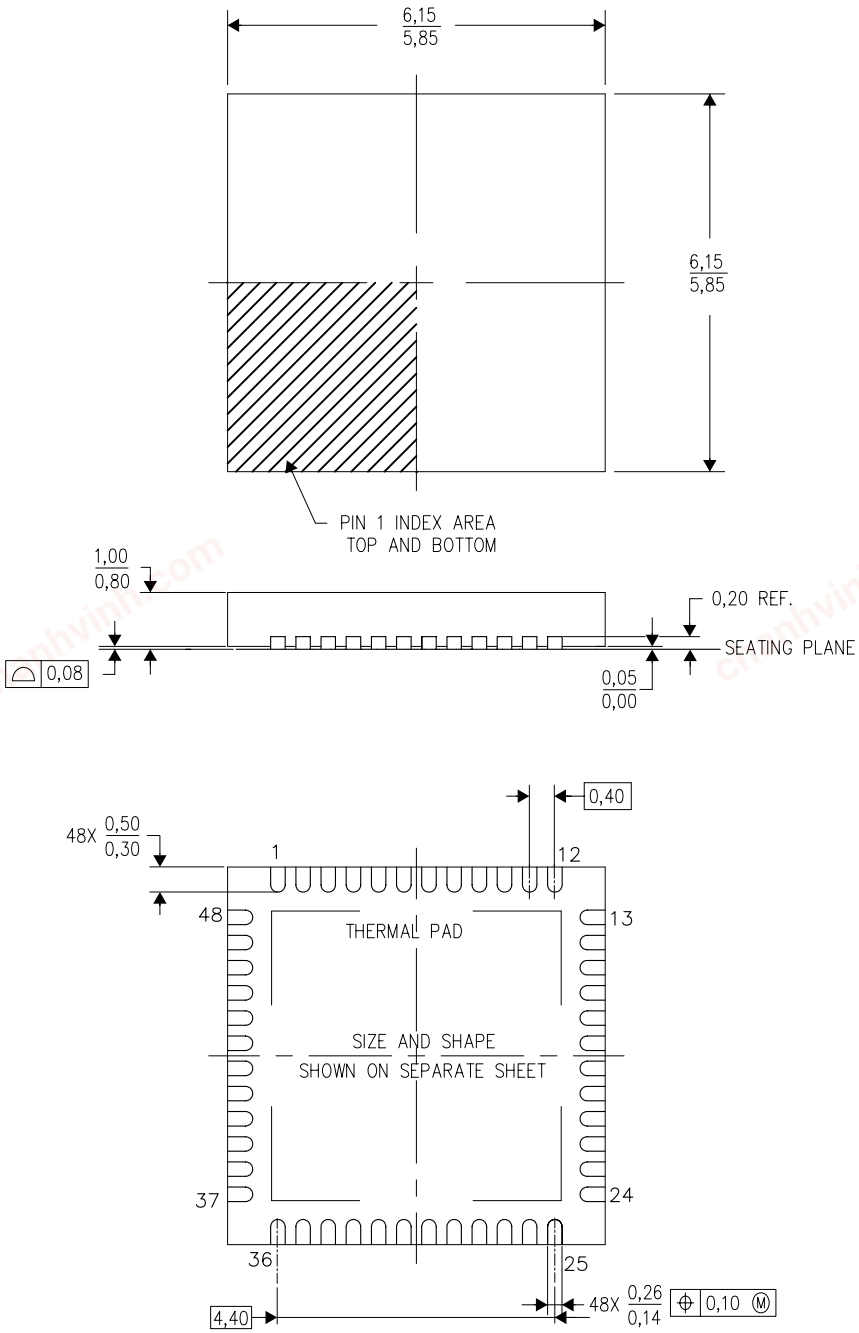

4207548/B 06/11

NOTES:
A. All linear dimensions are in millimeters. Dimensioning and tolerancing per ASME Y14.5M–1994.
B. This drawing is subject to change without notice.
C. Quad Flatpack, No–leads (QFN) package configuration.
D. The package thermal pad must be soldered to the board for thermal and mechanical performance.
E. See the additional figure in the Product Data Sheet for details regarding the exposed thermal pad features and dimensions.

chanhvinh.com


RSL (S–PVQFN–N48) PLASTIC QUAD FLATPACK NO–LEAD

THERMAL INFORMATION

This package incorporates an exposed thermal pad that is designed to be attached directly to an external heatsink. The thermal pad must be soldered directly to the printed circuit board (PCB). After soldering, the PCB can be used as a heatsink. In addition, through the use of thermal vias, the thermal pad can be attached directly to the appropriate copper plane shown in the electrical schematic for the device, or alternatively, can be attached to a special heatsink structure designed into the PCB. This design optimizes the heat transfer from the integrated circuit (IC).

For information on the Quad Flatpack No–Lead (QFN) package and its advantages, refer to Application Report, QFN/SON PCB Attachment, Texas Instruments Literature No. SLUA271. This document is available at www.ti.com.

The exposed thermal pad dimensions for this package are shown in the following illustration.

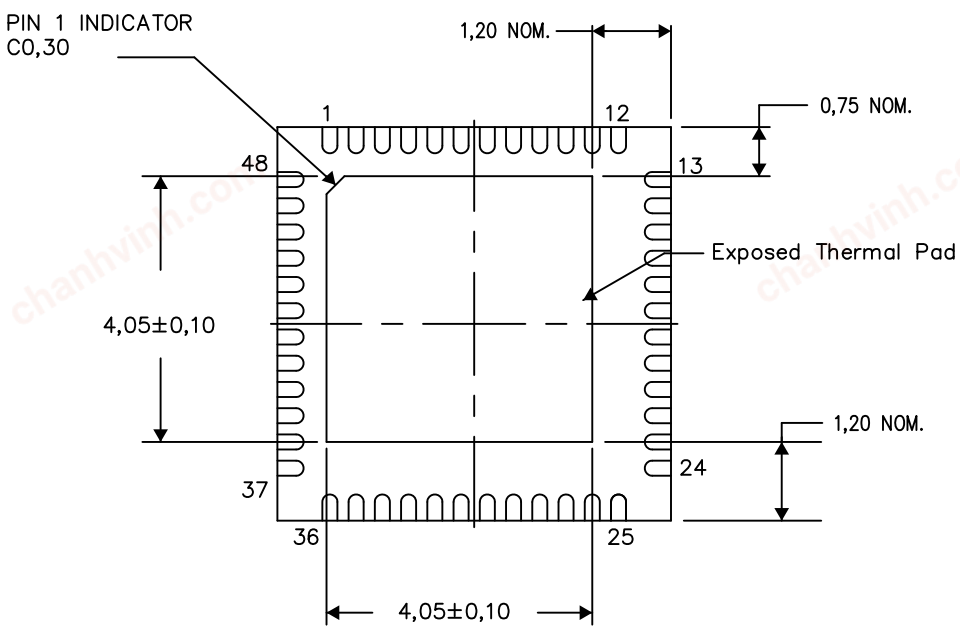

Bottom View


Exposed Thermal Pad Dimensions

4207841–4/P 03/13

NOTE: All linear dimensions are in millimeters

chanhvinh.com

RSL (S–PVQFN–N48) PLASTIC QUAD FLATPACK NO–LEAD

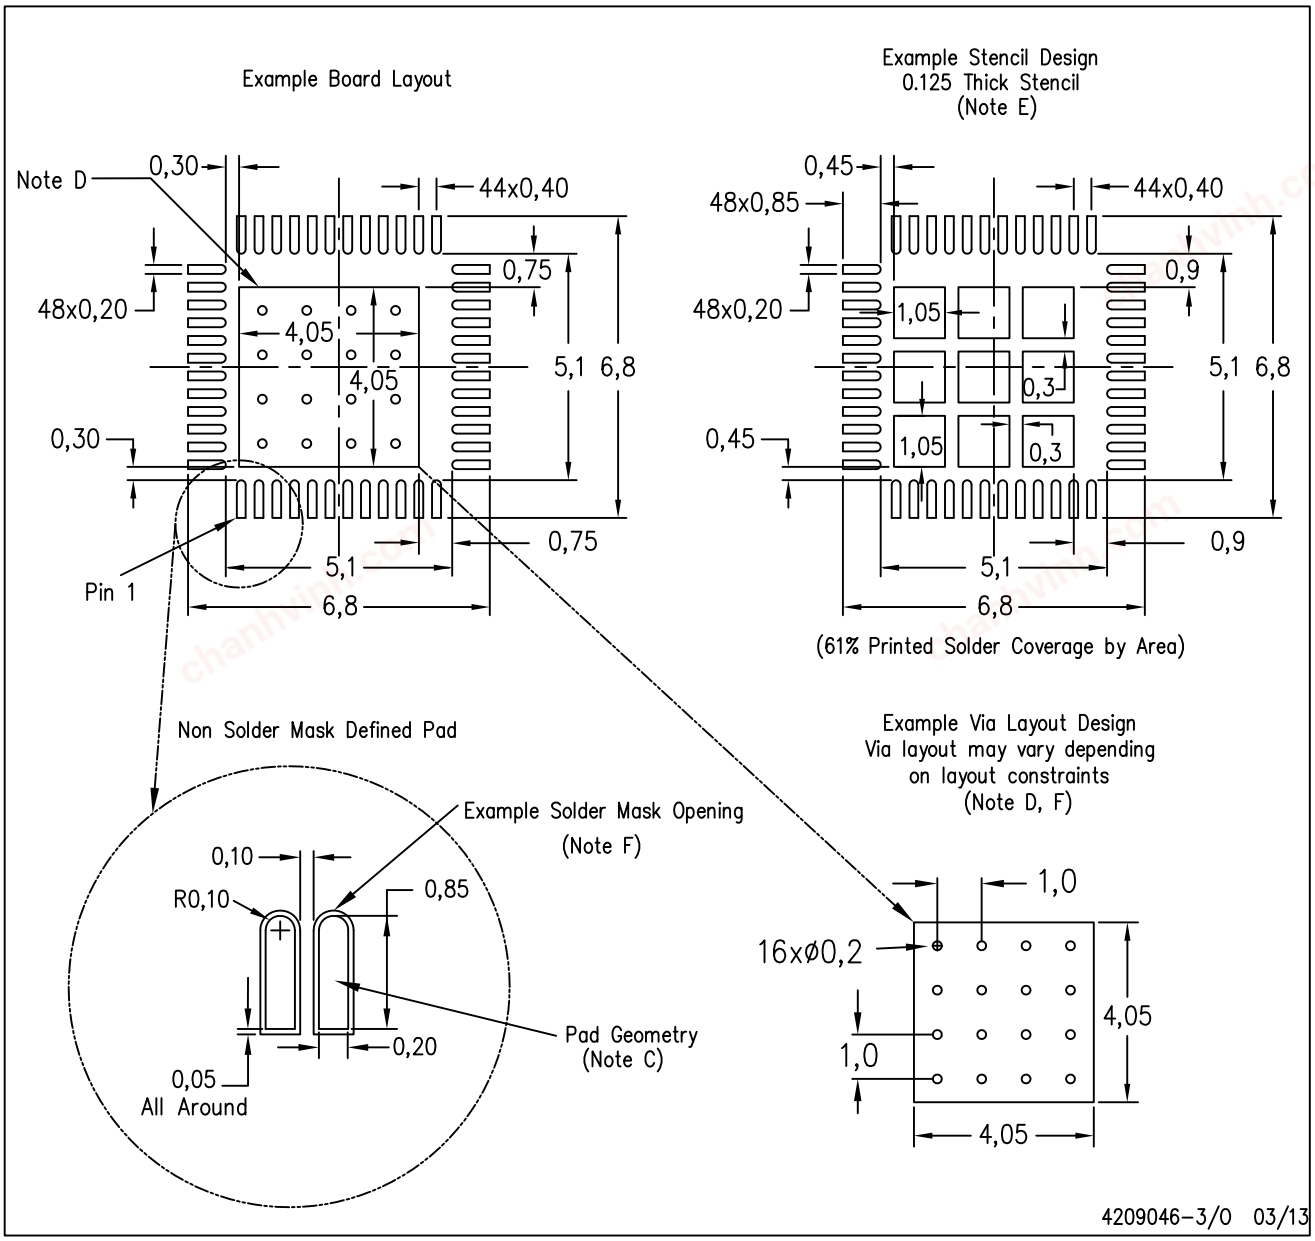

NOTES:
A. All linear dimensions are in millimeters.
B. This drawing is subject to change without notice.
C. Publication IPC–7351 is recommended for alternate designs.
D. This package is designed to be soldered to a thermal pad on the board. Refer to Application Note, QFN/SON PCB Attachment, Texas Instruments Literature No. SLUA271, and also the Product Data Sheets for specific thermal information, via requirements, and recommended board layout. These documents are available at www.ti.com <http://www.ti.com>.
E. Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil design recommendations. Refer to IPC 7525 for stencil design considerations.
F. Customers should contact their board fabrication site for recommended solder mask tolerances and via tenting recommendations for vias placed in the thermal pad.

chanhvinh.com

IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES “AS IS” AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you fully indemnify TI and its representatives against any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI’s products are provided subject to TI’s Terms of Sale, TI’s General Quality Guidelines, or other applicable terms available either on ti.com or provided in conjunction with such TI products. TI’s provision of these resources does not expand or otherwise alter TI’s applicable warranties or warranty disclaimers for TI products. Unless TI explicitly designates a product as custom or customer-specified, TI products are standard, catalog, general purpose devices.

TI objects to and rejects any additional or different terms you may propose.

Copyright © 2026, Texas Instruments Incorporated

Last updated 10/2025