chanhvinh.com

Lead-free Green

AS2333

1.8V, MICROPOWER CMOS ZERO-DRIFT OPERATIONAL AMPLIFIERS

Description

The AS2333 is dual CMOS operational amplifiers designed with chopping stabilization technique. This product can provide ultra-low input offset voltage (8μV typical) and near zero-drift over time and temperature. This technique also eliminates 1/f noise, and the cross over distortion presented in most rail to rail input operational amplifiers. The high-precision, low quiescent current amplifier offers high-impedance inputs that have a common-mode range 100mV beyond the rails, and rail-to-rail output that swings within 50mV of the rails. Single or dual supplies as low as 1.8V (±0.9V) and up to 5.5V (±2.75V) can be used.

The device is optimized for low voltage single supply application, especially for low-power high precision applications.


The AS2333 is available in standard 8-pin SO-8, MSOP-8 and U-DFN3030-8 (Type E) packages, and is specified for operation from -40°C to +125°C.

Features

- Low Input Offset Voltage: 8μV (typ)
- Zero Drift: 0.02μV/°C (typ)
- 0.01Hz to 10Hz Noise: 1.1μV_{PP}
- Low Quiescent Current: 12μA per Amplifier
- Supply Voltage: 1.8V to 5.5V
- Rail-to-Rail Input and Output
- Bandwidth 350kHz
- Slew Rate 0.12V/μs (typ)
- MSOP-8, SO-8 and U-DFN3030-8 (Type E) Packages
- **Totally Lead-Free & Fully RoHS Compliant (Notes 1 & 2)**
- **Halogen and Antimony Free. "Green" Device (Note 3)**
- **For automotive applications requiring specific change control (i.e. parts qualified to AEC-Q100/101/200, PPAP capable, and manufactured in IATF 16949 certified facilities), please contact us or your local Diodes representative. https://www.diodes.com/quality/product-definitions/**


Pin Assignments

(Top View)

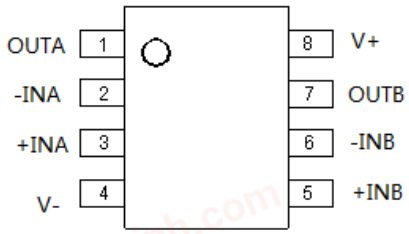

SO-8/MSOP-8

(Top View)




U-DFN3030-8 (Type E)

Applications


- Battery-Powered Instruments
- Handheld Test Equipment
- Medical Instrumentation
- Sensor Signal Conditioning
- Low Voltage Current Sensing

Notes:
1. No purposely added lead. Fully EU Directive 2002/95/EC (RoHS), 2011/65/EU (RoHS 2) & 2015/863/EU (RoHS 3) compliant.
2. See https://www.diodes.com/quality/lead-free/ for more information about Diodes Incorporated's definitions of Halogen- and Antimony-free, "Green" and Lead-free.
3. Halogen- and Antimony-free "Green" products are defined as those which contain <900ppm bromine, <900ppm chlorine (<1500ppm total Br + Cl) and <1000ppm antimony compounds.

Typical Application

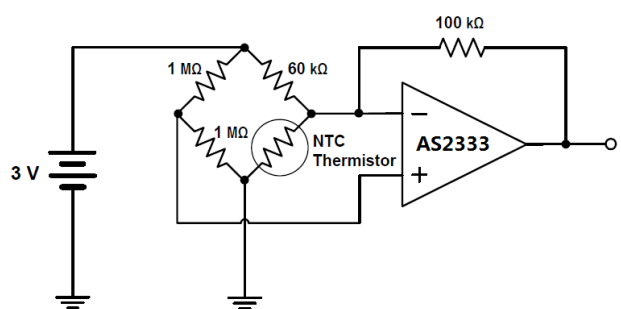

Thermistor Measurement

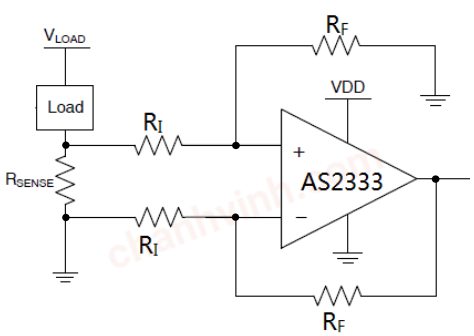

Low-Side Current Monitor

© Diodes Incorporated

chanhvinh.com

Pin Descriptions

Pin Number	Pin Name	I/O	Description
3	+INA	I	Noninverting input, channel A
5	+INB	I	Noninverting input, channel B
2	-INA	I	Inverting input, channel A
6	-INB	I	Inverting input, channel B
1	OUTA	O	Output, channel A
7	OUTB	O	Output, channel B
8	V+	—	Positive Power Supply Recommend to place a minimum 0.1μF decoupling capacitor between V+ pin and GND as close as possible.
4	V-	—	Negative Power Supply Single power supply application, it is normally tied to ground. Split power supply application, a minimum 0.1μF decouple capacitor will be recommended to place between V- pin and GND as close as possible.

Absolute Maximum Ratings (Note 4) (@T_A = +25°C, unless otherwise specified.)

Symbol	Parameter	Rating		Unit
V_S = V+ - V-	Supply Voltage Range	6.5		V
V_{-IN} / V_{+IN}	Signal Input Terminals (Note 5)	V- - 0.3V to V+ + 0.3V		V
—	Signal Input Terminals (Note 5)	-1 to +1		mA
	Output Short-Circuit (Note 6)	Continuous		mA
T_{STG}	Storage Temperature	-65 to +150		°C
T_J	Maximum Junction Temperature	+150		°C
T_{LEAD}	Lead Temperature (Soldering, 10 Seconds)	+260		°C
$R_{\theta JA}$	Junction-to-Ambient Thermal Resistance	SO-8	139	°C/W
		MSOP-8	184	°C/W
		U-DFN3030-8 (Type E)	—	°C/W
$R_{\theta JC}$	Junction-to-Case Thermal Resistance	SO-8	25	°C/W
		MSOP-8	18	°C/W
		U-DFN3030-8 (Type E)	—	°C/W
ESD HBM	Human Body Model ESD Protection	4		kV
ESD CDM	Charged-Device Model ESD Protection	1		kV

Notes:
4. *Absolute Maximum Ratings* indicate limits beyond which damage to the device may occur. *Recommended Operating Conditions* indicate conditions for which the device is intended to be functional, but specific performance is not guaranteed. For guaranteed specifications and the test conditions, see the *Electrical Characteristics*.
5. Input terminals are diode-clamped to the power-supply rails. Input signals that can swing more than 0.3V beyond the supply rails should be current limited to 10mA or less.
6. Short-circuit to ground.

Recommended Operating Conditions (@T_A = +25°C, unless otherwise specified.)

Symbol	Parameter	Rating	Unit
V_S = V+ - V-	Supply Voltage Range	1.8 to 5.5	V
T_A	Operating Ambient Temperature Range	-40 to +125	°C

© Diodes Incorporated

chanhvinh.com

Electrical Characteristics (@T_A = +25°C, V_S = 5.0V, R_L = 10kΩ connected to V_S / 2, V_{CM} = V_S / 2, and V_{OUT} = V_S / 2, unless otherwise specified.)

Symbol	Parameter	Conditions		Min	Typ	Max	Unit
Offset Voltage							
V_{OS}	Input Offset Voltage	V_S = 5V		—	8	22	μV
$\Delta V_{OS}/\Delta T$	Input Offset Voltage Drift (Note 7)	T_A = -40°C to +85°C		—	0.02	0.1	μV/°C
		T_A = -40°C to +125°C		—	—	0.2	μV/°C
PSRR	Power-Supply Rejection Ratio	V_S = 1.8V to 5.5V, T_A = -40°C to +125°C		—	1	5	μV/V
—	Long-Term Stability	—			(Note 7)		μV
—	Channel Separation, DC	—		—	0.1	—	μV/V
Input Bias Current							
I_B	Input Bias Current	T_A = +25°C		—	±70	±200	pA
		T_A = -40°C to +125°C		—	±400	—	
I_{OS}	Input Offset Current	—		—	±140	±400	
Noise							
V_N	Input Voltage Noise	f = 0.01Hz to 1Hz		—	0.3	—	μV_{PP}
		f = 0.1Hz to 10Hz		—	1.1	—	
I_N	Input Current Noise	f = 10Hz		—	100	—	$fA/\sqrt{Hz}$
Input Voltage							
V_{CM}	Common-Mode Voltage Range	—		(V-) - 0.1	—	(V+) + 0.1	V
CMRR	Common-Mode Rejection Ratio	(V-) - 0.1V < V_{CM} < (V+) + 0.1V, T_A = -40°C to +125°C		106	120	—	dB
Input Capacitance							
—	Differential	—		—	2	—	pF
—	Common-Mode	—		—	4	—	pF
Open-Loop Gain							
A_{OL}	Open-Loop Voltage Gain	(V-) + 100mV < V_O < (V+) - 100mV, R_L = 10kΩ, T_A = -40°C to +125°C		106	130	—	dB
Frequency Response							
GBW	Gain-Bandwidth Product	C_L = 100pF		—	350	—	kHz
SR	Slew Rate	G = +1		—	0.12	—	V/μs
Output							
—	Voltage Output Swing from Rail	Positive Rail R_L = 10kΩ	T_A = +25°C	—	30	50	mV
			T_A = -40°C to +125°C	—	—	70	
		Negative Rail R_L = 10kΩ	T_A = +25°C	—	10	50	
			T_A = -40°C to +125°C	—	—	70	
I_{SC}	Short-Circuit Current	Source Current		—	5	—	mA
		Sink Current		—	25	—	mA
—	Open-Loop Output Impedance	f = 350kHz, I_O = 0A		—	2	—	kΩ
Power Supply							
V_S	Specified Voltage Range	—		1.8	—	5.5	V
I_Q	Quiescent Current per Amplifier	I_O = 0A, T_A = +25°C		—	12	20	μA
		I_O = 0A, T_A = -40°C to +125°C		—	—	28	
t_{ON}	Turn-On Time	V_S = 5V		—	100	—	μs


Note: 7. 300-hour life test at +150°C demonstrated randomly distributed variation of approximately 1μV. This parameter guaranteed by design and characterization, not by testing.

© Diodes Incorporated


chanhvinh.com

Typical Performance Characteristics


Supply Current vs. Temperature

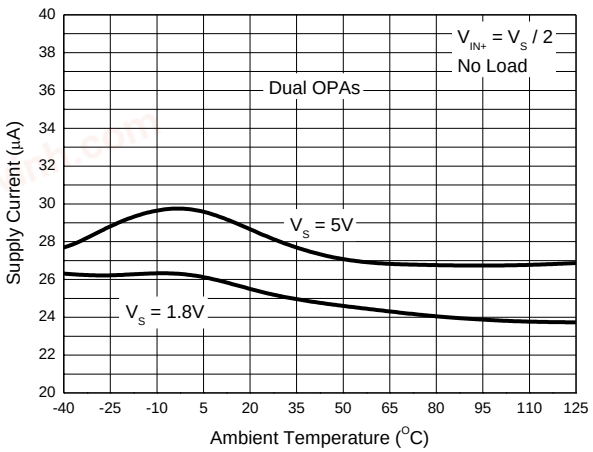


Input Offset Voltage vs. Input Common Mode Voltage

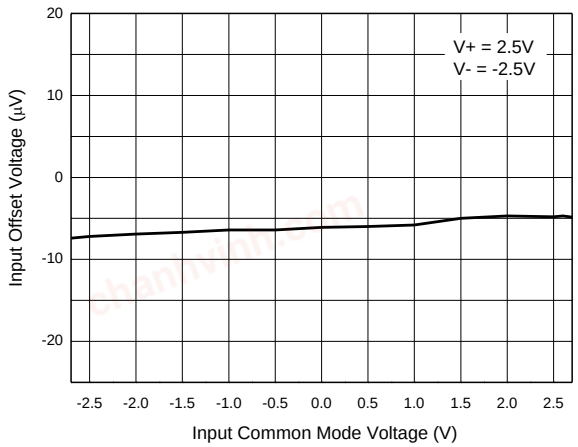


Output Characteristics-Sourcing Current

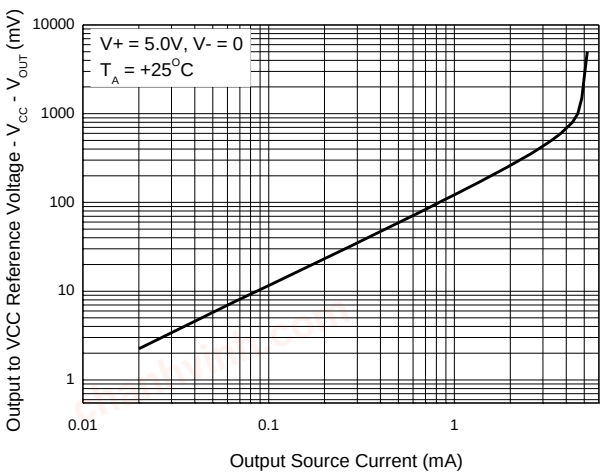


Output Characteristics-Sinking Current

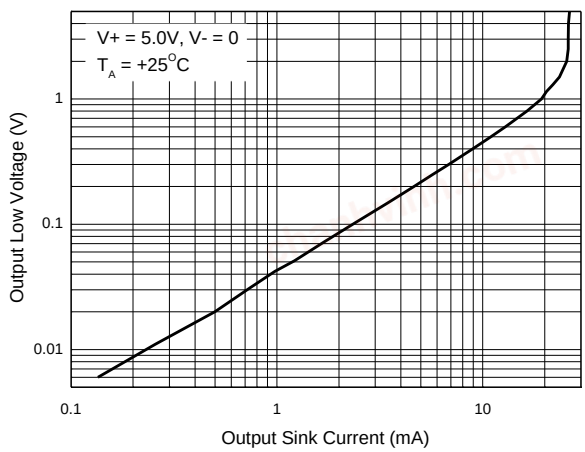

Large Signal Response

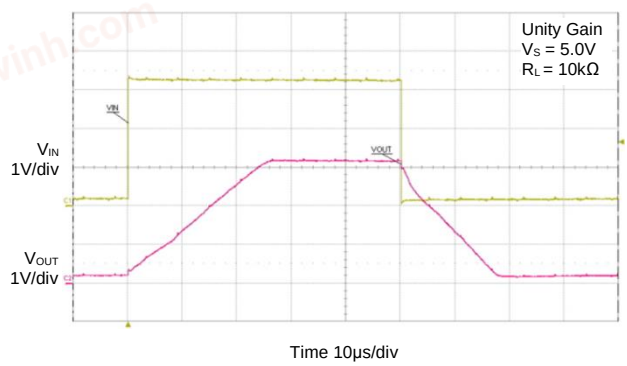

Small Signal Response

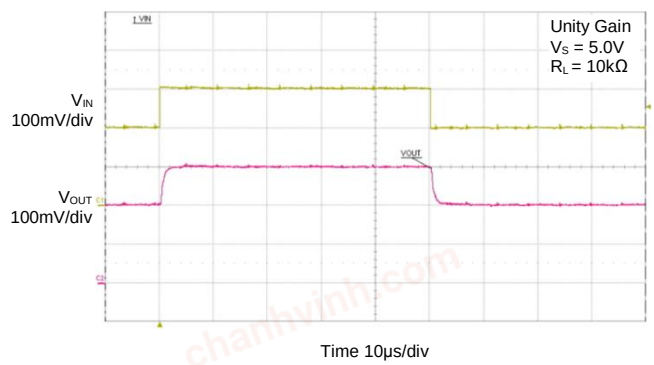


© Diodes Incorporated

chanhvinh.com


Typical Performance Characteristics (continued)

Small Signal Response

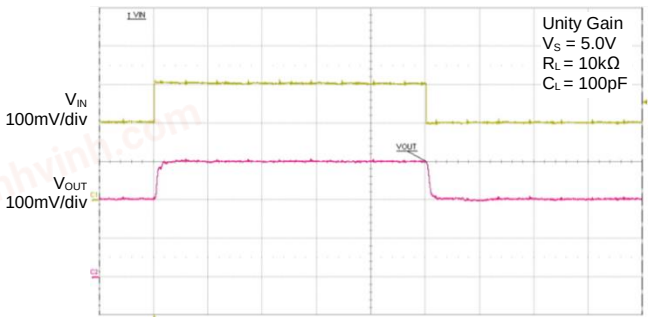


Time 10µs/div

Small Signal Response

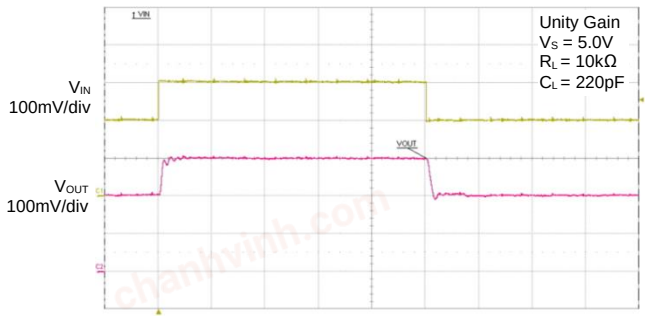


Time 10µs/div

Negative Overvoltage Response

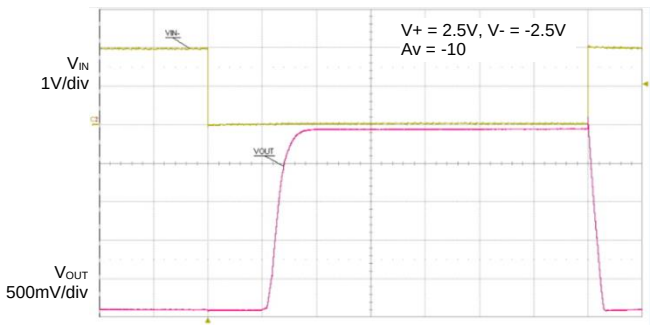


Time 50µs/div

Positive Overvoltage Response

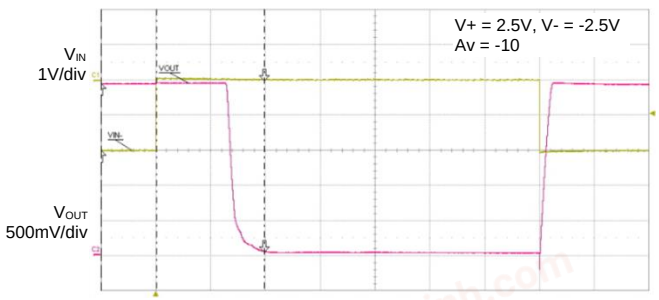


Time 50µs/div

Output Voltage Swing from Rail

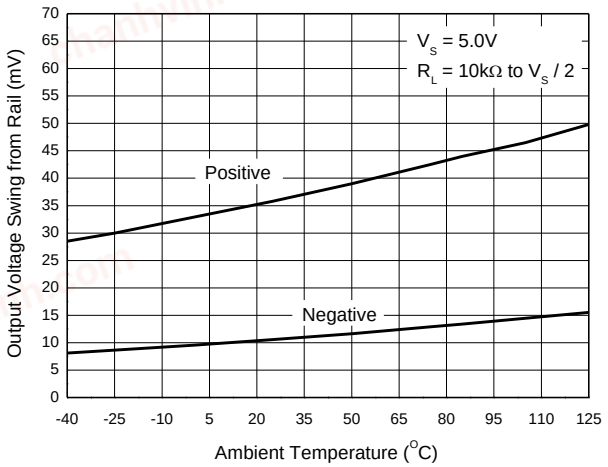

Voltage Noise Spectral Density

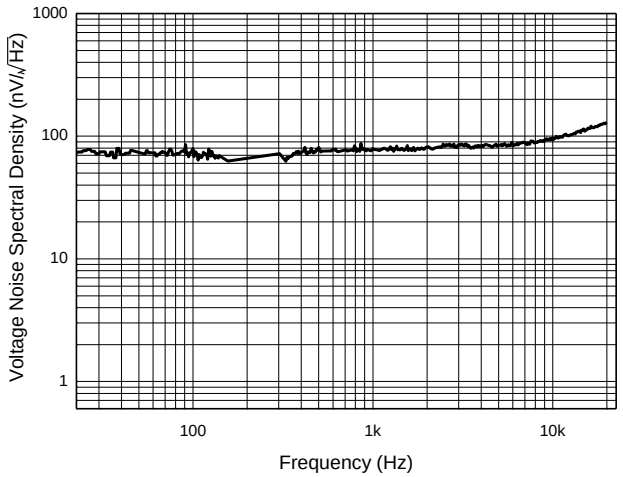


© Diodes Incorporated


chanhvinh.com

Typical Performance Characteristics (continued)

Frequency Response

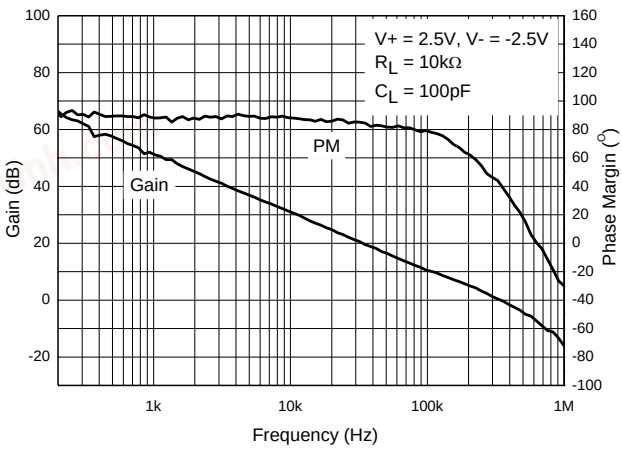

Power Supply Rejection Ration vs. Frequency

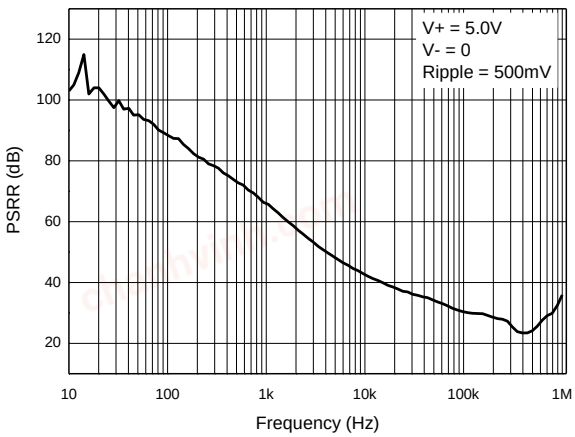

© Diodes Incorporated

chanhvinh.com

Application Information

Overview

The AS2333 is low power, zero-drift, high precision, rail-to-rail input and output operational amplifier, which adopts chopper-stabilized function circuits to provide the advantage of minimizing input offset voltage and offset voltage drift over time and temperature. Its input common-mode voltage range extends 0.1V beyond the supply rails to allow for sensing near ground or system V_{DD}. The device operates from a single-supply voltage as low as 1.8V, is unity-gain stable, has no 1/f noise, has good PSRR and CMRR performance. These features make the part suitable for a wide range of general-purpose applications, especially for low-power high precision applications.

Low Input Referred Noise

The device AS2333 is chopper stabilized amplifier, the flicker noise is reduced greatly because of this technique. The zero-drift chopper-stabilized amplifiers are especially suited for accurate, high-gain amplification at lower frequencies. In general, they do not exhibit the higher bandwidth of linear operational amplifier, and the location of their clock frequency establishes a practical frequency limit on signal fidelity. This makes performance at low frequencies especially important, and the chopper-stabilized architecture further contributes to low frequency usefulness by eliminating the classic linear operational amplifier 1/f input voltage noise. Many high gain sensor applications are at low frequencies, making zero-drift amplifiers a natural choice for this function.

Below plots compared conventional amplifier voltage noise density behavior and zero-drift amplifier's, this 1/f noise elimination in zero-drift amplifier allows the AS2333 to have much lower noise at DC and low frequency compared to conventional low noise amplifier.

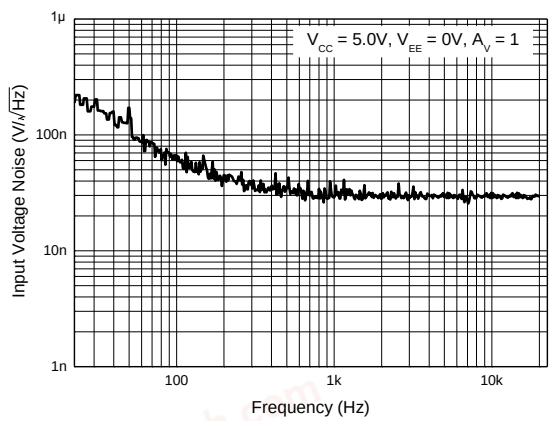


Figure 1. Input Voltage Noise in Conventional Amplifier (AZV832)

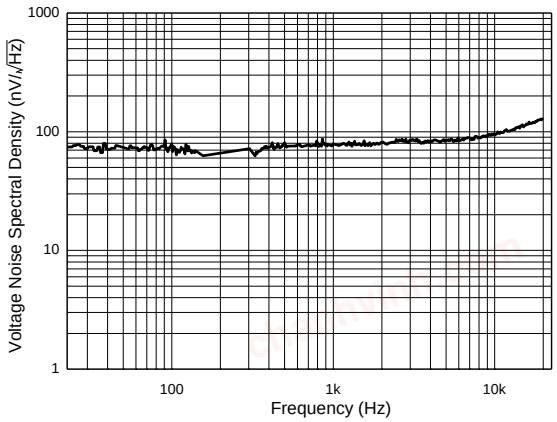


Figure 2. Input Voltage Noise in Zero-Drift Amplifier (AS2333)

Driving a Capacitive Load

The AS2333 can directly drive 200pF in unity-gain without oscillation. The unity-gain follower is the most sensitive configuration to capacitive loading. Capacitive loading directly on the output terminal can decrease the device's phase margin leading to high frequency ringing or oscillation.

To drive a heavier capacitive load, the circuit in Figure 3 can be used. The resistor R_{NULL} and C_L form a pole to increase stability by adding more phase margin to the system. The bigger R_{NULL} resistor value the more stable V_{OUT} is. Figure 4 and Figure 5 are AS2333 output pulse response waveforms with and without R_{NULL} 330Ω for load conditions C_L = 470pF and R_L = 10kΩ.

© Diodes Incorporated

chanhvinh.com

Application Information (continued)

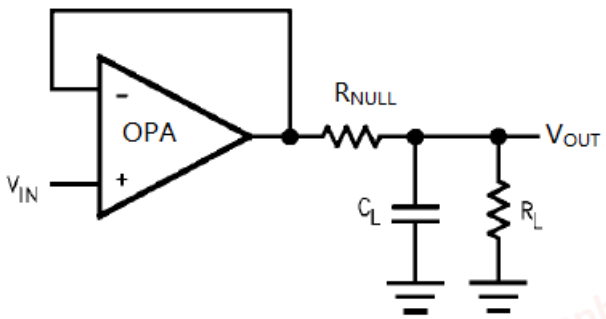


Figure 3. Capacitive Load with R_{NULL}

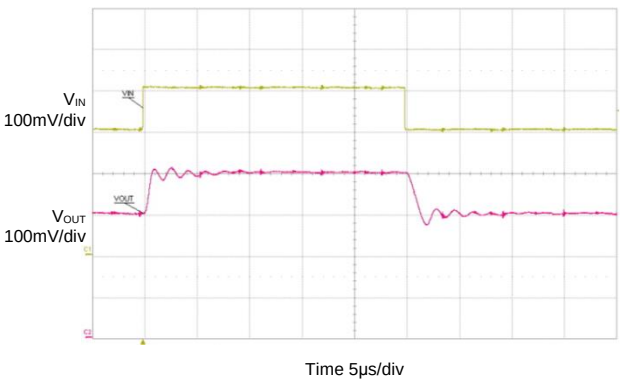


Figure 4. Test Result Without R_{NULL}

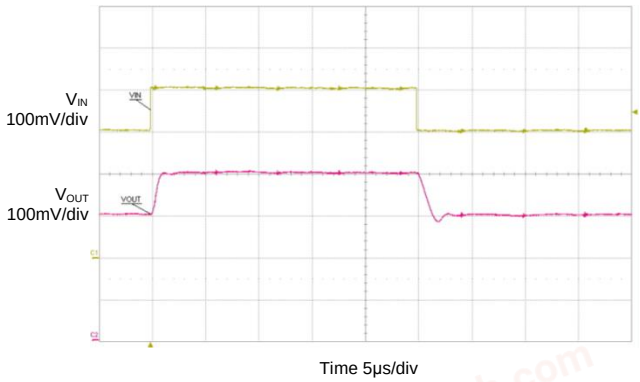


Figure 5. Test Result with R_{NULL} 330Ω

Reducing capacitive load ringing and overshoot, the RC snubber circuit also can be used, shown in Figure 6, it does allow the amplifier to drive larger values of capacitance while maintaining a minimum of overshoot and ringing. Figure 7 shows AS2333 test result for capacitive load 470pF with snubber circuit.

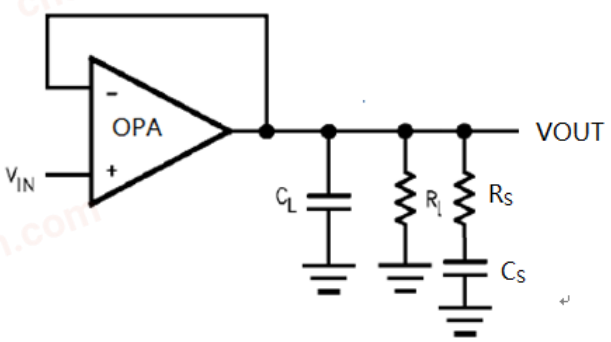


Figure 6. Circuit with Snubber Circuit

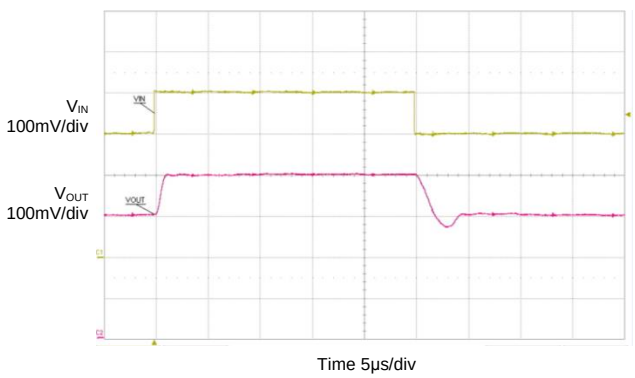


Figure 7. Test Result with Snubber Circuit

© Diodes Incorporated

chanhvinh.com

Application Information (continued)

Low-Side Current Monitor Application

Low-side current sensing is used to monitor the current through a load. This method can be used to detect over-current conditions and is often used in feedback control, as shown in Figure 8. A sense resistor is placed in series with the load to ground. Precision resistors are required for high accuracy and the resulting voltage drop is amplified using AS2333.

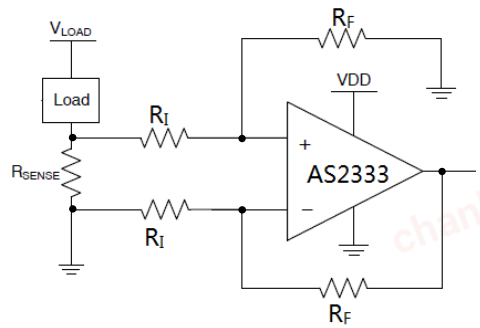


Figure 8. Low-Side Current Monitor Application

Differential Amplifier for Bridged Circuits

Sensors to measure strain, pressure, and temperature are often configured in a Wheatstone bridge circuit as shown in Figure 9. In the measurement, the voltage change that is produced is relatively small and needs to be amplified before going into an ADC. Precision amplifiers are recommended in these types of applications due to their high gain, low noise, and low offset voltage.

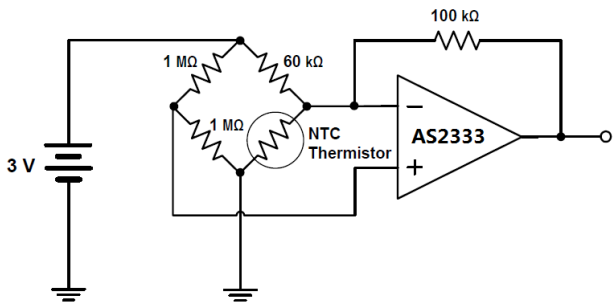


Figure 9. Bridge Circuit Amplification

© Diodes Incorporated

chanhvinh.com

Ordering Information

AS2333 X - X

Package	Packing
S : SO-8 M8 : MSOP-8 FGE : U-DFN3030-8 (Type E)	7/13 : Tape & Reel


Part Number	Identification Code	Packaging	Tape and Reel	
			Quantity	Part Number Suffix
AS2333S-13	AS2333	SO-8	2500/Tape & Reel	-13
AS2333M8-13	AS2333	MSOP-8	2500/Tape & Reel	-13
AS2333FGE-7 (Note 8)	ND	U-DFN3030-8 (Type E)	3000/Tape & Reel	-7

Note: 8. This part will be developed in future.

Marking Information

(1) SO-8


(Top View)



Ↄ¦¦ : Logo
AS2333 : Identification Code
YY : Year : 19, 20, 21~
WW : Week : 01~52; 52 represents 52 and 53 week
X X : Internal Code

(2) MSOP-8


(Top View)



Ↄ¦¦ : Logo
AS2333 : Identification Code
Y : Year : 0 to 9
W : Week : A to Z : 1 to 26 week; a to z : 27 to 52 week; z represents 52 and 53 week
X : Internal Code

(3) U-DFN3030-8 (Type E)

(Top View)



ND : Identification Code
Y : Year : 0~9
W : Week : A~Z : 1~26 week; a~z : 27~52 week; z represents 52 and 53 week
X : Internal Code


© Diodes Incorporated

chanhvinh.com

Package Outline Dimensions


Please see http://www.diodes.com/package-outlines.html for the latest version.

(1) Package Type: SO-8

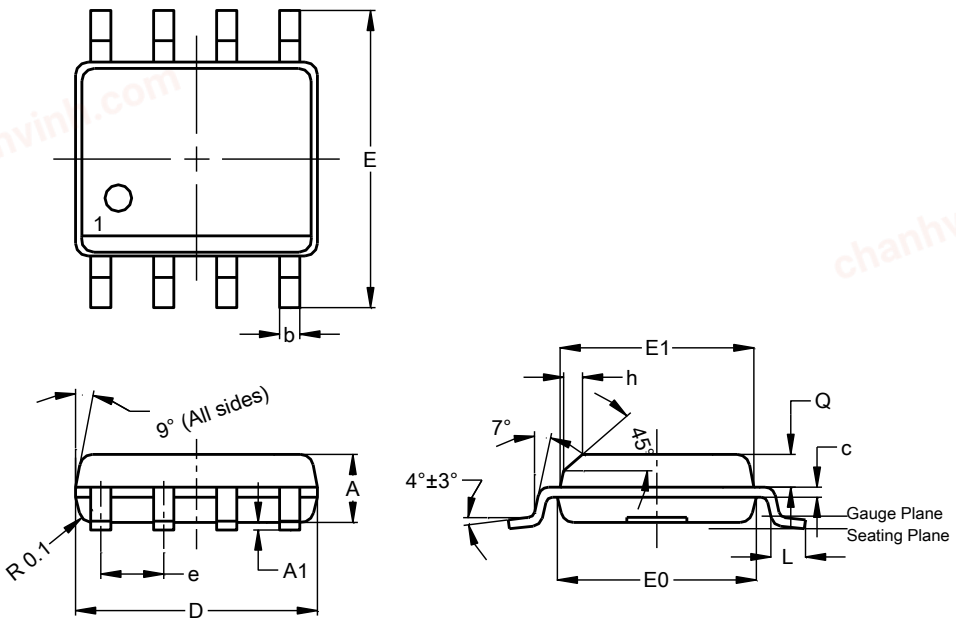

SO-8			
Dim	Min	Max	Typ
A	1.40	1.50	1.45
A1	0.10	0.20	0.15
b	0.30	0.50	0.40
c	0.15	0.25	0.20
D	4.85	4.95	4.90
E	5.90	6.10	6.00
E1	3.80	3.90	3.85
E0	3.85	3.95	3.90
e	--	--	1.27
h	--	--	0.35
L	0.62	0.82	0.72
Q	0.60	0.70	0.65
All Dimensions in mm			

(2) Package Type: MSOP-8

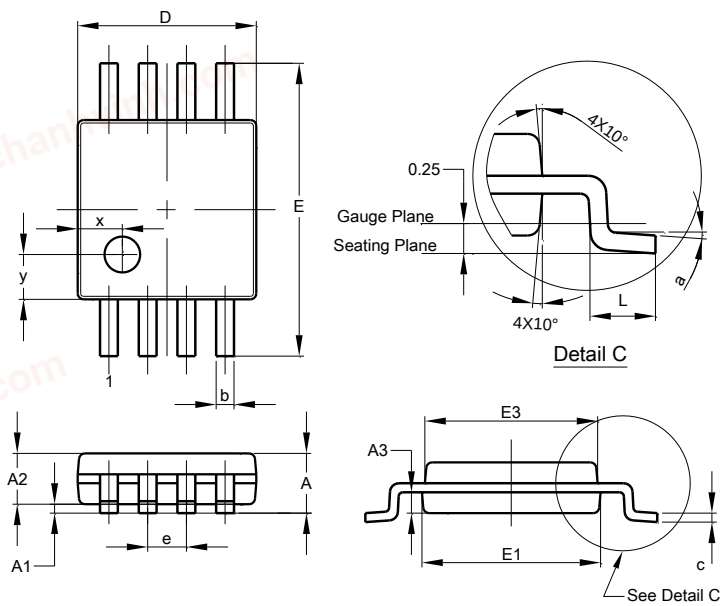

MSOP-8			
Dim	Min	Max	Typ
A	-	1.10	-
A1	0.05	0.15	0.10
A2	0.75	0.95	0.86
A3	0.29	0.49	0.39
b	0.22	0.38	0.30
c	0.08	0.23	0.15
D	2.90	3.10	3.00
E	4.70	5.10	4.90
E1	2.90	3.10	3.00
E3	2.85	3.05	2.95
e	-	-	0.65
L	0.40	0.80	0.60
a	0°	8°	4°
x	-	-	0.750
y	-	-	0.750
All Dimensions in mm			


© Diodes Incorporated

chanhvinh.com

Package Outline Dimensions (continued)

Please see http://www.diodes.com/package-outlines.html for the latest version.

(3) Package Type: U-DFN3030-8 (Type E)

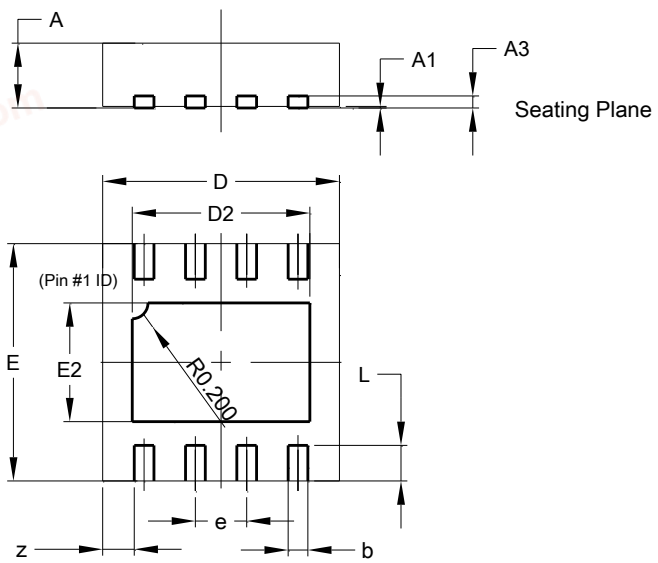


U-DFN3030-8 (Type E)			
Dim	**Min**	**Max**	**Typ**
A	0.57	0.63	0.60
A1	0.00	0.05	0.02
A3	-	-	0.15
b	0.20	0.30	0.25
D	2.95	3.05	3.00
D2	2.15	2.35	2.25
E	2.95	3.05	3.00
E2	1.40	1.60	1.50
e	-	-	0.65
L	0.30	0.60	0.45
z	-	-	0.40
All Dimensions in mm			

Suggested Pad Layout

Please see http://www.diodes.com/package-outlines.html for the latest version.

(1) Package Type: SO-8

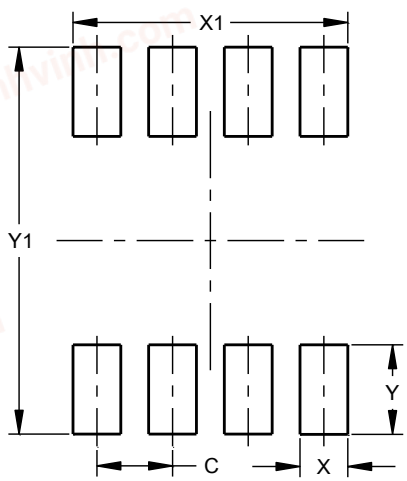

Dimensions	Value (in mm)
C	1.27
X	0.802
X1	4.612
Y	1.505
Y1	6.50


© Diodes Incorporated

chanhvinh.com

Suggested Pad Layout (continued)


Please see http://www.diodes.com/package-outlines.html for the latest version.

(2) Package Type: MSOP-8

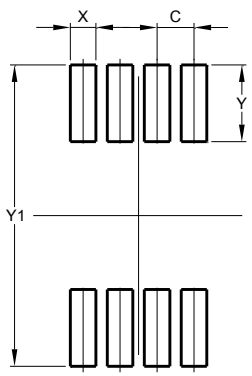

Dimensions	Value (in mm)
C	0.650
X	0.450
Y	1.350
Y1	5.300

(3) Package Type: U-DFN3030-8 (Type E)

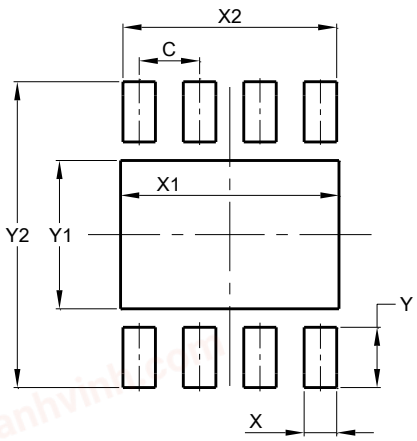

Dimensions	Value (in mm)
C	0.650
X	0.350
X1	2.350
X2	2.300
Y	0.650
Y1	1.600
Y2	3.300

Mechanical Data

SO-8

- Moisture Sensitivity: Level 1 per J-STD-020
- Terminals: Finish – Matte Tin Plated Leads, Solderable per MIL-STD-202, Method 208 e3
- Weight: 0.075 grams (Approximate)

MSOP-8

- Moisture Sensitivity: Level 1 per J-STD-020
- Terminals: Finish – Matte Tin Plated Leads, Solderable per MIL-STD-202, Method 208 e3
- Weight: 0.025 grams (Approximate)

© Diodes Incorporated

chanhvinh.com

IMPORTANT NOTICE

DIODES INCORPORATED MAKES NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARDS TO THIS DOCUMENT, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION).

Diodes Incorporated and its subsidiaries reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to this document and any product described herein. Diodes Incorporated does not assume any liability arising out of the application or use of this document or any product described herein; neither does Diodes Incorporated convey any license under its patent or trademark rights, nor the rights of others. Any Customer or user of this document or products described herein in such applications shall assume all risks of such use and will agree to hold Diodes Incorporated and all the companies whose products are represented on Diodes Incorporated website, harmless against all damages.

Diodes Incorporated does not warrant or accept any liability whatsoever in respect of any products purchased through unauthorized sales channel. Should Customers purchase or use Diodes Incorporated products for any unintended or unauthorized application, Customers shall indemnify and hold Diodes Incorporated and its representatives harmless against all claims, damages, expenses, and attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized application.

Products described herein may be covered by one or more United States, international or foreign patents pending. Product names and markings noted herein may also be covered by one or more United States, international or foreign trademarks.

This document is written in English but may be translated into multiple languages for reference. Only the English version of this document is the final and determinative format released by Diodes Incorporated.

LIFE SUPPORT

Diodes Incorporated products are specifically not authorized for use as critical components in life support devices or systems without the express written approval of the Chief Executive Officer of Diodes Incorporated. As used herein:

A. Life support devices or systems are devices or systems which:

1. are intended to implant into the body, or
2. support or sustain life and whose failure to perform when properly used in accordance with instructions for use provided in the labeling can be reasonably expected to result in significant injury to the user.

B. A critical component is any component in a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or to affect its safety or effectiveness.

Customers represent that they have all necessary expertise in the safety and regulatory ramifications of their life support devices or systems, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of Diodes Incorporated products in such safety-critical, life support devices or systems, notwithstanding any devices- or systems-related information or support that may be provided by Diodes Incorporated. Further, Customers must fully indemnify Diodes Incorporated and its representatives against any damages arising out of the use of Diodes Incorporated products in such safety-critical, life support devices or systems.

Copyright © 2020, Diodes Incorporated

www.diodes.com