chanhvinh.com

M850-LCD MULTIFUNCTION METERS

HOBUT

DESCRIPTION

The new range of Hobut multifunction panel meters feature 96 x 96mm moulded cases and selectable three colour backlight LCD screens. The range is easy to use, features user-programmable CT & VT ratios, and can be used on any single or 3 phase system with any input voltage without re-programming.

APPLICATION

The range is a cost effective replacement for traditional panel meters and is suitable for low, medium and high voltage control panels, gensets, building management systems, power management and more.

MOODY INTERNATIONAL UKAS MANAGEMENT SYSTEMS 014

CE



The user can select the colour screen preferred, either blue, green or white

RANGE

STANDARD FUNCTIONS:

Phase Voltage (V)	Reactive Energy (VArh)
Phase to Neutral Voltage (V)	Power Factor (PF)
Phase Current (I)	Instantaneous Amp Demand
Frequency (Hz)	Instantaneous Watt Demand
Active Power (W)	Instantaneous VA Demand
Active Energy (kWh)	Maximum Amp Demand
Reactive Power (VAr)	Maximum Watt Demand
Apparent Power (VA)	Maximum VA Demand

ORDERING INFORMATION

STANDARD PRODUCT — **OPTIONAL EXTRAS**

M850-LCD - P - RS - D - MV - THD

Suitable for any 1 or 3 phase system, AC aux 100-440V or DC aux 100-420V

Input 28/330V L-N
48/570V L-L
1A or 5A

Pulsed Output

RS 485 Output

DC AUX 10-70V DC

330mV Input (instead of 1A or 5A CT)

Total Harmonic Distribution (Amps & Volts)

Order example: a standard product with RS 485 output is part number M850-LCD-RS


PROGRAMMABLE FUNCTIONS

All models feature the following user-programmable functions:

- Selectable Screen Colour
- Current Transformer Ratio
- Voltage Transformer Ratio
- Baud Rate, Parity, Stops
- AC or DC AUX
- 1A or 5A CT
- Single or 3 phase system
- Input voltage range 28-570V
- RS485 address, 1-247
- Security code access for programming

PLUG-IN OPTIONS

Both pulsed output (for Wh or VArh) and RS 485 output (Modbus protocol) are plug in options which can be supplied with the multifunction meter. If purchased separately please use ordering codes on right.

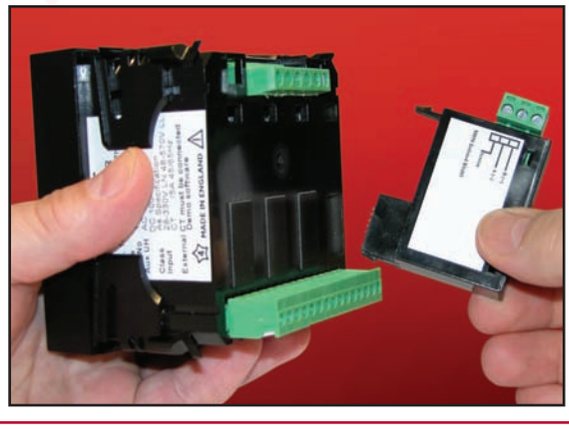



Pulsed Output when ordered separately use part PULSE-M850



RS 485 Output when ordered separately use part RS485-M850

chanhvinh.com

M850-LCD MULTIFUNCTION METERS

HOBUT

SPECIFICATIONS

ACCURACY

Volts/Amps:	0.5% of reading
Frequency:	0.1 Hz
Active Power:	1% of reading
Apparent Power:	1% of reading
Power Factor:	2% of range
Energy:	IEC 1036 Class 1

INPUT

Rated Un:	28-330V LN, 48-570V L-L
Overload:	800V continuous
Burden:	0.5VA per phase
Rated In:	0.5-6A
Overload:	10 In for 1 sec
Burden:	0.5VA per phase
Auxiliary:	100-440V AC / 100-420V DC (or 10/70V DC)
Frequency:	45/65Hz

DISPLAY

Digits:	3 lines 9999
Size:	14.2mm 7 segment
Brightness:	user adjustable

OUTPUT RELAY

Wh or VArh:	SPNO rated 50V
Pulse output:	150mA 5W AC/DC
Pulse duration:	programmable from 40msec-200msec

INSULATION

Test Voltage:	3kV RMS 50Hz for 1 minute between case, input and aux. 1kV between case, input, aux, relay output & RS485 output.
Impulse test:	EMC 5kV transient complies with IEC801/ EN55020 HF
Surge withstand:	IEC801/EN55020 Ansi C37.90A
Interference:	EHF 2.5kV 1Mhz complying to IEC255-4
Protection class II:	Complying to IEC348 / BS4753 / DIN57411 / VDE

STANDARDS

General:	IEC688, BSEN60688, BS4889, IEC359
EMC:	BSEN50081/2, BSEN50082/2
Safety:	IEC1010, BSEN601010

ENVIRONMENT


Working temp:	0-60°C
Storage temp:	-40 to +85°C
Relative humidity:	0-95% non condensing
Shock:	30G in 2 planes

MATERIAL

Black polycarbonate case to UL94V0

Weight: 0.7kg


CONNECTION DIAGRAM

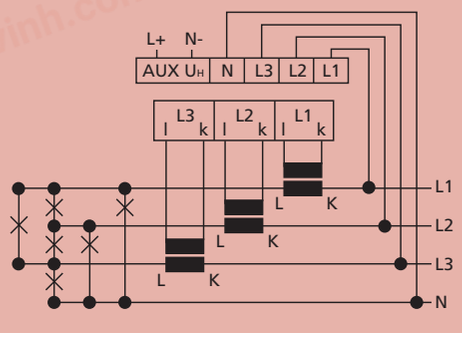

	VOLTAGE				CURRENT		
	L1	L2	L3	N	L1	L2	L3
1ph	✓	-	-	✓	✓	-	-
1ph 3W	✓	✓	-	✓	✓	✓	-
3ph 3W	✓	✓	✓	-	✓	-	✓
3ph 4W	✓	✓	✓	✓	✓	✓	✓
3ph 3W BAL	✓	✓	✓	-	✓	-	-
3ph 4W BAL	✓	-	-	✓	✓	-	-

Unused Voltage terminals are internally connected

DIMENSIONS (mm)

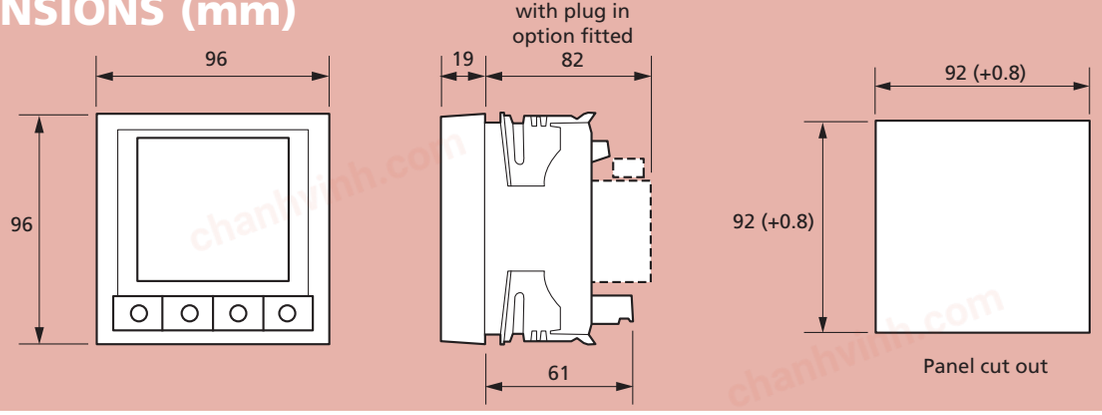

Our policy is one of continuous development and therefore specifications may change without notice.

HOWARD BUTLER LTD
CROWN WORKS, LINCOLN ROAD
WALSALL WS1 2EB ENGLAND
Tel: 01922 640003 Fax: 01922 723626
International Tel: +44 1922 640003 E-mail: sales@hobut.co.uk
Web: www.hobut.co.uk