chanhvinh.com

Think Automation and beyond...

IDEC

HE2G
Grip Switch

IEC60947-5-8 3-POSITION ENABLING SWITCH INSIDE

New

New compact, light-weight grip switch provides a comfortable hold

An HE2B enabling switch, compliant with IEC/EN60947-5-8, is installed inside the HE2G grip switch.

The world's smallest and lightest in its class!



(Monitor Switch)
UL pending


Variation

Select from a wide variety of models

Equipped with different control units for various use.

• HE2G-21SHE-L-L


Emergency Stop Switch
XA1E-BV3U02R



A: Momentary Pushbutton (white) **AB6M-M2PLW**
B: Momentary Pushbutton (white) **AB6M-M2PLW**

• HE2G-21SHE-L-K


Emergency Stop Switch
XA1E-BV3U02R



A: Momentary Pushbutton (white) **AB6M-M2PLW**
B: Key Selector **AS6M-2KT2PA**

•HE2G-21SHE-P-0

Emergency Stop Switch
XA1E-BV3U02R




C: Pilot Light (green) **UP9P-2498G**


Internal connector and solder terminals available

Choice of wire-saving internal connectors or solder terminal connections.

Internal Connector



Solder Terminal



Design

Compact design fits comfortably in the hand

The curved grip and small-size makes operation comfortable. The light-weight (approx. 140g, HE2G-21SH) and compact size is suitable for operators with small hands and for use in tight working environments.



Light operating force ensures worry-free operation

The operating force required to shift from position 1 (contact OFF) to position 2 (contact ON) is reduced by 50% compared with IDEC's HE1G grip switch. Less operating force ensures worry-free operation.


3-position switch with distinctive tactile feedback

Tactile clicking feedback allows easy recognition of switch operation when shifting from position 1 (contact OFF) to position 2 (contact ON).

Safety

Dual enabling contacts ensure a high level of safety

Dual enabling contacts with a separate actuator for each contact is IDEC's original design. This ensures a higher safety level. Disparity detection of category 4 (ISO 13849-1) can be achieved by using this switch with a safety relay module or a safety controller.



Actuators with plastic holders, applicable for HS5 series miniature interlock switches, can be used with the HE2G

Example of automatic and manual operation modes when HS5B/HS5D is used



Operation modes can be changed by inserting/removing the actuator with plastic holder installed to the HE2G into the HS5B/HS5D.
When the actuator is inserted, the operation is in automatic mode. When the actuator is removed, the operation is in manual mode.



chanhvinh.com

Types

Contact Configuration						Rubber Boot Material / Color	Wiring Style	Type No. (Ordering Type No.)
3-Position Switch	Monitor Switch	Additional Control Units (∗1)						
		Emergency Stop Switch	Control Unit (A)	Control Unit (B)	Pilot Switch (green) (C)			
2 contacts	With (1NC)	Without				Silicon Rubber / (Yellow) (∗2)	Solder Terminal	HE2G-21SH
							Internal Connector	HE2G-21SC
						NBR/PVC Polyblend / (Gray) (∗3)	Solder Terminal	HE2G-21SH-1N
							Internal Connector	HE2G-21SC-1N
		With (2NC)	Without		Without	Silicon Rubber / (Yellow) (∗2)	Solder Terminal	HE2G-21SHE
					With		Solder Terminal	HE2G-21SHE-P-0
		Without	Momentary Pushbutton (DPDT)	Momentary Pushbutton (DPDT)	Without		Solder Terminal	HE2G-21SH-L-L
		With (2NC)					Solder Terminal	HE2G-21SHE-L-L
				Key Selector Switch (DPDT)			Internal Connector	HE2G-21SCE-L-L
							Solder Terminal	HE2G-21SHE-L-K
							Internal Connector	HE2G-21SCE-L-K

∗1) Additional control units installed on the HE2G are as follows:
Emergency Stop Switch: XA1E-BV3U02R
Momentary Pushbutton: AB6M-M2PLW
Key Selector Switch: AS6M-2KT2PA Pilot Light: UP9P-2498G

∗2) Silicon rubber: Can be used in general factories. Remains flexible in cold temperatures. Suitable in applications with a wide operating temperature range.

∗3) NBR/PVC polyblend: Oil-proof. Suitable for environments subjected to machine oil and painting robots where silicon rubber cannot be used.

Specifications

Degree of Protection (IEC 60529)		IP67 / 66 (without additional control units) IP65 (with additonal control units)
Conditional Short-circuit Current		50A (250V) (Note)
Direct Opening Force		60N (monitor switch)
Free Fall		1.0m 1 fall (IEC60068-2-32 compliant)
Applicable Wire Size	Internal Connector	0.05 to 0.86 mm² (AWG18 to 30) (AWG22 between switch and connector)
	Solder Terminal	0.5 mm² maximum
Applicable Cable		Multicore cable diameter ø4.5 to 10 mm


Note) Use a 250V/10A fast-blow fuse as a short-circuit protector

Contact Ratings

Rated Insulation Voltage (Ui)			250V (momentary pushbutton and key selector: 125V) / 30V (with pilot light)		
Rated Thermal Current (Ith)			3A (emergency stop switch: 5A)∗		
Rated Voltage (Ue)			30V	125V	250V
Rated Current (Ie) 3-position switch (Terminal No. NO1-C1, NO2-C2)	AC	Resistive Load (AC-12)	—	1A	0.5A
		Inductive Load (AC-15)	—	0.7A	0.5A
	DC	Resistive Load (DC-12)	1A	0.2A	—
		Inductive Load (DC-13)	0.7A	0.1A	—


Note) Minimum applicable load (reference value): 3V AC/DC, 5 mA
(Applicable operation area depends on the operating conditions.)
∗However, operating temperature for internal connectors:
–25ºC min., 40ºC max. 2.5A (12 to 19 poles), 2A (20 to 22 poles)
40ºC min., 50ºC max. 2.5A (8 to12 poles), 2A (13 to 22 poles)
50ºC min., 60ºC max. 2.5A (6, 7 poles), 2A (8 to13 poles), 1.5A (14 to 22 poles)


Operation Characteristics

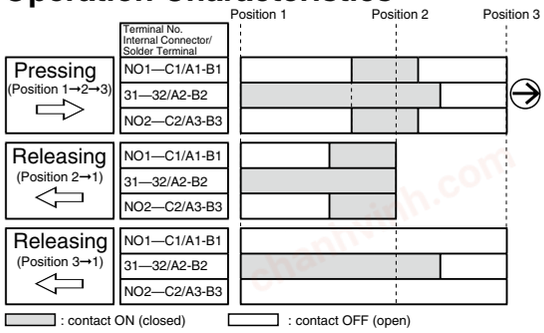

- Terminals NO1-C1/A1-B1, NO2-C2/A3-B3 are outputs of the 3-position enabling switch.
- The above operation characteristics show when the center of the grip switch button is pressed. Because two contacts are designed to operate independently, pressing the edge of the button turns on one contact earlier than the other contact, causing a delay in operation To avoid this, always press the center of the button.


Additional Control Unit Layout





Contact Arrangement (Internal Connector)


•Internal Connector Pin No.



3-position switch /control unit side connector:
Tyco Electronics D-1200D Series
Tab housing: 1-1903130-2 (4-pin connector)
1-1903130-3 (6-pin connector)
Tab contact: 19303116-2

- Emergency stop switch
- 3-position switch
- Momentary pushbutton
- Key selector switch

•Terminal Arrangement (TOP VIEW)



- Emergency stop switch
- Momentary pushbutton
- Key selector switch


6-Pin Connector Allotment Table

• Internal Connector Pin No.	• Momentary pushbutton • Key selector switch
A1	C2
A2	NO2
A3	NC2
B1	C1
B2	NO1
B3	NC1

- For signal of the 3-position switch, see “Operation Characteristics”.
- For solder terminal type terminal arrangement of each control unit, see each catalog.

Dimensions

•HE2G-21SH/HE2G-21SC

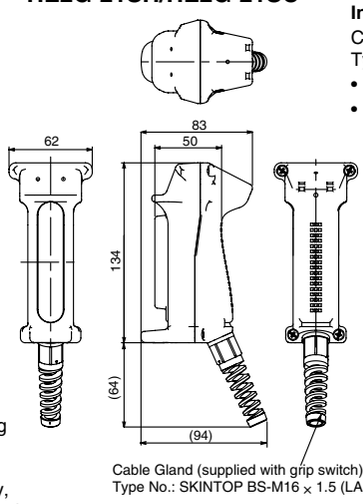

Internal Connector
Cable side connector:
Tyco Electronics D-1200D Series
- Receptacle: 1-1827864-☐
- Receptacle contact
  1827586-2: AWG28 to 30 (Hand tool: 1762952-1)
  1827587-2: AWG22 to 28 (Hand tool: 1762846-1)
  1827588-2: AWG22 to 28 (Hand tool: 1762950-1)
  1827589-2: AWG18 to 22 (Hand tool: 1762625-1)

Specify 2 or 3 in place of ☐.
2: 4-pin connector
3: 6-pin connector
The customer needs to purchase the connector separately.

All dimensions in mm.

Specifications and other descriptions in this catalog are subject to change without notice.

IDEC CORPORATION
7-31, Nishi-Miyahara 1-Chome, Yodogawa-ku, Osaka 532-8550, Japan
Tel: +81-6-6398-2571, Fax: +81-6-6392-9731
E-mail: marketing@idec.co.jp

IDEC CORPORATION (USA)
IDEC CANADA LIMITED
IDEC AUSTRALIA PTY. LTD.
IDEC ELECTRONICS LIMITED
IDEC ELEKTROTECHNIK GmbH
IDEC (SHANGHAI) CORPORATION
IDEC (BEIJING) CORPORATION
IDEC (SHENZHEN) CORPORATION
IDEC IZUMI (H.K.) CO., LTD.
IDEC TAIWAN CORPORATION
IDEC IZUMI ASIA PTE. LTD.

www.idec.com