
chanhvinh.com


Silicon Schottky Diodes

- For mixer applications in the VHF / UHF range
- For high-speed switching applications
- Pb-free (RoHS compliant) package


RoHS

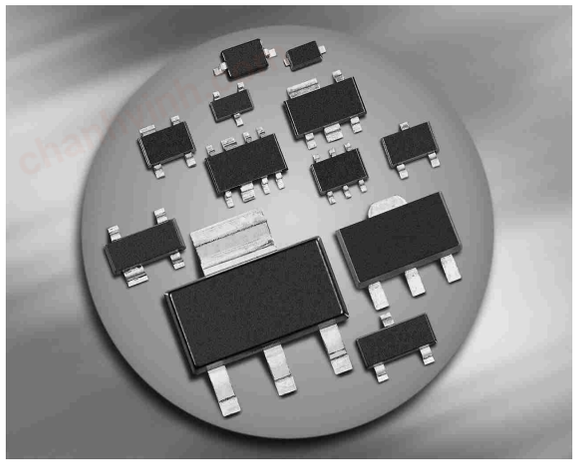


BAT68




BAT68-04
BAT68-04W




BAT68-06
BAT68-06W



BAT68-07W



BAT68-08S



ESD (**E**lectro**s**tatic **d**ischarge) sensitive device, observe handling precaution!

Type	Package	Configuration	L_S(nH)	Marking
BAT68	SOT23	single	1.8	83s
BAT68-04	SOT23	series	1.8	84s
BAT68-04W	SOT323	series	1.4	84s
BAT68-06	SOT23	common anode	1.8	86s
BAT68-06W	SOT323	common anode	1.4	86s
BAT68-07W	SOT343	parallel pair	1.6	87s
BAT68-08S	SOT363	parallel triple	1.4	83s

chanhvinh.com

Maximum Ratings at T_A = 25°C, unless otherwise specified

Parameter	Symbol	Value	Unit
Diode reverse voltage	V_R	8	V
Forward current	I_F	130	mA
Total power dissipation	P_{tot}		mW
BAT68, $T_S \leq 77$°C		150	
BAT68-04, BAT68-06, $T_S \leq 61$°C		150	
BAT68-04W/-06W/-08S, $T_S \leq 92$°C		150	
BAT68-07W, $T_S \leq 89$°C		150	
Junction temperature	T_j	150	°C
Storage temperature	T_{stg}	-55 ... 150	

Thermal Resistance

Parameter	Symbol	Value	Unit
Junction - soldering point[1)]	R_{thJS}		K/W
BAT68		≤ 490	
BAT68-04, BAT68-06		≤ 590	
BAT68-04W-BAT68-06W, BAT68-08S		≤ 390	
BAT68-07W		≤ 410	

Electrical Characteristics at T_A = 25°C, unless otherwise specified

Parameter	Symbol	Values			Unit
		min.	typ.	max.	
DC Characteristics					
Breakdown voltage	$V_{(BR)}$	8	-	-	V
$I_{(BR)}$ = 10 µA					
Reverse current	I_R				µA
V_R = 1 V		-	-	0.1	
V_R = 1 V, T_A = 60 °C		-	-	1.2	
Forward voltage	V_F				mV
I_F = 1 mA		-	318	340	
I_F = 10 mA		340	390	500	

[1]For calculation of R_{thJA} please refer to Application Note Thermal Resistance

chanhvinh.com


Electrical Characteristics at T_A = 25°C, unless otherwise specified

Parameter	Symbol	Values			Unit
		min.	typ.	max.	
AC Characteristics					
Diode capacitance V_R = 0 , f = 1 MHz	C_T	-	-	1	pF
Differential forward resistance I_F = 5 mA, f = 10 kHz	R_F	-	-	10	Ω

chanhvinh.com


Diode capacitance $C_T = f(V_R)$

f = 1MHz

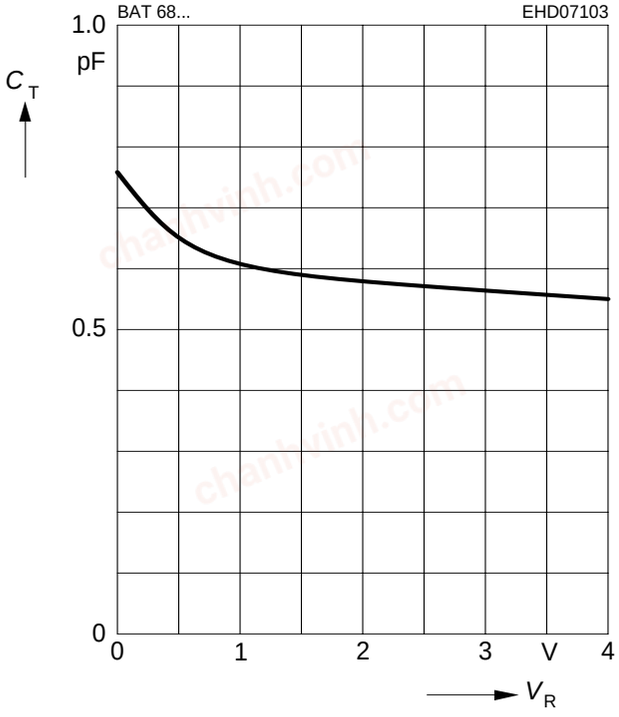


Differential forward resistance $r_f = f(I_F)$

f = 10kHz

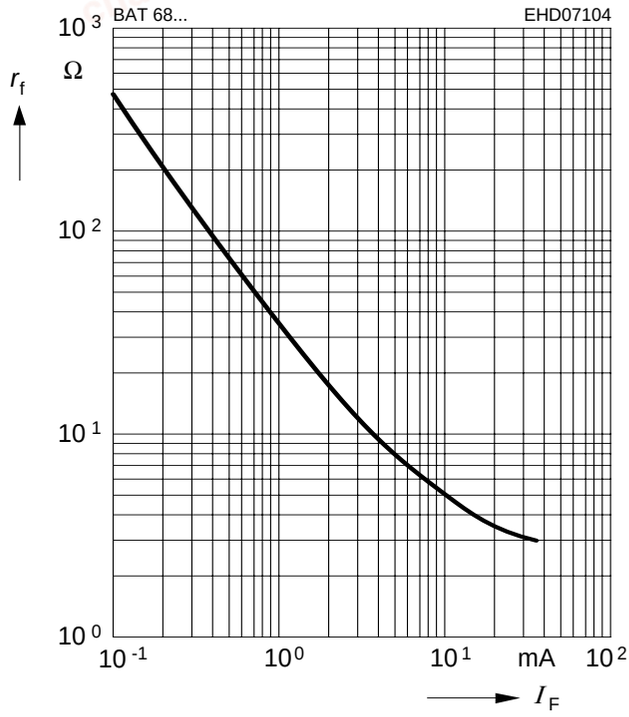


Reverse current $I_R = f(V_R)$

T_A = Parameter

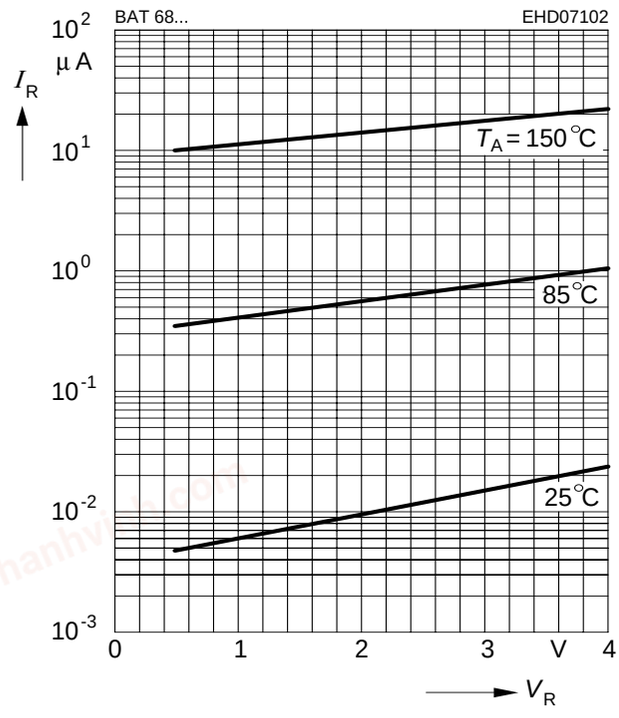


Forward current $I_F = f(V_F)$

T_A = Parameter

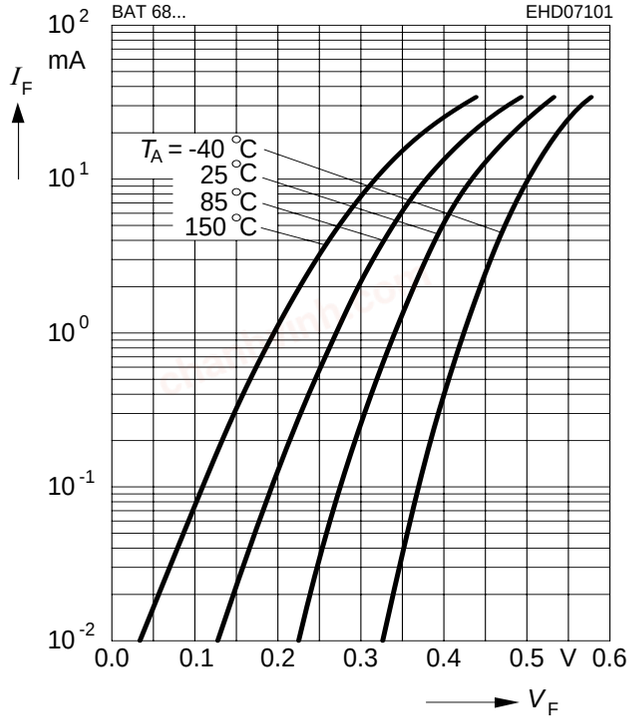


chanhvinh.com


Forward current $I_F = f(T_S)$
BAT68

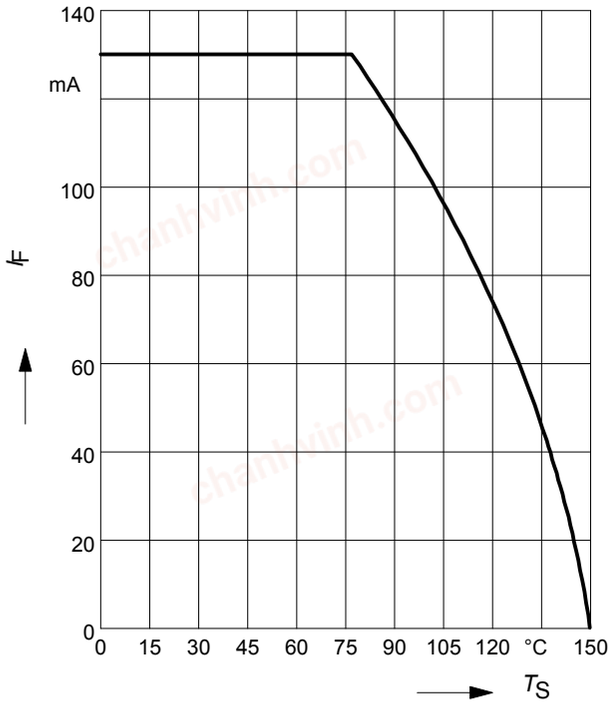


Forward current $I_F = f(T_S)$
BAT68-04, BAT68-06

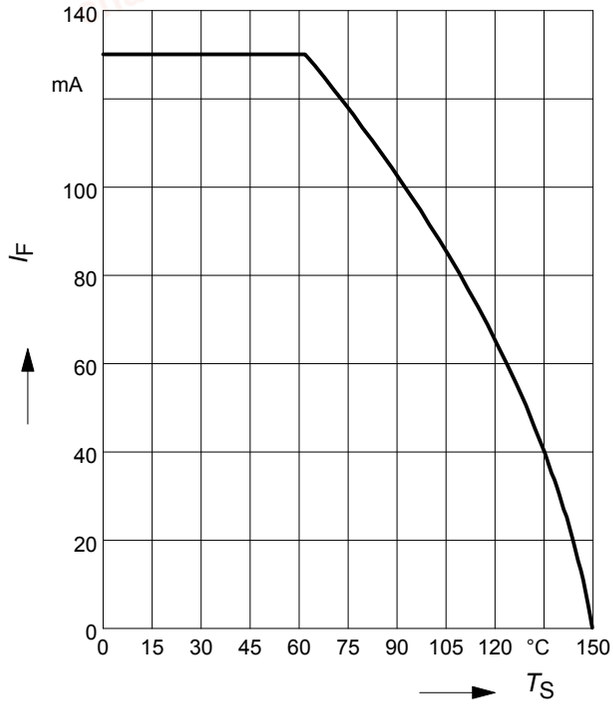

Forward current $I_F = f(T_S)$
BAT68-04W, BAT68-06W, BAT68-08S

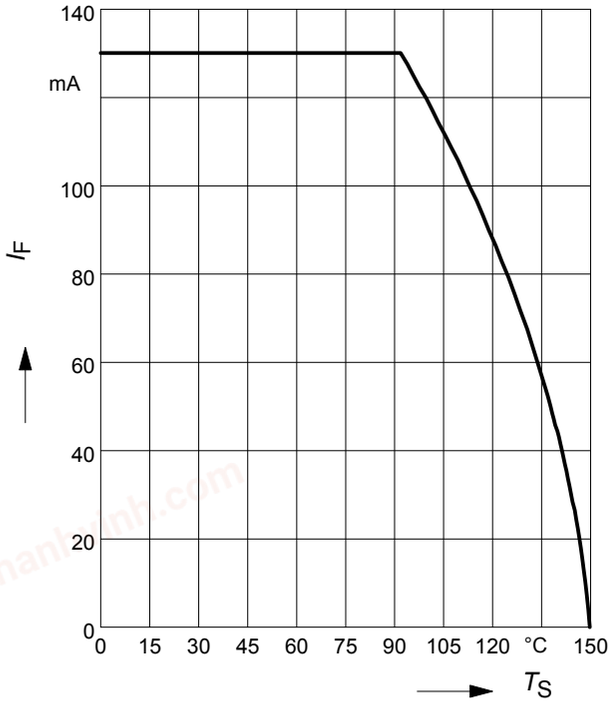


Forward current $I_F = f(T_S)$
BAT68-07W

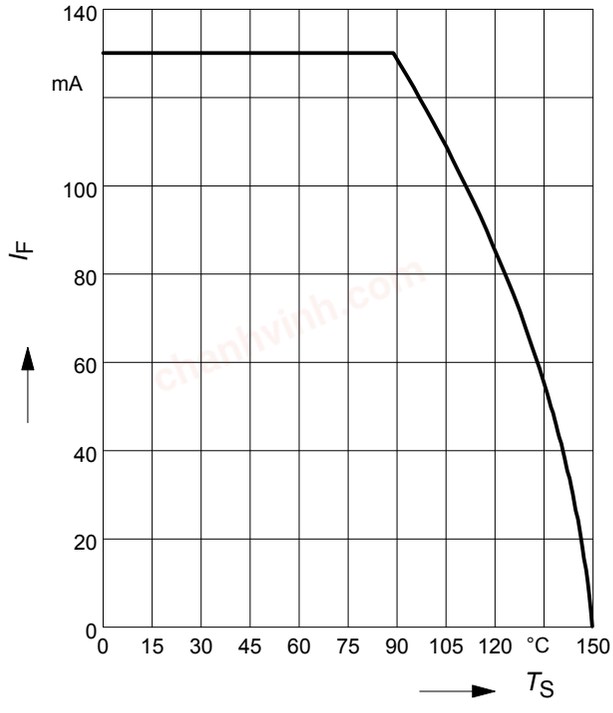

chanhvinh.com

Permissible Puls Load $R_{thJS} = f(t_p)$


BAT68-04W, BAT68-06W

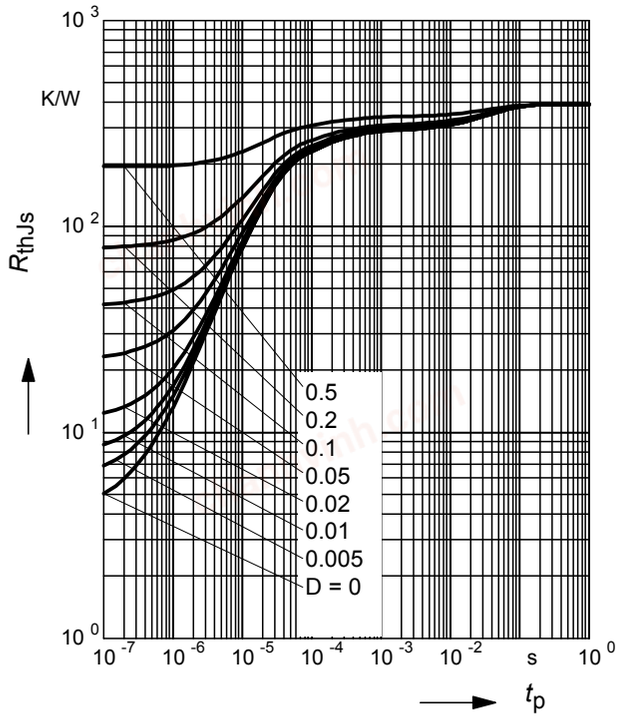

Permissible Pulse Load


$I_{Fmax}/I_{FDC} = f(t_p)$

BAT68-04W, BAT68-06W

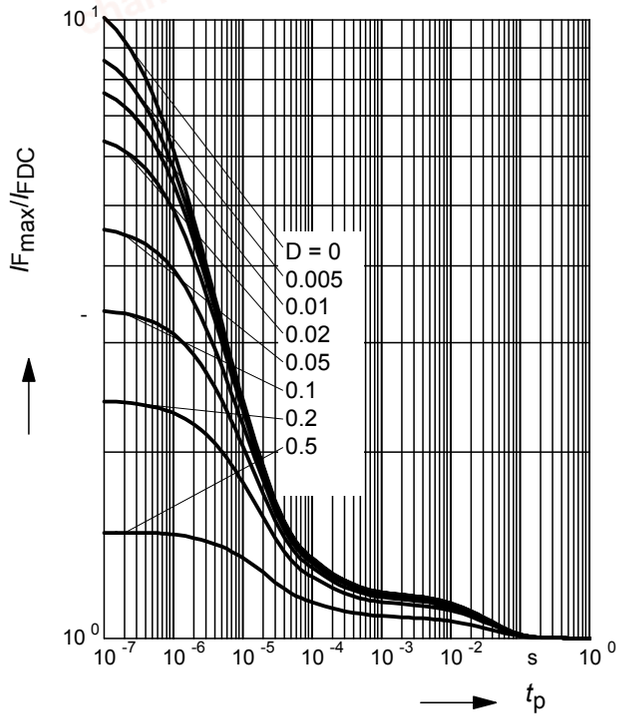

Permissible Puls Load $R_{thJS} = f(t_p)$


BAT68-07W

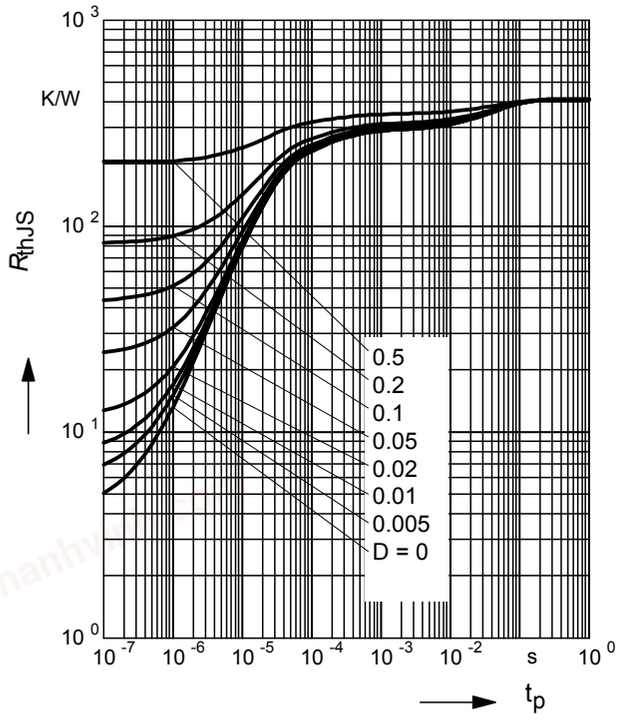

Permissible Pulse Load

$I_{Fmax}/I_{FDC} = f(t_p)$

BAT68-07W

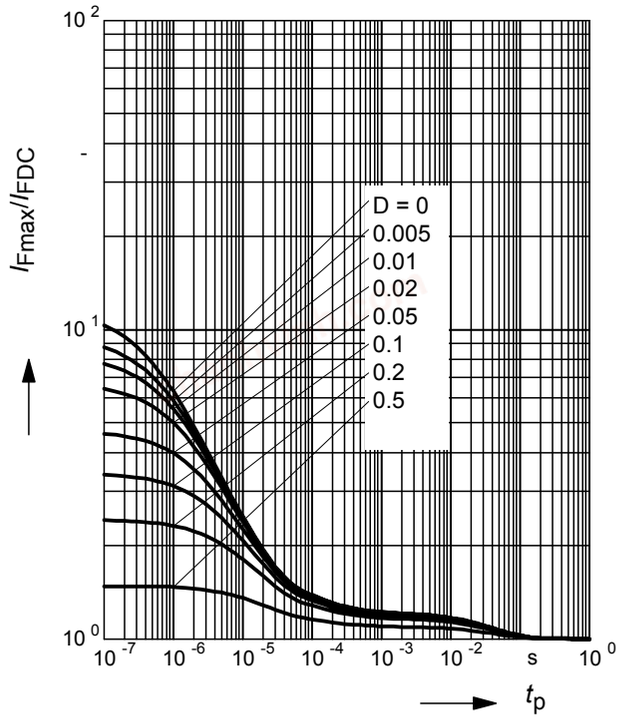


chanhvinh.com


Rectifier voltage $V_{out} = f\ (V_{in})$

f = 900MHz

R_L = Parameter in kΩ

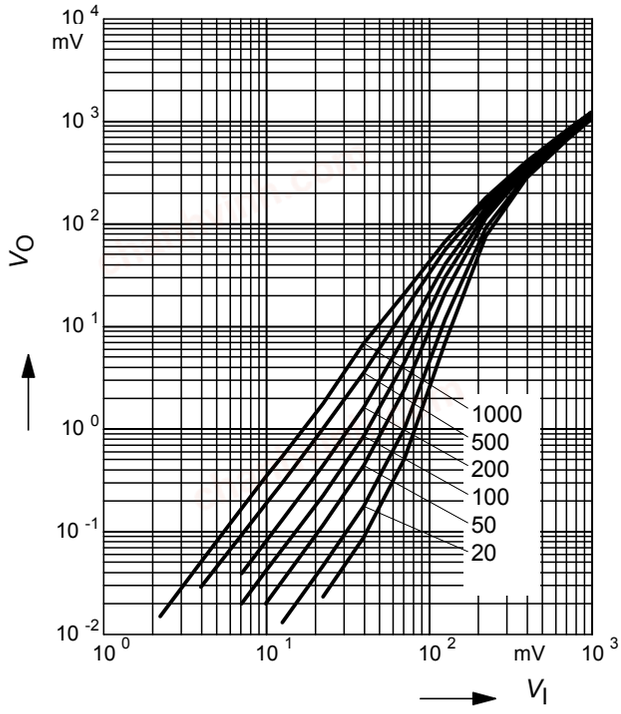


Testcircuit

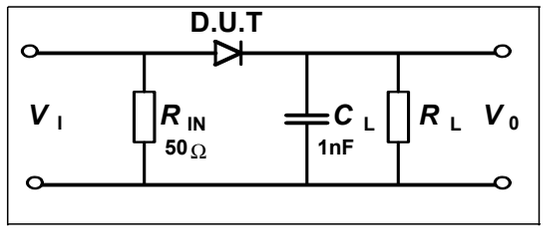


chanhvinh.com

Package Outline

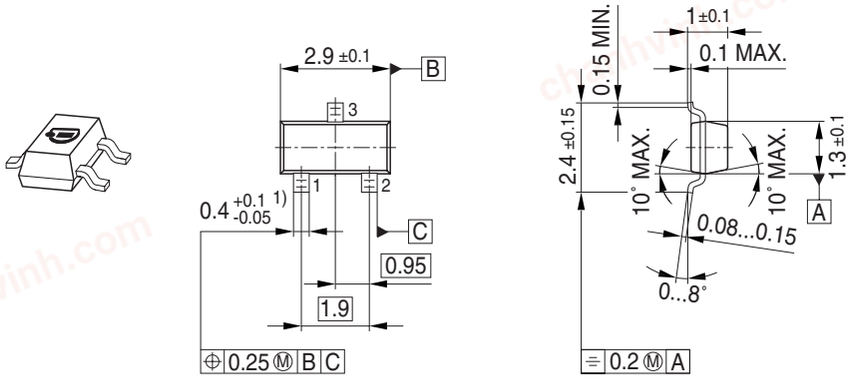


1) Lead width can be 0.6 max. in dambar area

Foot Print




Marking Layout (Example)

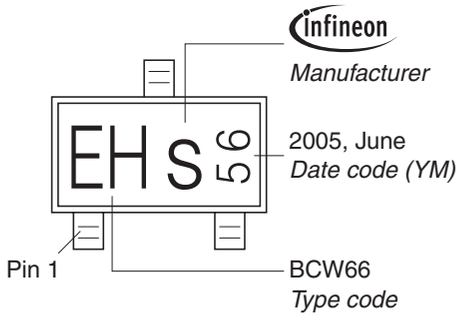

Standard Packing


Reel ø180 mm = 3.000 Pieces/Reel
Reel ø330 mm = 10.000 Pieces/Reel

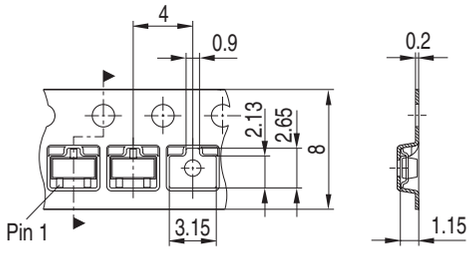


chanhvinh.com

Package Outline




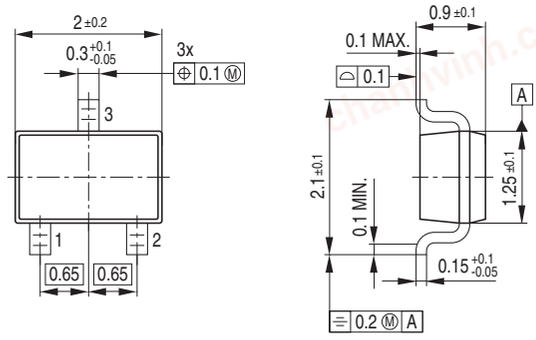

Foot Print




Marking Layout (Example)

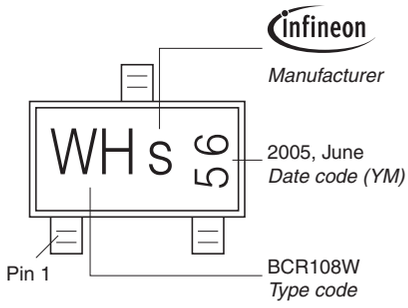

Standard Packing


Reel ø180 mm = 3.000 Pieces/Reel
Reel ø330 mm = 10.000 Pieces/Reel

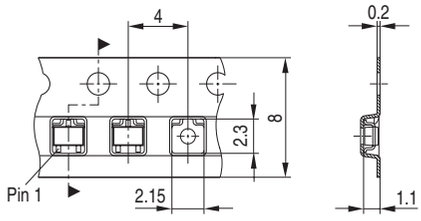


chanhvinh.com


Package Outline








Foot Print




Marking Layout (Example)

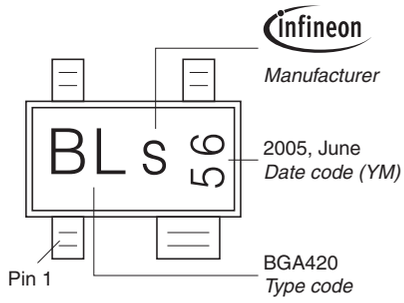


Standard Packing

Reel ø180 mm = 3.000 Pieces/Reel
Reel ø330 mm = 10.000 Pieces/Reel

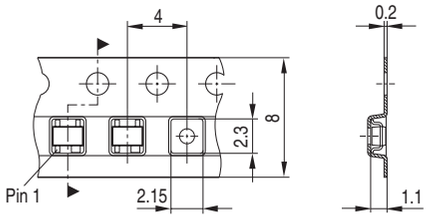


chanhvinh.com

Package Outline

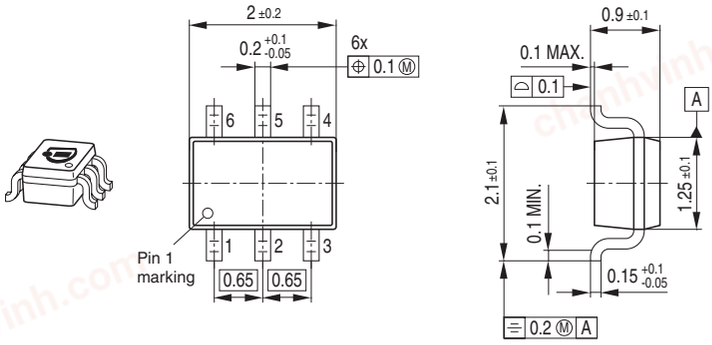


Foot Print



Marking Layout (Example)


Small variations in positioning of
Date code, Type code and Manufacture are possible.

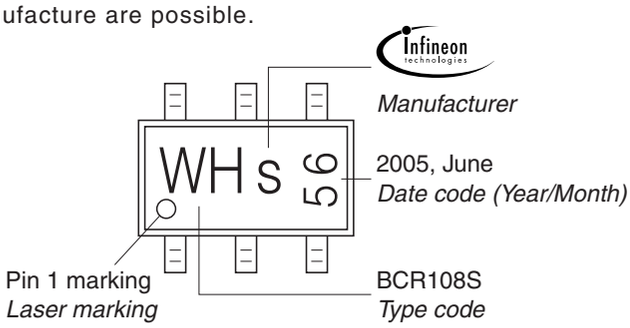

Standard Packing

Reel ø180 mm = 3.000 Pieces/Reel
Reel ø330 mm = 10.000 Pieces/Reel

For symmetric types no defined Pin 1 orientation in reel.

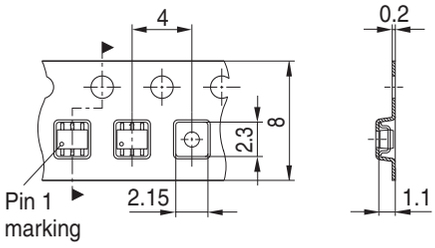

chanhvinh.com

Edition 2009-11-16

Published by
Infineon Technologies AG
81726 Munich, Germany

© 2009 Infineon Technologies AG
All Rights Reserved.

Legal Disclaimer

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics. With respect to any examples or hints given herein, any typical values stated herein and/or any information regarding the application of the device, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation, warranties of non-infringement of intellectual property rights of any third party.

Information

For further information on technology, delivery terms and conditions and prices, please contact the nearest Infineon Technologies Office (<www.infineon.com>).

Warnings

Due to technical requirements, components may contain dangerous substances. For information on the types in question, please contact the nearest Infineon Technologies Office.
Infineon Technologies components may be used in life-support devices or systems only with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support device or system or to affect the safety or effectiveness of that device or system. Life support devices or systems are intended to be implanted in the human body or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.