chanhvinh.com

BFP640

NPN Silicon Germanium RF Transistor



- High gain low noise RF transistor
- Provides outstanding performance for a wide range of wireless applications
- Ideal for CDMA and WLAN applications
- Outstanding noise figure F = 0.65 dB at 1.8 GHz
  Outstanding noise figure F = 1.2 dB at 6 GHz
- High maximum stable gain
  G_{ms} = 24 dB at 1.8 GHz
- Gold metallization for extra high reliability
- 70 GHz f_T-Silicon Germanium technology
- Pb-free (RoHS compliant) package[1)]
- Qualified according AEC Q101

AEC Qualified RoHS

ESD (**E**lectro**s**tatic **d**ischarge) sensitive device, observe handling precaution!

Type	Marking	Pin Configuration						Package
BFP640	R4s	1=B	2=E	3=C	4=E	-	-	SOT343

[1]Pb-containing package may be available upon special request

2007-05-29

chanhvinh.com

Maximum Ratings

Parameter	Symbol	Value	Unit
Collector-emitter voltage	V_{CEO}		V
T_A > 0 °C		4	
T_A ≤ 0 °C		3.7	
Collector-emitter voltage	V_{CES}	13	
Collector-base voltage	V_{CBO}	13	
Emitter-base voltage	V_{EBO}	1.2	
Collector current	I_C	50	mA
Base current	I_B	3	
Total power dissipation[1)] T_S ≤ 90°C	P_{tot}	200	mW
Junction temperature	T_j	150	°C
Ambient temperature	T_A	-65 ... 150	
Storage temperature	T_{stg}	-65 ... 150	

Thermal Resistance

Parameter	Symbol	Value	Unit
Junction - soldering point[2)]	R_{thJS}	≤ 300	K/W

Electrical Characteristics at T_A = 25°C, unless otherwise specified

Parameter	Symbol	Values			Unit
		min.	typ.	max.	
DC Characteristics					
Collector-emitter breakdown voltage I_C = 1 mA, I_B = 0	$V_{(BR)CEO}$	4	4.5	-	V
Collector-emitter cutoff current V_{CE} = 13 V, V_{BE} = 0	I_{CES}	-	-	30	µA
Collector-base cutoff current V_{CB} = 5 V, I_E = 0	I_{CBO}	-	-	100	nA
Emitter-base cutoff current V_{EB} = 0.5 V, I_C = 0	I_{EBO}	-	-	3	µA
DC current gain I_C = 30 mA, V_{CE} = 3 V, pulse measured	h_{FE}	110	180	270	-

[1] T_S is measured on the collector lead at the soldering point to the pcb

[2] For calculation of R_{thJA} please refer to Application Note Thermal Resistance

chanhvinh.com

Electrical Characteristics at T_A = 25°C, unless otherwise specified

Parameter	Symbol	Values			Unit
		min.	typ.	max.	
AC Characteristics (verified by random sampling)					
Transition frequency I_C = 30 mA, V_{CE} = 3 V, f = 1 GHz	f_T	30	40	-	GHz
Collector-base capacitance V_{CB} = 3 V, f = 1 MHz, V_{BE} = 0 , emitter grounded	C_{cb}	-	0.09	0.2	pF
Collector emitter capacitance V_{CE} = 3 V, f = 1 MHz, V_{BE} = 0 , base grounded	C_{ce}	-	0.23	-	
Emitter-base capacitance V_{EB} = 0.5 V, f = 1 MHz, V_{CB} = 0 , collector grounded	C_{eb}	-	0.5	-	
Noise figure I_C = 5 mA, V_{CE} = 3 V, f = 1.8 GHz, $Z_S = Z_{Sopt}$ I_C = 5 mA, V_{CE} = 3 V, f = 6 GHz, $Z_S = Z_{Sopt}$	F	 - -	 0.65 1.2	 - -	dB
Power gain, maximum stable[1)] I_C = 30 mA, V_{CE} = 3 V, $Z_S = Z_{Sopt}$, $Z_L = Z_{Lopt}$, f = 1.8 GHz	G_{ms}	-	24	-	dB
Power gain, maximum available[1)] I_C = 30 mA, V_{CE} = 3 V, $Z_S = Z_{Sopt}$, $Z_L = Z_{Lopt}$, f = 6 GHz	G_{ma}	-	12.5	-	dB
Transducer gain I_C = 30 mA, V_{CE} = 3 V, $Z_S = Z_L$ = 50 Ω, f = 1.8 GHz f = 6 GHz	$\lvert S_{21e}\rvert^2$	 - -	 21 10.5	 - -	dB
Third order intercept point at output[2)] V_{CE} = 3 V, I_C = 30 mA, Z_S=Z_L=50 Ω, f = 1.8 GHz	IP_3	-	26.5	-	dBm
1dB Compression point at output I_C = 30 mA, V_{CE} = 3 V, Z_S=Z_L=50 Ω, f = 1.8 GHz	P_{-1dB}	-	13	-	

[1] $G_{ma} = \lvert S_{21e} / S_{12e}\rvert (k-(k^2-1)^{1/2})$, $G_{ms} = \lvert S_{21e} / S_{12e}\rvert$

[2] IP3 value depends on termination of all intermodulation frequency components.
Termination used for this measurement is 50Ω from 0.1 MHz to 6 GHz

chanhvinh.com


SPICE Parameter (Gummel-Poon Model, Berkley-SPICE 2G.6 Syntax):

Transistor Chip Data:

IS =	0.22	fA	BF =	450	-	NF =	1.025	-
VAF =	1000	V	IKF =	0.15	A	ISE =	21	fA
NE =	2	-	BR =	55	-	NR =	1	-
VAR =	2	V	IKR =	3.8	mA	ISC =	400	fA
NC =	1.8	-	RB =	3.129	Ω	IRB =	1.522	mA
RBM =	2.707	Ω	RE =	0.6	-	RC =	3.061	Ω
CJE =	227.6	fF	VJE =	0.8	V	MJE =	0.3	-
TF =	1.8	ps	XTF =	10	-	VTF =	1.5	V
ITF =	0.4	A	PTF =	0	deg	CJC =	67.43	fF
VJC =	0.6	V	MJC =	0.5	-	XCJC =	1	-
TR =	0.2	ns	CJS =	93.4	fF	VJS =	0.6	V
MJS =	0.27	-	XTB =	-1.42	-	EG =	1.078	eV
XTI =	3	-	FC =	0.8		TNOM	298	K
AF =	2	-	KF =	7.291E-11				
TITF1	-0.0065	-	TITF2	1.0E-5				

All parameters are ready to use, no scalling is necessary.

Package Equivalent Circuit:

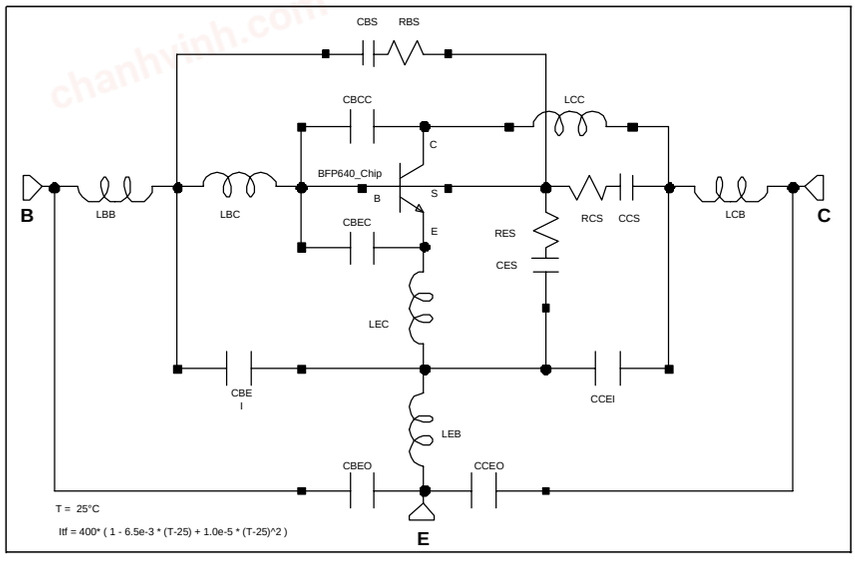

For examples and ready to use parameters please contact your local Infineon Technologies distributor or sales office to obtain a Infineon Technologies CD-ROM or see Internet: http://www.infineon.com


LBC =	120	pH
LCC =	120	pH
LEC =	20	pH
LBB =	696.2	pH
LCB =	682.4	pH
LEB =	230.6	pH
CBEC =	98.4	fF
CBCC =	55.9	fF
CES =	180	fF
CBS =	79	fF
CCS =	75	fF
CCEO =	131.2	fF
CBEO =	102.5	fF
CCEI =	112.6	fF
CBEI =	180.4	fF
RBS =	1200	Ω
RCS =	1200	Ω
RES =	300	Ω

Valid up to 6GHz


2007-05-29

chanhvinh.com

Total power dissipation $P_{tot} = f(T_S)$

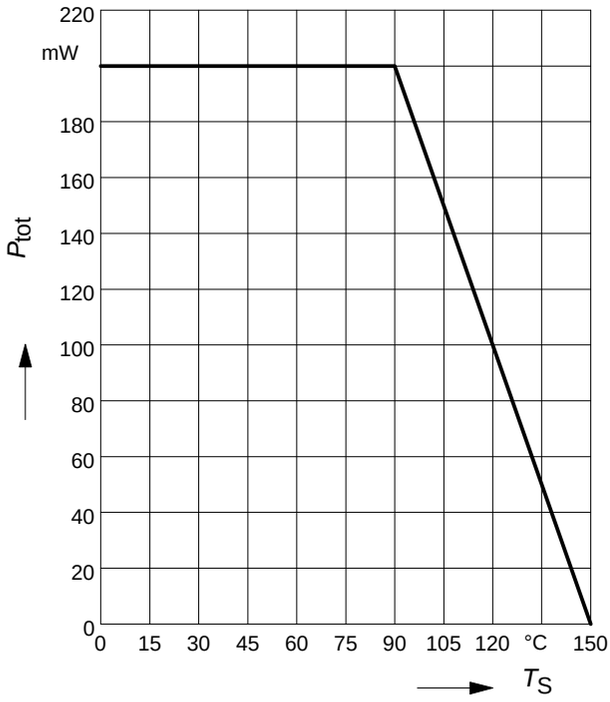


Permissible Pulse Load $R_{thJS} = f(t_p)$

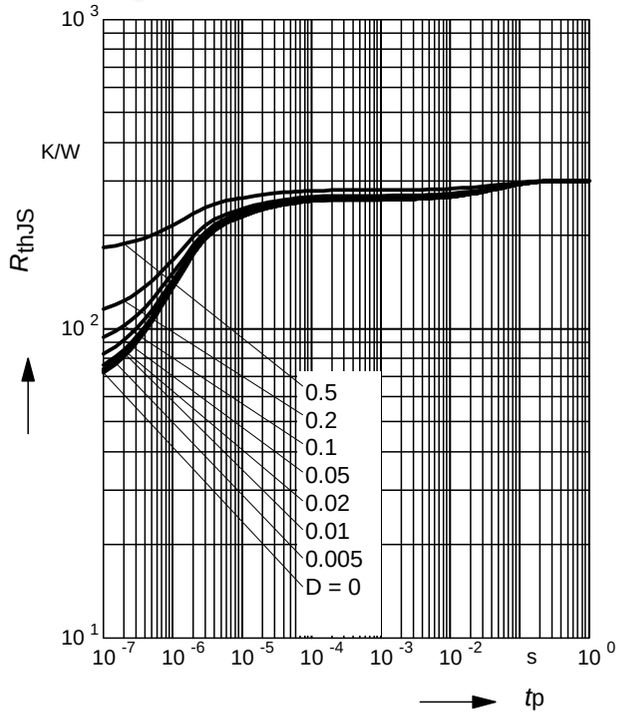


Permissible Pulse Load

$P_{totmax}/P_{totDC} = f(t_p)$

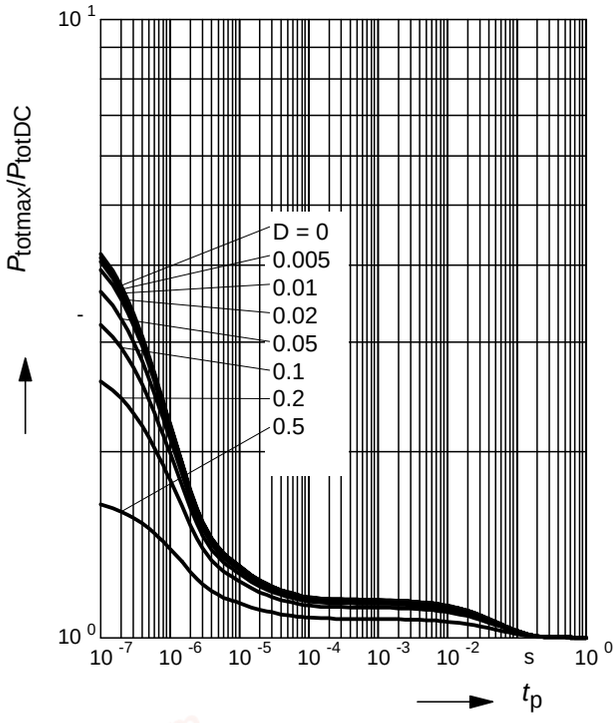

Collector-base capacitance $C_{cb} = f(V_{CB})$

f = 1MHz

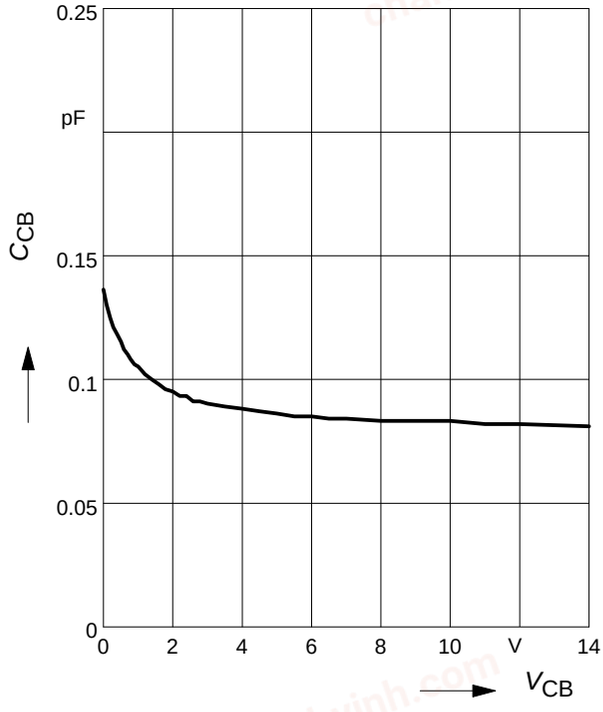


2007-05-29

chanhvinh.com

Third order Intercept Point $IP_3=f(I_C)$

(Output, $Z_S=Z_L=50\Omega$)


V_{CE} = parameter, f = 1.8 GHz

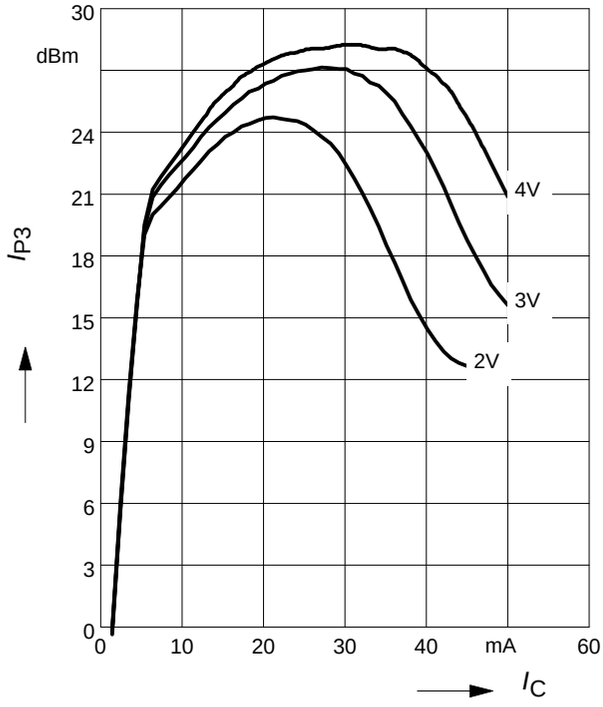

Transition frequency $f_T= f(I_C)$

f = 1GHz


V_{CE} = parameter

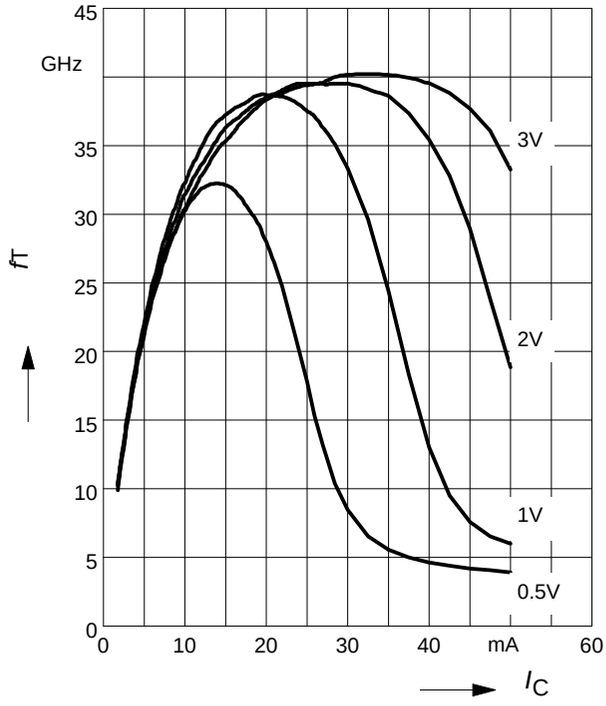

Power gain G_{ma}, $G_{ms} = f(I_C)$

V_{CE} = 3V


f = parameter

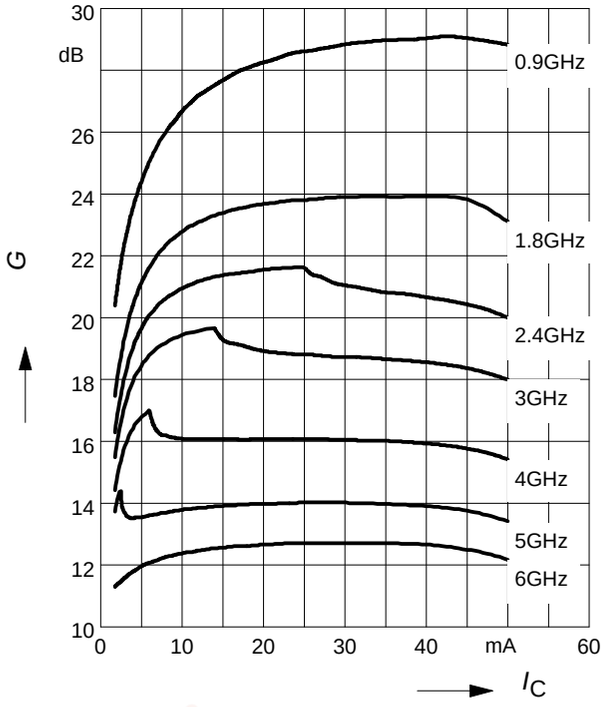

Power Gain G_{ma}, G_{ms} = $f(f)$,

$|S_{21}|^2 = f$ (f)

V_{CE} = 3V, I_C = 30mA

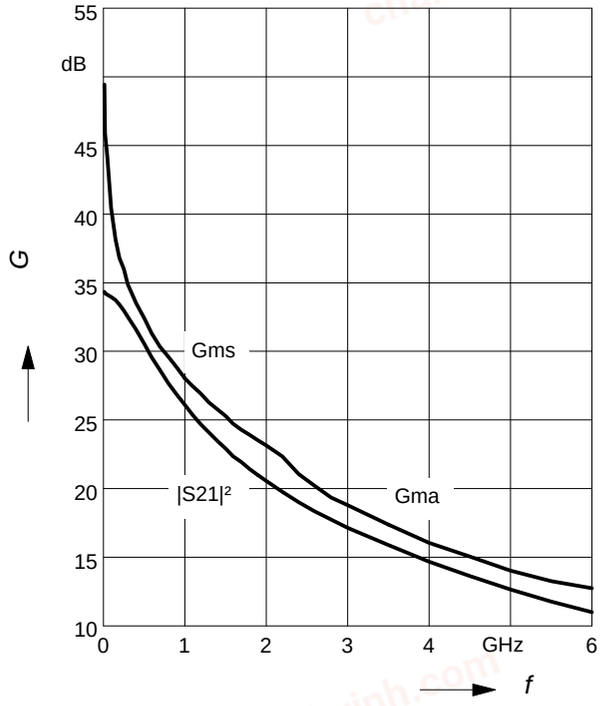


chanhvinh.com

Power gain G_{ma}, $G_{ms} = f\ (V_{CE})$


I_C = 30mA

f = parameter

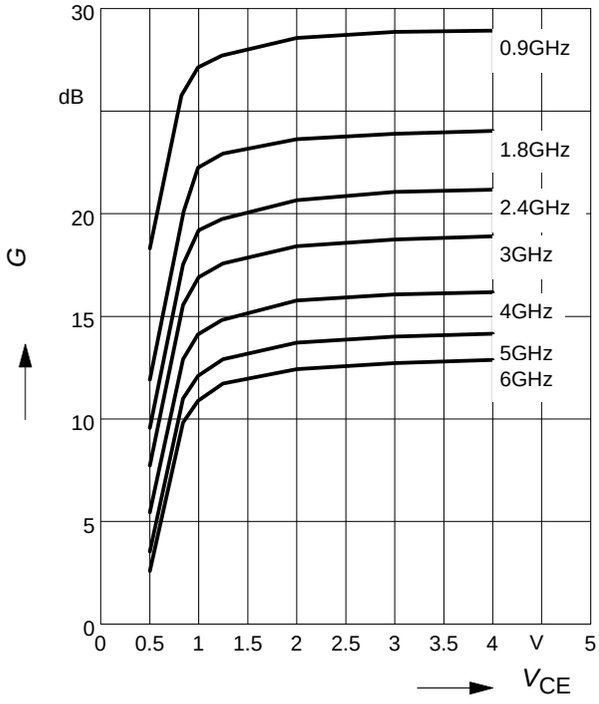


Noise figure $F = f(I_C)$

V_{CE} = 3V, $Z_S = Z_{Sopt}$

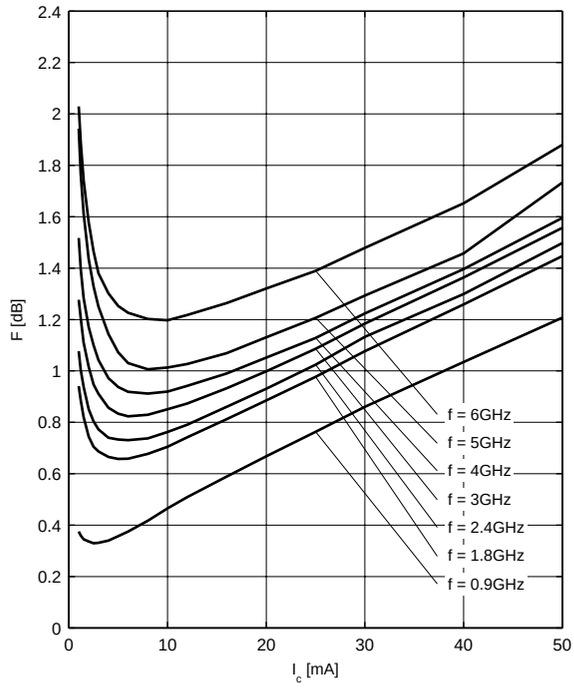


Noise figure $F = f(I_C)$

V_{CE} = 3V, f = 1.8 GHz

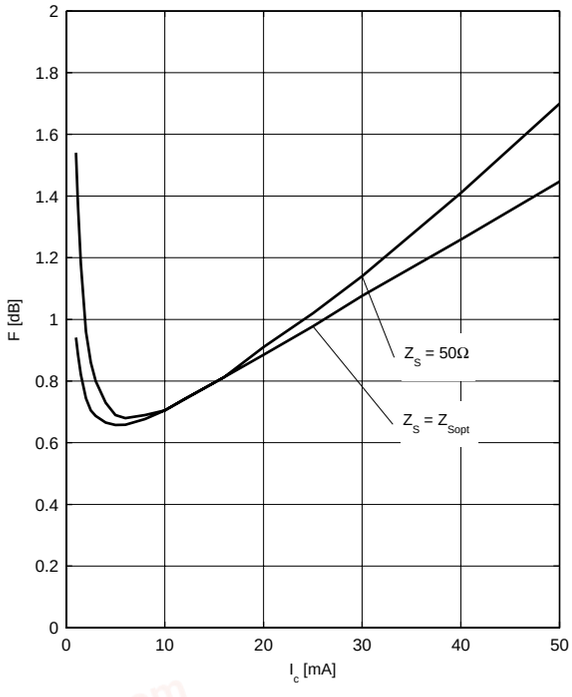


Noise figure $F = f(f)$

V_{CE} = 3V, $Z_S = Z_{Sopt}$

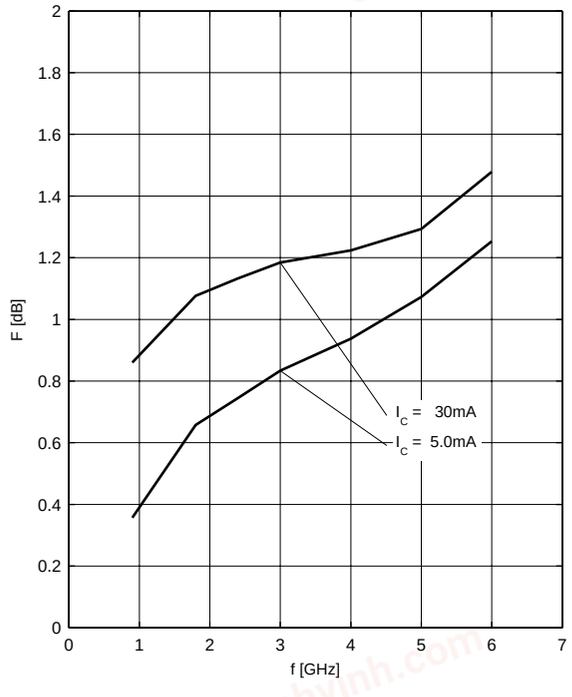

chanhvinh.com


Source impedance for min.
noise figure vs. frequency
V_{CE} = 3 V, I_C = 5 mA/ 30 mA

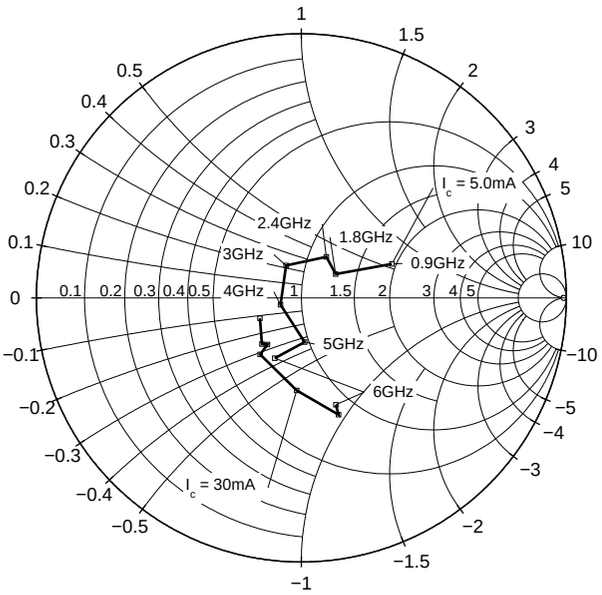


chanhvinh.com

Package Outline




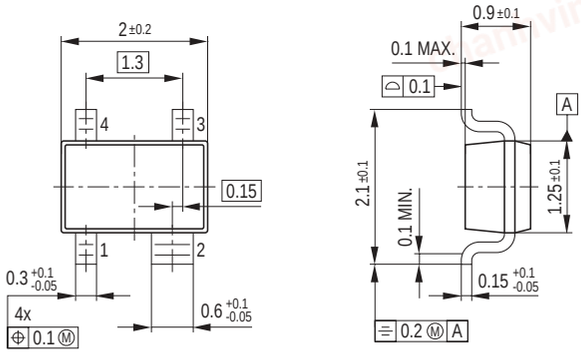

Foot Print




Marking Layout (Example)

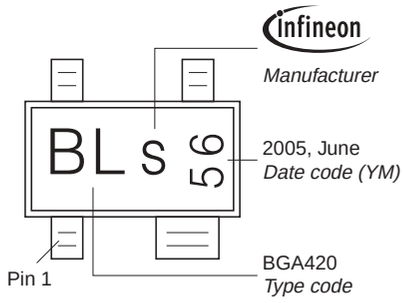

Standard Packing

Reel ø180 mm = 3.000 Pieces/Reel
Reel ø330 mm = 10.000 Pieces/Reel

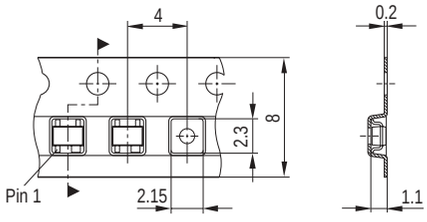

2007-05-29

chanhvinh.com

Edition 2006-02-01
Published by
Infineon Technologies AG
81726 München, Germany
© Infineon Technologies AG 2007.
All Rights Reserved.

Attention please!

The information given in this dokument shall in no event be regarded as a guarantee of conditions or characteristics (“Beschaffenheitsgarantie”). With respect to any examples or hints given herein, any typical values stated herein and/or any information regarding the application of the device, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation warranties of non-infringement of intellectual property rights of any third party.

Information

For further information on technology, delivery terms and conditions and prices please contact your nearest Infineon Technologies Office (**www.infineon.com**).

Warnings

Due to technical requirements components may contain dangerous substances. For information on the types in question please contact your nearest Infineon Technologies Office.
Infineon Technologies Components may only be used in life-support devices or systems with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support device or system, or to affect the safety or effectiveness of that device or system.
Life support devices or systems are intended to be implanted in the human body, or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.