chanhvinh.com

BFP650

High linearity wideband silicon NPN RF bipolar transistor

Order now · Technical documents · Simulation · Support

Product description

The BFP650 is a RF bipolar transistor based on SiGe:C technology that is part of Infineon's established sixth generation transistor family. Its transition frequency f_T of 42 GHz and high linearity characteristics at low currents make the device suitable for energy efficiency designs at frequency as high as 5 GHz. It remains cost competitive without compromising on ease of use.



Feature list

- Minimum noise figure NF_{min} = 1 dB at 2.4 GHz, 3 V, 30 mA
- High gain G_{ma} = 17.5 dB at 2.4 GHz, 3 V, 70 mA
- OIP_3 = 30 dBm at 2.4 GHz, 3 V, 70 mA

Product validation

Qualified for industrial applications according to the relevant tests of JEDEC47/20/22.

Potential applications

- Low noise, high linearity amplifiers in SDARS receivers
- Low noise, high linearity amplifiers for ISM band applications
- Low noise, high linearity amplifiers for multimedia applications such as CATV

Device information

Table 1 Part information

Product name / Ordering code	Package	Pin configuration				Marking	Pieces / Reel
BFP650 / BFP650H6327XTSA1	SOT343	1 = B	2 = E	3 = C	4 = E	R5s	3000

***Attention*: ESD (Electrostatic discharge) sensitive device, observe handling precautions**

chanhvinh.com

Table of contents

Product description . . . 1
Feature list . . . 1
Product validation . . . 1
Potential applications . . . 1
Device information . . . 1
Table of contents . . . 2
1 Absolute maximum ratings . . . 3
2 Thermal characteristics . . . 4
3 Electrical characteristics . . . 5
3.1 DC characteristics . . . 5
3.2 General AC characteristics . . . 5
3.3 Frequency dependent AC characteristics . . . 6
3.4 Characteristic DC diagrams . . . 10
3.5 Characteristic AC diagrams . . . 13
4 Package information SOT343 . . . 20
Revision history . . . 21
Disclaimer . . . 22

chanhvinh.com

1 Absolute maximum ratings

Table 2 Absolute maximum ratings at T_A = 25 °C (unless otherwise specified)

Parameter	Symbol	Values		Unit	Note or test condition
		Min.	Max.		
Collector emitter voltage	V_{CEO}	–	4.0	V	Open base
			3.7		T_A = -55 °C, open base
Collector emitter voltage	V_{CES}		13		E-B short circuited
Collector base voltage	V_{CBO}		13		Open emitter
Emitter base voltage	V_{EBO}		1.2		Open collector
Base current	I_B		10	mA	–
Collector current	I_C		150		
Total power dissipation [1)]	P_{tot}		500	mW	$T_S \leq 78$ °C
Junction temperature	T_J		150	°C	–
Storage temperature	T_{Stg}	-55			

***Attention**: Stresses above the max. values listed here may cause permanent damage to the device. Exposure to absolute maximum rating conditions for extended periods may affect device reliability. Exceeding only one of these values may cause irreversible damage to the integrated circuit.*

1 T_S is the soldering point temperature. T_S is measured on the emitter lead at the soldering point of the PCB.

chanhvinh.com

2 Thermal characteristics

Table 3 Thermal resistance

Parameter	Symbol	Values			Unit	Note or test condition
		Min.	Typ.	Max.		
Junction - soldering point	R_{thJS}	–	140	–	K/W	–

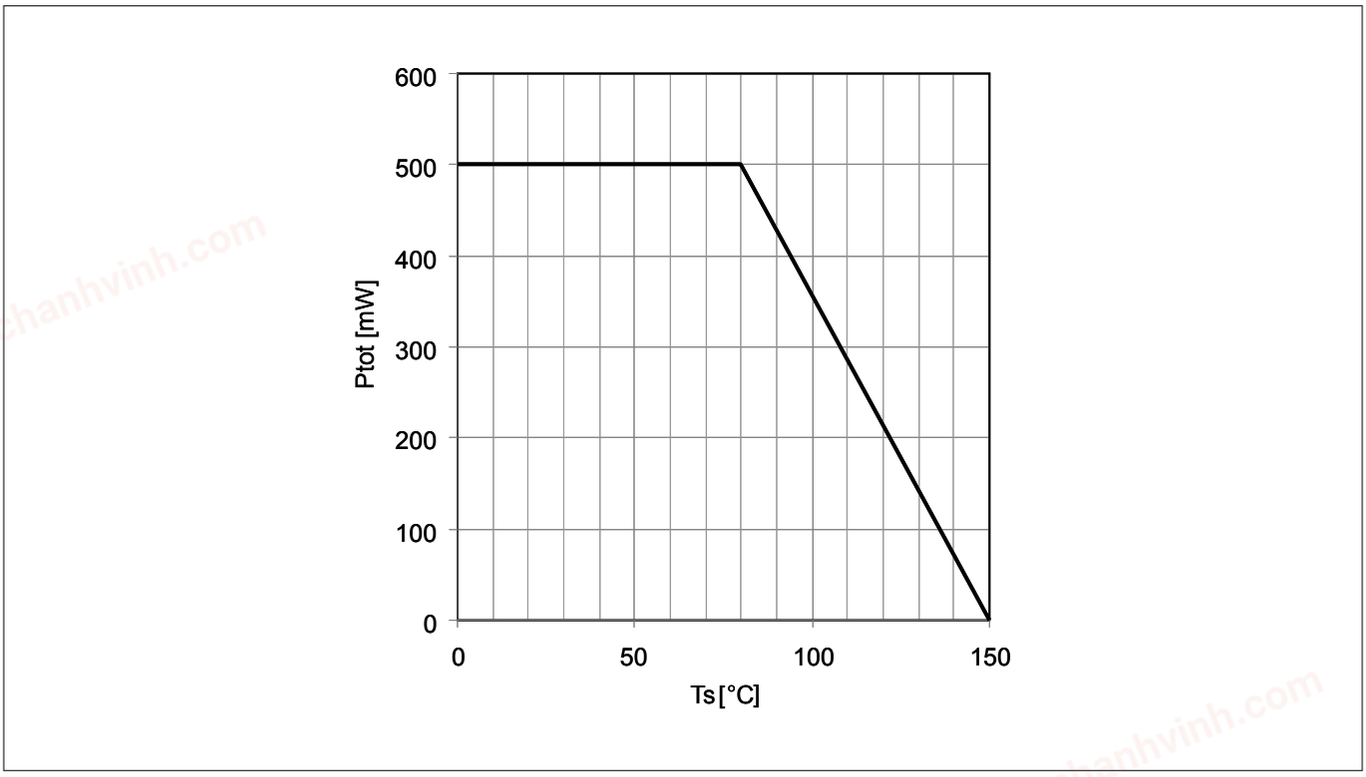


Figure 1 Total power dissipation $P_{tot} = f(T_s)$

chanhvinh.com

3 Electrical characteristics

3.1 DC characteristics

Table 4 DC characteristics at T_A = 25 °C

Parameter	Symbol	Values			Unit	Note or test condition
		Min.	Typ.	Max.		
Collector emitter breakdown voltage	$V_{(BR)CEO}$	4	4.5	–	V	I_C = 3 mA, I_B = 0, open base
Collector emitter leakage current	I_{CES}	–	0.1	1 [2)]	µA	V_{CE} = 13 V, V_{BE} = 0, E-B short circuited
			1	40 [2)]	nA	V_{CE} = 5 V, V_{BE} = 0, E-B short circuited
Collector base leakage current	I_{CBO}		1	40 [2)]		V_{CB} = 5 V, I_E = 0, open emitter
Emitter base leakage current	I_{EBO}		10	500 [2)]		V_{EB} = 0.5 V, I_C = 0, open collector
DC current gain	h_{FE}	100	170	250		V_{CE} = 3 V, I_C = 5 mA, pulse measured

3.2 General AC characteristics

Table 5 General AC characteristics at T_A = 25 °C

Parameter	Symbol	Values			Unit	Note or test condition
		Min.	Typ.	Max.		
Transition frequency	f_T	31	42	–	GHz	V_{CE} = 3 V, I_C = 70 mA, f = 1 GHz
Collector base capacitance	C_{CB}	–	0.26	0.4	pF	V_{CB} = 3 V, V_{BE} = 0, f = 1 MHz, emitter grounded
Collector emitter capacitance	C_{CE}		0.45	–		V_{CE} = 3 V, V_{BE} = 0, f = 1 MHz, base grounded
Emitter base capacitance	C_{EB}		1.3			V_{EB} = 0.5 V, V_{CB} = 0, f = 1 MHz, collector grounded

2 Maximum values not limited by the device but by the short cycle time of the 100% test.

chanhvinh.com

3.3 Frequency dependent AC characteristics

Measurement setup is a test fixture with Bias-T's in a 50 Ω system, T_A = 25 °C.

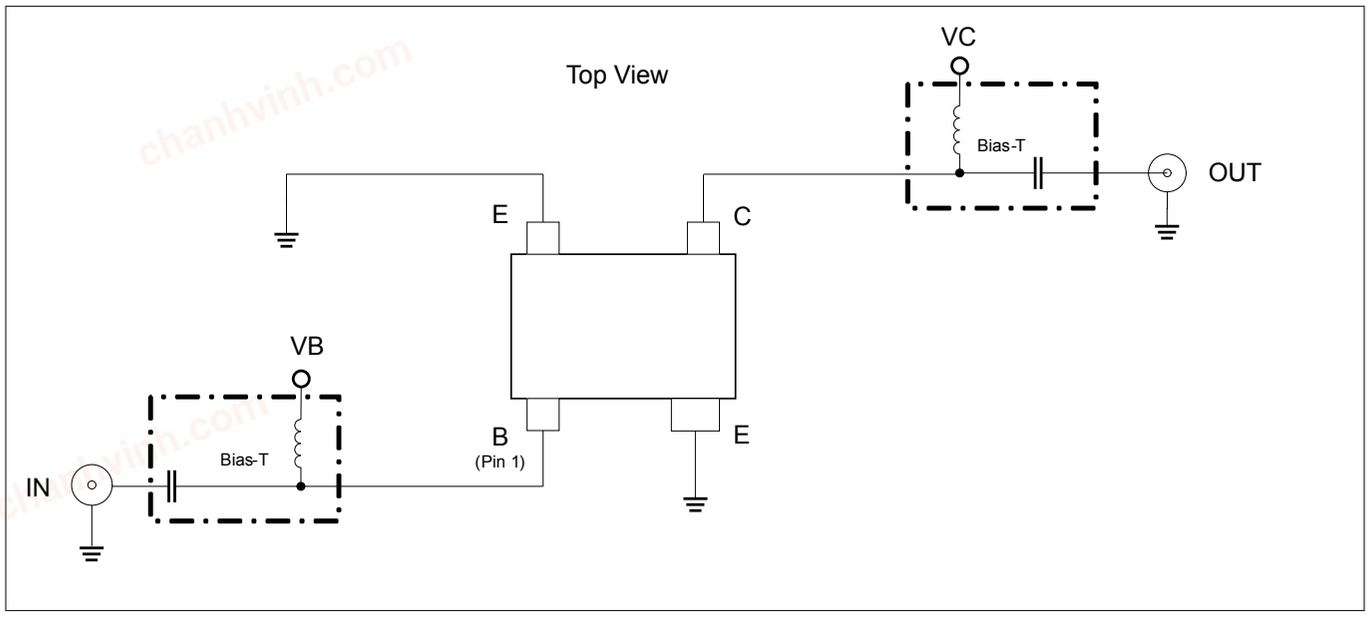


Figure 2 Testing circuit

Table 6 AC characteristics, V_{CE} = 3 V, f = 150 MHz

Parameter	Symbol	Values			Unit	Note or test condition
		Min.	Typ.	Max.		
Power gain		–		–	dB	
• Maximum power gain	G_{ms}		38			I_C = 70 mA
• Transducer gain	$\|S_{21}\|^2$		37.5			
Noise figure						
• Minimum noise figure	NF_{min}		0.75			I_C = 30 mA
• Associated gain	G_{ass}		32			
Linearity					dBm	
• 3rd order intercept point at output	OIP_3		29.5			I_C = 70 mA, $Z_S = Z_L$ = 50 Ω
• 1 dB gain compression point at output	OP_{1dB}		16.5			

chanhvinh.com

Electrical characteristics

Table 7 AC characteristics, V_{CE} = 3 V, f = 450 MHz

Parameter	Symbol	Values			Unit	Note or test condition
		Min.	Typ.	Max.		
Power gain		–		–	dB	
• Maximum power gain	G_{ms}		31.5			I_C = 70 mA
• Transducer gain	$\|S_{21}\|^2$		29.5			
Noise figure						
• Minimum noise figure	NF_{min}		0.75			I_C = 30 mA
• Associated gain	G_{ass}		29.5			
Linearity					dBm	
• 3rd order intercept point at output	OIP_3		30			I_C = 70 mA, $Z_S = Z_L$ = 50 Ω
• 1 dB gain compression point at output	OP_{1dB}		16.5			

Table 8 AC characteristics, V_{CE} = 3 V, f = 900 MHz

Parameter	Symbol	Values			Unit	Note or test condition
		Min.	Typ.	Max.		
Power gain		–		–	dB	
• Maximum power gain	G_{ms}		26.5			I_C = 70 mA
• Transducer gain	$\|S_{21}\|^2$		24			
Noise figure						
• Minimum noise figure	NF_{min}		0.8			I_C = 30 mA
• Associated gain	G_{ass}		24.5			
Linearity					dBm	
• 3rd order intercept point at output	OIP_3		31			I_C = 70 mA, $Z_S = Z_L$ = 50 Ω
• 1 dB gain compression point at output	OP_{1dB}		17			

Table 9 AC characteristics, V_{CE} = 3 V, f = 1.5 GHz

Parameter	Symbol	Values			Unit	Note or test condition
		Min.	Typ.	Max.		
Power gain		–		–	dB	
• Maximum power gain	G_{ms}		22.5			I_C = 70 mA
• Transducer gain	$\|S_{21}\|^2$		19.5			
Noise figure						
• Minimum noise figure	NF_{min}		0.85			I_C = 30 mA
• Associated gain	G_{ass}		20.5			
Linearity					dBm	
• 3rd order intercept point at output	OIP_3		31			I_C = 70 mA, $Z_S = Z_L$ = 50 Ω
• 1 dB gain compression point at output	OP_{1dB}		17			

chanhvinh.com

Electrical characteristics

Table 10 AC characteristics, V_{CE} = 3 V, f = 1.9 GHz

Parameter	Symbol	Values			Unit	Note or test condition
		Min.	Typ.	Max.		
Power gain		–		–	dB	
• Maximum power gain	G_{ms}		20			I_C = 70 mA
• Transducer gain	$\|S_{21}\|^2$		17.5			
Noise figure						
• Minimum noise figure	NF_{min}		0.95			I_C = 30 mA
• Associated gain	G_{ass}		17.5			
Linearity					dBm	
• 3rd order intercept point at output	OIP_3		30.5			I_C = 70 mA, $Z_S = Z_L$ = 50 Ω
• 1 dB gain compression point at output	OP_{1dB}		17			

Table 11 AC characteristics, V_{CE} = 3 V, f = 2.4 GHz

Parameter	Symbol	Values			Unit	Note or test condition
		Min.	Typ.	Max.		
Power gain		–		–	dB	
• Maximum power gain	G_{ms}		17.5			I_C = 70 mA
• Transducer gain	$\|S_{21}\|^2$		15			
Noise figure						
• Minimum noise figure	NF_{min}		1			I_C = 30 mA
• Associated gain	G_{ass}		15			
Linearity					dBm	
• 3rd order intercept point at output	OIP_3		30			I_C = 70 mA, $Z_S = Z_L$ = 50 Ω
• 1 dB gain compression point at output	OP_{1dB}		17			

Table 12 AC characteristics, V_{CE} = 3 V, f = 3.5 GHz

Parameter	Symbol	Values			Unit	Note or test condition
		Min.	Typ.	Max.		
Power gain		–		–	dB	
• Maximum power gain	G_{ms}		14.5			I_C = 70 mA
• Transducer gain	$\|S_{21}\|^2$		11.5			
Noise figure						
• Minimum noise figure	NF_{min}		1.2			I_C = 30 mA
• Associated gain	G_{ass}		11.5			
Linearity					dBm	
• 3rd order intercept point at output	OIP_3		30			I_C = 70 mA, $Z_S = Z_L$ = 50 Ω
• 1 dB gain compression point at output	OP_{1dB}		17			

chanhvinh.com

Electrical characteristics

Table 13 AC characteristics, V_{CE} = 3 V, f = 5.5 GHz

Parameter	Symbol	Values			Unit	Note or test condition
		Min.	Typ.	Max.		
Power gain		–		–	dB	
• Maximum power gain	G_{ms}		10.5			I_C = 70 mA
• Transducer gain	$\|S_{21}\|^2$		7			
Noise figure						
• Minimum noise figure	NF_{min}		1.6			I_C = 30 mA
• Associated gain	G_{ass}		8.5			
Linearity					dBm	
• 3rd order intercept point at output	OIP_3		29.5			I_C = 70 mA, Z_S = Z_L = 50 Ω
• 1 dB gain compression point at output	OP_{1dB}		16.5			

Note: $G_{ms} = |S_{21} / S_{12}|$ for $k < 1$; $G_{ma} = |S_{21} / S_{12}| (k-(k^2-1)^{1/2})$ for $k > 1$. In order to get the NF_{min} values stated in this chapter, the test fixture losses have been subtracted from all measured results. OIP_3 value depends on termination of all intermodulation frequency components. Termination used for this measurement is 50 Ω from 0.2 MHz to 12 GHz.

chanhvinh.com

3.4 Characteristic DC diagrams

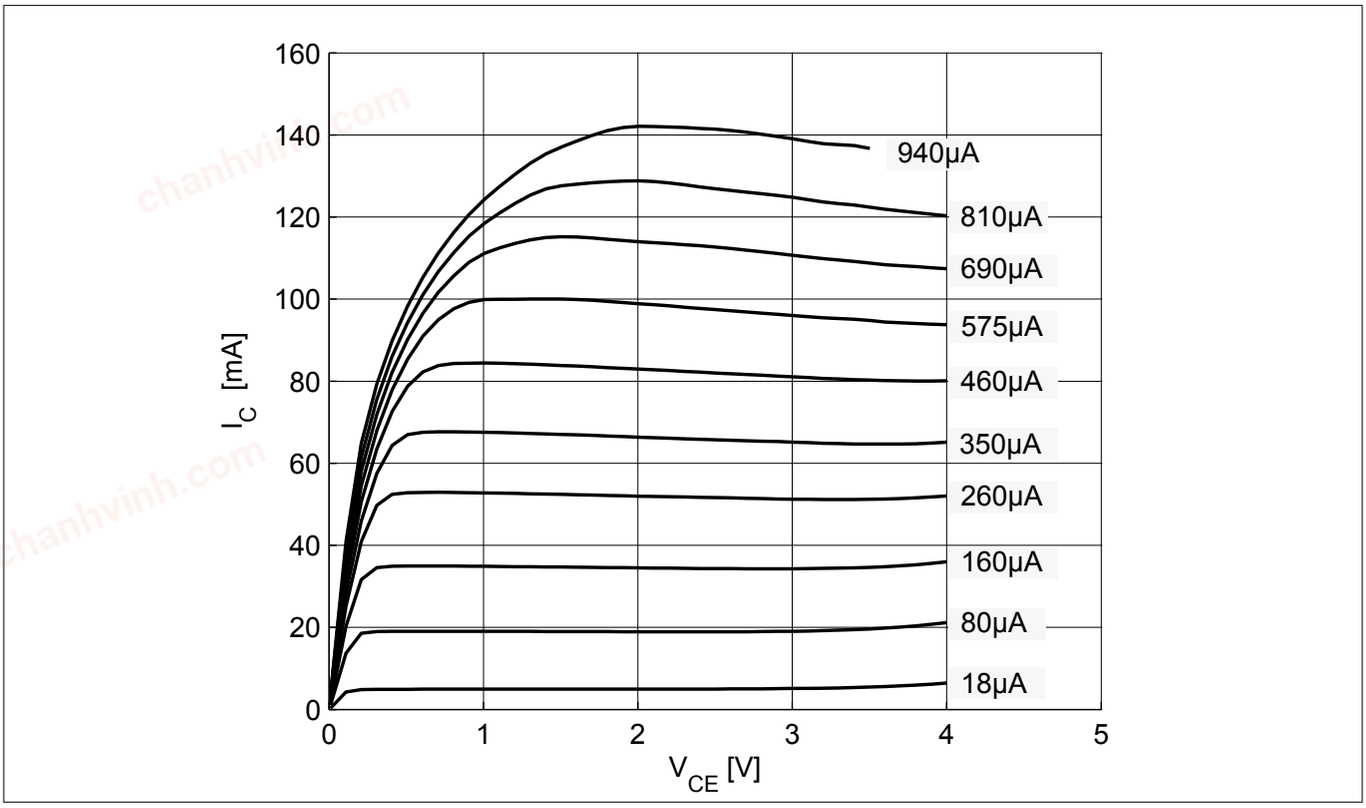


Figure 3 **Collector current vs. collector emitter voltage $I_C = f(V_{CE})$, I_B = parameter**

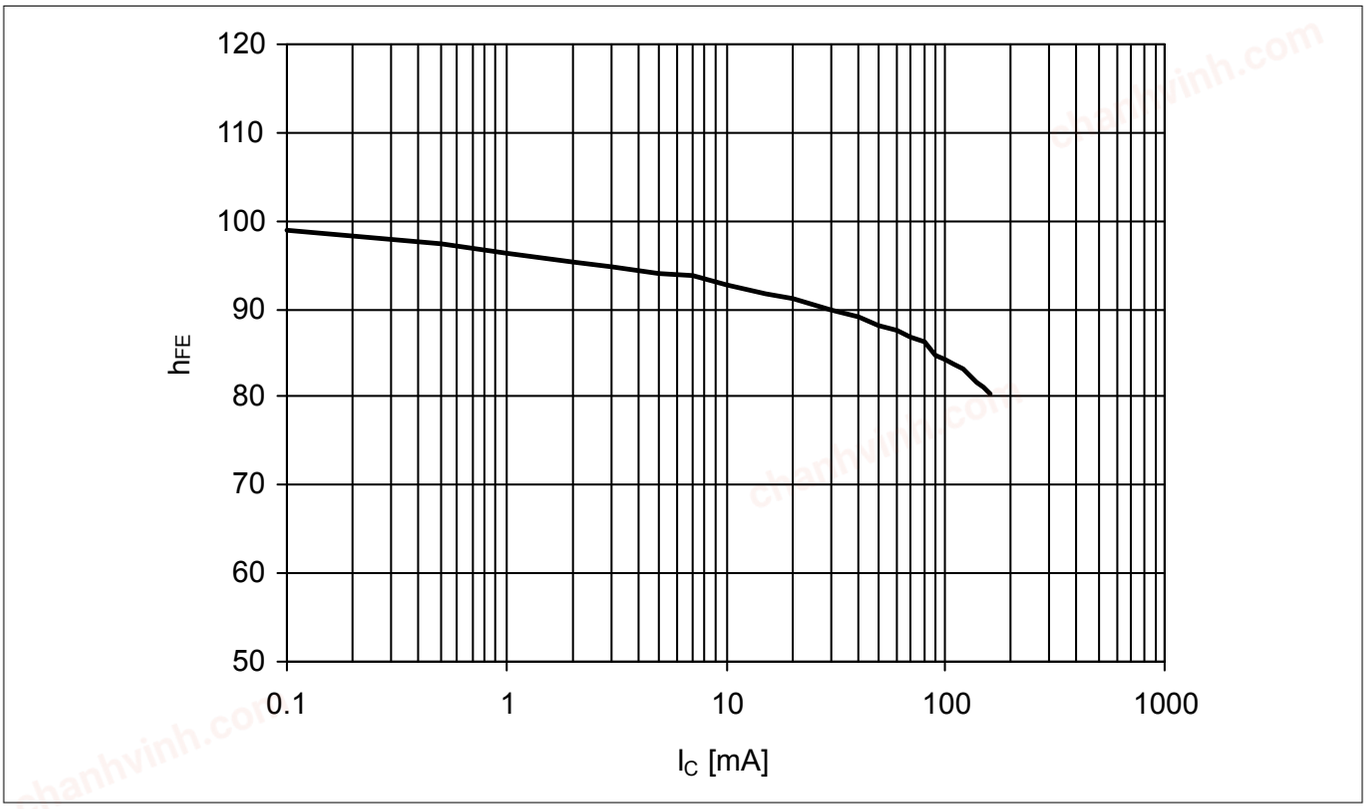


Figure 4 **DC current gain $h_{FE} = f(I_C)$, V_{CE} = 3 V**

chanhvinh.com

Electrical characteristics

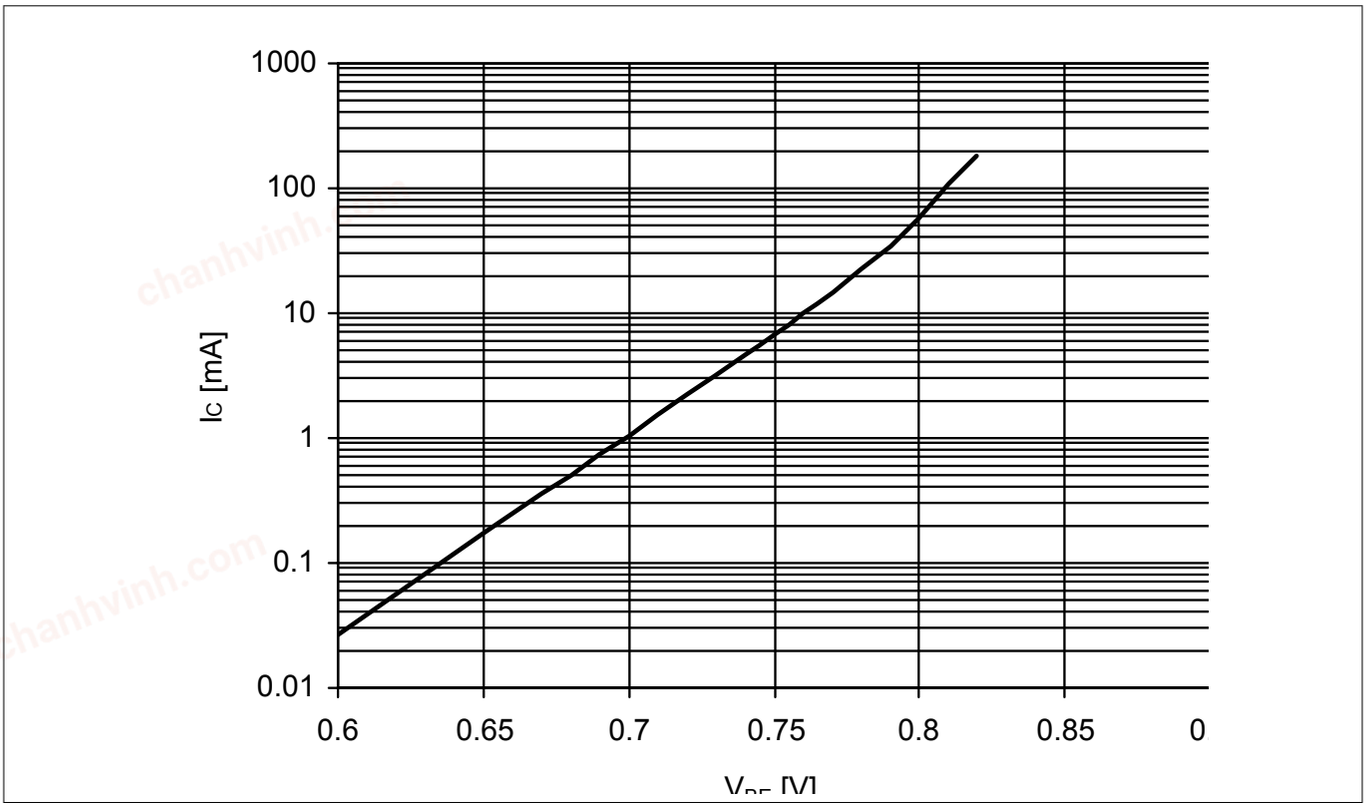


Figure 5 **Collector current vs. base emitter forward voltage $I_C = f(V_{BE})$, $V_{CE} = 2$ V**

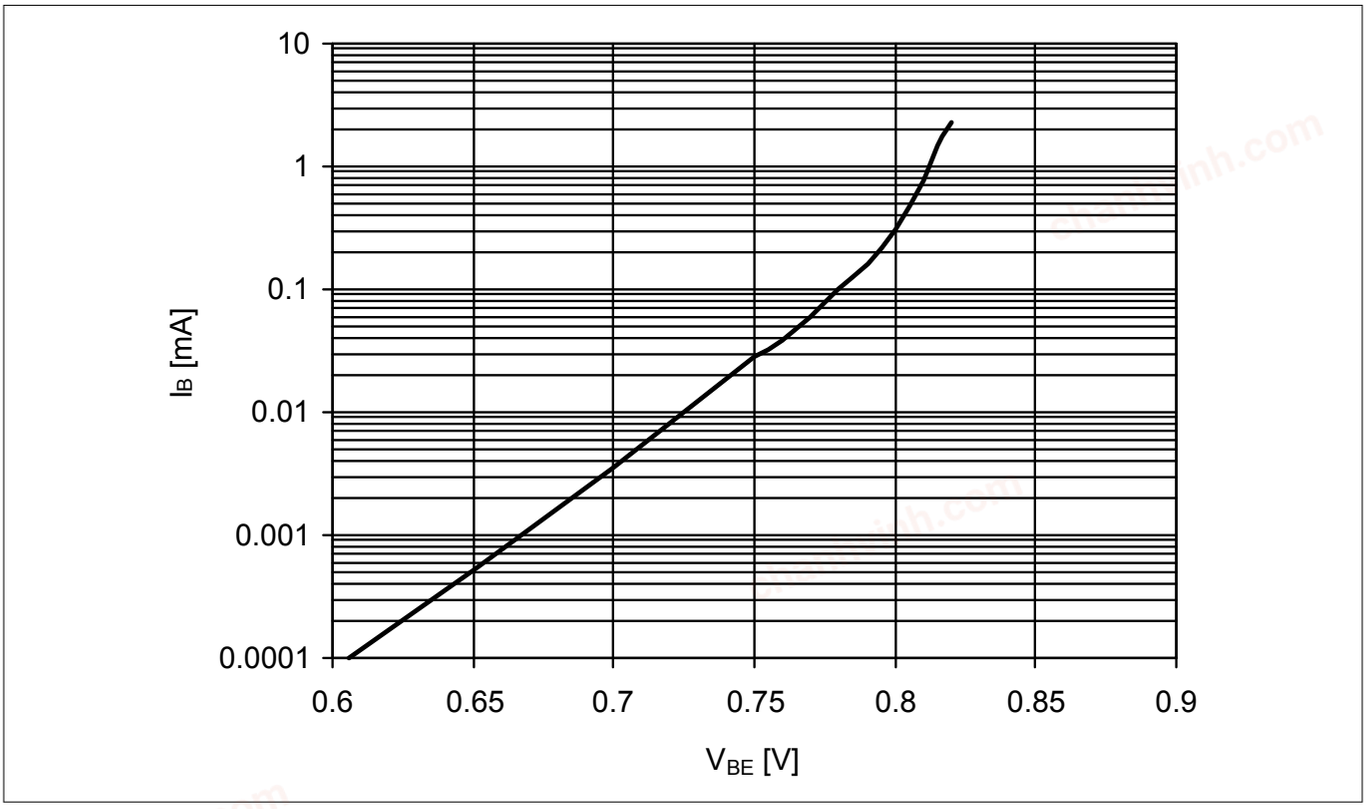


Figure 6 **Base current vs. base emitter forward voltage $I_B = f(V_{BE})$, $V_{CE} = 2$ V**

chanhvinh.com

Electrical characteristics

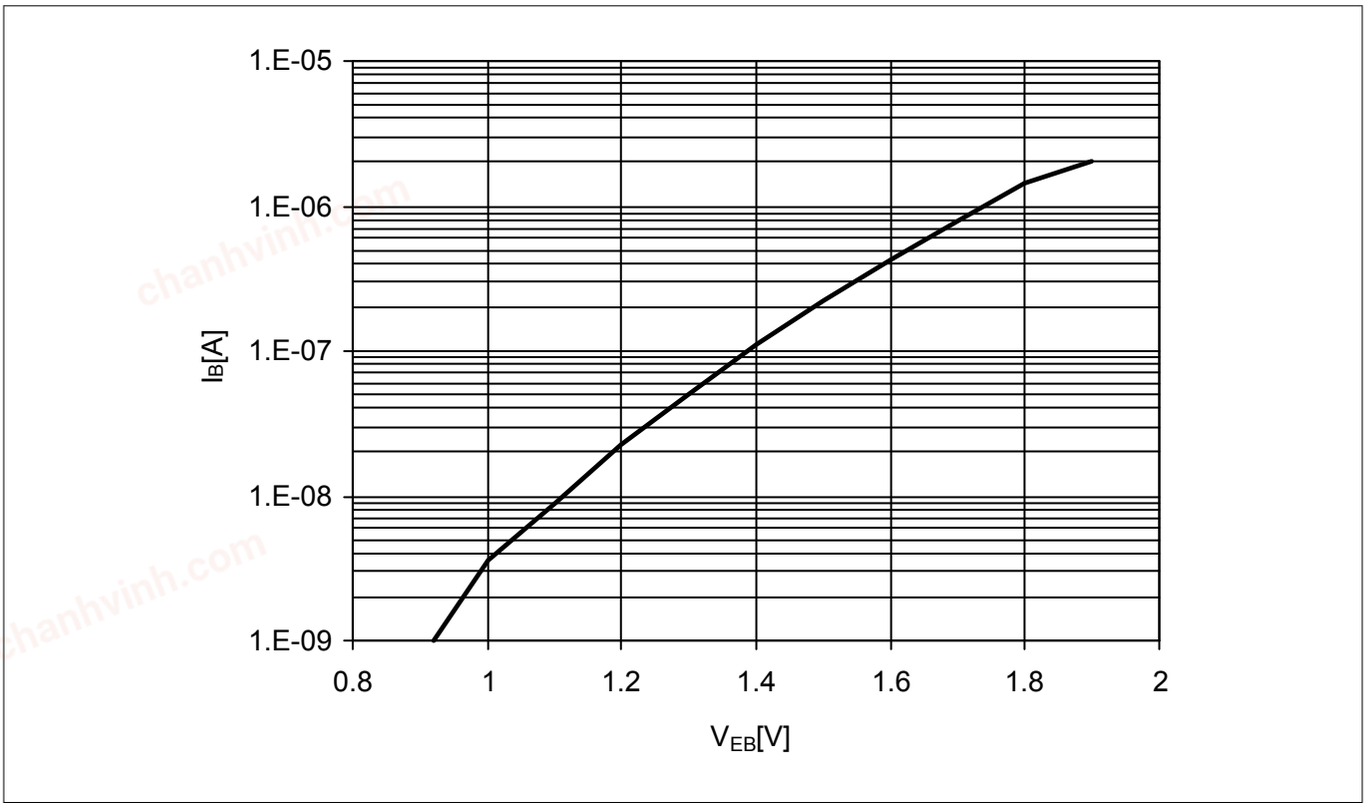


Figure 7 **Base current vs. base emitter reverse voltage $I_B = f(V_{EB})$, $V_{CE} = 2$ V**

chanhvinh.com

3.5 Characteristic AC diagrams

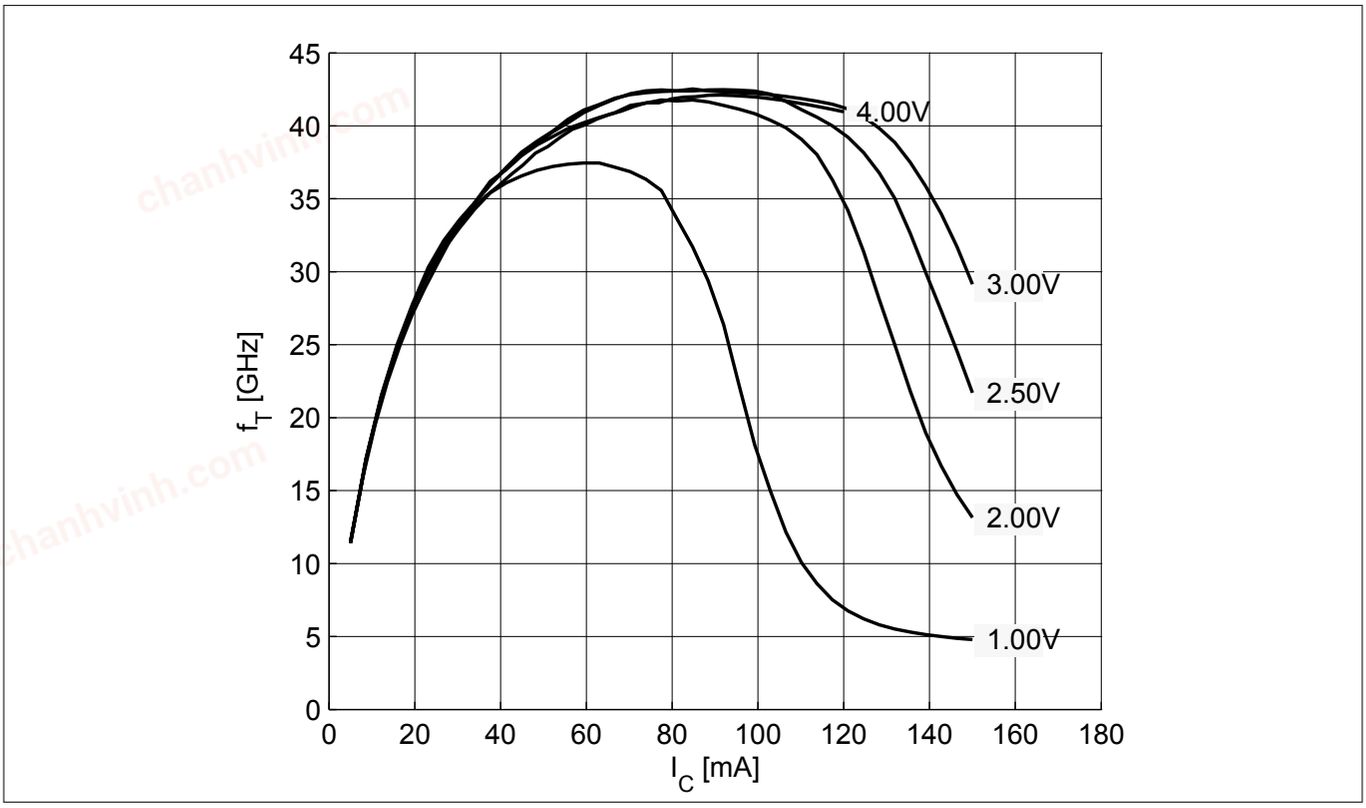


Figure 8 **Transition frequency $f_T = f(I_C)$, $f = 1$ GHz, V_{CE} = parameter**

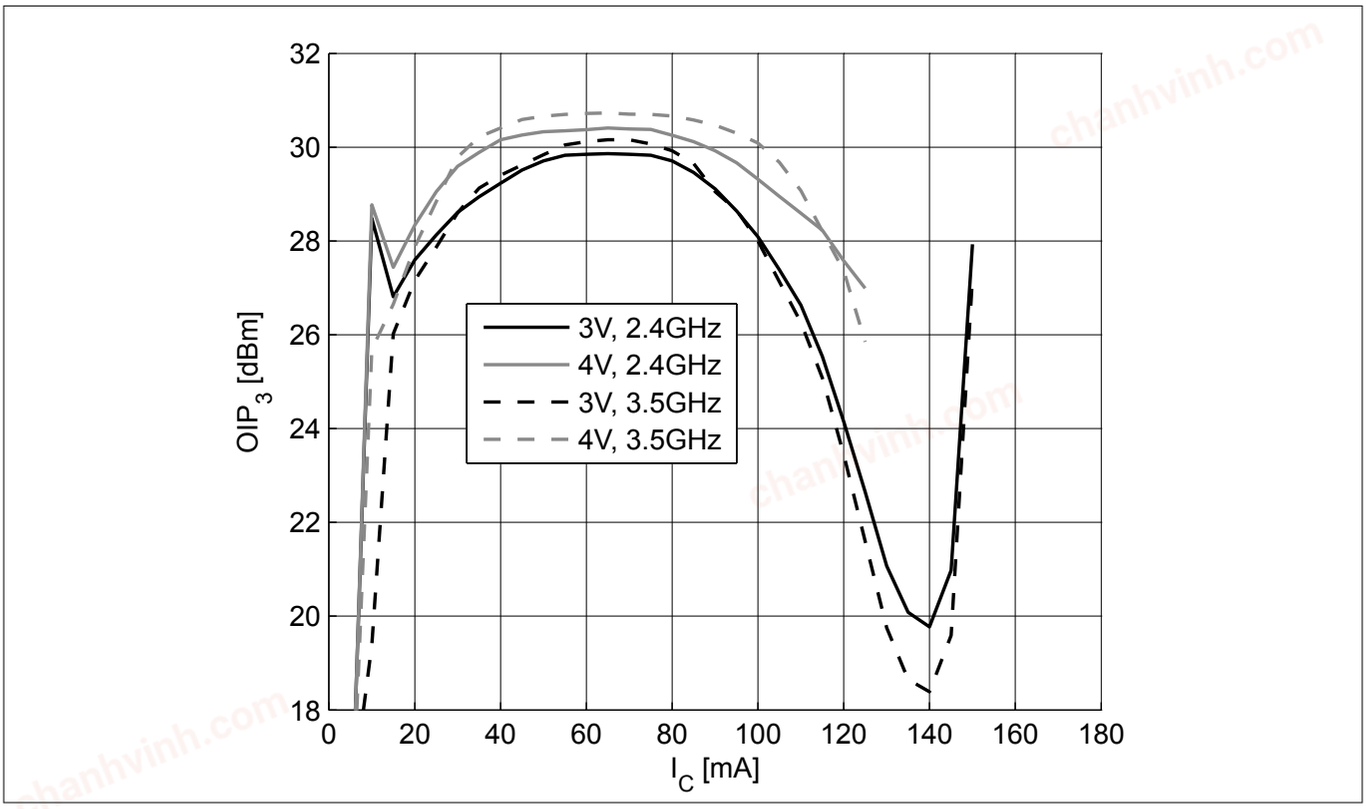


Figure 9 **3rd order intercept point $OIP_3 = f(I_C)$, $Z_S = Z_L = 50\ \Omega$, V_{CE}, f = parameters**

chanhvinh.com

Electrical characteristics

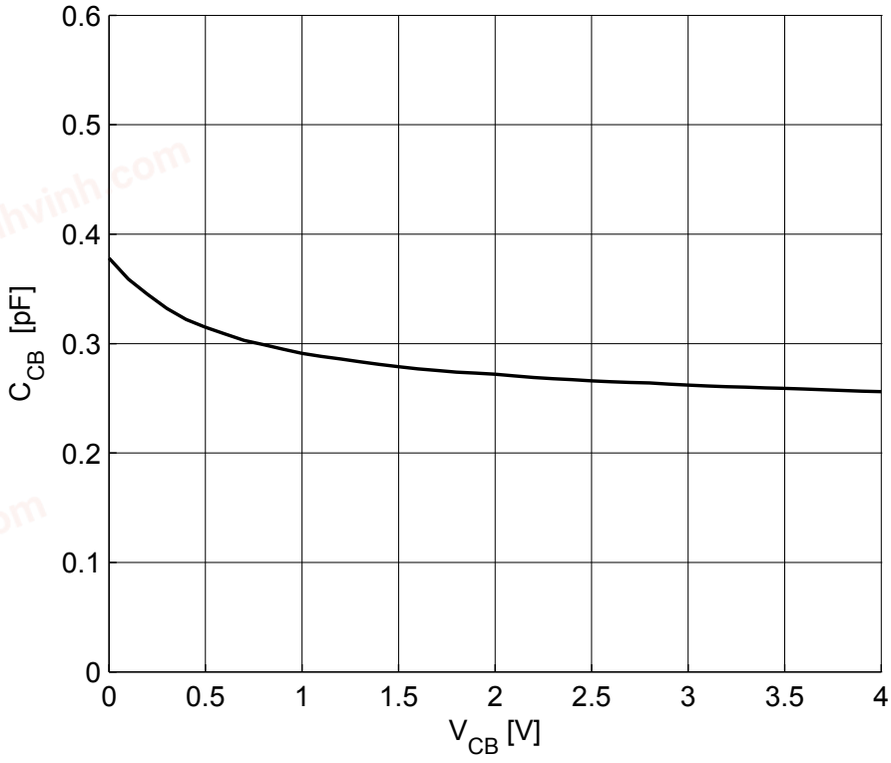


Figure 10 **Collector base capacitance $C_{CB} = f(V_{CB})$, $f = 1$ MHz**

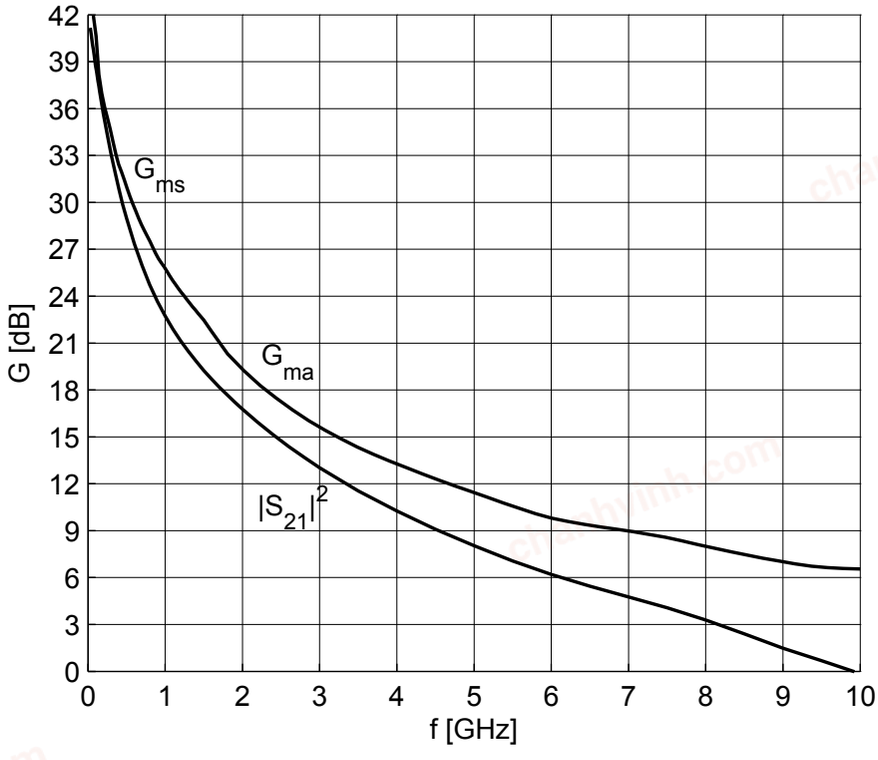


Figure 11 **Gain G_{ma}, G_{ms}, $|S_{21}|^2 = f(f)$, $V_{CE} = 3$ V, $I_C = 70$ mA**

chanhvinh.com

Electrical characteristics

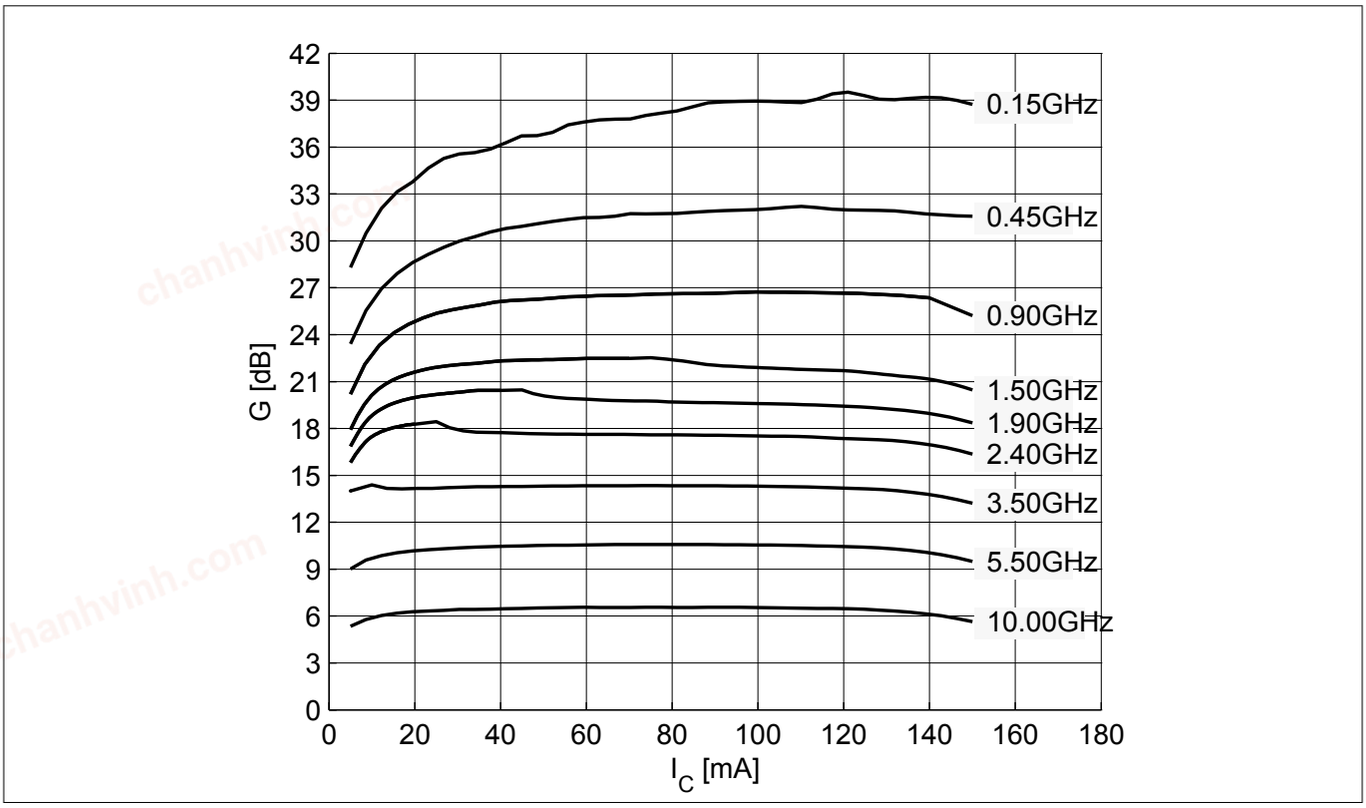


Figure 12 **Maximum power gain G_{max} = f(I_C), V_{CE} = 3 V, f = parameter in GHz**

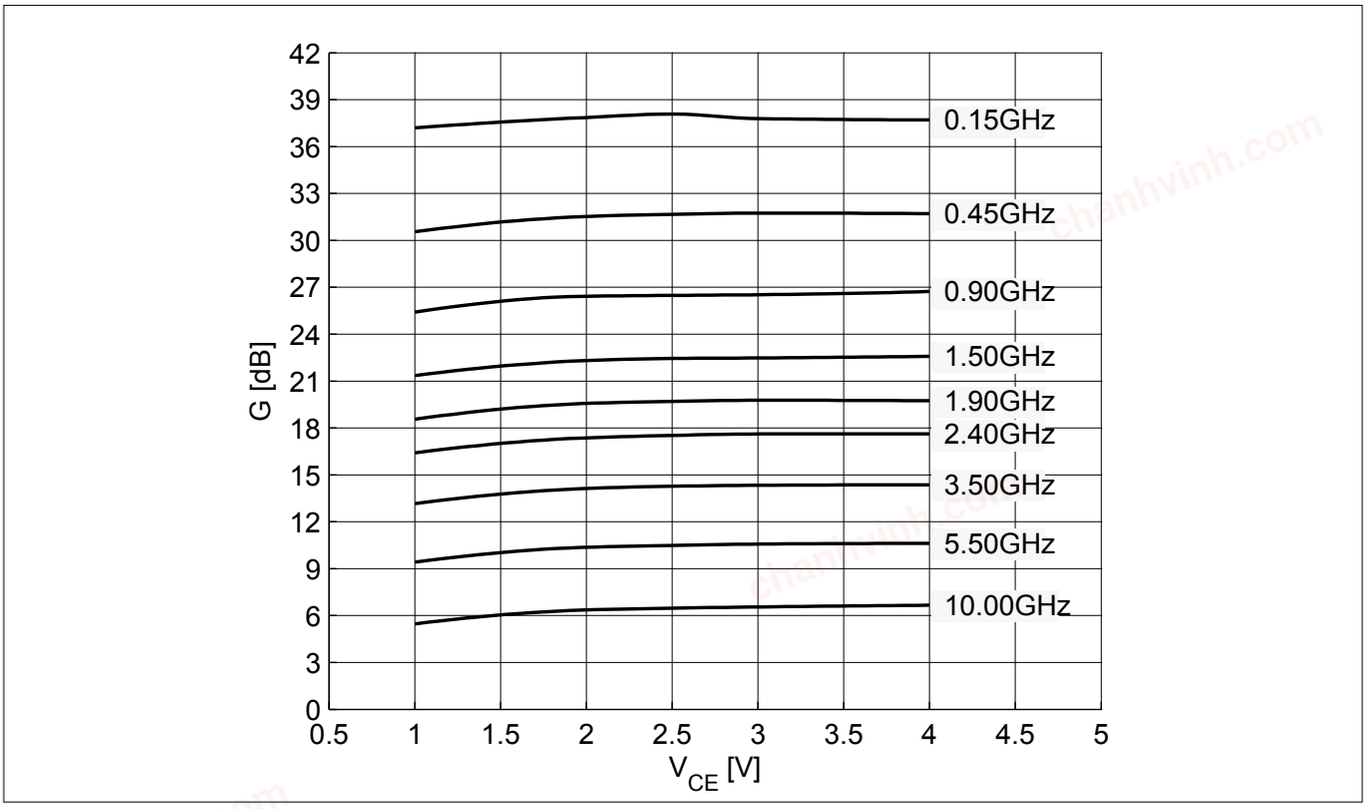


Figure 13 **Maximum power gain G_{max} = f(V_{CE}), I_C = 70 mA, f = parameter in GHz**

chanhvinh.com

Electrical characteristics

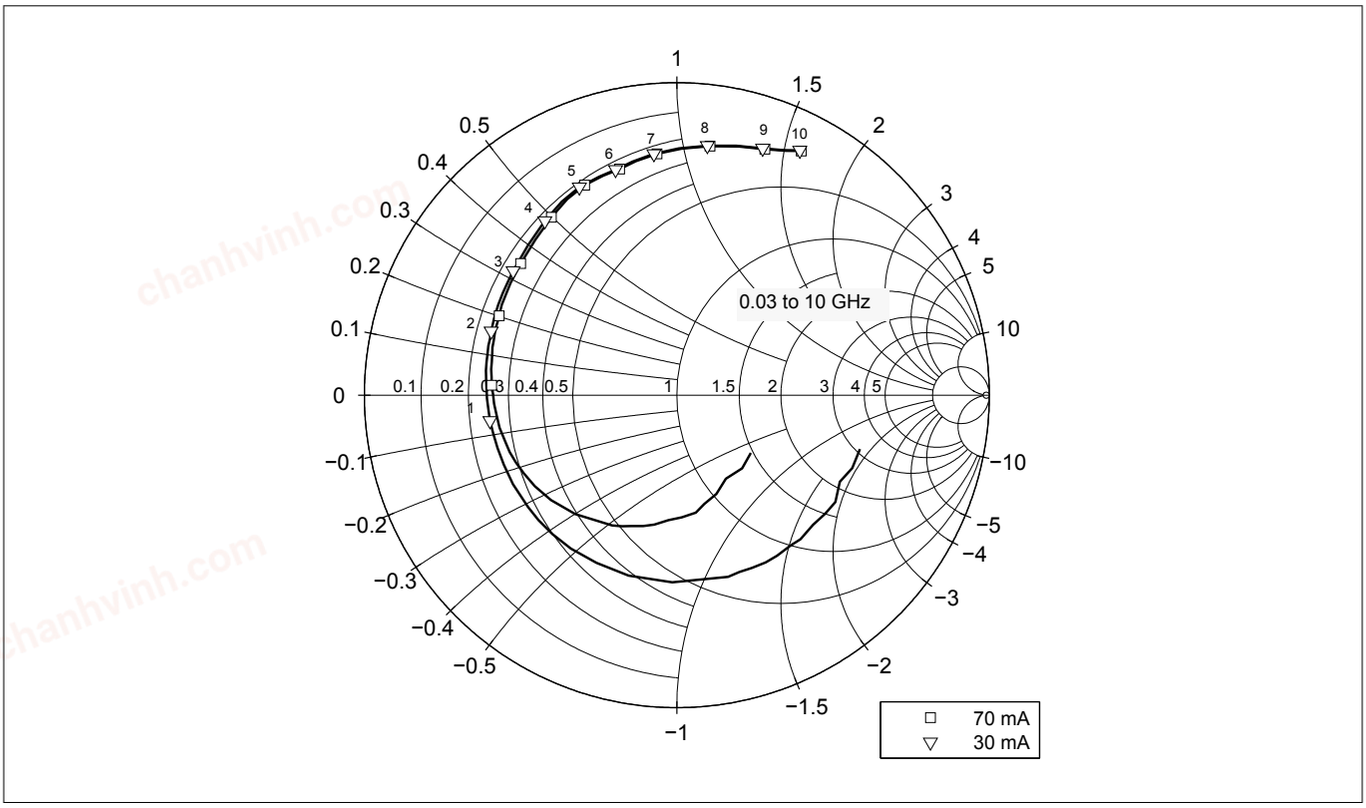


Figure 14 **Input reflection coefficient S_{11} = f(*f*), V_{CE} = 3 V, I_C = 30 / 70 mA**

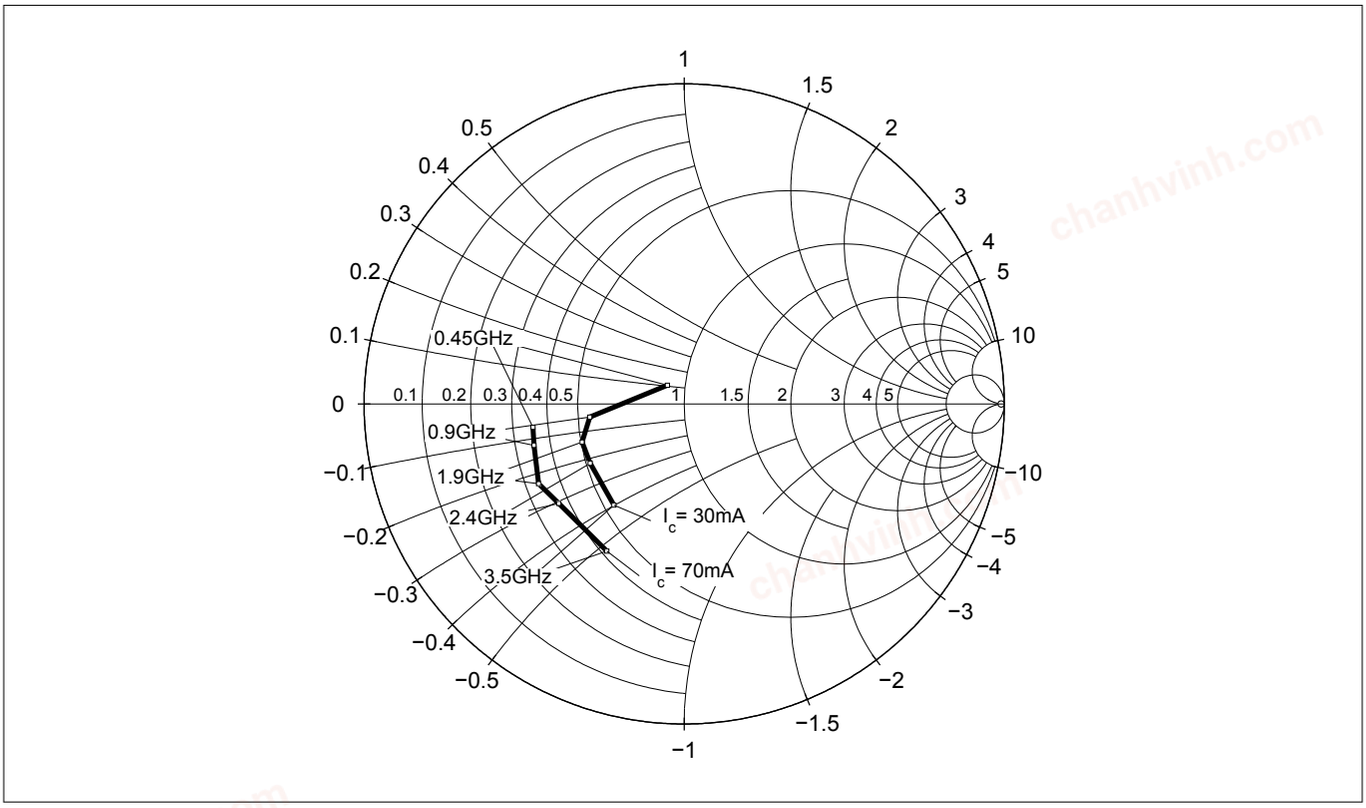


Figure 15 **Source impedance for minimum noise figure $Z_{S,opt}$ = f(*f*), V_{CE} = 3 V, I_C = 30 / 70 mA**

chanhvinh.com

Electrical characteristics

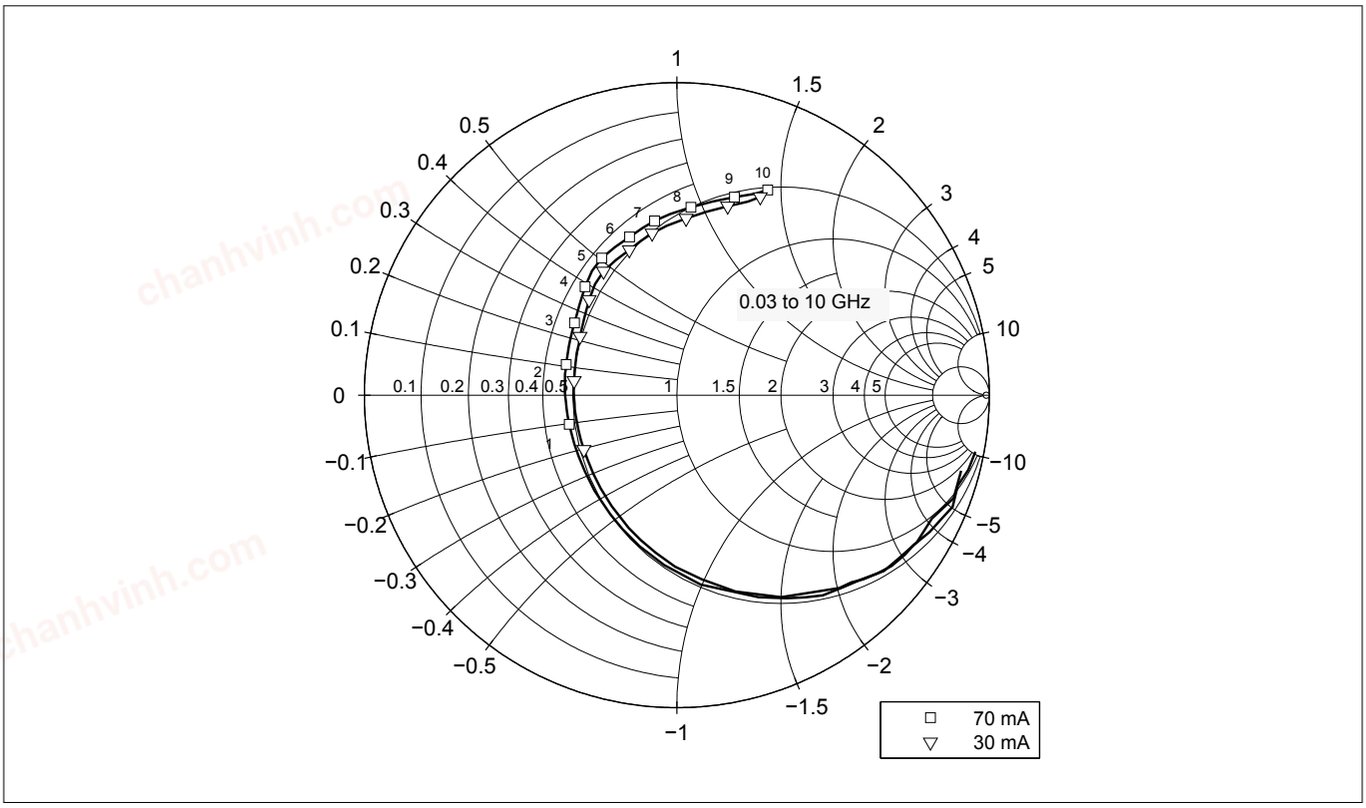


Figure 16 **Output reflection coefficient S_{22} = f(f), V_{CE} = 3 V, I_C = 30 / 70 mA**

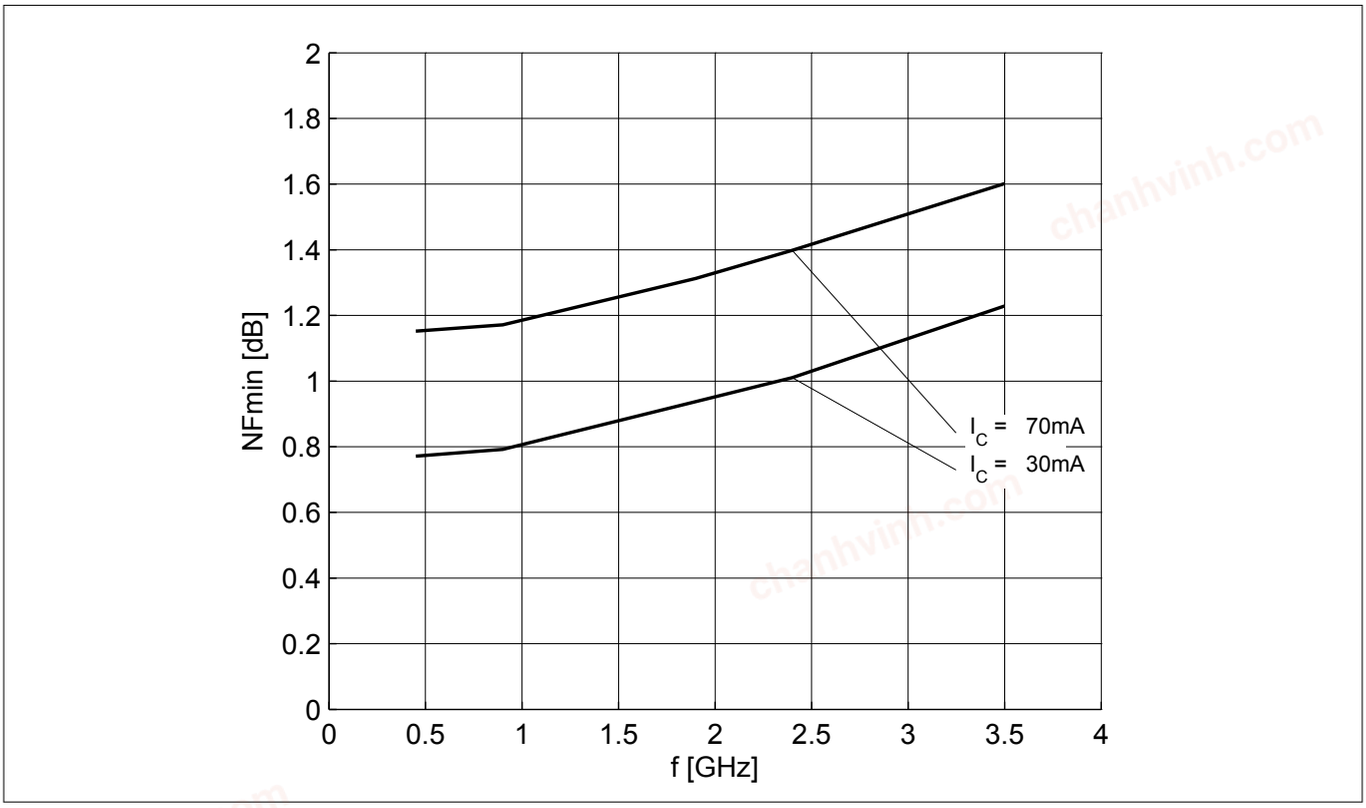


Figure 17 **Noise figure NF_{min} = f(f), Z_S = $Z_{S,opt}$, V_{CE} = 3 V, I_C = 30 / 70 mA**

chanhvinh.com

Electrical characteristics

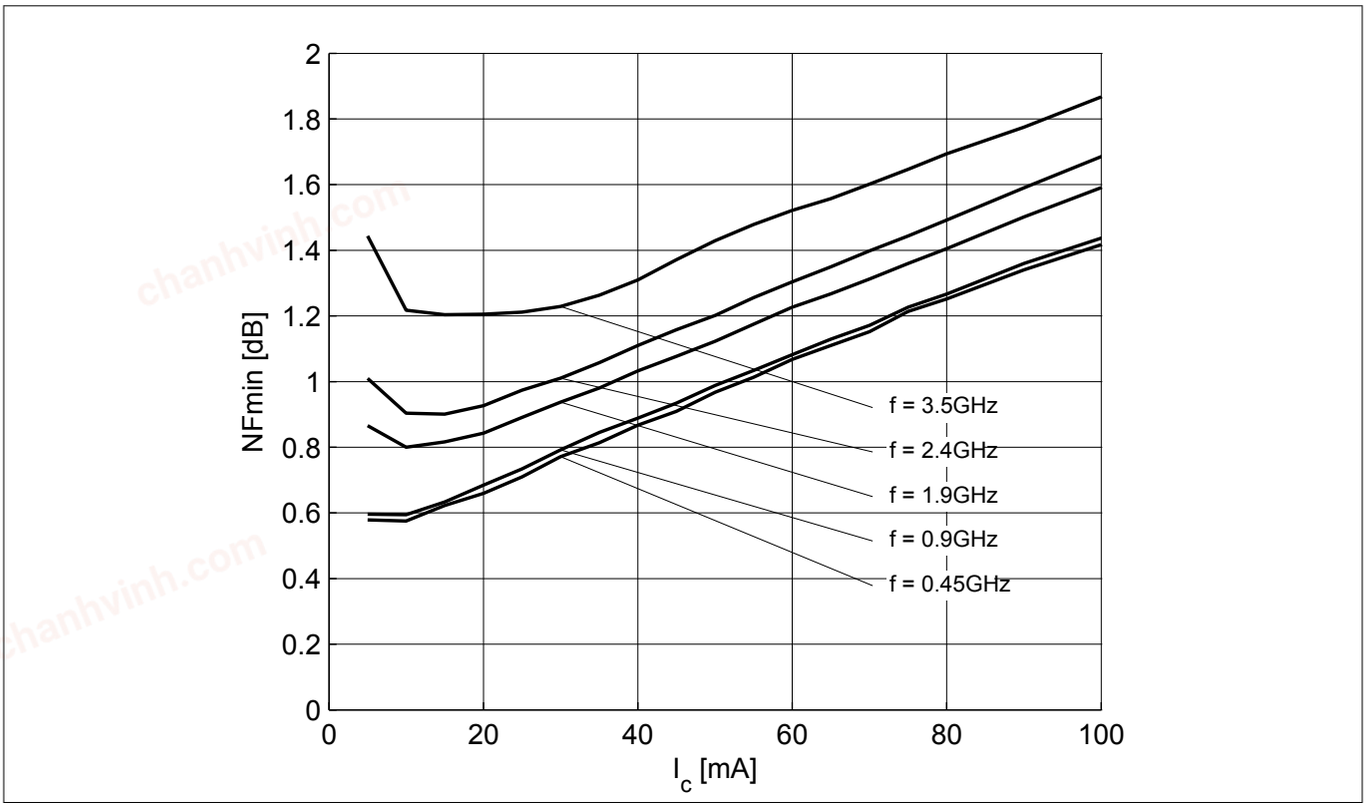


Figure 18 **Noise figure NF_{min} = f(I_C), Z_S = $Z_{S,opt}$, V_{CE} = 3 V, f = parameter in GHz**

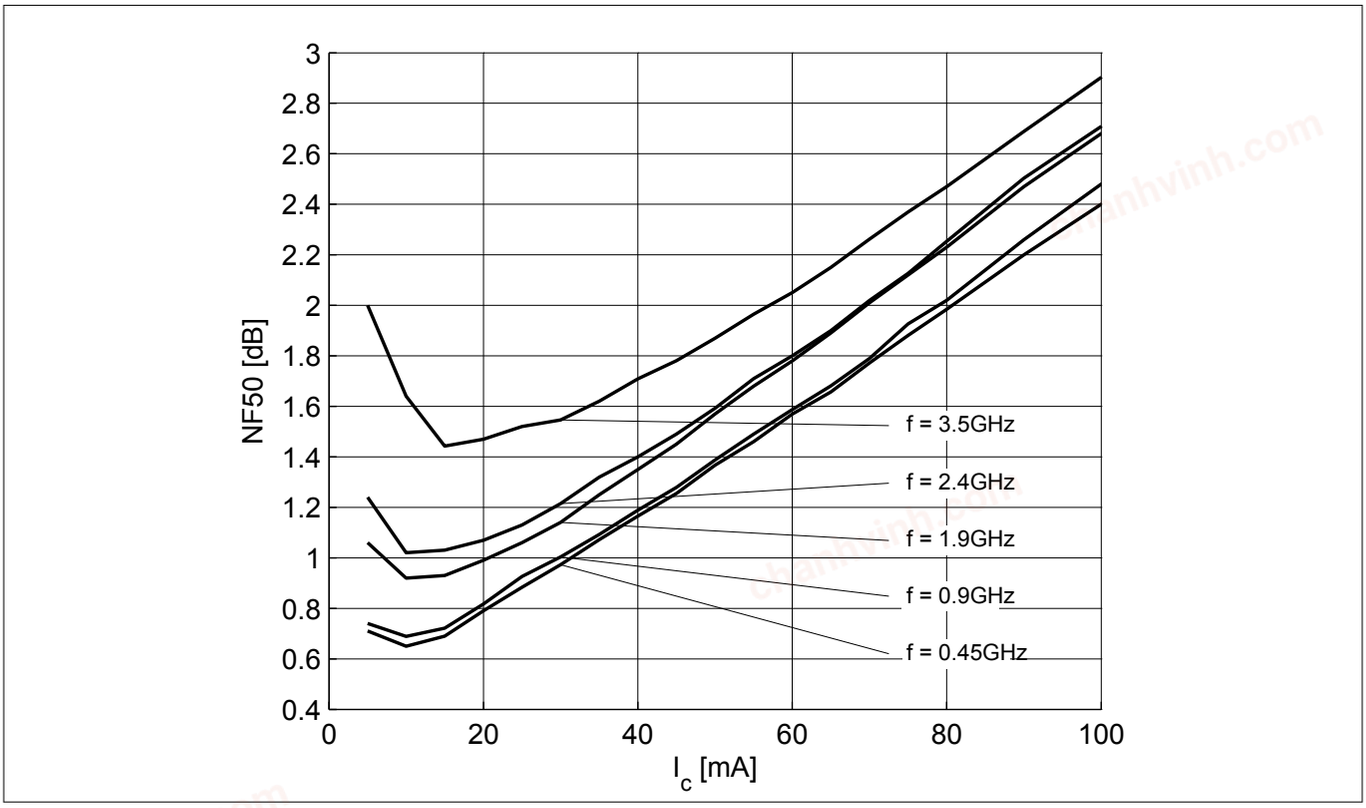


Figure 19 **Noise figure NF_{50} = f(I_C), Z_S = 50 Ω, V_{CE} = 3 V, f = parameter in GHz**

chanhvinh.com

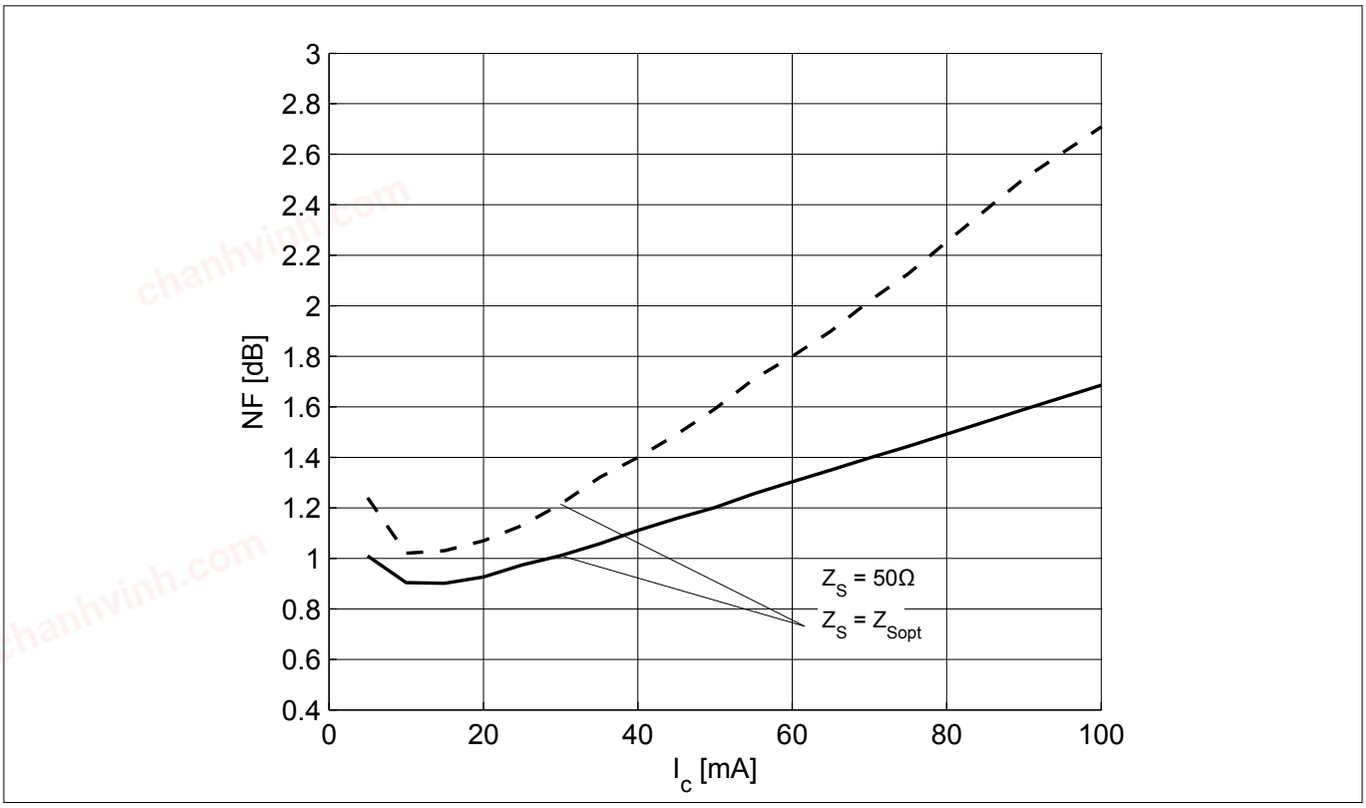


Figure 20 **Noise figure NF_{50} = f(I_C), Z_S = 50 Ω, NF_{min} = f(I_C), Z_S = $Z_{S,opt}$, V_{CE} = 3 V, f = 2.4 GHz**

Note: The curves shown in this chapter have been generated using typical devices but shall not be considered as a guarantee that all devices have identical characteristic curves. T_A = 25 °C.

chanhvinh.com

4 Package information SOT343

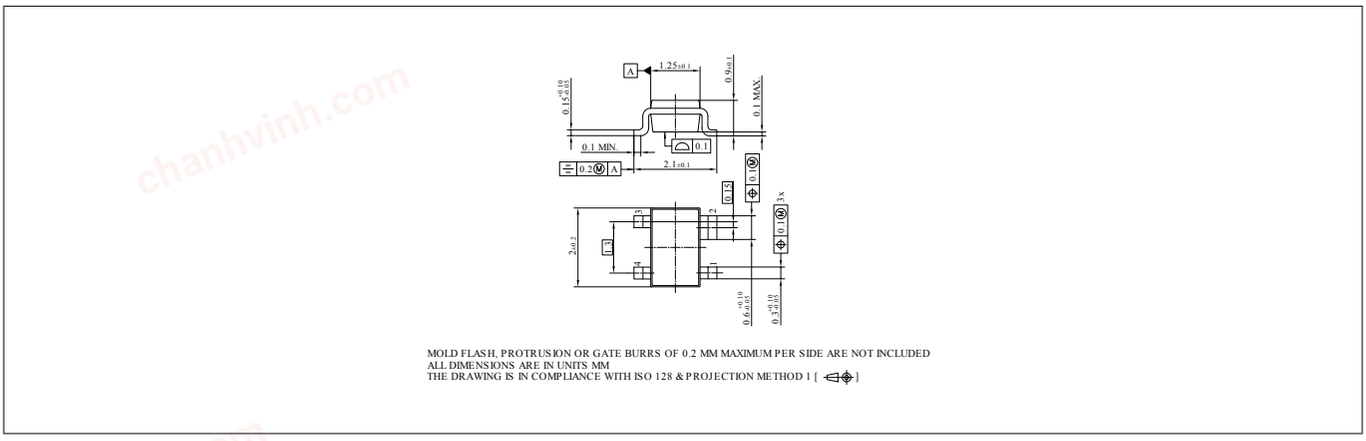


Figure 21 Package outline

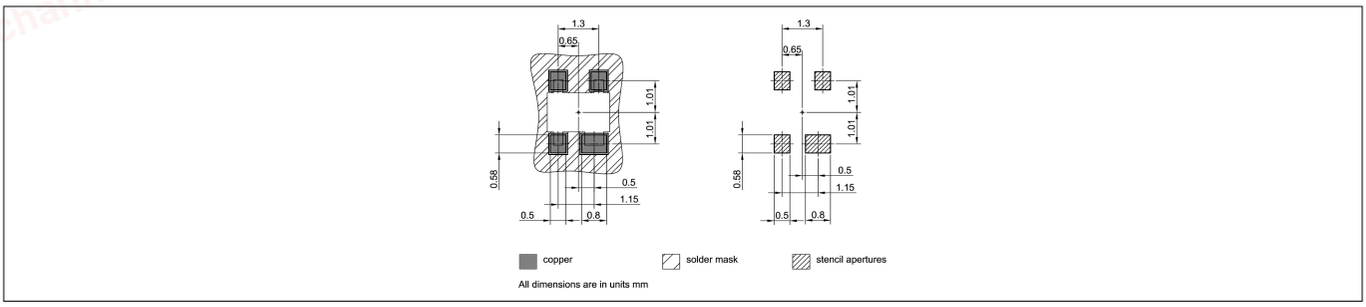


Figure 22 Foot print

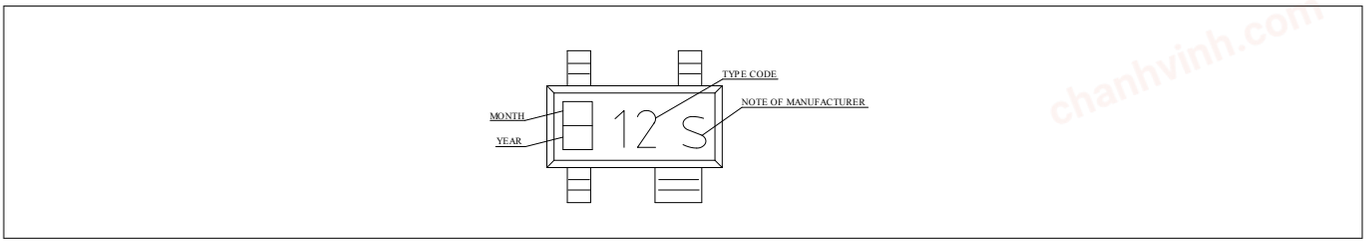


Figure 23 Marking layout example

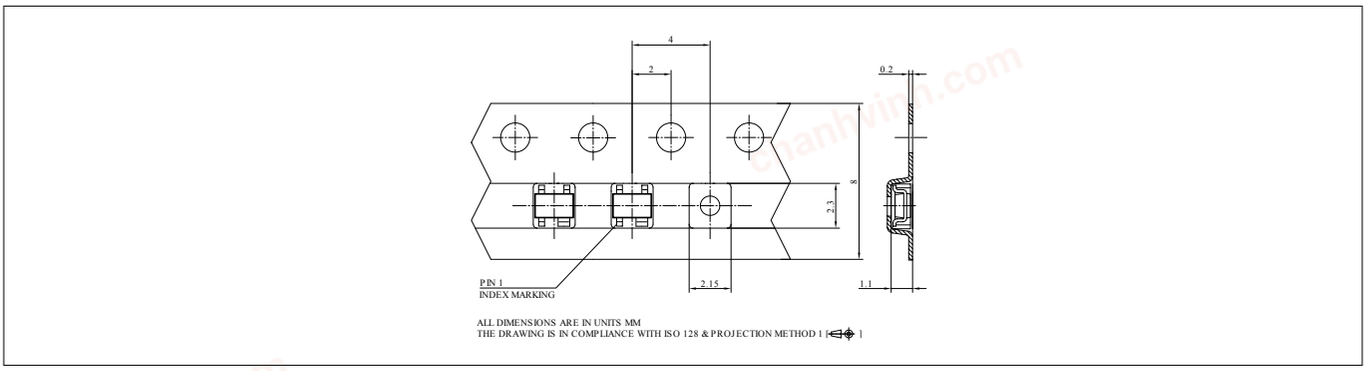


Figure 24 Tape dimensions

chanhvinh.com

Revision history

Document version	Date of release	Description of changes
Revision 2.0	2019-01-25	New datasheet layout.

chanhvinh.com

Trademarks

All referenced product or service names and trademarks are the property of their respective owners.

Edition 2019-01-25

Published by

Infineon Technologies AG

81726 Munich, Germany

© 2019 Infineon Technologies AG

All Rights Reserved.

Do you have a question about any aspect of this document?

Email: erratum@infineon.com

Document reference
IFX-aqy1526270604395

IMPORTANT NOTICE

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics (“Beschaffenheitsgarantie”) .

With respect to any examples, hints or any typical values stated herein and/or any information regarding the application of the product, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation warranties of non-infringement of intellectual property rights of any third party.

In addition, any information given in this document is subject to customer’s compliance with its obligations stated in this document and any applicable legal requirements, norms and standards concerning customer’s products and any use of the product of Infineon Technologies in customer’s applications.

The data contained in this document is exclusively intended for technically trained staff. It is the responsibility of customer’s technical departments to evaluate the suitability of the product for the intended application and the completeness of the product information given in this document with respect to such application.

WARNINGS

Due to technical requirements products may contain dangerous substances. For information on the types in question please contact your nearest Infineon Technologies office.

Except as otherwise explicitly approved by Infineon Technologies in a written document signed by authorized representatives of Infineon Technologies, Infineon Technologies’ products may not be used in any applications where a failure of the product or any consequences of the use thereof can reasonably be expected to result in personal injury

chanhvinh.com

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Infineon:
BFP650H6327XTSA1

chanhvinh.com