chanhvinh.com

Smart High-Side Power Switch
One Channel: 1 x 1Ω


RoHS AEC Qualified

Features

- Current controlled input
- Short circuit protection
- Current limitation
- Overload protection
- Overvoltage protection (including load dump)
- Switching inductive loads
- Clamp of negative voltage at output with inductive loads
- Thermal shutdown with restart
- ESD - Protection
- Loss of GND and loss of V_{bb} protection
- Very low standby current
- Reverse battery protection
- Improved electromagnetic compatibility (EMC)
- AEC qualified
- Green product (RoHS compliant)

Product Summary

Overvoltage protection	$V_{bbin(AZ)}$	62	V
Operating voltage	$V_{bb(on)}$	4.9...60	V
On-state resistance	R_{ON}	1	Ω

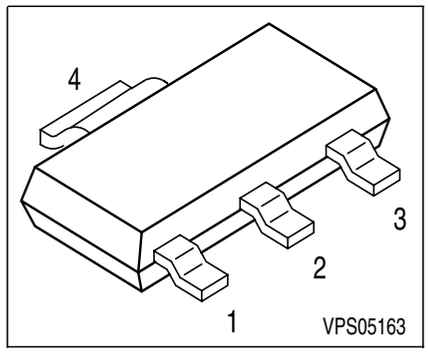

PG-SOT-223

Application


- All types of resistive, inductive and capacitive loads
- Current controlled power switch for 12V, 24V and 42V DC applications
- Driver for electromechanical relays
- Signal amplifier

General Description

N channel vertical power MOSFET with charge pump and current controlled input, monolithically integrated in Smart SIPMOS®technology.
Providing embedded protective functions.

chanhvinh.com

Block Diagram

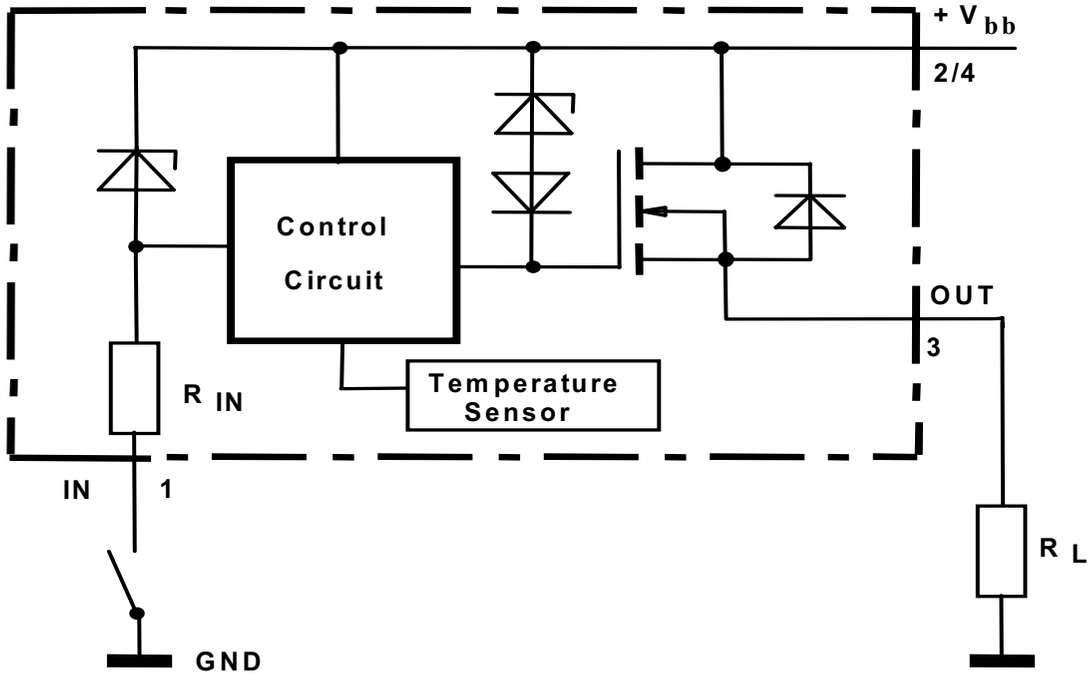

Pin	Symbol	Function
1	IN	Input, activates the power switch in case of connection to GND
2	Vbb	Positive power supply voltage
3	OUT	Output to the load
4	Vbb	Positive power supply voltage

chanhvinh.com

Maximum Ratings

Parameter at T_j = 25°C, unless otherwise specified	Symbol	Value	Unit
Supply voltage	V_{bb}	60	V
Load current (Short - circuit current, see page 5)	I_L	self limited	A
Maximum current through the input pin (DC)	I_{IN}	±15	mA
Operating temperature	T_j	-40 ...+150	°C
Storage temperature	T_{stg}	-55 ... +150	
Power dissipation[1)] T_A = 25 °C	P_{tot}	1.7	W
Inductive load switch-off energy dissipation[2)] single pulse T_j = 150 °C, I_L = 0.15 A	E_{AS}	1	J
Load dump protection[3)] $V_{LoadDump}$[4)]= V_A + V_S R_I=2Ω, t_d=400ms, V_{IN}= low or high I_L = 150 mA, V_{bb} = 13,5 V V_{bb} = 27 V	$V_{Loaddump}$	 93.5 127	V
Electro**s**tatic **d**ischarge voltage (Human Body Model) according to ANSI EOS/ESD - S5.1 - 1993 ESD STM5.1 - 1998 Input pin all other pins	V_{ESD}	 ±1 ±5	kV

[1]Device on 50mm*50mm*1.5mm epoxy PCB FR4 with 6 cm2 (one layer, 70µm thick) copper area for V_{bb} connection. PCB is vertical without blown air.

[2]not subject to production test, specified by design

[3]more details see EMC-Characteristics on page 7

[4]$V_{Loaddump}$ is setup without the DUT connected to the generator per ISO 7637-1 and DIN 40839 .

chanhvinh.com

Electrical Characteristics

Parameter at T_j = -40...150 °C, V_{bb} = 9...42 V unless otherwise specified	Symbol	Values			Unit
		min.	typ.	max.	
Thermal Characteristics					
Thermal resistance @ min. footprint	$R_{th(JA)}$	-	86	125	K/W
Thermal resistance @ 6 cm^2 cooling area [1]	$R_{th(JA)}$	-	60	72	
Thermal resistance, junction - soldering point	R_{thJS}	-	-	17	K/W
Load Switching Capabilities and Characteristics					
On-state resistance Pin1 connencted to GND	R_{ON}				Ω
T_j = 25 °C, I_L = 150 mA, V_{bb} = 9...52 V		-	1	1.5	
T_j = 150 °C		-	1.5	3	
T_j = 25 °C, I_L = 50 mA, V_{bb} = 6 V		-	2	5	
Nominal load current[2] Device on PCB [1] T_a = 85 °C , $T_j \leq$ 150 °C	$I_{L(nom)}$	0.2	-	-	A
Turn-on time[3] V_{IN} = V_{bb} to 0V to 90% V_{OUT}	t_{on}				µs
R_L = 270 Ω		-	-	125[4]	
R_L = 270 Ω, V_{bb} = 13.5 V, T_j = 25 °C		-	45	100	
Turn-off time[3] V_{IN} = 0V to V_{bb} to 10% V_{OUT}	t_{off}				
R_L = 270 Ω		-	-	175[4]	
R_L = 270 Ω, V_{bb} = 13.5 V, T_j = 25 °C		-	40	140	
Slew rate on[3] V_{IN} = V_{bb} to 0V 10 to 30% V_{OUT}	dV/dt_{on}				V/µs
R_L = 270 Ω		-	-	6[4]	
R_L = 270 Ω, T_j = 25 °C, V_{bb} = 13.5 V		-	1.3	4	
Slew rate off[3] V_{IN} = 0V to V_{bb} 70 to 40% V_{OUT}	$-dV/dt_{off}$				
R_L = 270 Ω		-	-	8[4]	
R_L = 270 Ω, T_j = 25 °C, V_{bb} = 13.5 V		-	1.7	4	

[1] Device on 50mm*50mm*1.5mm epoxy PCB FR4 with 6 cm2 (one layer, 70µm thick) copper area for V_{bb} connection. PCB is vertical without blown air.

[2] Nominal load current is limited by the current limitation (see page 5)

[3] Timing values only with high input slewrates, otherwise slower.

[4] not subject to production test, specified by design

chanhvinh.com

Electrical Characteristics

Parameter at T_j = -40...150 °C, V_{bb} = 9...42 V unless otherwise specified	Symbol	Values			Unit
		min.	typ.	max.	
Operating Parameters					
Operating voltage	$V_{bb(on)}$	4.9	-	60	V
Standby current Pin1 = open	$I_{bb(off)}$	-	2	10	µA
Protection Functions[1)]					
Initial peak short circuit current limit (see page 11) T_j = -40 °C, V_{bb} = 13.5 V, t_m = 100 µs T_j = 25 °C T_j = 150 °C	$I_{L(SCp)}$	 - - 0.2	 - 0.9 -	 1.2 - -	A
Repetitive short circuit current limit $T_j = T_{jt}$	$I_{L(SCr)}$	-	0.7	-	
Output clamp (inductive load switch off) at $V_{OUT} = V_{bb} - V_{ON(CL)}$, I_{bb} = 4 mA	$V_{ON(CL)}$	60	-	-	V
Overvoltage protection I_{bb} = 1 mA	$V_{bbin(AZ)}$	62	68	-	
Thermal overload trip temperature	T_{jt}	150	-	-	°C
Thermal hysteresis	ΔT_{jt}	-	10	-	K

[1] Integrated protection functions are designed to prevent IC destruction under fault conditions described in the data sheet. Fault conditions are considered as "outside" normal operating range. Protection functions are not designed for continuous repetitive operation.

chanhvinh.com

Electrical Characteristics

Parameter at T_j = -40...150 °C, V_{bb} = 9...42 V unless otherwise specified	Symbol	Values			Unit
		min.	typ.	max.	
Input					
Off state input current $V_{OUT} \leq 0.1$ V T_j = 25 °C, R_L = 270 Ω T_j = 150 °C	$I_{IN(off)}$	 - -	 - -	 0.05 0.04	mA
On state input current (Pin1 grounded)[1)]	$I_{IN(on)}$	-	0.3	1	
Input resistance	R_I	0.5	1	2.5	kΩ
Reverse Battery					
Continuous reverse drain current T_C = 25 °C	I_S	-	-	0.2	A
Drain-source diode voltage ($V_{OUT} > V_{bb}$) I_F = 0.2 A, $I_{IN} \leq$ 0,05 mA	$-V_{ON}$	-	600	-	mV

[1]Driver circuit must be able to drive currents > 1mA.

chanhvinh.com

EMC-Characteristics

All EMC-Characteristics are based on limited number of sampels and no part of production test.

Test Conditions:

If not other specified the test circuitry is the minimal functional configuration without any external components for protection or filtering.

Supply voltage:	V_{bb} = 13.5V	Temperature:	T_a = 23 ±5°C ;
Load:	R_L = 220Ω		
Operation mode:	PWM DC On/Off	Frequency:	100Hz / Duty Cycle: 50%
DUT-Specific.:	-		

Fast electrical transients

Acc. ISO 7637


Test Pulse	Test Level	Test Results		Pulse Cycle Time and Generator Impedance
		On	Off	
1	-200 V	C	C	500ms ; 10Ω
2	+200 V	C	C	500ms ; 10Ω
3a	-200 V	C	C	100ms ; 50Ω
3b	+ 200 V	C	C	100ms ; 50Ω
4[1)]	-7 V	C	C	0,01Ω
5	175 V	E (150V)	E (150V)	400ms ; 2Ω

The test pulses are applied at V_{bb}

Definition of functional status

Class	Content
C	All functions of the device are performed as designed after exposure to disturbance.
E	One or more function of a device does not perform as designed after exposure and can not be returned to proper operation without repairing or replacing the device. The value after the character shows the limit.

Test circuit:

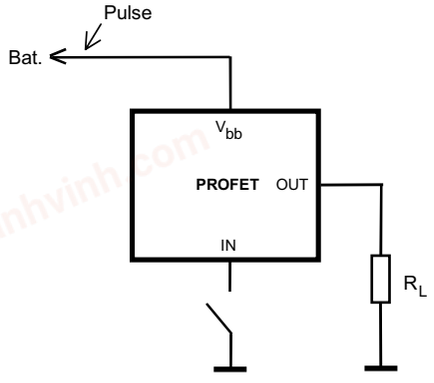


[1]Supply voltage V_{bb} = 12 V instead of 13,5 V.

chanhvinh.com


Conducted Emission

Acc. IEC 61967-4 (1Ω / 150Ω method)


Typ. V_{bb}-Pin Emission at DC-On with 150Ω-matching network

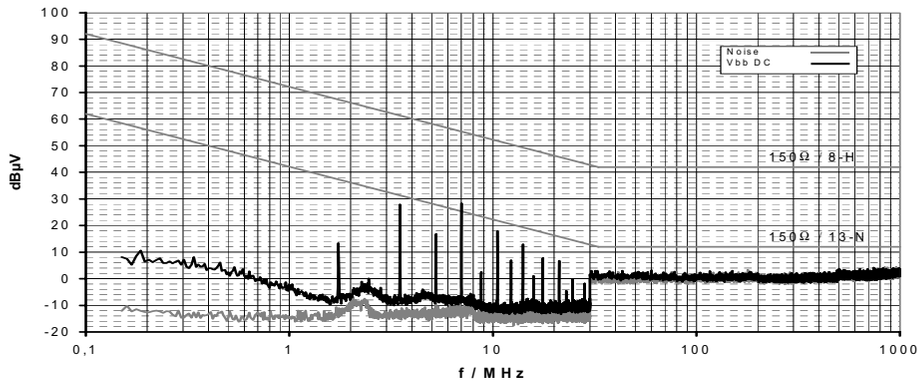

Typ. V_{bb}-Pin Emission at PWM-Mode with 150Ω-matching network

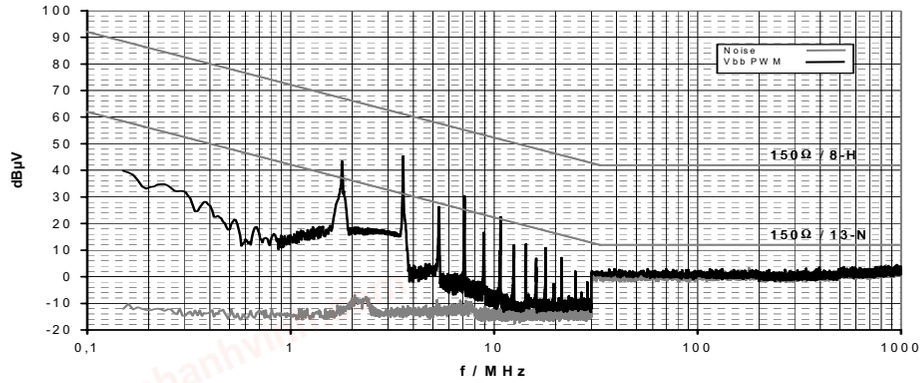

Test circuit:

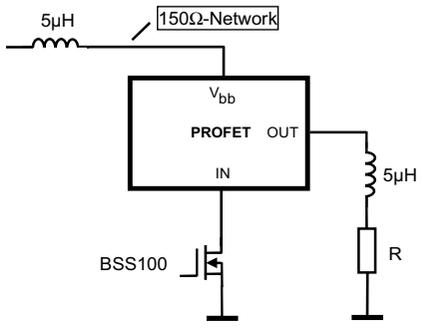

For defined decoupling and high reproducibility a defined choke (5µH at 1 MHz) is inserted between supply and V_{bb}-pin.


chanhvinh.com

Conducted Susceptibility


Acc. 47A/658/CD IEC 62132-4 (Direct Power Injection)

Direct Power Injection: Forward Power CW
Failure criteria: Amplitude and frequency deviation max. 10% at Out


Typ. V_{bb}-Pin Susceptibility at DC-On/Off

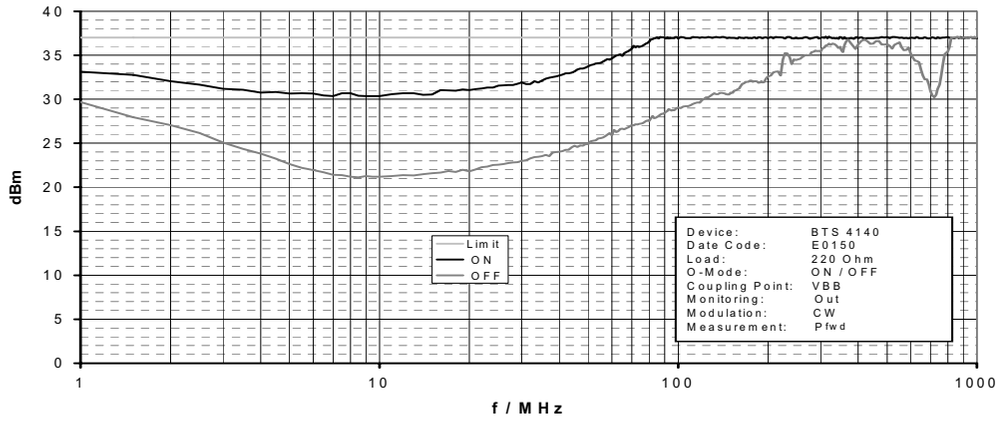

Typ. V_{bb}-Pin Susceptibility at PWM-Mode

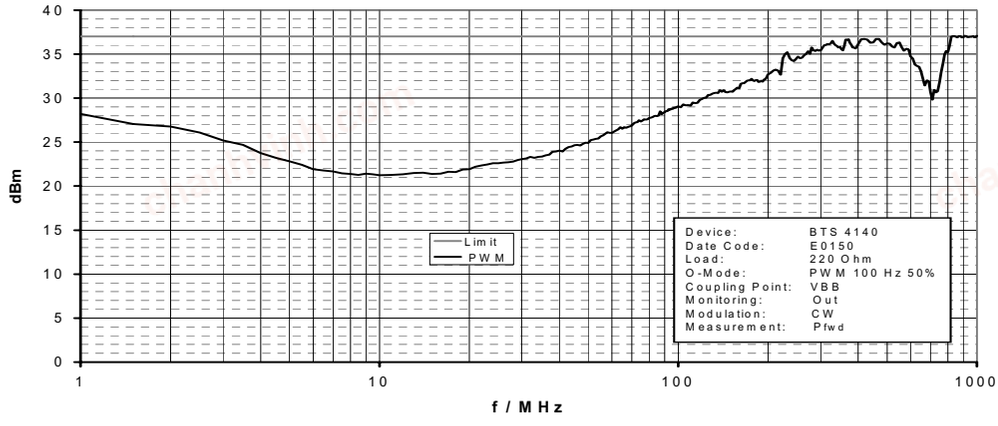


Test circuit:

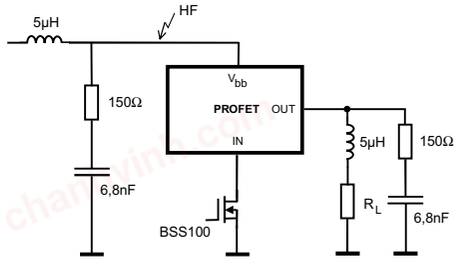


For defined decoupling and high reproducibility the same choke and the same 150Ω -matching network as for the emission measurement is used.

chanhvinh.com


Terms

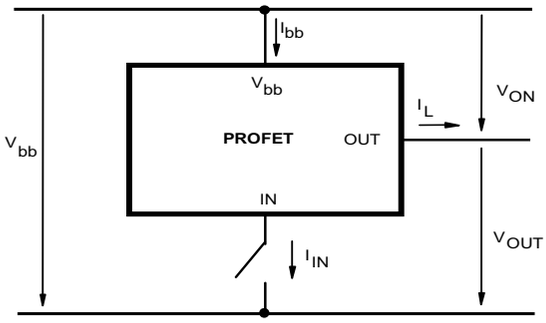

Input circuit (ESD protection)

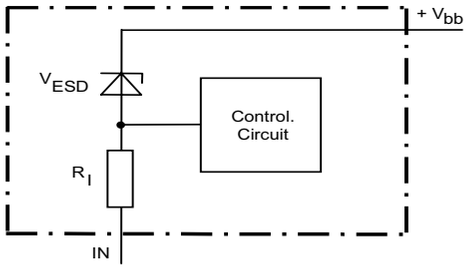


Reverse battery protection

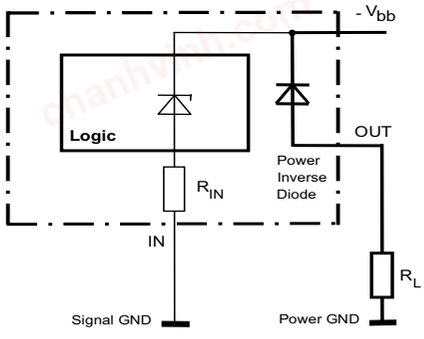


R_I=1kΩ typ., Temperature protection is not active during inverse current.

Inductive and overvoltage output clamp

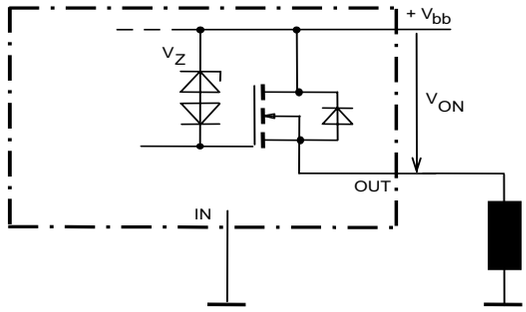

V_{ON} clamped to 60 V min.


Overvoltage protection of logic part

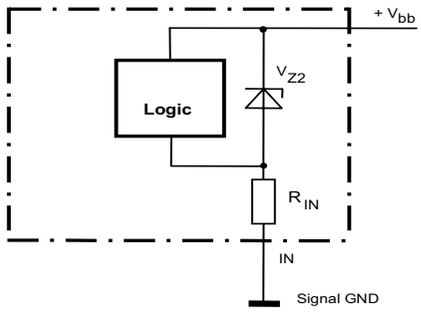


$V_{bb,AZ} = V_{Z2} + I_{bb} * R_{IN}$ = 62V min.

chanhvinh.com

V_{bb} disconnect with charged inductive load

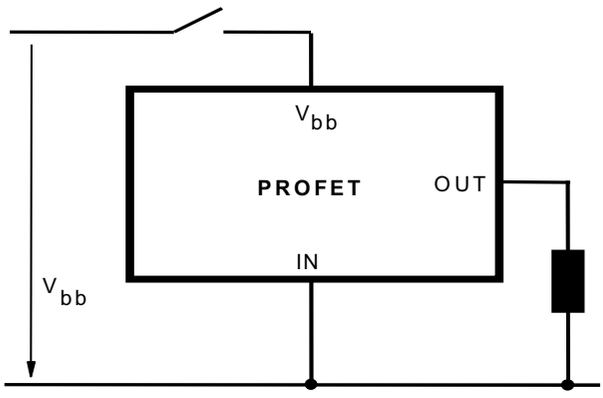

Inductive Load switch-off energy dissipation

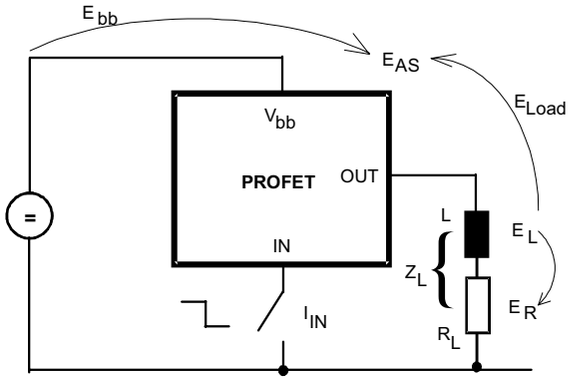


Energy stored in load inductance: $E_L = ½ * L * I_L^2$

While demagnetizing load inductance,
the enérgy dissipated in PROFET is
$E_{AS} = E_{bb} + E_L - E_R = V_{ON(CL)} * i_L(t)\,dt$,
with an approximate solution for $R_L > 0\Omega$:


$$E_{AS} = \frac{I_L * L}{2 * R_L} * (V_{bb} + |V_{OUT(CL)}|) * \ln\left(1 + \frac{I_L * R_L}{|V_{OUT(CL)}|}\right)$$

chanhvinh.com


Typ. transient thermal impedance
Z_{thJA}=f(t_p) @ 6cm² heatsink area
Parameter: $D=t_p/T$

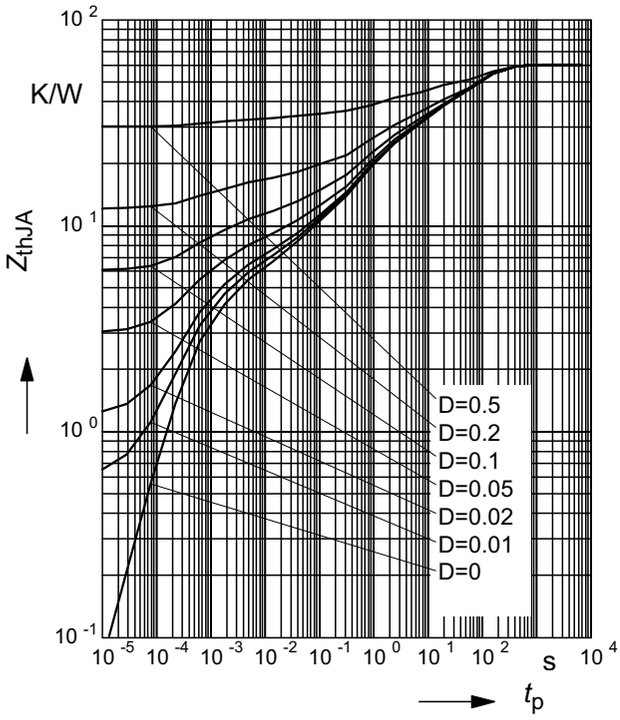


Typ. transient thermal impedance
Z_{thJA}=f(t_p) @ min. footprint
Parameter: $D=t_p/T$

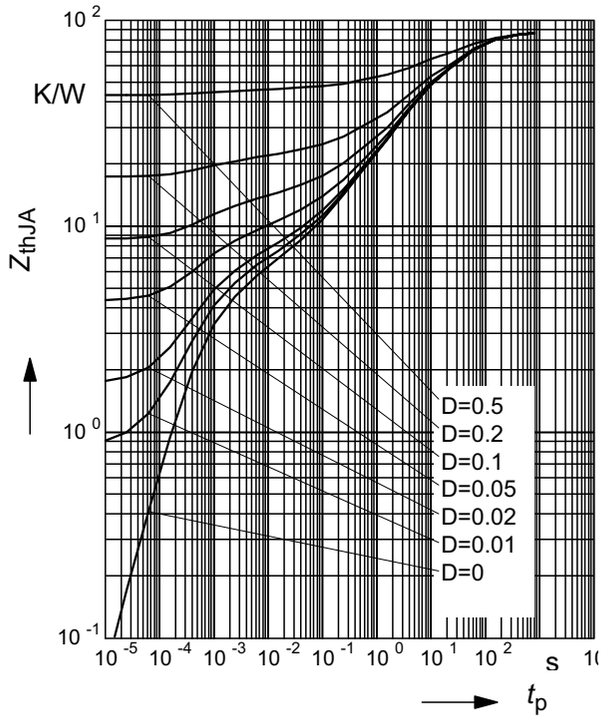

Typ. on-state resistance
R_{ON} = f(T_j) ; V_{bb} = 9V ; Pin1 grounded;
I_L=150mA

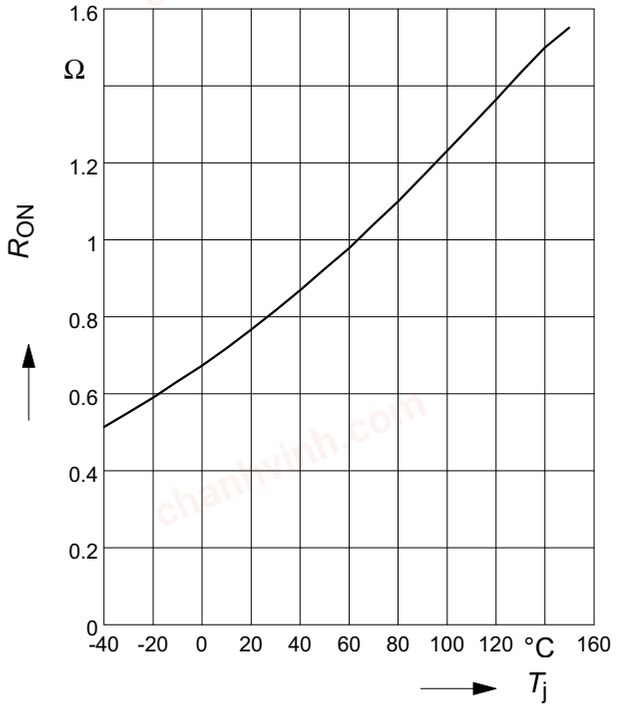


Typ. on-state resistance
R_{ON} = f(V_{bb}); I_L = 150mA ; Pin1 grounded

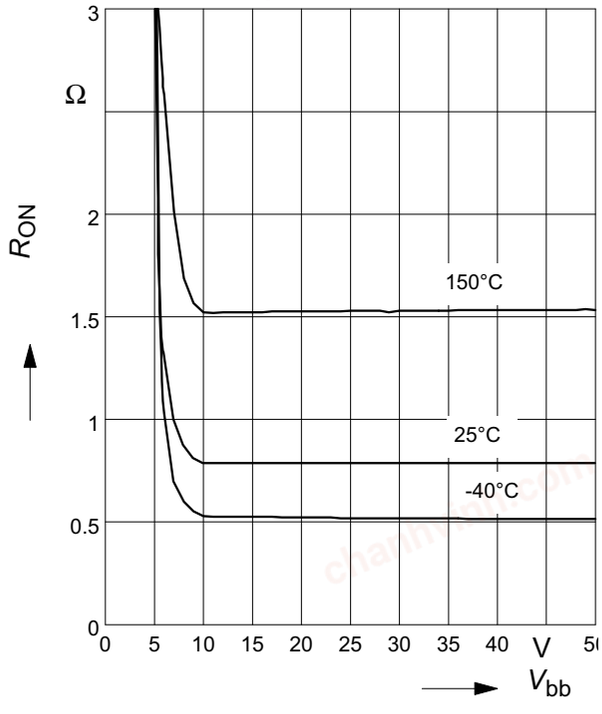

chanhvinh.com


Typ. turn on time

t_{on} = f(T_j); R_L = 270Ω

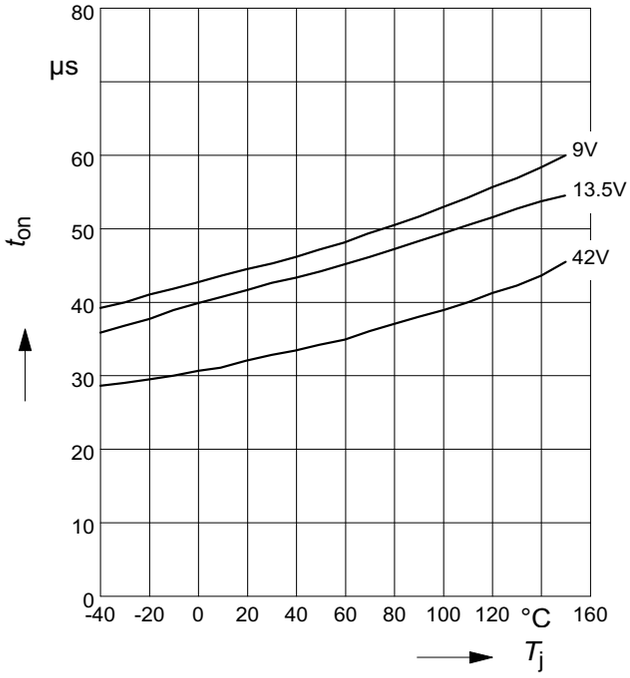


Typ. turn off time

t_{off} = f(T_j); R_L = 270Ω

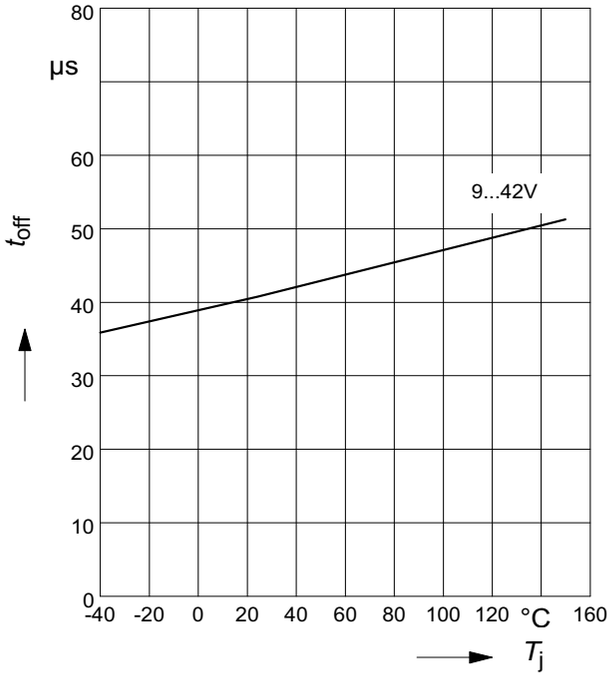


Typ. slew rate on

dV/dt_{on} = f(T_j) ; R_L = 270 Ω

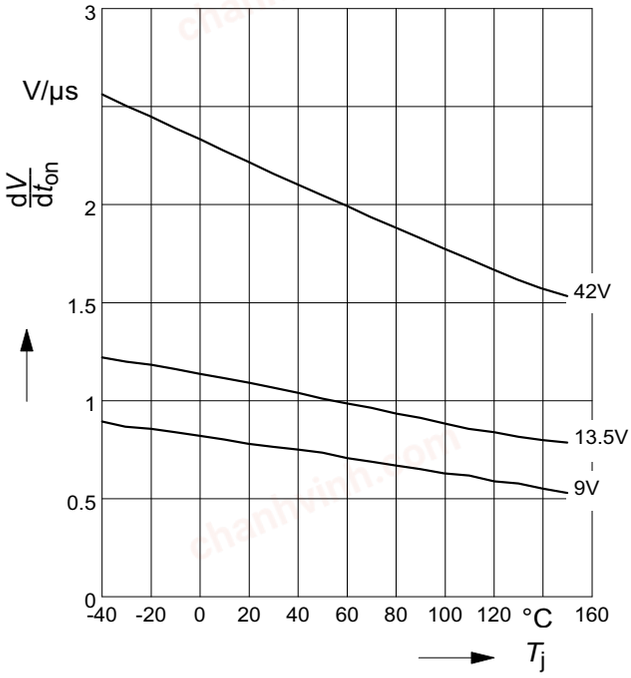


Typ. slew rate off

dV/dt_{off} = f(T_j); R_L = 270 Ω

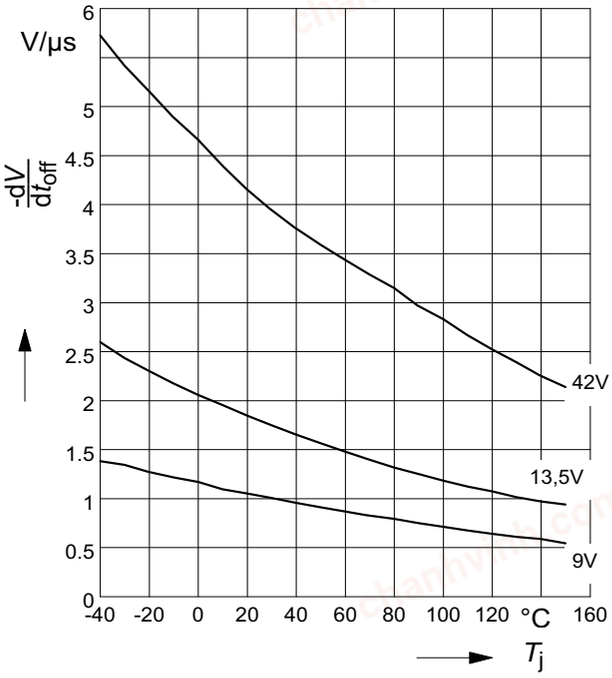


chanhvinh.com


Typ. initial peak short circuit current limit
$I_{L(SCp)} = f(T_j)$; V_{bb} = 13,5 V; t_m = 100 µs

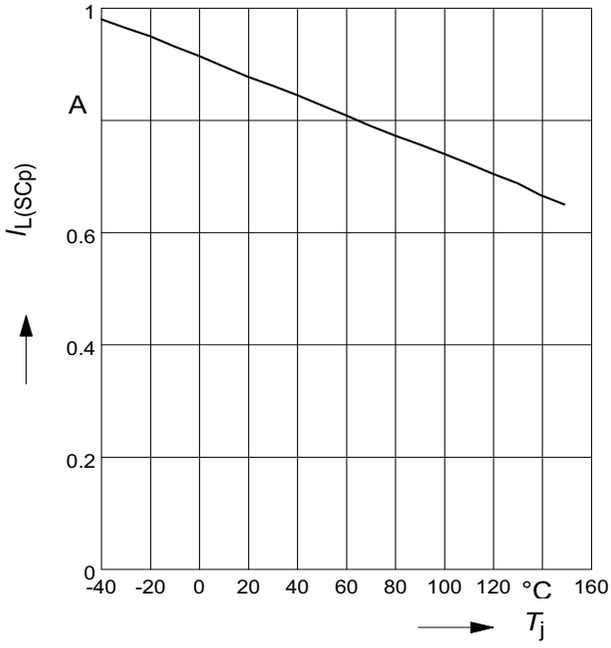


Typ. initial short circuit shutdown time
$t_{off(SC)} = f(T_{j,start})$

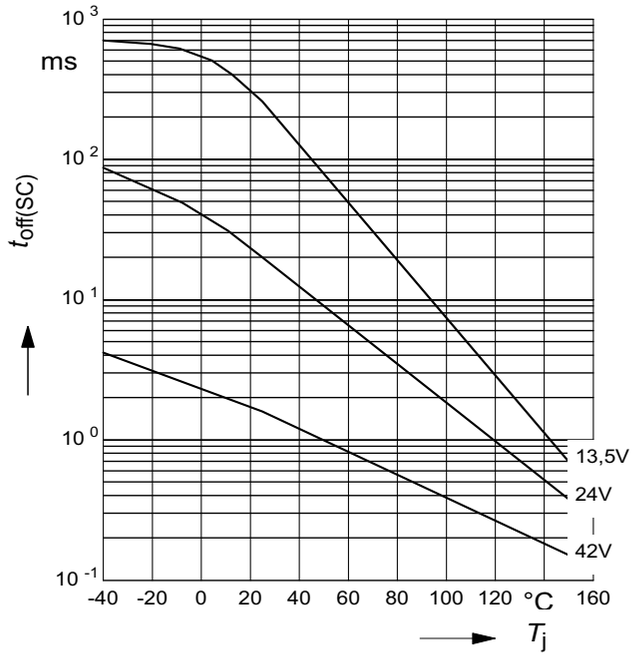

Typ. initial peak short circuit current limit
$I_{L(SCp)} = f(V_{bb})$; t_m = 100 µs

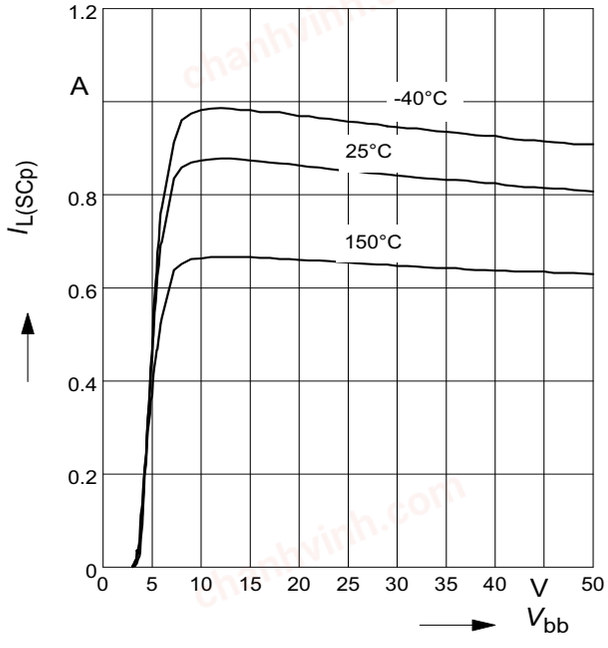


Typ. current limitation characteristic:
$I_{L(SC)} = f(V_{ON})$, V_{bb} = 13,5V

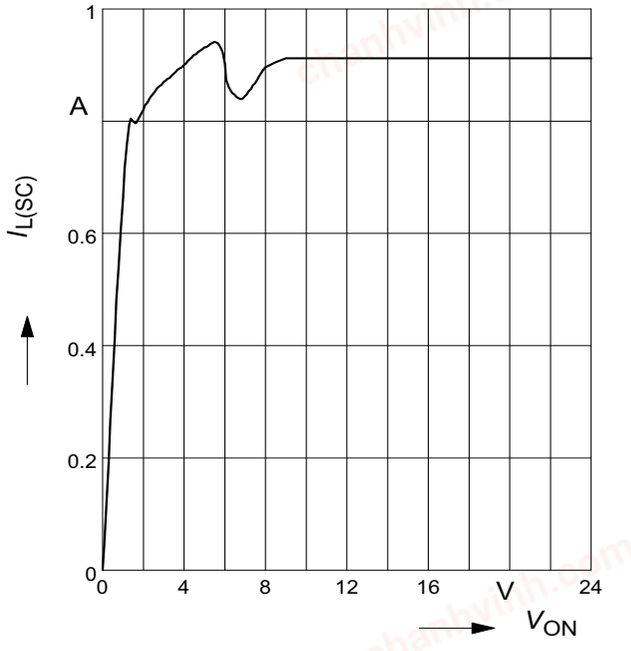

chanhvinh.com


Typ. standby current

$I_{bb(off)} = f(T_j)$; Pin1 open

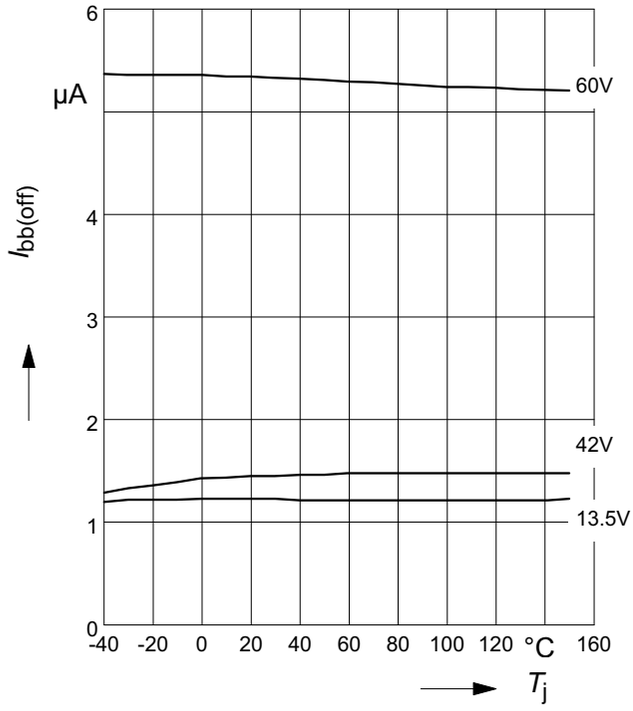

Maximum allowable inductive switch-off energy, single pulse

$E_{AS} = f(I_L)$; T_{jstart} = 150°C

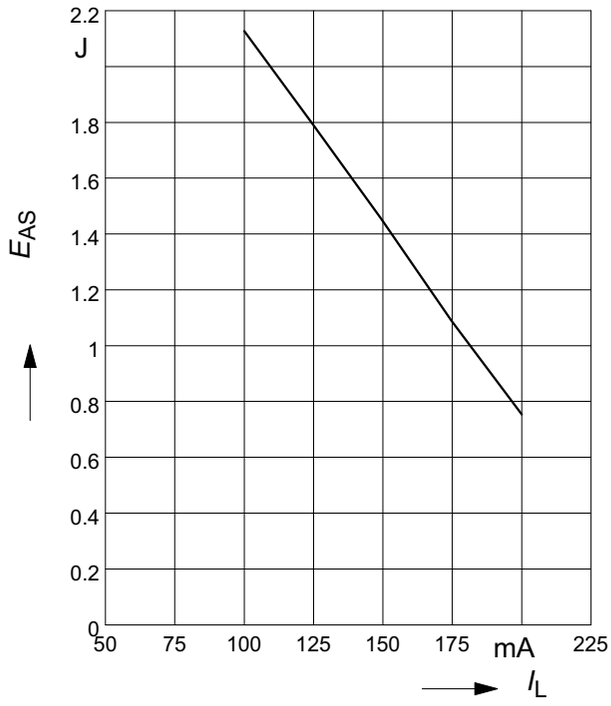

chanhvinh.com

Figure 1a: Vbb turn on:

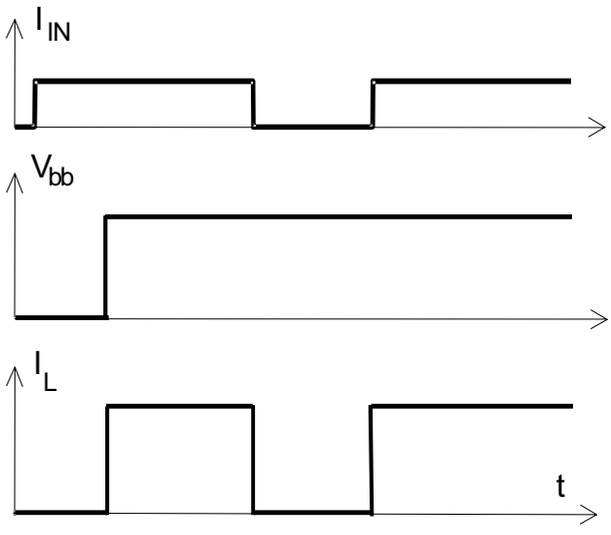


Figure 2b: Switching a lamp

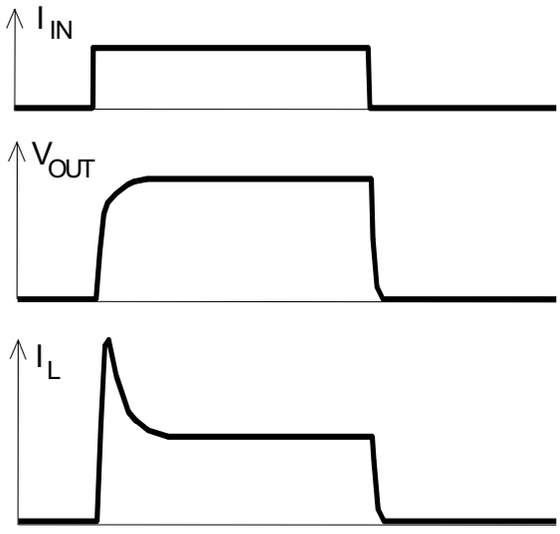


Figure 2a: Switching a resistive load, turn-on/off time and slew rate definition



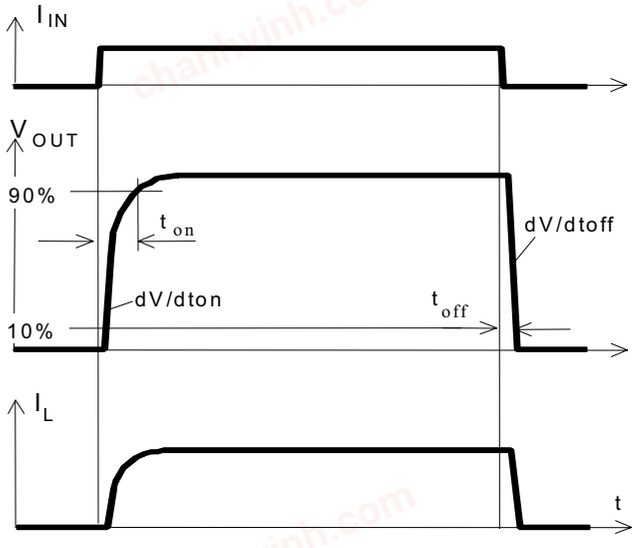


Figure 2c: Switching an inductive load

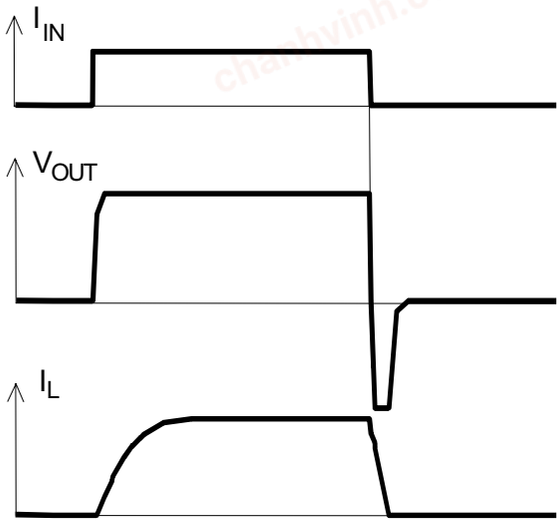

chanhvinh.com

Figure 3a: Turn on into short circuit,
shut down by overtemperature, restart by cooling

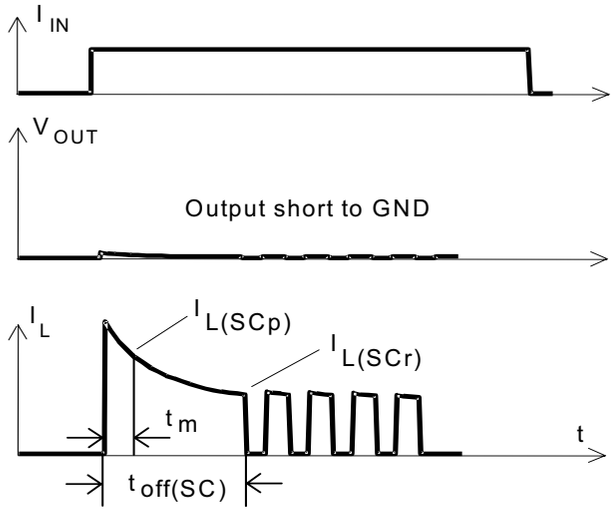

Heating up of the chip may require several milliseconds, depending on external conditions.

Figure 3b: Short circuit in on-state
shut down by overtemperature, restart by cooling


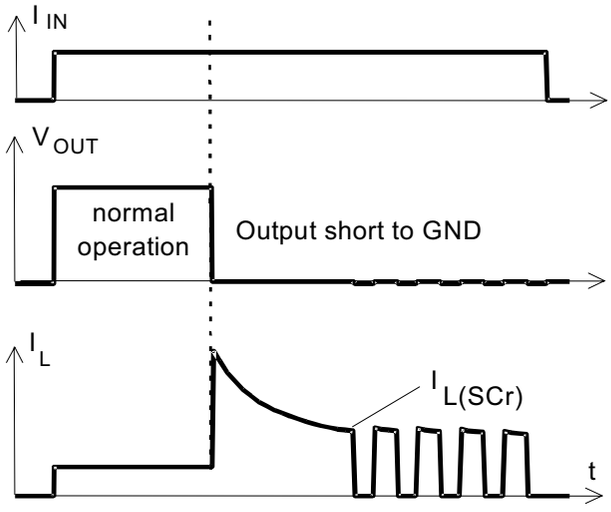


Figure 4: Overtemperature:
Reset if $T_j < T_{jt}$

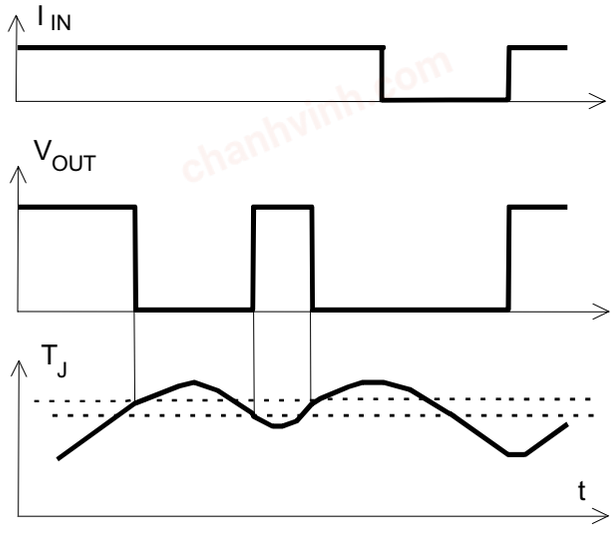

chanhvinh.com

Package Outlines

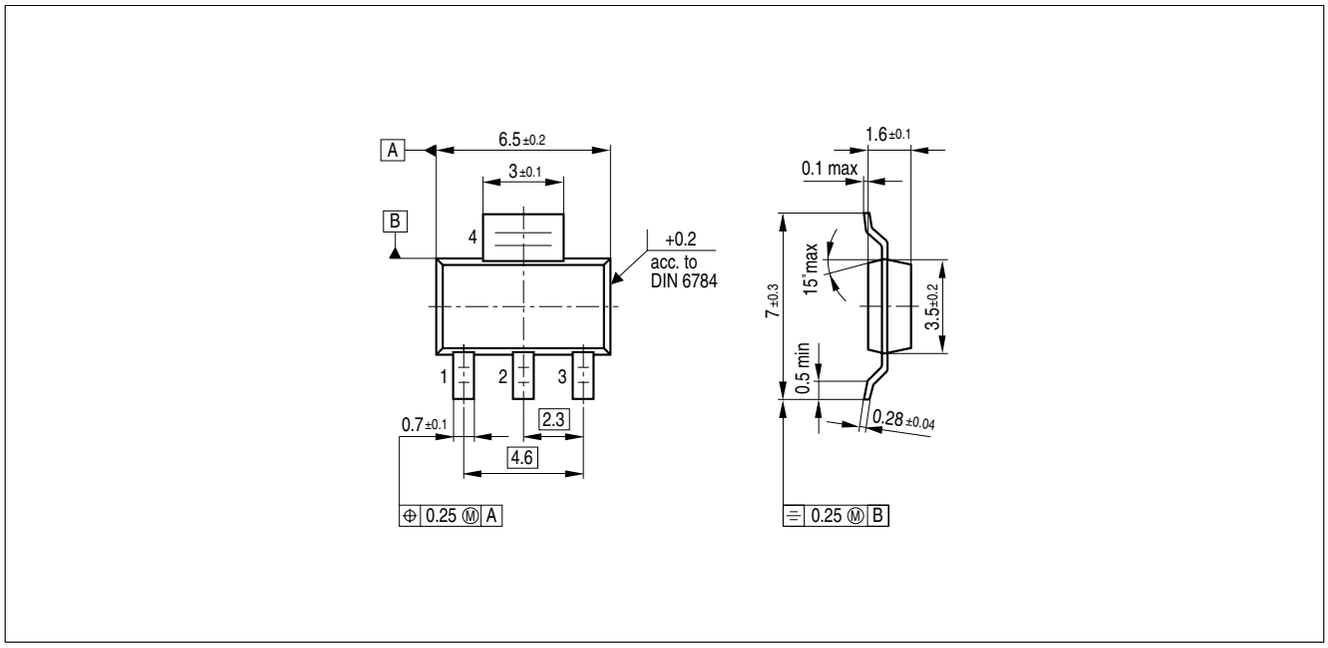


Figure 1 **PG-SOT-223** (Plastic Dual Small Outline Package) (RoHS-compliant)

To meet the world-wide customer requirements for environmentally friendly products and to be compliant with government regulations the device is available as a green product. Green products are RoHS-Compliant (i.e Pb-free finish on leads and suitable for Pb-free soldering according to IPC/JEDEC J-STD-020).

Please specify the package needed (e.g. green package) when placing an order

You can find all of our packages, sorts of packing and others in our Infineon Internet Page “Products”: **http://www.infineon.com/products**.

Dimensions in mm

chanhvinh.com

Revision History

Version	Date	Changes
V1.1	2007-05-29	Creation of the green datasheet. First page : Adding the green logo and the AEC qualified Adding the bullet AEC qualified and the RoHS compliant features Package page Modification of the package to be green.

chanhvinh.com

Edition 2007-05-29

Published by
Infineon Technologies AG
81726 Munich, Germany

© Infineon Technologies AG 5/29/07.
All Rights Reserved.

Legal Disclaimer

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics (“Beschaffenheitsgarantie”). With respect to any examples or hints given herein, any typical values stated herein and/or any information regarding the application of the device, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation warranties of non-infringement of intellectual property rights of any third party.

Information

For further information on technology, delivery terms and conditions and prices please contact your nearest Infineon Technologies Office (**www.infineon.com**).

Warnings

Due to technical requirements components may contain dangerous substances. For information on the types in question please contact your nearest Infineon Technologies Office.

Infineon Technologies Components may only be used in life-support devices or systems with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support device or system, or to affect the safety or effectiveness of that device or system. Life support devices or systems are intended to be implanted in the human body, or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.