chanhvinh.com

Public

IGLR65R200D2
Final datasheet

CoolGaN™ G5

PG-TSON-8

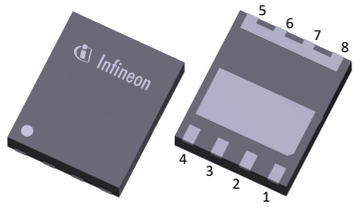

CoolGaN™ Transistor 650 V G5

Infineon's CoolGaN™ is a highly efficient gallium nitride (GaN) transistor designed for power conversion at 650 V. It enables higher power density, supports reduced system BOM cost, and facilitates miniaturized form factors. Produced using 200 mm (8 inch) wafer technology and fully automated production lines, it features narrow production tolerances and the highest product quality. This makes it suitable for a wide range of applications, from consumer electronics to industrial applications.

Features

- Enhancement mode transistor
- Ultra-fast switching
- No reverse-recovery charge
- Capable of reverse conduction
- Low gate and output charge
- Superior commutation ruggedness
- 2 kV HBM ESD standards



Benefits

- Normally OFF transistor technology ensures safe operation
- Enables rapid and precise power delivery control
- Improves system efficiency and reliability
- Ensures robust performance under challenging conditions

These features collectively make CoolGaN™ a game-changer in the realm of power conversion, offering a compelling combination of efficiency, compactness, and reliability.



Potential applications

Industrial, telecom, datacenter SMPS based on half-bridge hard and soft switching topologies such as totem pole PFC and high frequency LLC, as well as charger and adapter.

Product validation

Fully qualified according to JEDEC for Industrial Applications

Table 1 Key performance parameters

Parameter	Value	Unit
$V_{DS,max}$	650	V
$V_{DS,trans-max}$	900	V
$R_{DS(on),max}$	240	mΩ
$Q_{g,typ}$	1.3	nC
$I_{D,pulse}$	16	A
Q_{oss} @ 400 V	9.6	nC
Q_{rr}	0	nC

Type / Ordering code	Package	Marking	Related links
IGLR65R200D2	PG-TSON-8	65R200D	see Appendix A

chanhvinh.com

Table of contents

Description 1
Maximum ratings 3
Thermal characteristics 4
Electrical characteristics 5
Electrical characteristics diagrams 7
Test circuits 12
Package outlines 13
Appendix A 16
Revision history 17
Trademarks 17
Disclaimer 17

chanhvinh.com

1 Maximum ratings

at T_j = 25°C, unless otherwise specified. Stresses beyond max ratings may cause permanent damage to the device. For optimum lifetime and reliability, Infineon recommends operating conditions that do not continuously exceed 80% of the maximum ratings stated (unless otherwise explicitly stated). For further information, contact your local Infineon sales office.

Table 2 Maximum ratings

Parameter	Symbol	Values			Unit	Note / Test condition
		Min.	Typ.	Max.		
Drain source voltage, continuous	$V_{DS,max}$	-	-	650	V	V_{GS} = 0 V, derating recommendation according JEDEC JEP198
Leakage current at drain source transient voltage	$I_{DS,trans}$	-	-	3.3	mA	V_{GS} = 0 V, $V_{DS,trans}$ = 900 V
Drain source voltage transient	$V_{DS,trans}$	-	-	900	V	<1% duty cycle, <1 µs, 1 million pulses
Drain source voltage, pulsed	$V_{DS,pulsed}$	-	-	750 650	V	T_j = 25°C; V_{GS} ≤ 0 V; cumulated stress time ≤ 1 h T_j = 125°C; V_{GS} ≤ 0 V; cumulated stress time ≤ 1 h
Switching surge voltage, pulsed	$V_{DS,surge}$	-	-	750	V	DC bus voltage = 700 V; turn off $V_{DS,pulse}$ = 750 V; turn on $I_{D,pulse}$ =7.3 A; T_j = 105°C; f ≤ 100 kHz, t ≤100 s (10 million pulses)
Continuous current, drain source [1]	I_D	-	-	9.2	A	T_C=25°C; T_j = $T_{j,max}$
Pulsed current, drain source	$I_{D,pulse}$	-16 -9.7	-	16 9.7	A	T_j=25°C; I_G=7.1 mA; See Diagram 3, 5 T_j=125°C; I_G=7.1 mA; See Diagram 4, 6
Gate current, continuous [2]	$I_{G,avg}$	-	-	5.3	mA	T_j=-55°C to T_j=150°C; See Table 9
Gate current, pulsed [2]	$I_{G,pulsed}$	-0.53	-	0.53	A	T_j=-55°C to T_j=150°C; t_{pulse}= 50 ns, f = 100 kHz; See Table 9
Gate source voltage, continuous [2]	V_{GS}	-10	-	-	V	T_j=-55°C to T_j=150°C; See Diagram 12
Gate source voltage, pulsed [2]	$V_{GS,pulse}$	-25	-	-	V	T_j=-55°C to T_j=150°C; t_{pulse}= 50 ns, f = 100 kHz; open drain
Power dissipation	P_{tot}	-	-	34	W	T_C=25°C
Operating junction temperature	T_j	-55	-	150	°C	-
Storage temperature	T_{stg}	-55	-	150	°C	Max shelf life depends on storage conditions
Drain-source voltage slew-rate	dv/dt	-	-	200	V/ns	-

[1] Limited by $T_{j,max}$. Maximum duty cycle D = 0.75

[2] We recommend using an advanced driving technique to optimize the device performance. Please see gate drive application note for more details.

chanhvinh.com

2 Thermal characteristics

Table 3 Thermal characteristics

Parameter	Symbol	Values			Unit	Note / Test condition
		Min.	Typ.	Max.		
Thermal resistance, junction - case	R_{thJC}	-	-	3.7	°C/W	-
Thermal resistance, junction - ambient	R_{thJA}	-	-	163	°C/W	Device on PCB, minimum footprint
Thermal resistance, junction - ambient for SMD version	R_{thJA}	-	-	74	°C/W	Device on 40 mm*40 mm*1.5 mm epoxy PCB FR4 with 6 cm^2 (one layer, 70 µm thickness) copper area for tab (source) connection and cooling. PCB is vertical without air stream cooling.
Soldering temperature	T_{sold}	-	-	260	°C	MSL3, wave & reflow soldering allowed

chanhvinh.com

3 Electrical characteristics

at T_j=25°C, unless specified otherwise

Table 4 Static characteristics

Parameter	Symbol	Values			Unit	Note / Test condition
		Min.	Typ.	Max.		
Gate threshold voltage	$V_{GS(th)}$	0.9 -	1.2 1	1.6 -	V	I_{DS}=0.71 mA; V_{DS}=10 V; T_j=25°C I_{DS}=0.71 mA; V_{DS}=10 V; T_j=150°C
Gate-Source reverse clamping voltage	$V_{GS,\ clamp}$	-	-	-8	V	I_{GS}=-1 mA
Drain-Source leakage current	I_{DSS}	-	0.27 5.4	27 -	µA	V_{DS}=650 V, V_{GS}=0 V, T_j=25°C V_{DS}=650 V, V_{GS}=0 V, T_j=150°C
Drain-Source on-state resistance	$R_{DS(on)}$	-	0.200 0.430	0.240 -	Ω	I_G=7.1 mA; I_D=2.1 A; T_j=25°C I_G=7.1 mA; I_D=2.1 A; T_j=150°C
Gate resistance	$R_{G,int}$	-	0.87	-	Ω	LCR impedance measurement; f=f_{res}, open drain;

Table 5 Dynamic characteristics

Parameter	Symbol	Values			Unit	Note / Test condition
		Min.	Typ.	Max.		
Input capacitance	C_{iss}	-	91	-	pF	V_{GS}=0 V; V_{DS}=400 V, f=1 MHz
Output capacitance	C_{oss}	-	15	-	pF	V_{GS}=0 V, V_{DS}=400 V, f=1 MHz
Reverse transfer capacitance	C_{rss}	-	0.21	-	pF	V_{GS}=0 V, V_{DS}=400 V, f=1 MHz
Effective output capacitance, energy related [3)]	$C_{o(er)}$	-	18	-	pF	V_{DS}=0 to 400 V
Effective output capacitance, time related [4)]	$C_{o(tr)}$	-	24	-	pF	V_{GS}=0 V; V_{DS}=0 to 400 V; I_D=const
Output charge	Q_{oss}	-	9.6	-	nC	V_{DS}=0 to 400 V
Coss stored energy	E_{oss}	-	1.4	.	µJ	V_{DS}=0 to 400 V
Turn-on delay time	$t_{d(on)}$	-	7	-	ns	I_D= 2.1 A; R_{ON}=18 Ohm; R_{OFF}=18 Ohm; R_{SS}=1200 Ohm; C_C=0.82 nF; V_{DRV}=12 V; see Table 8
Turn-off delay time	$t_{d(off)}$	-	9	-	ns	I_D= 2.1 A; R_{ON}=18 Ohm; R_{OFF}=18 Ohm; R_{SS}=1200 Ohm; C_C=0.82 nF; V_{DRV}=12 V; see Table 8
Rise time	t_r	-	6	-	ns	I_D= 2.1 A; R_{ON}=18 Ohm; R_{OFF}=18 Ohm; R_{SS}=1200 Ohm; C_C=0.82 nF; V_{DRV}=12 V; see Table 8
Fall time	t_f	-	28	-	ns	I_D= 2.1 A; R_{ON}=18 Ohm; R_{OFF}=18 Ohm; R_{SS}=1200 Ohm; C_C=0.82 nF; V_{DRV}=12 V; see Table 8

chanhvinh.com

3) $C_{o(er)}$ is a fixed capacitance that gives the same stored energy as C_{oss} while V_{DS} is rising from 0 to 400 V
4) $C_{o(tr)}$ is a fixed capacitance that gives the same charging time as C_{oss} while V_{DS} is rising from 0 to 400 V

Table 6 Gate charge characteristics

Parameter	Symbol	Values			Unit	Note / Test condition
		Min.	Typ.	Max.		
Gate charge	Q_G	-	1.26	-	nC	V_{GS}=0 to 3 V; V_{DS}=400 V, I_D=2.1 A

Table 7 Reverse conduction characteristics

Parameter	Symbol	Values			Unit	Note / Test condition
		Min.	Typ.	Max.		
Source-Drain reverse voltage	V_{SD}	-	2.0	2.4	V	V_{GS}=0 V; I_{SD}=2.1 A
Pulsed current, reverse	$I_{SD,pulse}$	-	-	16	A	I_G=7.1 mA
Reverse recovery charge 5)	Q_{rr}	-	0	-	nC	I_{SD}=2.1 A; V_{DS}=400 V

5) Excluding Qoss

chanhvinh.com

4 Electrical characteristics diagrams

Diagram 1: Power dissipation

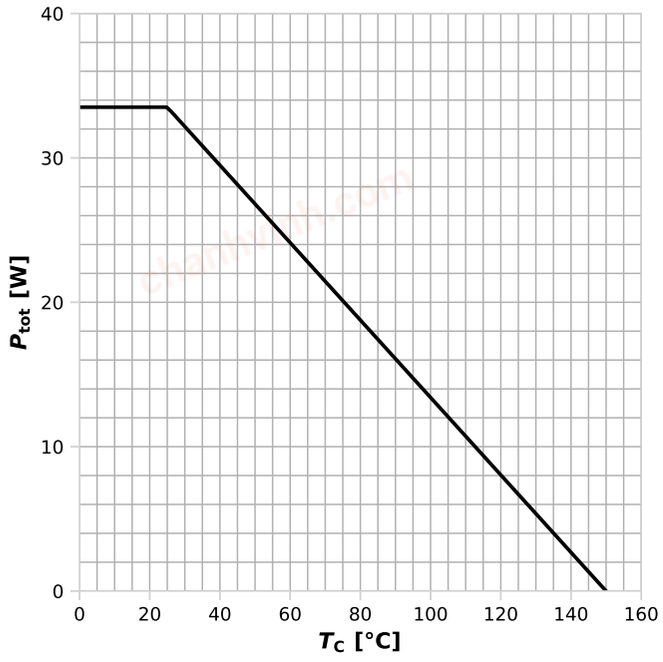

P_{tot}=f(T_C)

Diagram 2: Max. transient thermal impedance

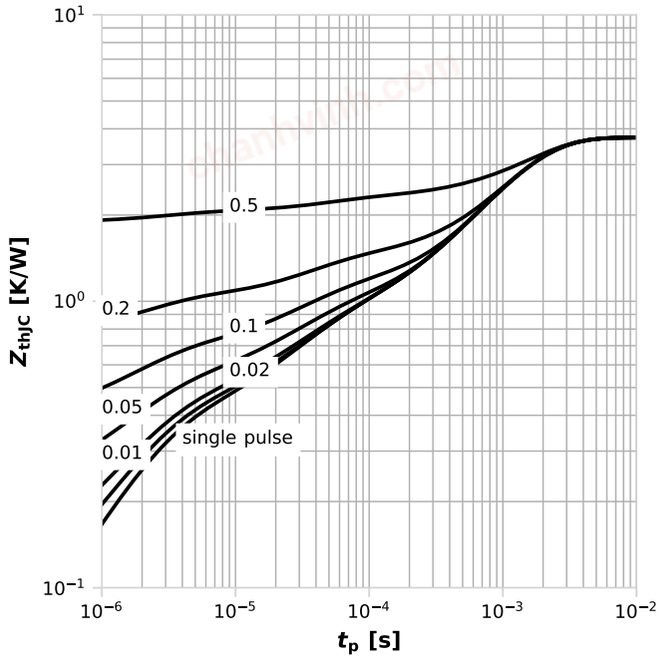

Z_{thJC} =f(t_P); parameter: D=t_p/T

Diagram 3: Safe operating area

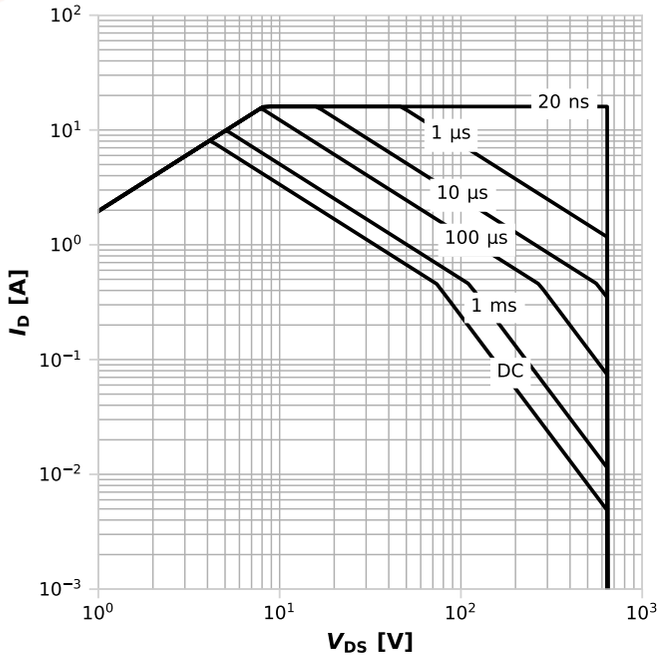

I_D=f(V_{DS}); T_C=25°C; D=0; parameter: t_p

Diagram 4: Safe operating area

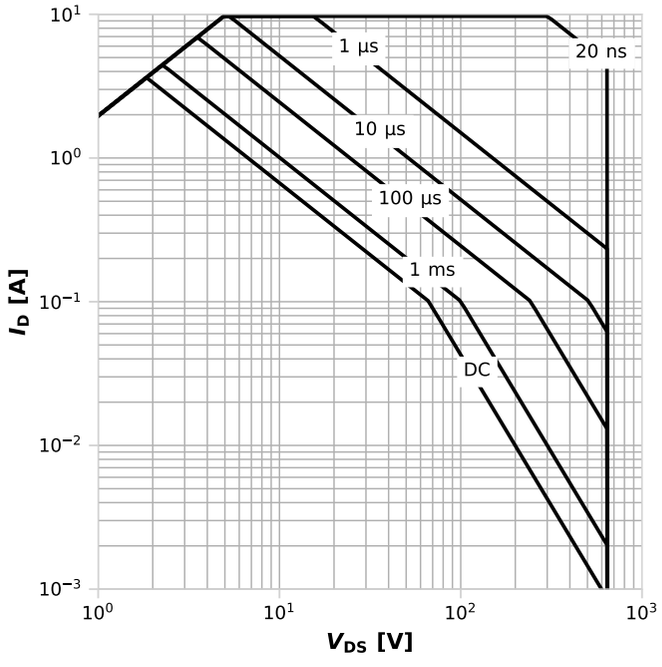

I_D=f(V_{DS}); T_C=125°C; D=0; parameter: t_p

chanhvinh.com

Diagram 5: Repetitive safe operating area	Diagram 6: Repetitive safe operating area
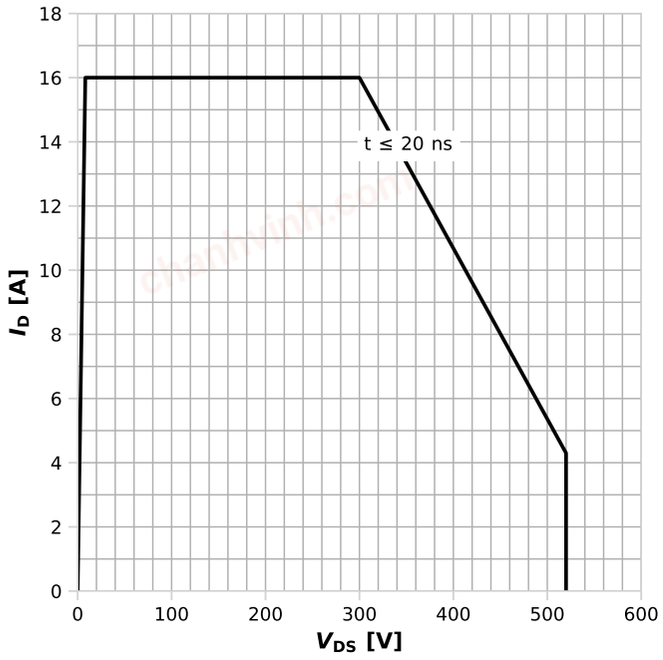	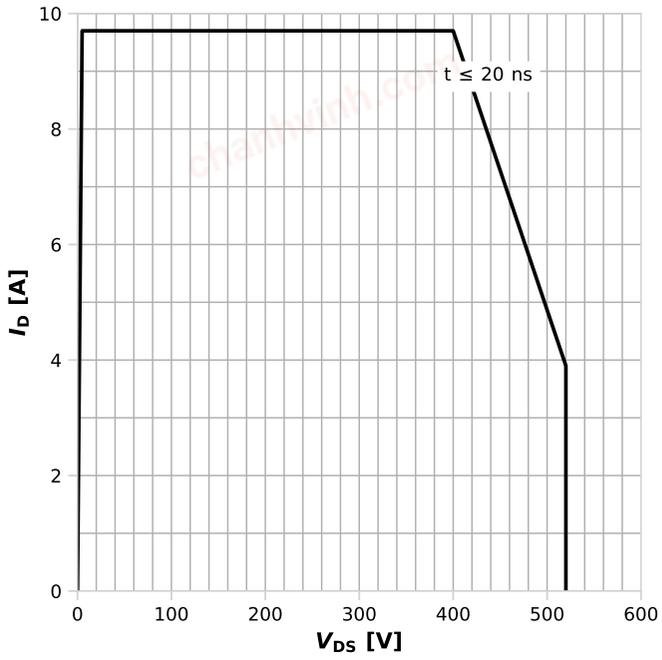
I_D=f(V_{DS}); T_C=25°C; T_j≤150°C; parameter: t_p	I_D=f(V_{DS}); T_C=125°C; T_j≤150°C; parameter: t_p

Diagram 7: Typ. output characteristics	Diagram 8: Typ. output characteristics
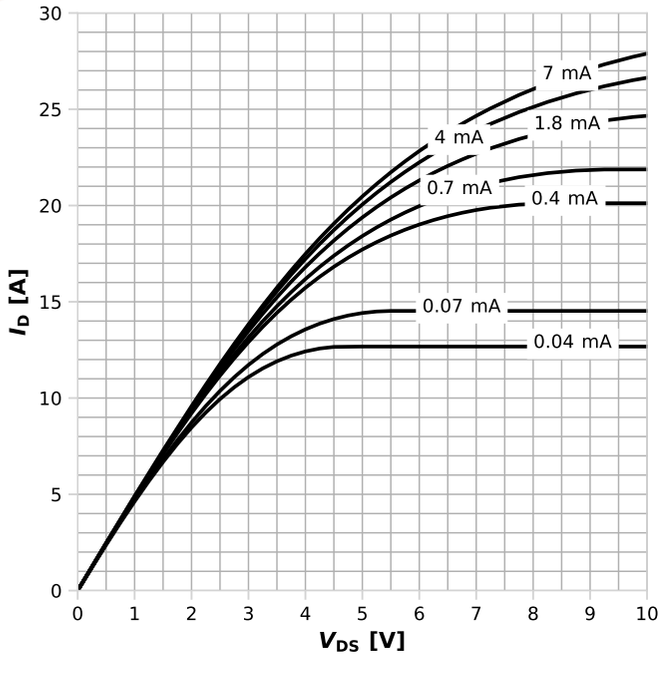	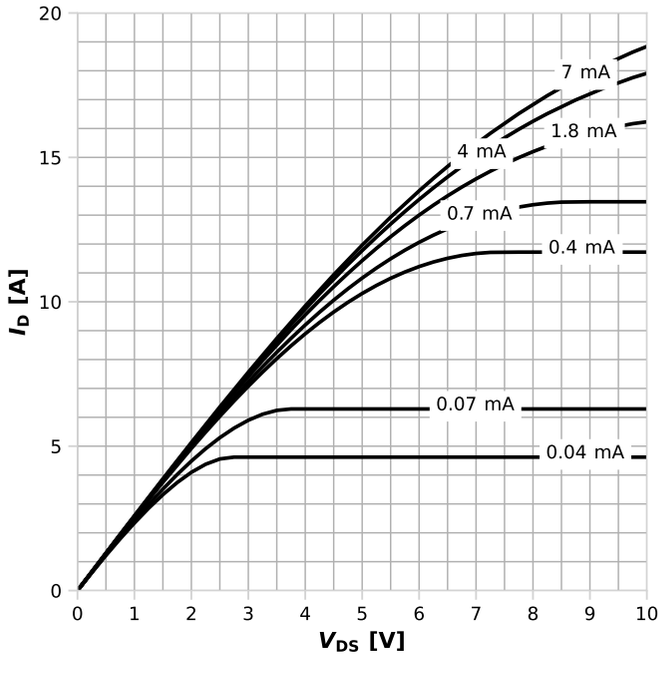
I_D=f(V_{DS}); T_j=25°C; parameter: I_{GS}	I_D=f(V_{DS}); T_j=125°C; parameter: I_{GS}

chanhvinh.com

Diagram 9: Typ. Drain-source on-state resistance	Diagram 10: Drain-source on-state resistance
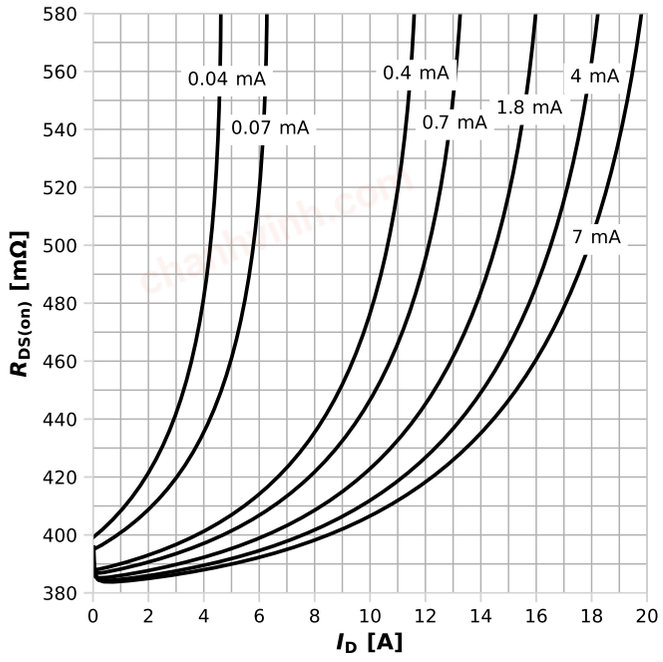	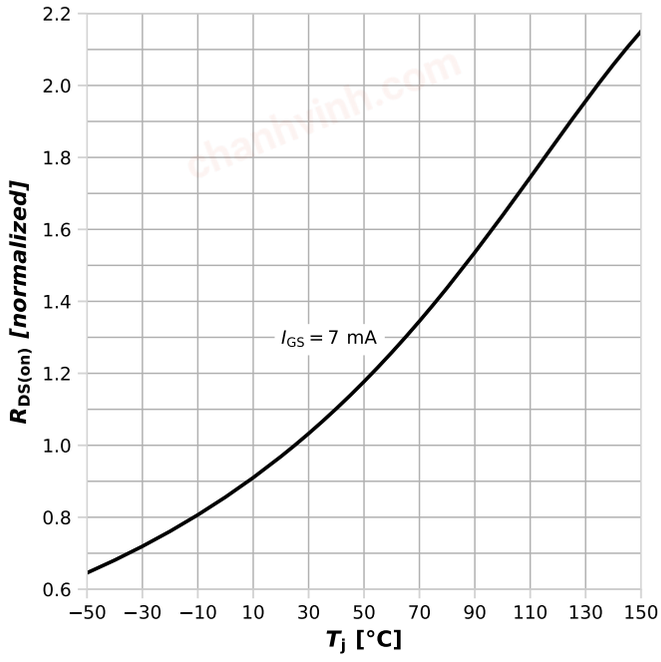
$R_{DS(on)}$=f(I_D); T_j=125°C; parameter: I_{GS}	$R_{DS(on)}$=f(T_j); I_D=2.1 A

Diagram 11: Typ. gate characteristics forward	Diagram 12: Typ. gate characteristics reverse
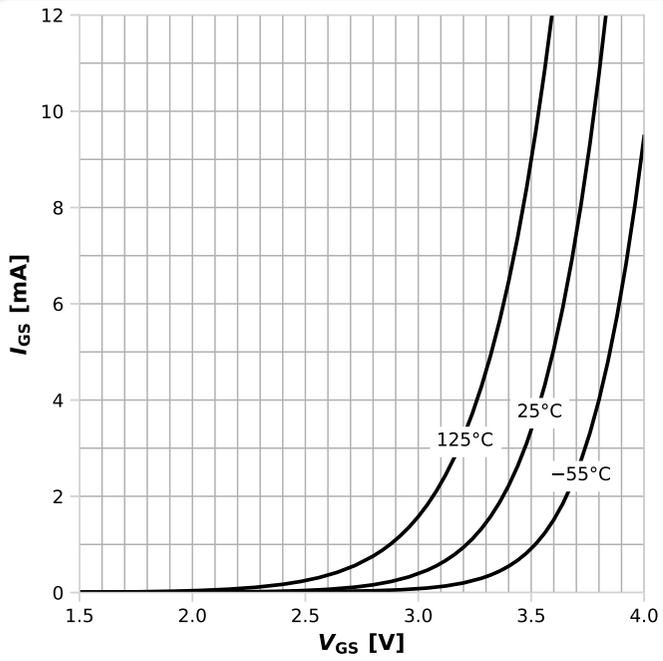	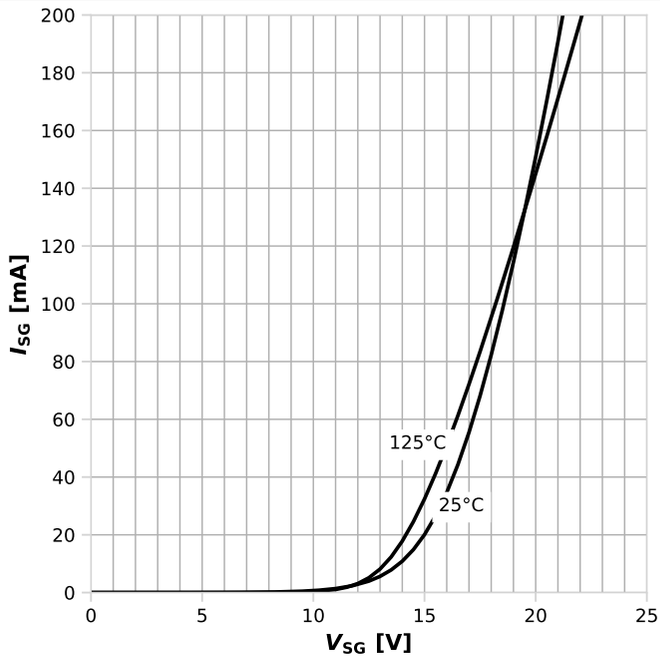
I_{GS}=f(V_{GS}); open drain; parameter: T_j	I_{SG}=f(V_{SG}); parameter: T_j

chanhvinh.com

Diagram 13: Typ. transfer characteristics

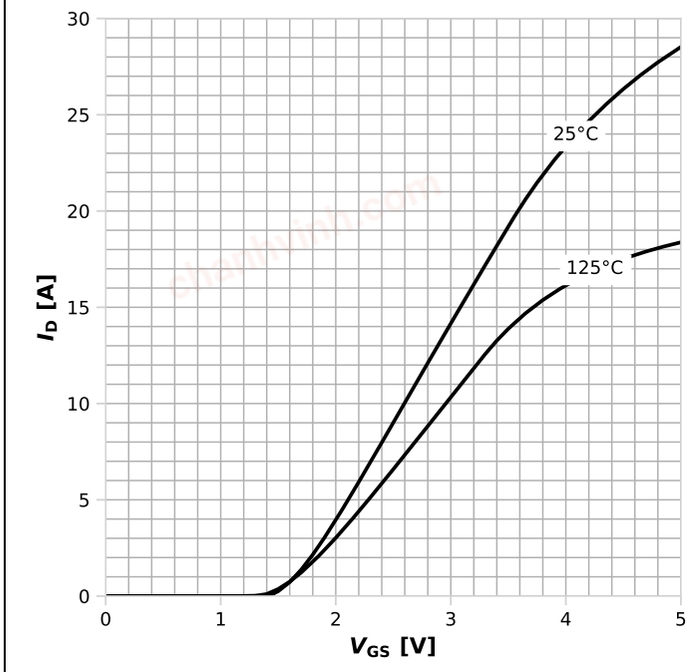

I_D=f(I_{GS}); V_{DS}=8V; parameter: T_j

Diagram 14: Typ. transfer gate current characteristic

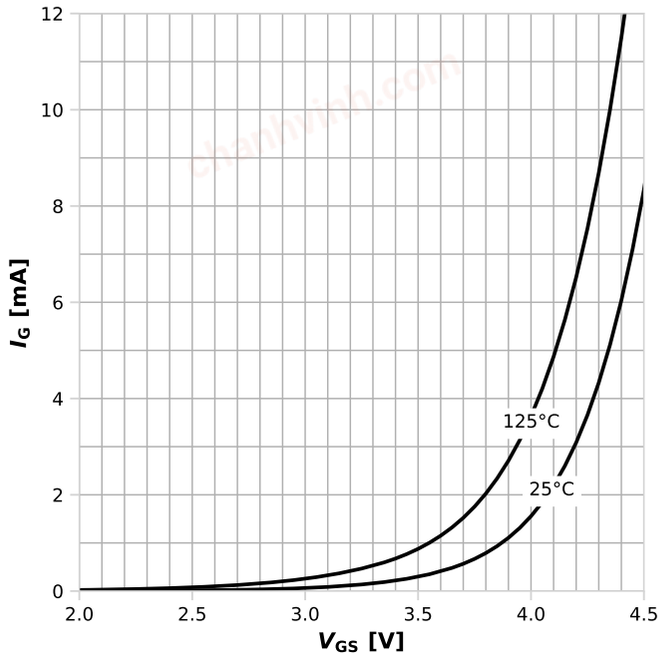

I_G=f(V_{GS}); V_{DS}=8V; parameter: T_j

Diagram 15: Typ. channel reverse characteristics

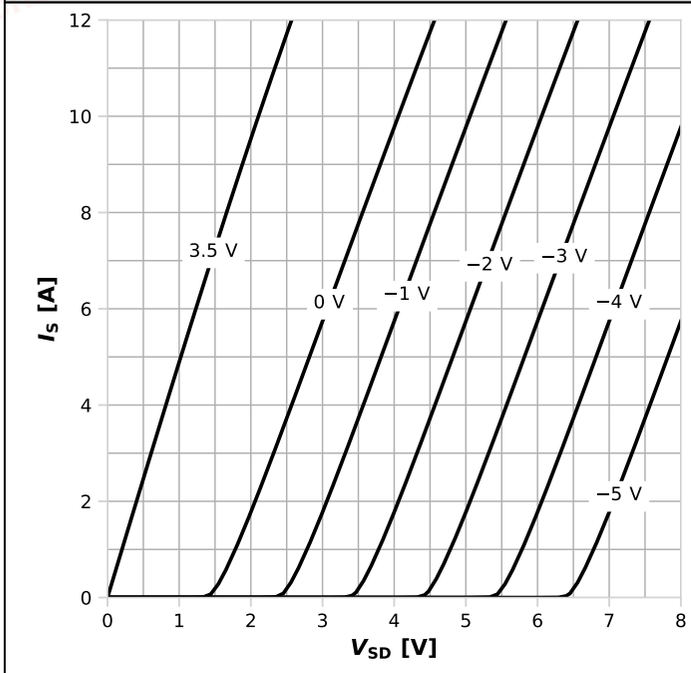

I_S=f(V_{SD}); T_j=25°C; parameter: V_{GS}

Diagram 16: Typ. channel reverse characteristics

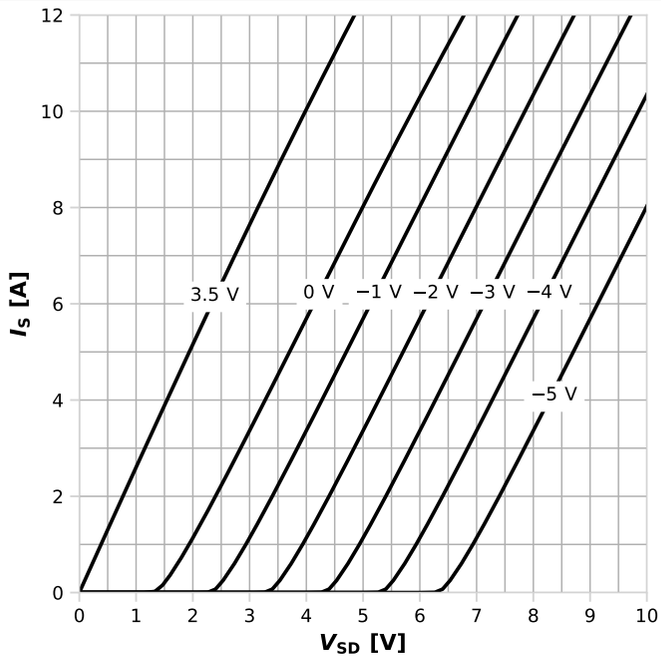

I_S=f(V_{SD}); T_j=125°C; parameter: V_{GS}

chanhvinh.com

Diagram 17 Typ. gate charge	Diagram 18: Typ. capacitances
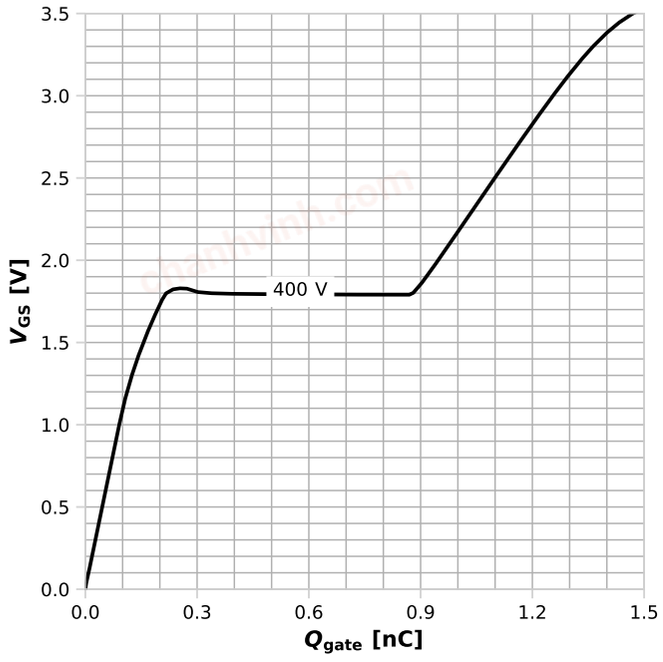	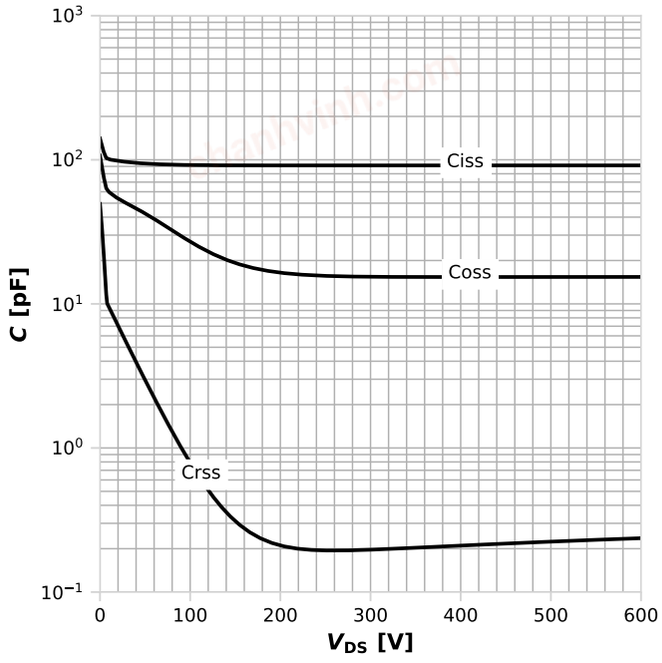
V_{GS}=f(Q_{gate}); I_D=2.1 A pulsed; I_G=4.5 mA; parameter: V_{DD}	C=f(V_{DS}); V_{GS}=0 V

Diagram 19: Typ. output charge	Diagram 20: Typ. Coss stored energy
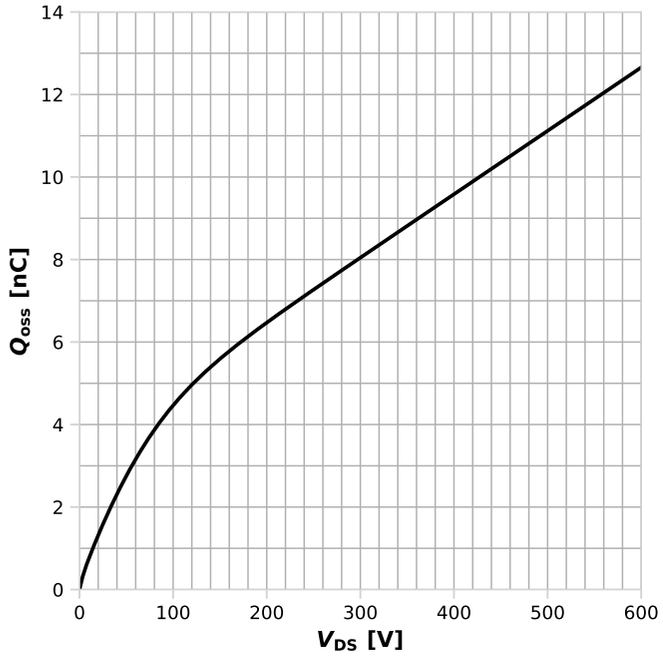	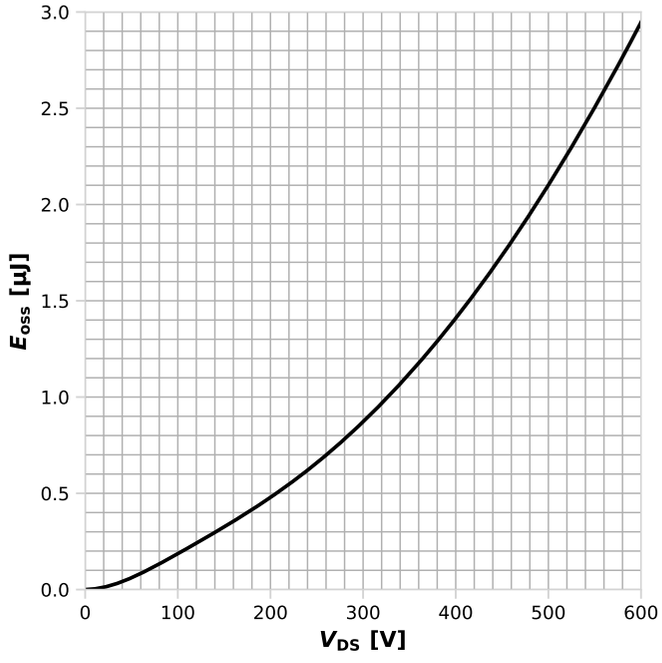
Q_{oss}=f(V_{DS})	E_{oss}=f(V_{DS})

chanhvinh.com

5 Test circuits

Table 8 Reverse channel characteristics test

Switching times with inductive load	Switching times waveform
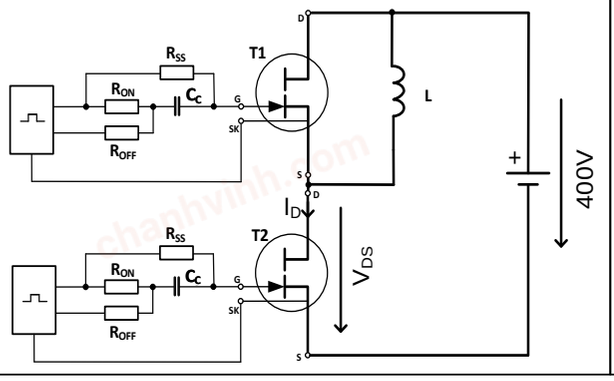	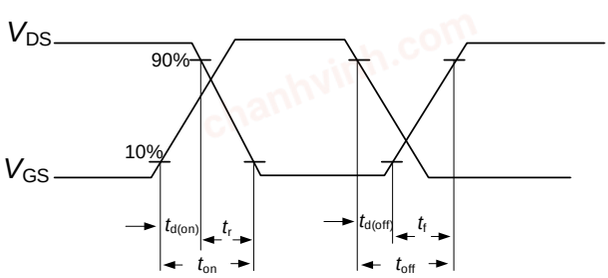

Table 9 Gate current switching waveform

Gate current switching waveform
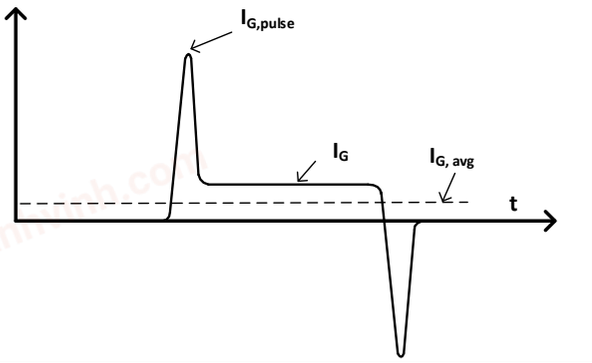

chanhvinh.com

6 Package outlines

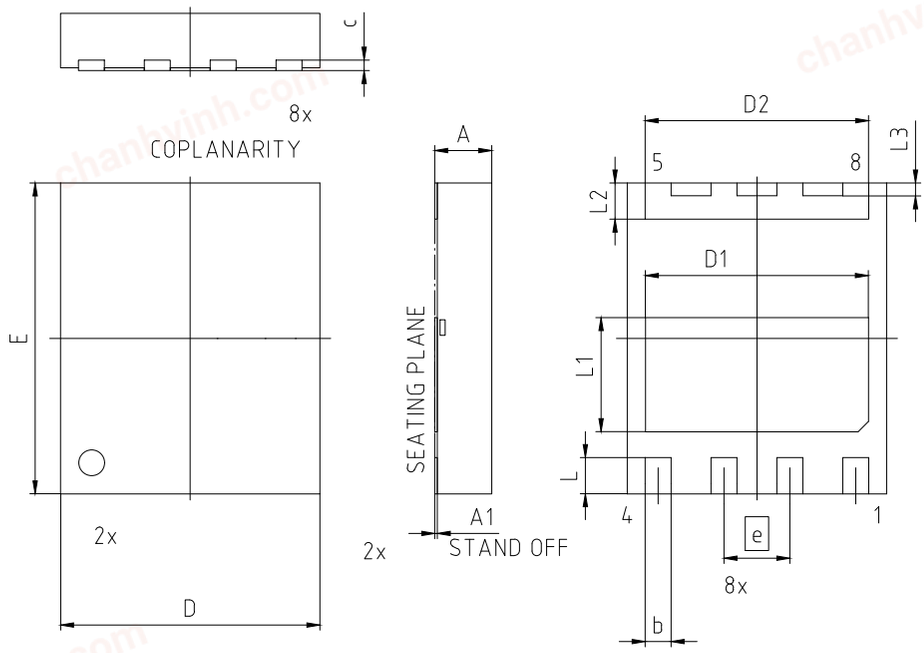

PACKAGE - GROUP NUMBER:	PG-TSON-8-U03	
DIMENSIONS	MILLIMETERS	
	MIN.	MAX.
A	-	1.10
A1	-	0.05
b	0.45	0.55
c	0.20	
D	5.00	
D1	4.20	4.40
D2	4.21	4.41
E	6.00	
e	1.27	
L	0.60	0.80
L1	2.10	2.30
L2	0.60	0.80
L3	0.15	0.35

Figure 1 Outline PG-TSON-8, dimensions in mm

chanhvinh.com

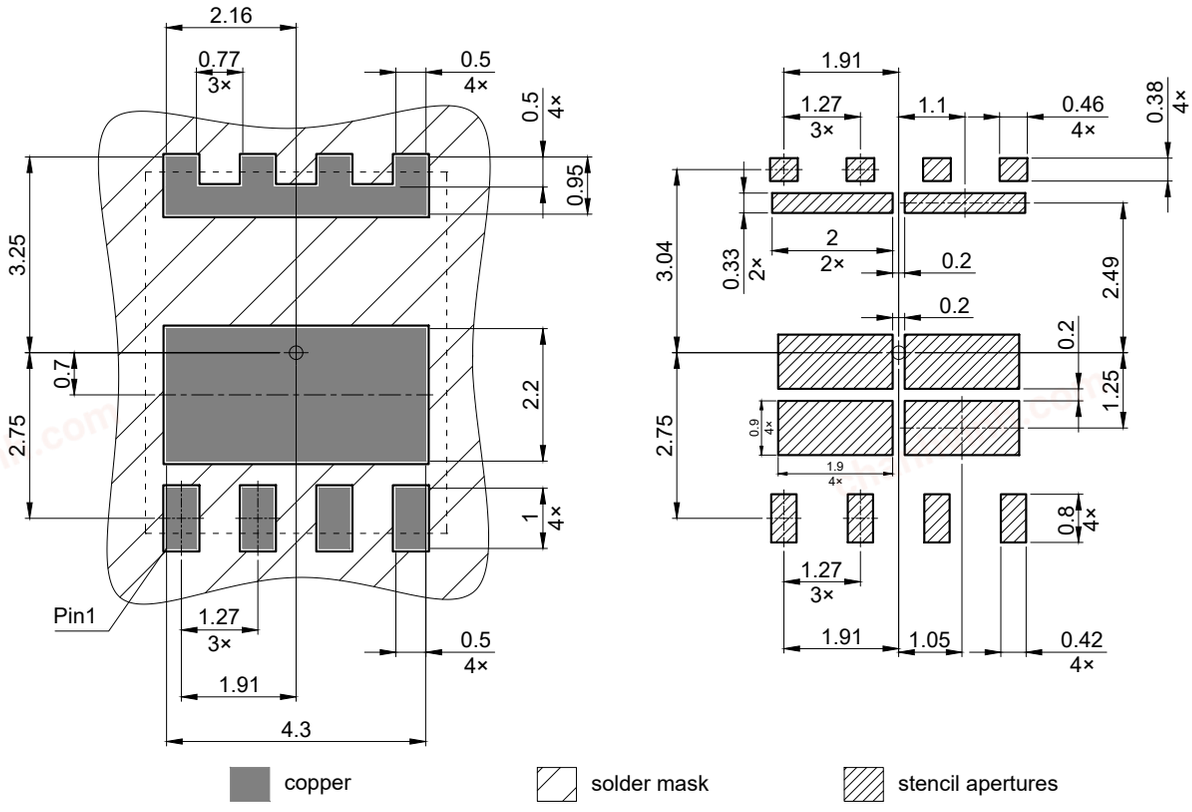

All pads are non-solder mask defined
All dimensions are in units mm

Figure 2 Footprint drawing PG-TSON-8, dimensions in mm

chanhvinh.com

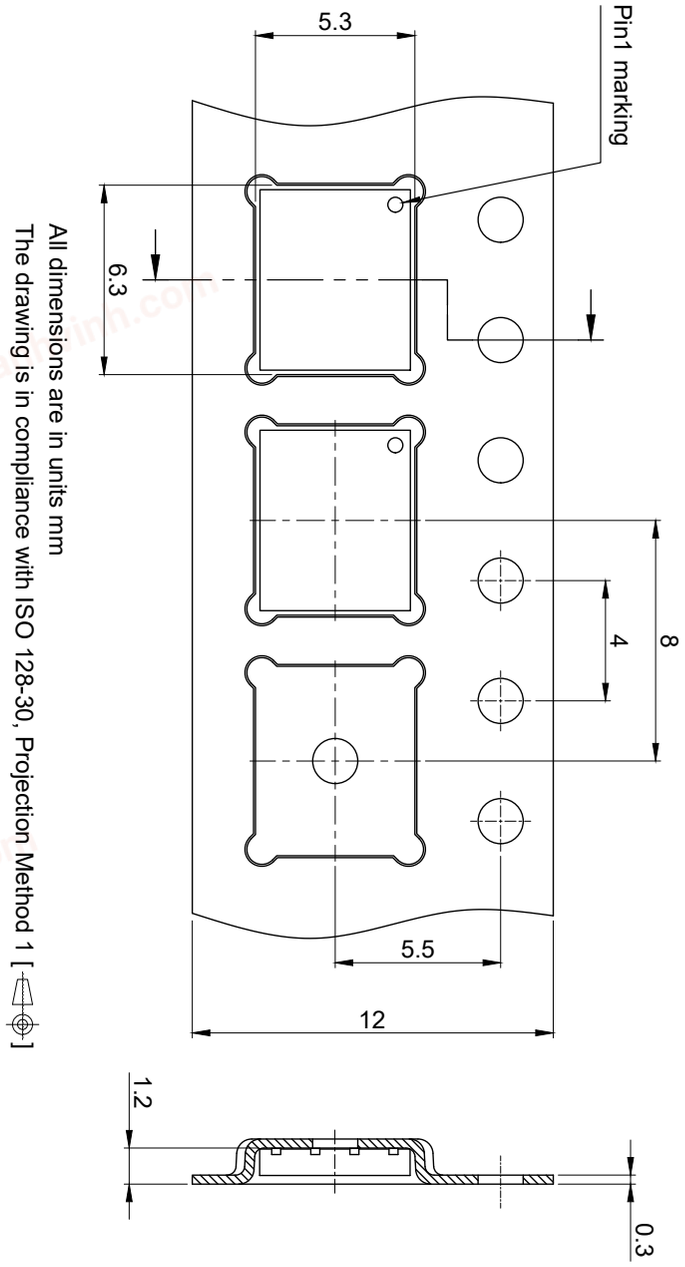

Figure 3 Packaging variant PG-TSON-8, dimensions in mm

chanhvinh.com

7 Appendix A

Table 10 Related links

- CoolGaN™ GaN 650 V webpage
- CoolGaN™ GaN 650 V reliability white paper
- CoolGaN™ GaN 650 V gate driver application note
- CoolGaN™ GaN 650 V applications information

chanhvinh.com

Revision history

IGLR65R200D2

Revision 2024-10-28, Rev. 1.0

Previous revisions

Revision	Date	Subjects (major changes since last revision)
1.0	2024-10-28	Release of final

Trademarks
All referenced product or service names and trademarks are the property of their respective owners.

We Listen to Your Comments Any information within this document that you feel is wrong, unclear or missing at all? Your feedback will help us to continuously improve the quality of this document. Please send your proposal (including a reference to this document) to: **erratum@infineon.com**

Published by
Infineon Technologies AG
81726 München, Germany
© 2024 Infineon Technologies AG
All Rights Reserved.

Legal Disclaimer
The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics (“Beschaffenheitsgarantie”) . With respect to any examples, hints or any typical values stated herein and/or any information regarding the application of the product, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation warranties of non-infringement of intellectual property rights of any third party.

In addition, any information given in this document is subject to customer’s compliance with its obligations stated in this document and any applicable legal requirements, norms and standards concerning customer’s products and any use of the product of Infineon Technologies in customer’s applications.

The data contained in this document is exclusively intended for technically trained staff. It is the responsibility of customer’s technical departments to evaluate the suitability of the product for the intended application and the completeness of the product information given in this document with respect to such application.

Information
For further information on technology, delivery terms and conditions and prices please contact your nearest Infineon Technologies Office (www.infineon.com).

Warnings
Due to technical requirements, components may contain dangerous substances. For information on the types in question, please contact the nearest Infineon Technologies Office.
The Infineon Technologies component described in this Data Sheet may be used in life-support devices or systems and/or automotive, aviation and aerospace applications or systems only with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support, automotive, aviation and aerospace device or system or to affect the safety or effectiveness of that device or system. Life support devices or systems are intended to be implanted in the human body or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.