chanhvinh.com

International
IOR Rectifier

Data Sheet No. PD60143-O

IR2127(S) / IR2128(S)
IR21271(S) & (PbF)

CURRENT SENSING SINGLE CHANNEL DRIVER


Features

- Floating channel designed for bootstrap operation
  Fully operational to +600V
  Tolerant to negative transient voltage dV/dt immune
- Application- specific gate drive range:
  Motor Drive: 12 to 20V (IR2127/IR2128)
  Automotive: 9 to 20V (IR21271)
- Undervoltage lockout
- 3.3V, 5V and 15V input logic compatible
- $\overline{\text{FAULT}}$ lead indicates shutdown has occured
- Output in phase with input (IR2127/IR21271)
- Output out of phase with input (IR2128)
- Avaliable in Lead-Free


Product Summary

V_{OFFSET}	600V max.	
I_O+/-	200 mA / 420 mA	
V_{OUT}	12 - 20V (IR2127/IR2128)	9 - 20V (IR21271)
V_{CSth}	250 mV or 1.8V	
$t_{on/off}$ (typ.)	200 & 150 ns	

Packages



8-Lead PDIP




8-Lead SOIC

Description

The IR2127/IR2128/IR21271(S) is a high voltage, high speed power MOSFET and IGBT driver. Proprietary HVIC and latch immune CMOS technologies enable ruggedized monolithic construction. The logic input is compatible with standard CMOS or LSTTL outputs, down to 3.3V. The protection circuity detects over-current in the driven power transistor and terminates the gate drive voltage. An open drain $\overline{\text{FAULT}}$ signal is provided to indicate that an over-current shutdown has occurred. The output driver features a high pulse current buffer stage designed for minimum cross-conduction. The floating channel can be used to drive an N-channel power MOSFET or IGBT in the high side or low side configuration which operates up to 600 volts.

Typical Connection

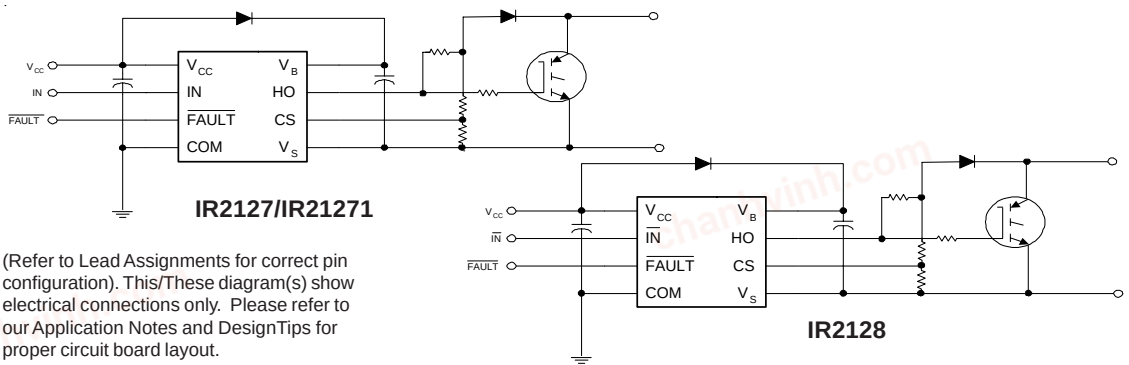

(Refer to Lead Assignments for correct pin configuration). This/These diagram(s) show electrical connections only. Please refer to our Application Notes and DesignTips for proper circuit board layout.

chanhvinh.com

Absolute Maximum Ratings

Absolute Maximum Ratings indicate sustained limits beyond which damage to the device may occur. All voltage parameters are absolute voltages referenced to COM. The Thermal Resistance and Power Dissipation ratings are measured under board mounted and still air conditions.

Symbol	Definition	Min.	Max.	Units
V_B	High Side Floating Supply Voltage	-0.3	625	V
V_S	High Side Floating Offset Voltage	V_B - 25	V_B + 0.3	
V_{HO}	High Side Floating Output Voltage	V_S - 0.3	V_B + 0.3	
V_{CC}	Logic Supply Voltage	-0.3	25	
V_{IN}	Logic Input Voltage	-0.3	V_{CC} + 0.3	
V_{FLT}	$\overline{\text{FAULT}}$ Output Voltage	-0.3	V_{CC} + 0.3	
V_{CS}	Current Sense Voltage	V_S - 0.3	V_B + 0.3	
dV_S/dt	Allowable Offset Supply Voltage Transient	—	50	V/ns
P_D	Package Power Dissipation @ $T_A \leq +25°C$ (8 Lead DIP)	—	1.0	W
	(8 Lead SOIC)	—	0.625	
Rth_{JA}	Thermal Resistance, Junction to Ambient (8 Lead DIP)	—	125	°C/W
	(8 Lead SOIC)	—	200	
T_J	Junction Temperature	—	150	°C
T_S	Storage Temperature	-55	150	
T_L	Lead Temperature (Soldering, 10 seconds)	—	300	

Recommended Operating Conditions

The Input/Output logic timing diagram is shown in Figure 1. For proper operation the device should be used within the recommended conditions. The V_S offset rating is tested with all supplies biased at 15V differential.

Symbol	Definition		Min.	Max.	Units
V_B	High Side Floating Supply Voltage	(IR2127/IR2128)	V_S + 12	V_S + 20	V
		(IR21271)	V_S + 9	V_S + 20	
V_S	High Side Floating Offset Voltage		Note 1	600	
V_{HO}	High Side Floating Output Voltage		V_S	V_B	
V_{CC}	Logic Supply Voltage		10	20	
V_{IN}	Logic Input Voltage		0	V_{CC}	
V_{FLT}	$\overline{\text{FAULT}}$ Output Voltage		0	V_{CC}	
V_{CS}	Current Sense Signal Voltage		V_S	V_S + 5	
T_A	Ambient Temperature		-40	125	°C

Note 1: Logic operational for V_S of -5 to +600V. Logic state held for V_S of -5V to $-V_{BS}$. (Please refer to the Design Tip DT97-3 for more details).

chanhvinh.com

Dynamic Electrical Characteristics

V_{BIAS} (V_{CC}, V_{BS}) = 15V, C_L = 1000 pF and T_A = 25°C unless otherwise specified. The dynamic electrical characteristics are measured using the test circuit shown in Figure 3.

Symbol	Definition	Min.	Typ.	Max.	Units	Test Conditions
t_{on}	Turn-On Propagation Delay	—	200	250	ns	V_S = 0V
t_{off}	Turn-Off Propagation Delay	—	150	200		V_S = 600V
t_r	Turn-On Rise Time	—	80	130		
t_f	Turn-Off Fall Time	—	40	65		
t_{bl}	Start-Up Blanking Time	500	700	900		
t_{cs}	CS Shutdown Propagation Delay	—	240	360		
t_{flt}	CS to $\overline{\text{FAULT}}$ Pull-Up Propagation Delay	—	340	510		


Static Electrical Characteristics

V_{BIAS} (V_{CC}, V_{BS}) = 15V and T_A = 25°C unless otherwise specified. The V_{IN}, V_{TH} and I_{IN} parameters are referenced to COM. The V_O and I_O parameters are referenced to V_S.


Symbol	Definition		Min.	Typ.	Max.	Units	Test Conditions
V_{IH}	Logic “1” Input Voltage Logic “0” Input Voltage	(IR2127/IR21271) (IR2128)	3.0	—	—	V	V_{CC} = 10V to 20V
V_{IL}	Logic “0” Input Voltage Logic “1” Input Voltage	(IR2127/IR21271) (IR2128)	—	—	0.8	V	V_{CC} = 10V to 20V
V_{CSTH+}	CS Input Positive	(IR2127/IR2128)	180	250	320	mV	V_{CC} = 10V to 20V
	Going Threshold	(IR21271)	—	1.8	—	V	V_{CC} = 10V to 20V
V_{OH}	High Level Output Voltage, V_{BIAS} - V_O		—	—	100	mV	I_O = 0A
V_{OL}	Low Level Output Voltage, V_O		—	—	100	mV	I_O = 0A
I_{LK}	Offset Supply Leakage Current		—	—	50	µA	V_B = V_S = 600V
I_{QBS}	Quiescent V_{BS} Supply Current		—	200	400	µA	V_{IN} = 0V or 5V
I_{QCC}	Quiescent V_{CC} Supply Current		—	60	120	µA	V_{IN} = 0V or 5V
I_{IN+}	Logic “1” Input Bias Current		—	7.0	15	µA	V_{IN} = 5V
I_{IN-}	Logic “0” Input Bias Current		—	—	1.0	µA	V_{IN} = 0V
I_{CS+}	“High” CS Bias Current		—	—	1.0	µA	V_{CS} = 3V
I_{CS-}	“High” CS Bias Current		—	—	1.0	µA	V_{CS} = 0V
V_{BSUV+}	V_{BS} Supply Undervoltage Positive Going Threshold	(IR2127/IR2128) (IR21271)	8.8 6.3	10.3 7.2	11.8 8.2	V	
V_{BSUV-}	V_{BS} Supply Undervoltage Negative Going Threshold	(IR2127/IR2128) (IR21271)	7.5 6.0	9.0 6.8	10.6 7.7	V	
I_{O+}	Output High Short Circuit Pulsed Current		200	250	—	mA	V_O = 0V, V_{IN} = 5V PW ≤ 10 µs
I_{O-}	Output Low Short Circuit Pulsed Current		420	500	—	mA	V_O = 15V, V_{IN} = 0V PW ≤ 10 µs
Ron, FLT	FAULT - Low on Resistance		—	125	—	Ω	

chanhvinh.com

Functional Block Diagram IR2127/IR21271

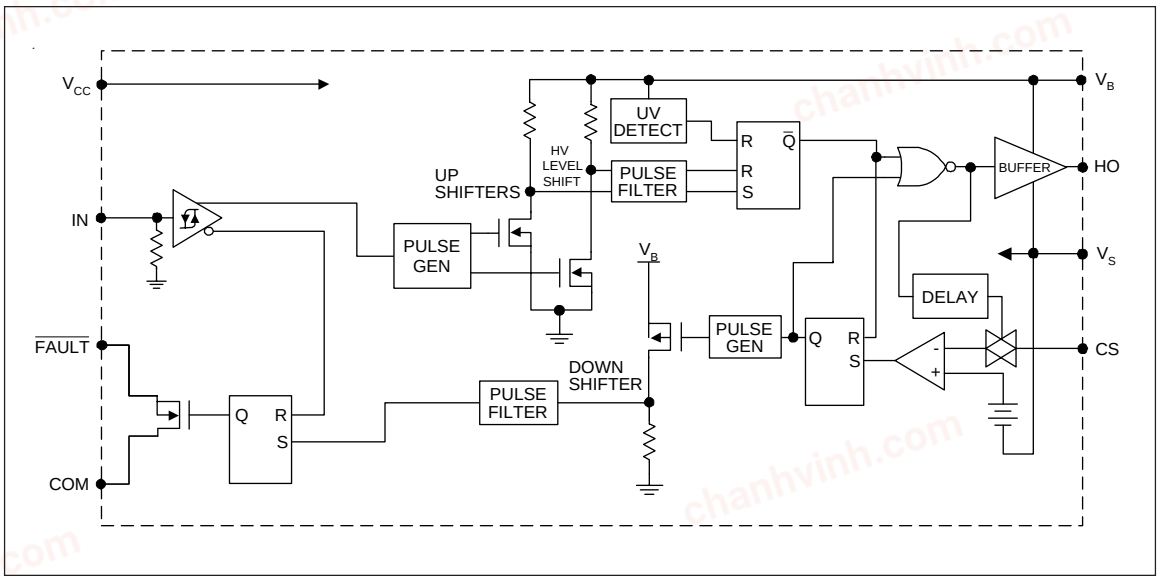

Functional Block Diagram IR2128

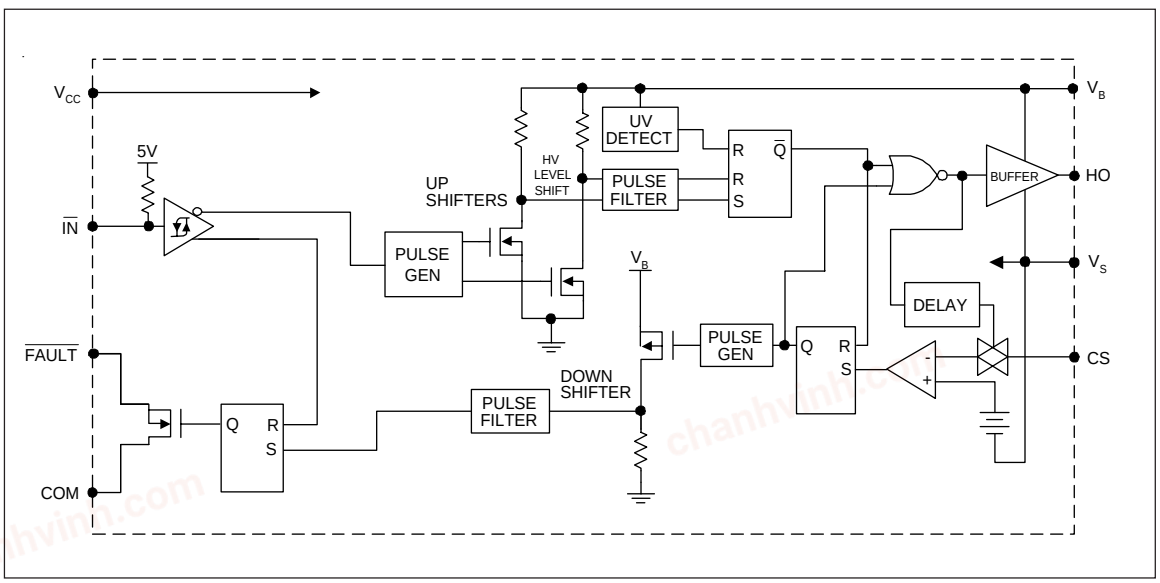


chanhvinh.com

Lead Definitions


Symbol	Description
V_{CC}	Logic and gate drive supply
IN	Logic input for gate driver output (HO), in phase with HO (IR2127/IR21271) out of phase with HO (IR2128)
$\overline{FAULT}$	Indicates over-current shutdown has occurred, negative logic
COM	Logic ground
V_B	High side floating supply
HO	High side gate drive output
V_S	High side floating supply return
CS	Current sense input to current sense comparator

Lead Assignments




8 Lead PDIP

IR2127/IR21271




8 Lead SOIC

IR2127S/IR21271S



8 Lead PDIP

IR2128



8 Lead SOIC

IR2128S

chanhvinh.com

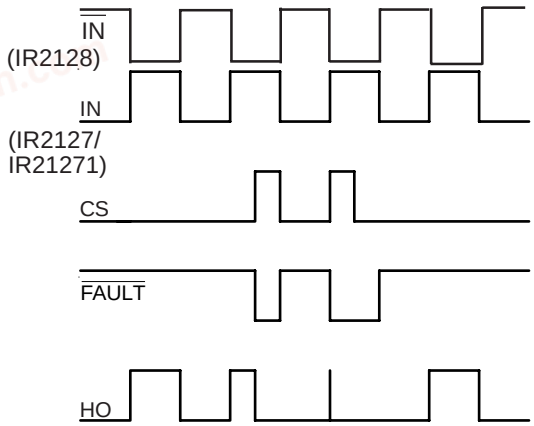


Figure 1. Input/Output Timing Diagram

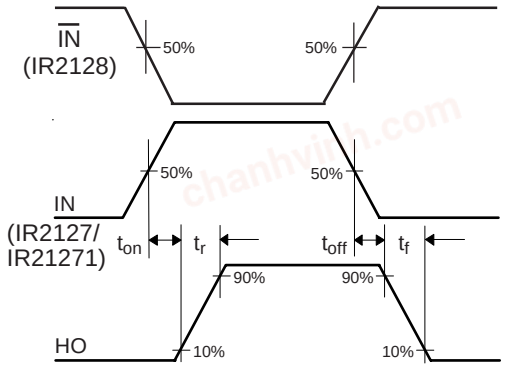


Figure 2. Switching Time Waveform Definition

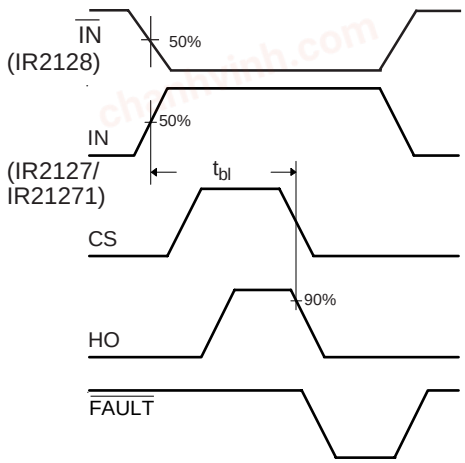


Figure 3. Start-up Blanking Time Waveform Definitions




Figure 4. CS Shutdown Waveform Definitions




Figure 5. CS to FAULT Waveform Definitions

chanhvinh.com

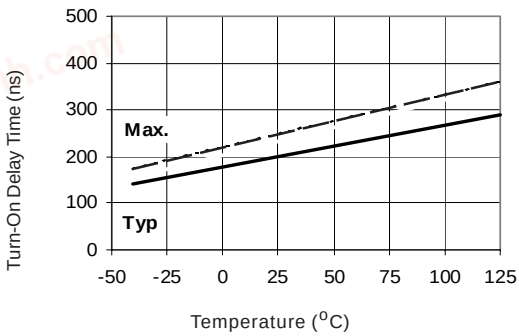


Figure 10A Turn-On Time vs. Temperature

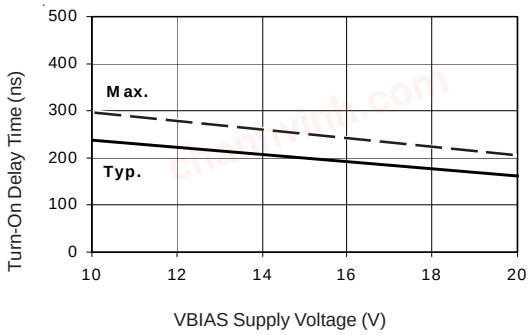


Figure 10B Turn-On Time vs. Supply Voltage

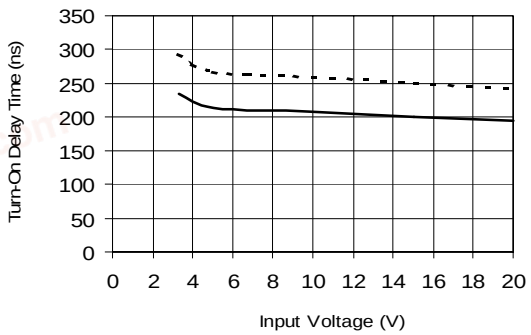


Figure 10C Turn-On Time vs. Input Voltage

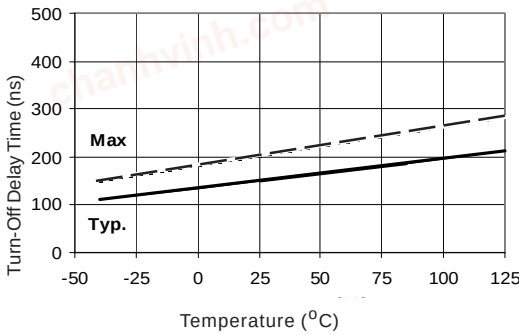


Figure 11A Turn-Off Time vs. Temperature

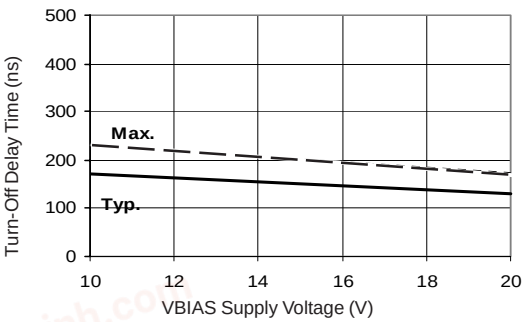


Figure 11B Turn-Off Time vs. Supply Voltage

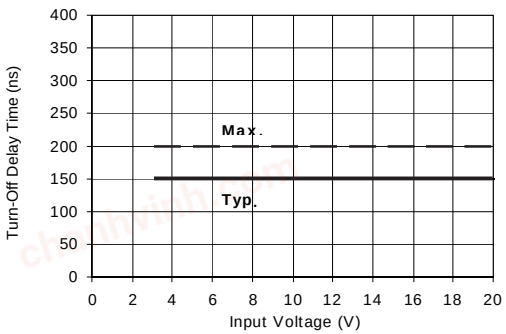


Figure 11C Turn-OffTime vs. Input Voltage

chanhvinh.com

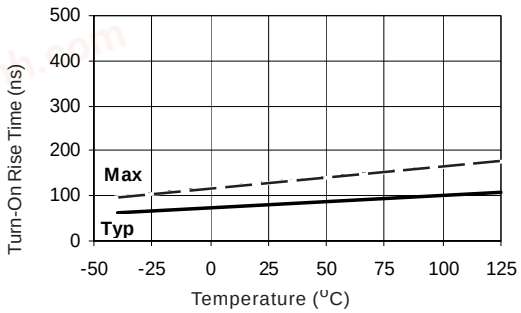


Figure 12A Turn-On Rise Time vs. Temperature

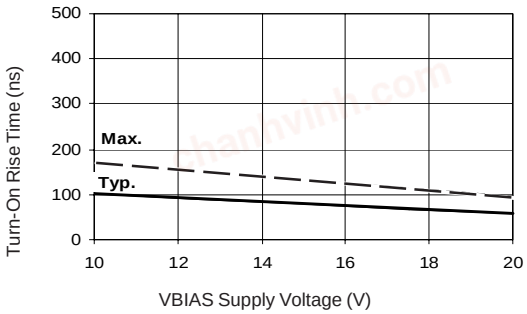


Figure 12B Turn-On Rise Time vs. Supply Voltage

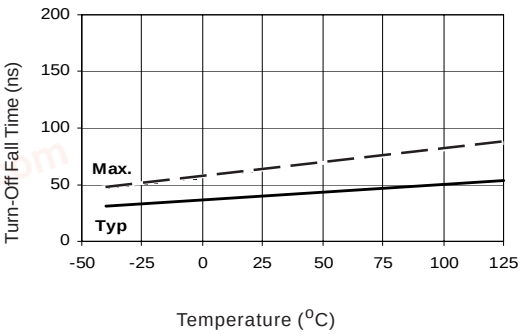


Figure 13A Turn-Off Fall Time vs. Temperature

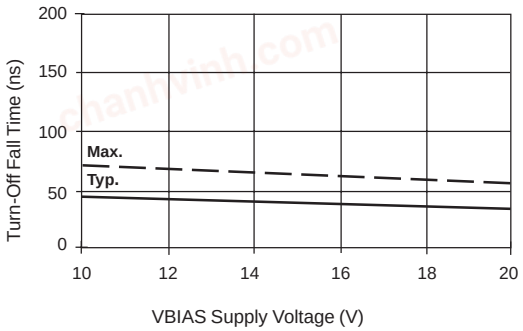


Figure 13B Turn-Off Fall Time vs. Voltage

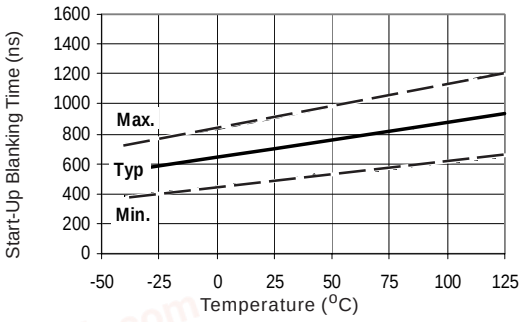


Figure 14A Start-Up Blanking Time vs. Temperature

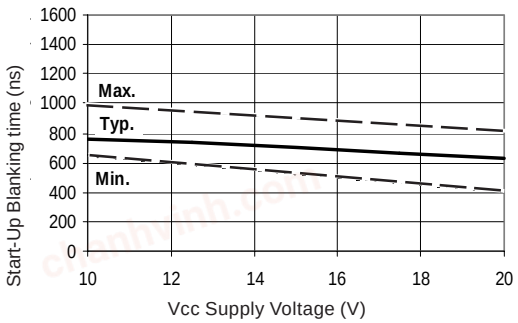


Figure 14B Start-Up Blanking Time vs Voltage

chanhvinh.com

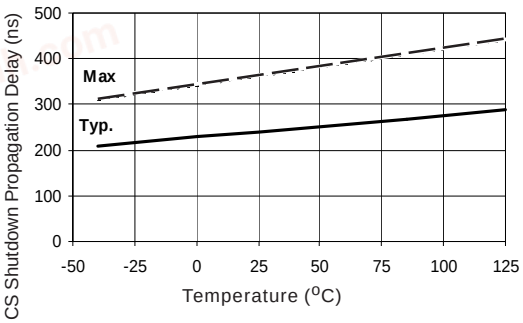


Figure 15A CS Shutdown Propagation Delay vs. Temperature

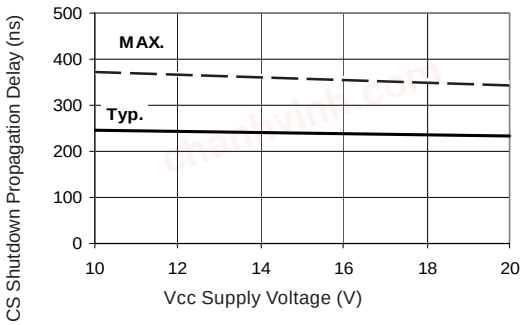


Figure 15B CS Shutdown Propagation Delay vs. Voltage

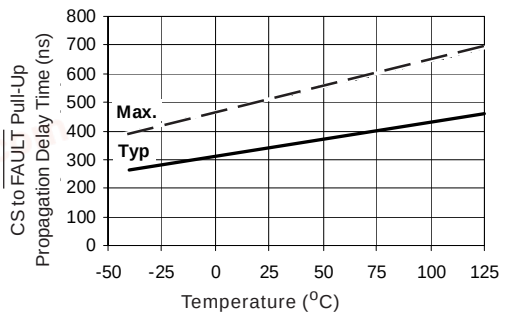


Figure 16A CS to $\overline{\text{FAULT}}$ Pull-Up Propagation Delay vs. Temperature

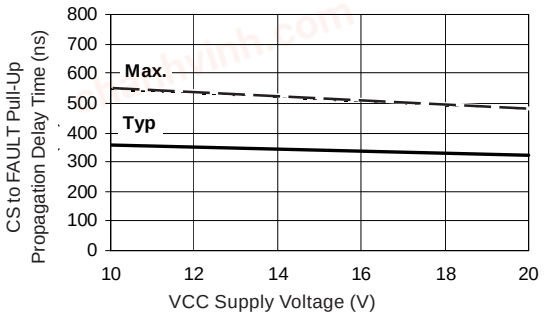


Figure 16B CS to $\overline{\text{FAULT}}$ Pull-Up Propagation Delay vs. Voltage

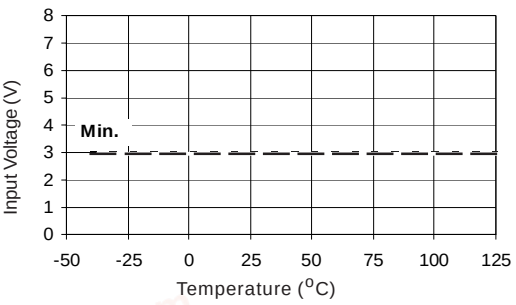


Figure 17A Logic "1" Input Voltage (IR2127) Logic "0" Input Voltage (IR2128) vs Temperature

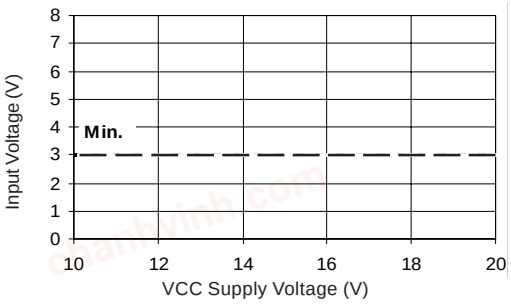


Figure 17B Logic "1" Input Voltage (IR2127) Logic "0" Input Voltage (IR2128) vs Voltage

chanhvinh.com

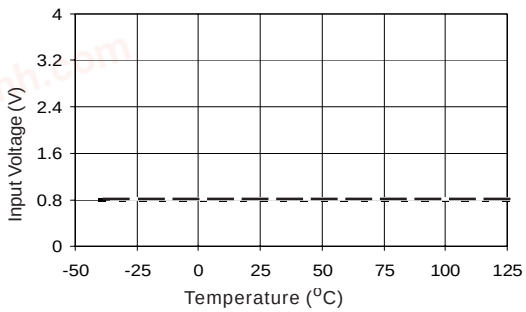


Figure 18A Logic "0" Input Voltage (IR2127) Logic "1" Input Voltage (IR2128) vs Temperature

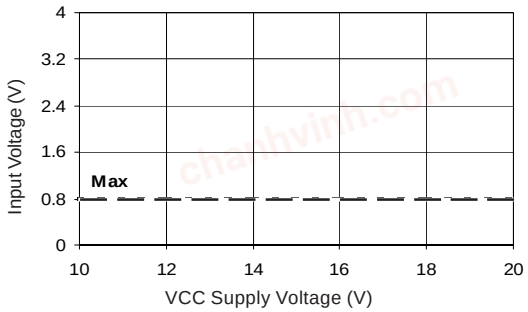


Figure 18B Logic "0" Input Voltage (IR2127) Logic "1" Input Voltage (IR2128) vs Voltage

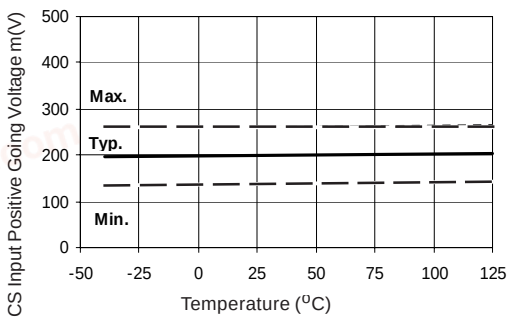


Figure 19A CS Input Positive Going Voltage vs Temperature (IR2127/IR2128)

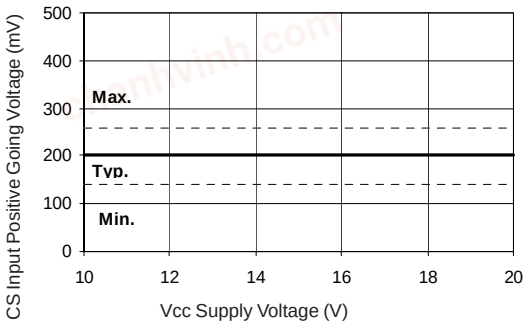


Figure 19B CS Input Positive Going Voltage vs Voltage (IR2127/IR2128)

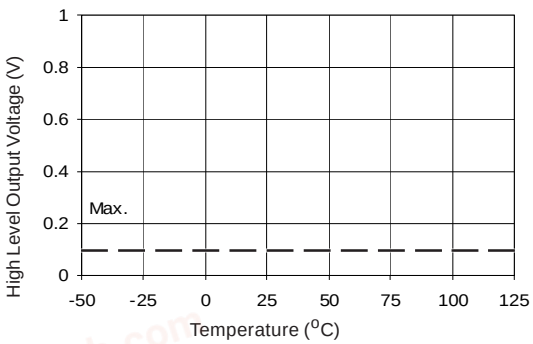


Figure 20A High Level Output vs Temperature

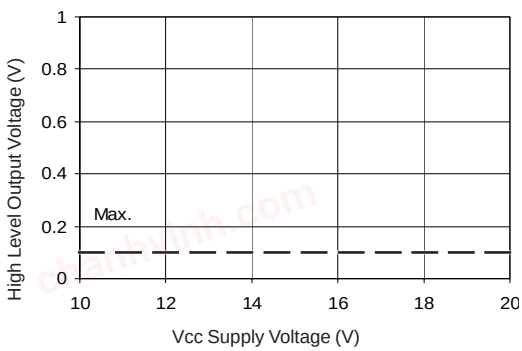


Figure 20B High Level Output vs Voltage

chanhvinh.com

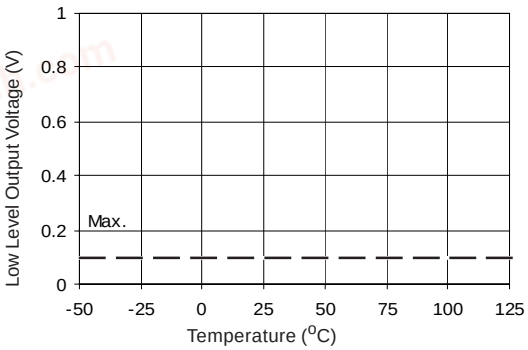


Figure 21A Low Level Output vs Temperature

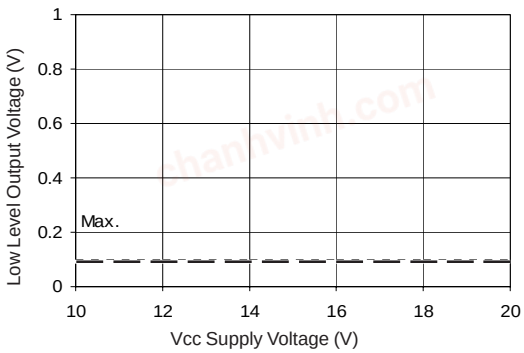


Figure 21B Low Level Output vs Voltage

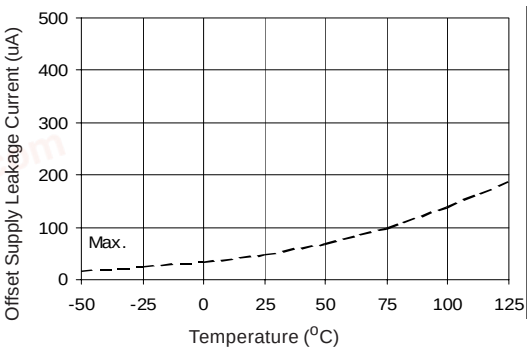


Figure 22A Offset Supply Current vs Temperature

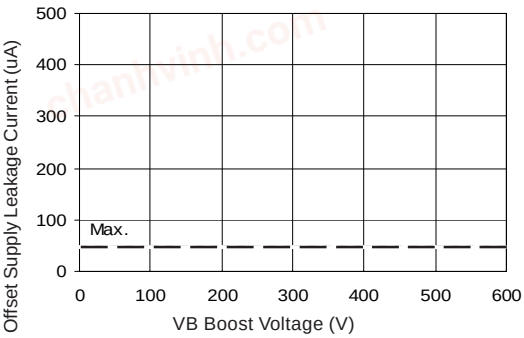


Figure 22B Offset Supply Current vs Voltage

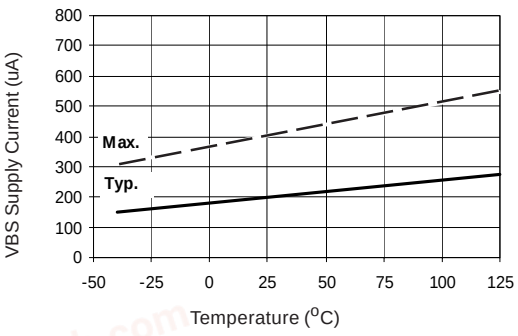


Figure 23A VBS Supply Current vs Temperature

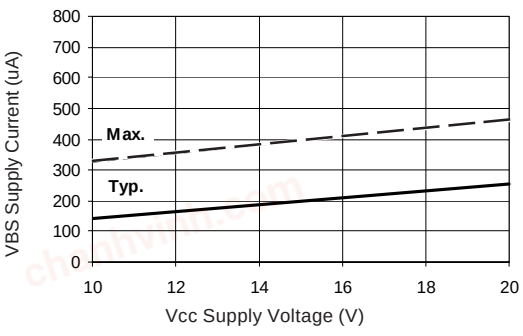


Figure 23B VBS Supply Current vs Voltage

chanhvinh.com

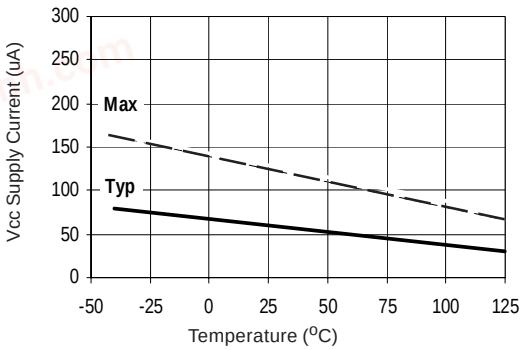


Figure 24A Vcc Supply Current vs Temperature

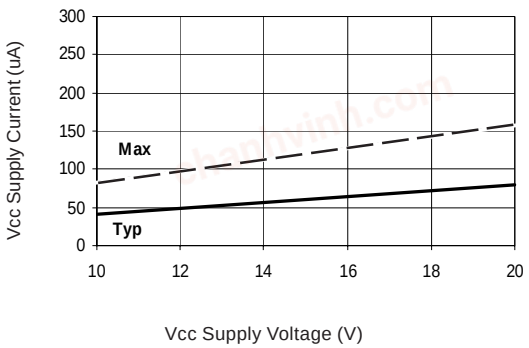


Figure 24B Vcc Supply Current vs Voltage

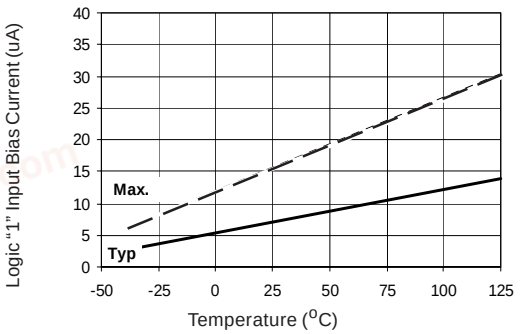


Figure 25A Logic "1" Input Current vs Temperature

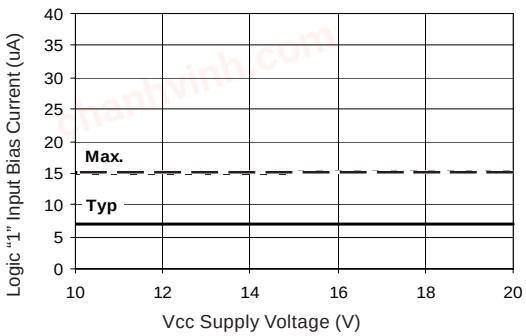


Figure 25B Logic "1" Input Current vs Voltage

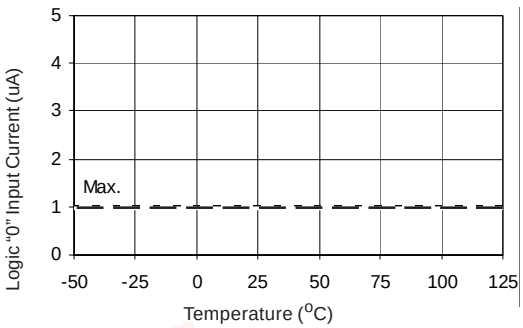


Figure 26A Logic "0" Input Current vs Temperature

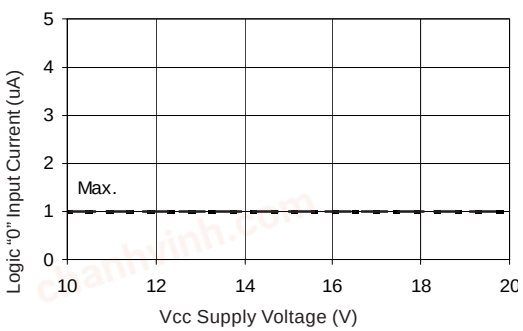


Figure 26B Logic "0" Input Current vs Voltage

chanhvinh.com

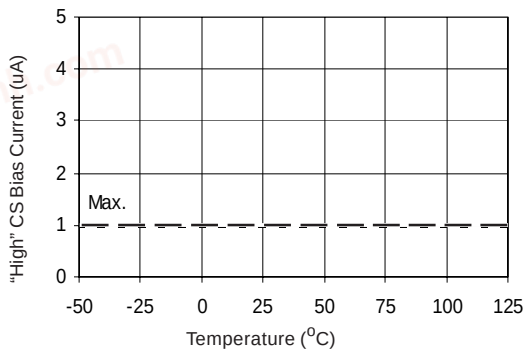


Figure 27A "High" CS Bias Current vs Temperature

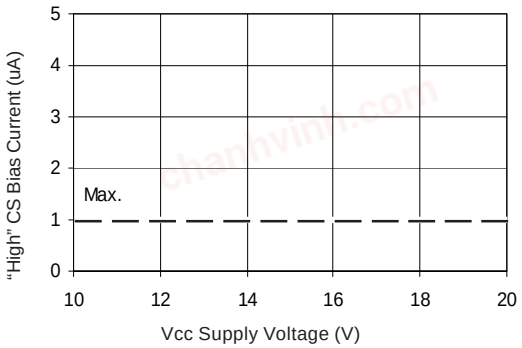


Figure 27B "High" CS Bias Current vs Voltage

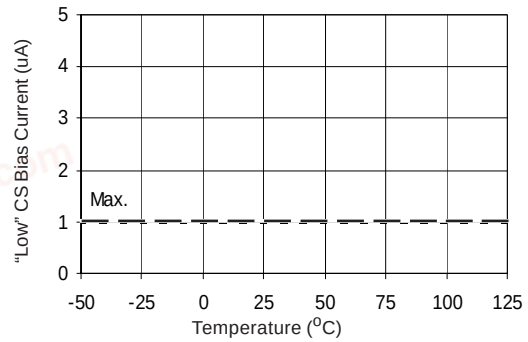


Figure 28A "Low" CS Bias Current vs Temperature

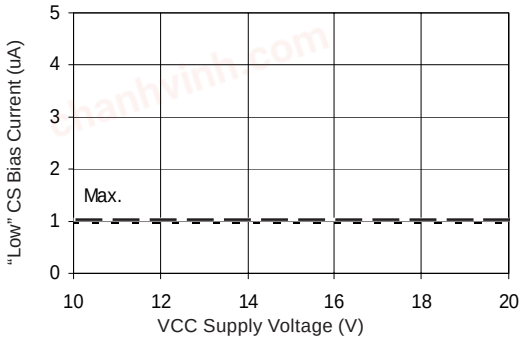


Figure 28B "Low" CS Bias Current vs Voltage

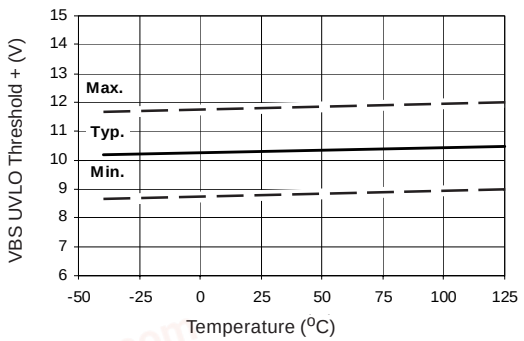


Figure 29A VBS Undervoltage Threshold (+) vs Temperature (IR2127/IR2128)

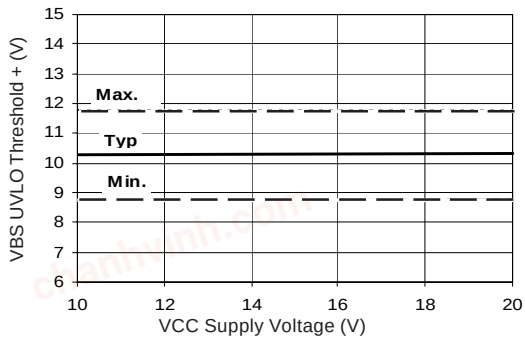


Figure 29B VBS Undervoltage Threshold (+) vs Voltage (IR2127/IR2128)

chanhvinh.com

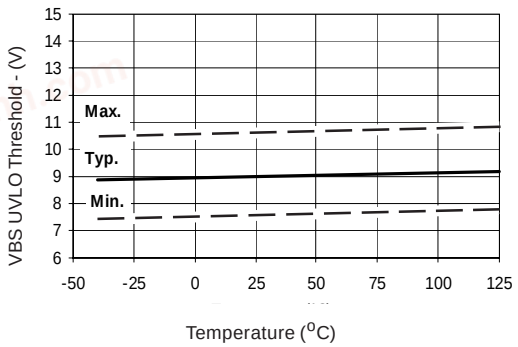


Figure 30A VBS Undervoltage Threshold (-) vs Temperature (IR2127/IR2128)

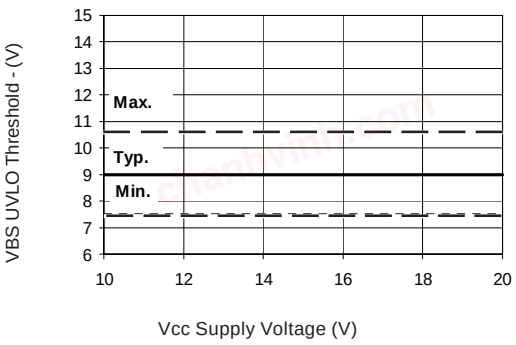


Figure 30B VBS Undervoltage Threshold (-) vs Voltage (IR2127/IR2128)

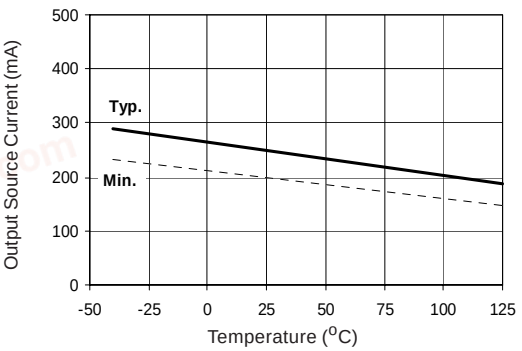


Figure 31A Output Source Current vs Temperature

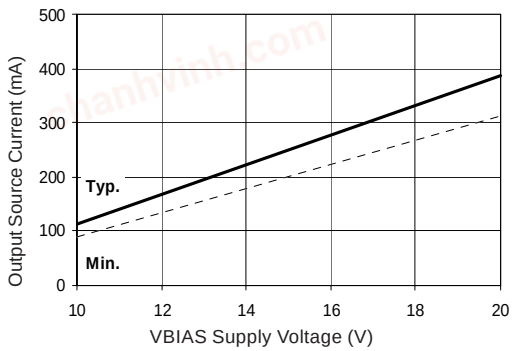


Figure 31B Output Source Current vs Voltage

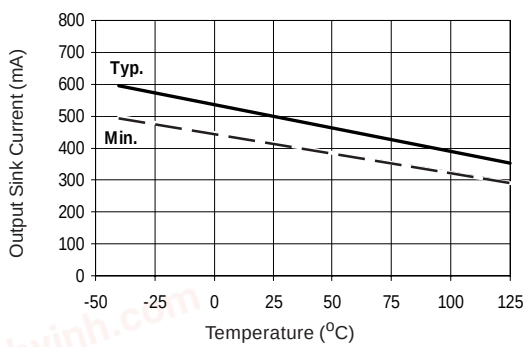


Figure 32A Output Sink Current vs Temperature


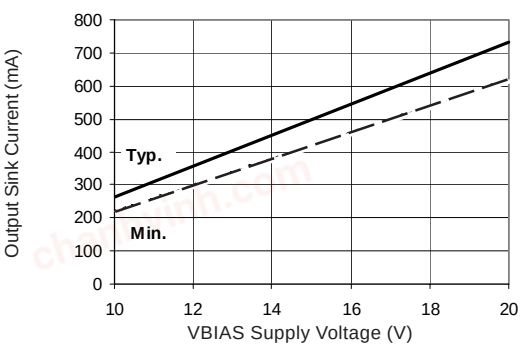


Figure 32B Output Sink Current vs Voltage

chanhvinh.com

Case outlines

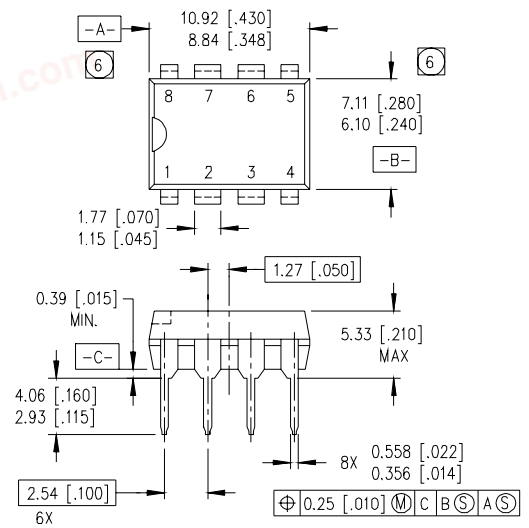


NOTES:

1. DIMENSIONING & TOLERANCING PER ANSI Y14.5M-1982.
2. CONTROLLING DIMENSION: INCH.
3. DIMENSIONS ARE SHOWN IN MILLIMETERS [INCHES].
4. OUTLINE CONFORMS TO JEDEC OUTLINE MS-001AB.


(5) MEASURED WITH THE LEADS CONSTRAINED TO BE PERPENDICULAR TO DATUM PLANE C.

(6) DIMENSION DOES NOT INCLUDE MOLD PROTUSIONS. MOLD PROTUSIONS SHALL NOT EXCEED 0.25 [.010].

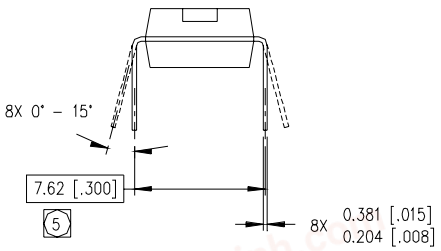

8-Lead PDIP

01-6014
01-3003 01 (MS-001AB)

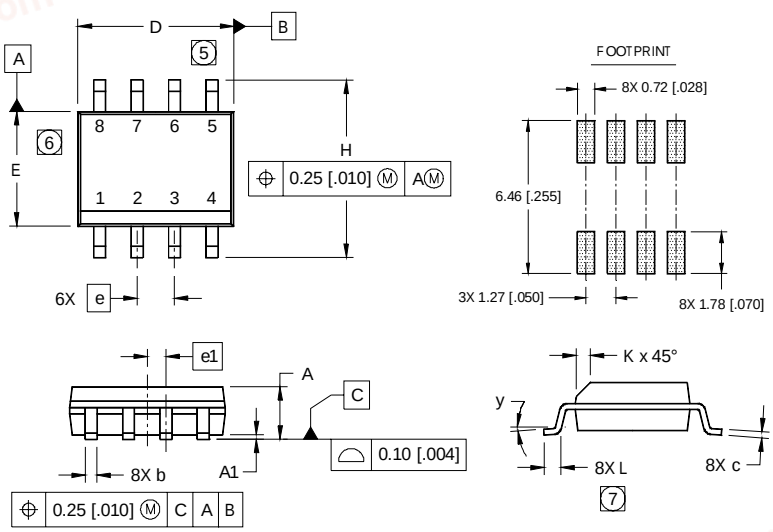

DIM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	.0532	.0688	1.35	1.75
A1	.0040	.0098	0.10	0.25
b	.013	.020	0.33	0.51
c	.0075	.0098	0.19	0.25
D	.189	.1968	4.80	5.00
E	.1497	.1574	3.80	4.00
e	.050 BASIC		1.27 BASIC	
e1	.025 BASIC		0.635 BASIC	
H	.2284	.2440	5.80	6.20
K	.0099	.0196	0.25	0.50
L	.016	.050	0.40	1.27
y	0°	8°	0°	8°

NOTES:

1. DIMENSIONING & TOLERANCING PER ASME Y14.5M-1994.
2. CONTROLLING DIMENSION: MILLIMETER
3. DIMENSIONS ARE SHOWN IN MILLIMETERS [INCHES].
4. OUTLINE CONFORMS TO JEDEC OUTLINE MS-012AA.

(5) DIMENSION DOES NOT INCLUDE MOLD PROTRUSIONS. MOLD PROTRUSIONS NOT TO EXCEED 0.15 [.006].

(6) DIMENSION DOES NOT INCLUDE MOLD PROTRUSIONS. MOLD PROTRUSIONS NOT TO EXCEED 0.25 [.010].

(7) DIMENSION IS THE LENGTH OF LEAD FOR SOLDERING TO A SUBSTRATE.


8-Lead SOIC

01-6027
01-0021 11 (MS-012AA)

chanhvinh.com

International
IOR Rectifier

LEADFREE PART MARKING INFORMATION

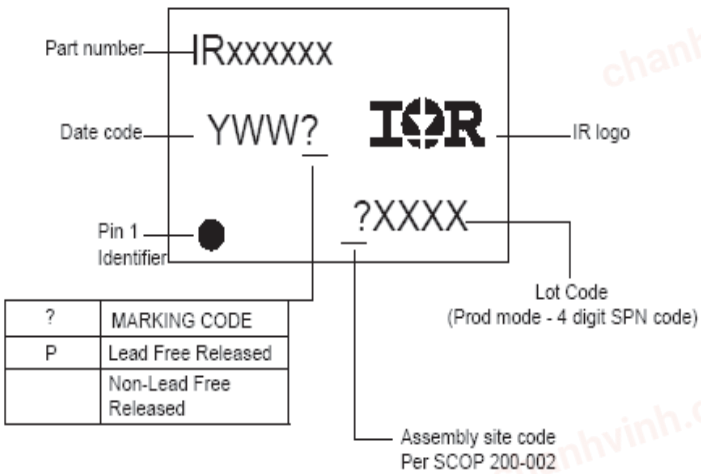

?	MARKING CODE
P	Lead Free Released
	Non-Lead Free Released

ORDER INFORMATION

Basic Part (Non-Lead Free)

8-Lead PDIP	IR2127	order	IR2127
8-Lead SOIC	IR2127S	order	IR2127S
8-Lead PDIP	IR21271	order	IR21271
8-Lead SOIC	IR21271S	order	IR21271S
8-Lead PDIP	IR2128	order	IR2128
8-Lead SOIC	IR2128S	order	IR2128S

Lead-Free Part

8-Lead PDIP	IR2127	order	IR2127PbF
8-Lead SOIC	IR2127S	order	IR2127SPbF
8-Lead PDIP	IR21271	order	IR21271PbF
8-Lead SOIC	IR21271S	order	IR21271SPbF
8-Lead PDIP	IR2128	order	IR2128PbF
8-Lead SOIC	IR2128S	order	IR2128SPbF

International
IOR Rectifier

This product has been designed and qualified for the Industrial market.
Qualification Standards can be found on IR's Web site.
Data and specifications subject to change without notice.

IR WORLD HEADQUARTERS: 233 Kansas St., El Segundo, California 90245, USA Tel: (310) 252-7105
TAC Fax: (310) 252-7903
Visit us at www.irf.com for sales contact information.
09/08/04