chanhvinh.com

Current transducer LF 210-S

I_{PN} = 200 A

For the electronic measurement of current: DC, AC, pulsed..., with galvanic separation between the primary and the secondary circuit.



Features

- Bipolar and insulated current measurement up to 420 A
- Current output
- Closed loop (compensated) current transducer
- Panel mounting.

Advantages

- High accuracy
- Very low offset drift over temperature.

Applications

- Windmill inverters
- Test and measurement
- Substations
- AC variable speed and servo motor drives
- Statics converters for DC motors drives
- Battery supplied applications
- Uninterruptible Power Supplies (UPS)
- Switched Mode Power Supplies (SMPS)
- Power supplies for welding applications.

Standards

- EN 50178: 1997
- IEC 61010-1: 2010
- UL 508: 2010.

Application Domain

- Industrial.

chanhvinh.com

Absolute maximum ratings

Parameter	Symbol	Unit	Value
Maximum supply voltage (working) (−40 … 85 °C)	$\pm U_C$	V	±15.75
Primary conductor temperature	T_B	°C	100
Maximum steady state primary current (−40 … 85 °C)	I_{PN}	A	200

Stresses above these ratings may cause permanent damage.
Exposure to absolute maximum ratings for extended periods may degrade reliability.

UL 508: Ratings and assumptions of certification

File # E189713 Volume: 2 Section: 9

Standards

- USR indicates investigation to the Standard for Industrial Control Equipment UL 508.
- CNR indicates investigation to the Canadian standard for Industrial Control Equipment CSA C22.2 No. 14-13

Conditions of acceptability

When installed in the end-use equipment, with primary feedthrough potential involved of 600 V AC/DC, consideration shall be given to the following:

1 - These products must be mounted in a suitable end-use enclosure.

2 - The secondary pin terminals have not been evaluated for field wiring.

3 - Low voltage control circuit shall be supplied by an isolating source (such as transformer, optical isolator, limiting impedance or electro-mechanical relay).

4 - Based on the temperature test performed on all Series, the primary bar or conductor shall not exceed 100 °C in the end use application.

Marking

Only those products bearing the UL or UR Mark should be considered to be Listed or Recognized and covered under UL's Follow-Up Service. Always look for the Mark on the product.

chanhvinh.com

Insulation coordination

Parameter	Symbol	Unit	Value	Comment
Rms voltage for AC insulation test, 50 Hz, 1 min	U_d	kV	3.5	
Impulse withstand voltage 1.2/50 µs	$\hat{U}_W$	kV	8.8	
Insulation resistance	R_{IS}	MΩ	1000	measured at 3.5 kV AC
Comparative tracking index	*CTI*		600	
Application example			300 V CAT III, PD2	Reinforced insulation, non uniform field according to EN 50178, IEC 61010
Application example			1000 V CAT III, PD2	Basic insulation, non uniform field according to EN 50178, IEC 61010
Case material	-	-	V0 according to UL 94	
Clearance and creepage	See dimensions drawing on page 7			

Environmental and mechanical characteristics

Parameter	Symbol	Unit	Min	Typ	Max	Comment
Ambient operating temperature	T_A	°C	−40		85	
Ambient storage temperature	T_S	°C	−50		90	
Mass	*m*	g		75		

LEM reserves the right to carry out modifications on its transducers, in order to improve them, without prior notice

chanhvinh.com

Electrical data

At T_A = 25 °C, $\pm U_C$ = ±15 V, R_M = 1 Ω, unless otherwise noted.
Lines with a * in the conditions column apply over the −40 … 85 °C ambient temperature range.

Parameter	Symbol	Unit	Min	Typ	Max		Conditions
Primary nominal rms current	I_{PN}	A			200	*	
Primary current, measuring range	I_{PM}	A	−420		420	*	
Measuring resistance	R_M	Ω	0 [1]			*	Max value of R_M is given in figure 1
Secondary nominal rms current	I_{SN}	A	−0.1		0.1	*	
Resistance of secondary winding	R_S	Ω			27		$R_S(T_A) = R_S \times (1 + 0.004 \times (T_A + \Delta temp - 25))$ Estimated temperature increase @I_{PN} is Δtemp = 15 °C
Secondary current	I_S	A	−0.21		0.21	*	
Number of secondary turns	N_S			2000			
Theoretical sensitivity	G_{th}	mA/A		0.5			
Supply voltage	$\pm U_C$	V	±11.4		±15.75	*	
Current consumption	I_C	mA		33 + I_S 35 + I_S			$\pm U_C$ = ±12 V $\pm U_C$ = ±15 V
Offset current, referred to primary	I_O	A	−0.15		0.15		
Temperature variation of I_O, referred to primary	I_{OT}	A	−0.2		0.2	*	
Magnetic offset current, referred to primary	I_{OM}	A		±0.2			After 3 × I_{PN}
Sensitivity error	ε_G	%	−0.1		0.1	*	
Linearity error	ε_L	% of I_{PN}	−0.05		0.05	*	
Overall accuracy at I_{PN}	X_G	% of I_{PN}	−0.2 −0.2		0.2 0.2	*	25 … 85 °C −40 … 85 °C
Output rms noise current referred to primary	I_{no}	mA		20			1 Hz to 100 kHz (see figure 4)
Reaction time @ 10 % of I_{PN}	t_{ra}	µs		0.5			0 to 200 A, 75 A/µs R_M = 10 Ω
Step response time to 90 % of I_{PN}	t_r	µs		0.5			0 to 200 A, 75 A/µs R_M = 10 Ω (see figure 2)
Frequency bandwidth	BW	kHz		100			R_M = 50 Ω; −3 dB

Note: [1] With ±15 V as power supply. Other values of minimum values according to conditions of use are given in Figure 1.


Definition of typical, minimum and maximum values

Minimum and maximum values for specified limiting and safety conditions have to be understood as such as well as values shown in “typical” graphs.
On the other hand, measured values are part of a statistical distribution that can be specified by an interval with upper and lower limits and a probability for measured values to lie within this interval.
Unless otherwise stated (e.g. “100 % tested”), the LEM definition for such intervals designated with “min” and “max” is that the probability for values of samples to lie in this interval is 99.73 %.
For a normal (Gaussian) distribution, this corresponds to an interval between −3 sigma and +3 sigma. If “typical” values are not obviously mean or average values, those values are defined to delimit intervals with a probability of 68.27 %, corresponding to an interval between −sigma and +sigma for a normal distribution.
Typical, minimum and maximum values are determined during the initial characterization of the product.

LEM reserves the right to carry out modifications on its transducers, in order to improve them, without prior notice

chanhvinh.com

Typical performance characteristics

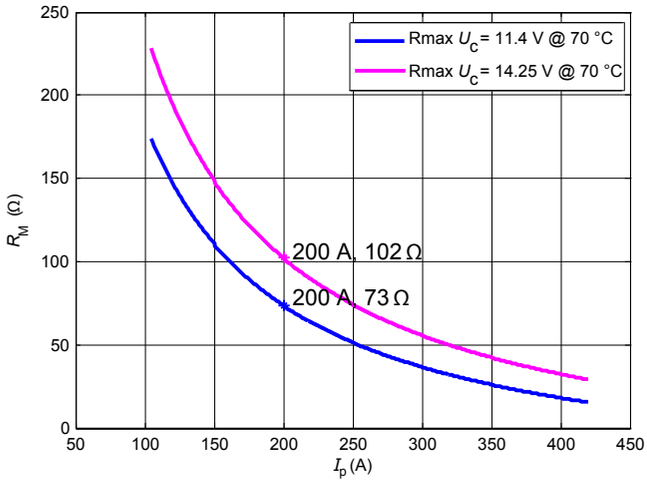

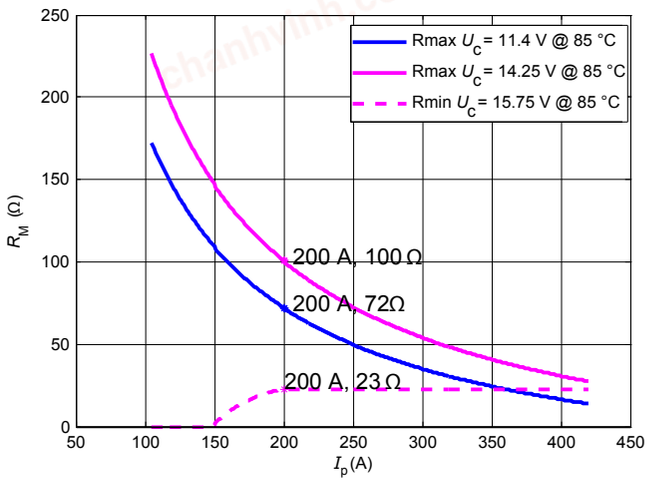


Figure 1: Maximum measuring resistance

$$R_{M\,max} = N_S \times \frac{U_{C\,min} - 0.3\ V}{I_P} - R_{S\,max} - 4.1\ \Omega$$

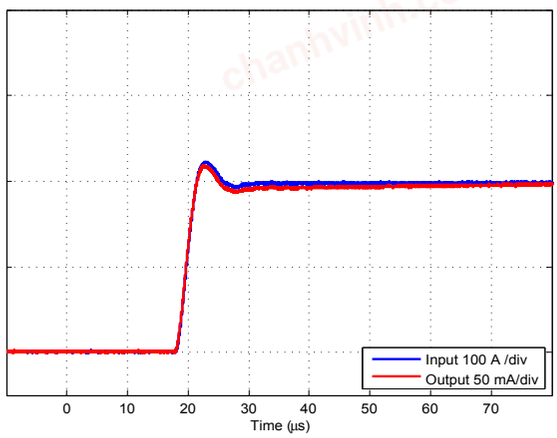


Figure 2: Typical step response (0 to 200 A, 75 A/µs R_M = 10 Ω)

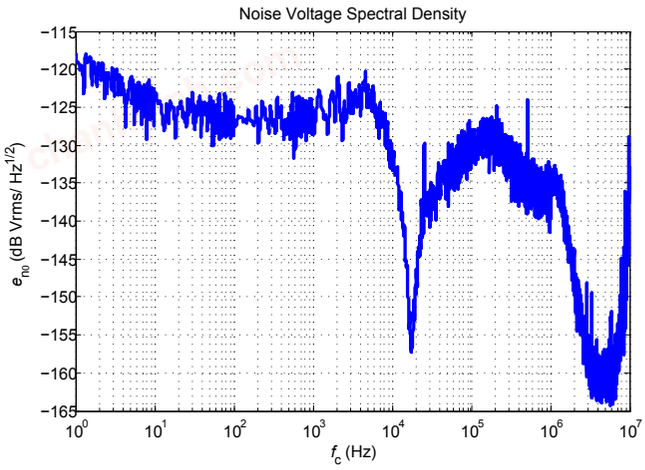


Figure 3: Typical noise voltage density e_{no} with R_M = 10 Ω

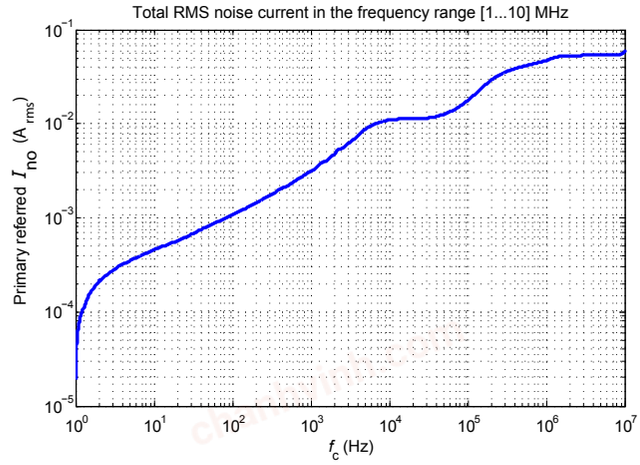


Figure 4: Typical total output current noise with (primary referred, rms) with R_M = 10 Ω

To calculate the noise in a frequency band f_1 to f_2, the formula is:

$$I_{no}(f_1 \ldots f_2) = \sqrt{I_{no}(f_2)^2 - I_{no}(f_2)^2}$$

with $I_{no}(f)$ read from figure 4 (typical, rms value).

Example:
What is the noise from 10^3 to 10^6 Hz?
Figure 4 gives I_{no} (10^3 Hz) = 3.19 mA and I_{no} (10^6 Hz) = 84.4 mA.
The output current noise (rms) is therefore:

$\sqrt{(46.77 \times 10^{-3})^2 - (3.11 \times 10^{-3})^2}$ = 46.67 mA referred to primary

LEM reserves the right to carry out modifications on its transducers, in order to improve them, without prior notice

chanhvinh.com

Typical performance characteristics

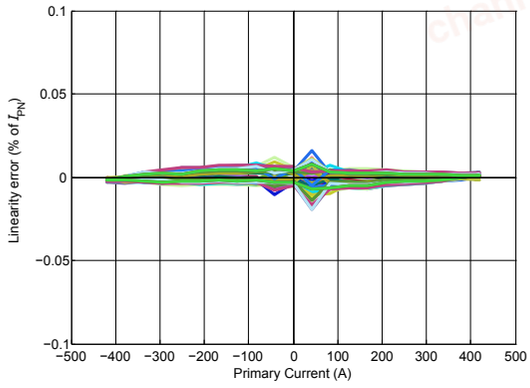


Figure 5: Linearity

Performance parameters definition

Sensitivity and linearity

To measure sensitivity and linearity, the primary current (DC) is cycled from 0 to I_{PM}, then to $-I_{PM}$ and back to 0 (equally spaced I_{PM}/10 steps).
The sensitivity *G* is defined as the slope of the linear regression line for a cycle between $\pm I_{PM}$.
The linearity error ε_L is the maximum positive or negative difference between the measured points and the linear regression line, expressed in % of the maximum measured value.

Magnetic offset

The magnetic offset I_{OM} is the change of offset after a given current has been applied to the input. It is included in the linearity error as long as the transducer remains in its measuring range.

Electrical offset

The electrical offset current I_{OE} is the residual output current when the input current is zero.

Overall accuracy

The overall accuracy X_G is the error at $\pm I_{PN}$, relative to the rated value I_{PN}.
It includes all errors mentioned above.

Response and reaction times

The response time t_r and the reaction time t_{ra} are shown in the next figure.
Both slightly depend on the primary current d*i*/d*t*. They are measured at nominal current.


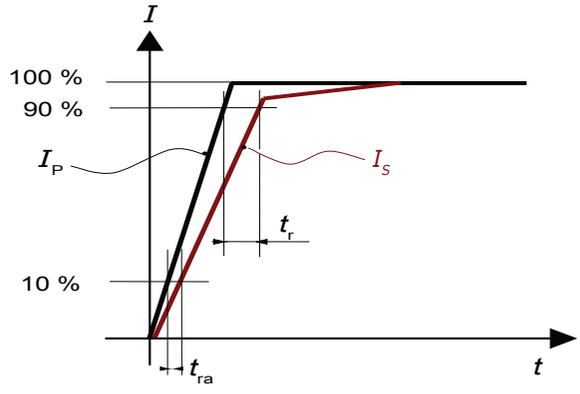


Figure 6: Response time t_r and reaction time t_{ra}

chanhvinh.com

Dimensions (in mm)

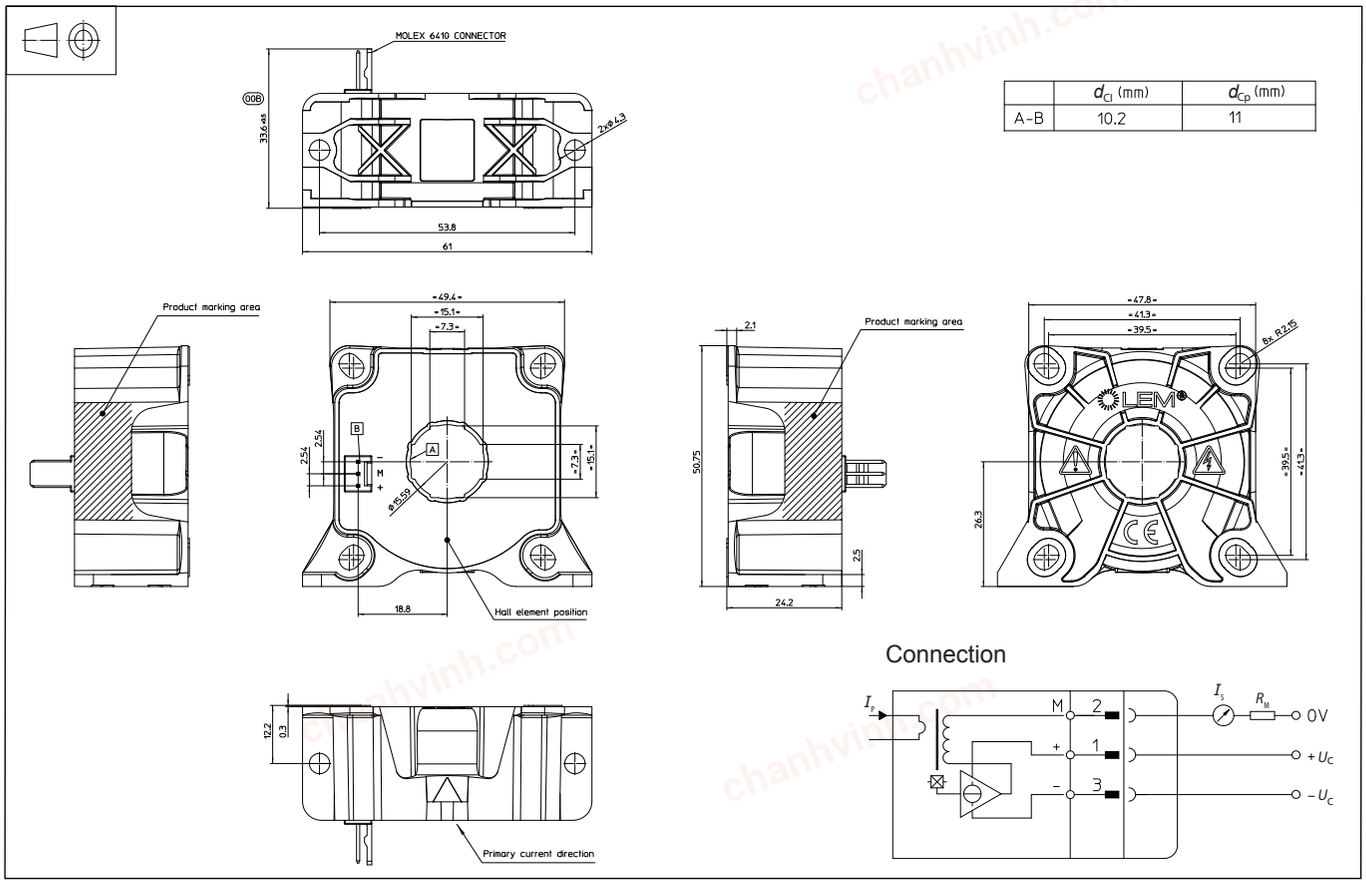

	d_{Cl} (mm)	d_{Cp} (mm)
A-B	10.2	11

Mechanical characteristics

- General tolerance ±0.3 mm
- Transducer fastening
  Vertical position 2 holes ⌀ 4.3 mm
  2 M4 steel screws
  Recommended fastening torque 2.1 N·m (±10 %)
- Transducer fastening
  Horizontal position 4 holes ⌀ 4.3 mm
  4 M4 steel screws
  Recommended fastening torque 2.1 N·m (±10 %)
- Connection of secondary MOLEX 6410
- Primary through hole ⌀ 15.59 mm

Remarks

- I_S is positive when I_P flows in the direction of arrow.
- The secondary cables also have to be routed together all the way.
- Installation of the transducer is to be done without primary current or secondary voltage present.
- Maximum temperature of primary conductor: see page 2.
- This is a standard model. For different versions (supply voltages, turns ratios, unidirectional measurements...), please contact us.
- Installation of the transducer must be done unless otherwise specified on the datasheet, according to LEM Transducer Generic Mounting Rules. Please refer to LEM document N°ANE120504 available on our Web site: **Products/ Product Documentation.**

Safety

This transducer must be used in limited-energy secondary circuits according to IEC 61010-1.

This transducer must be used in electric/electronic equipment with respect to applicable standards and safety requirements in accordance with the manufacturer's operating instructions.

Caution, risk of electrical shock

When operating the transducer, certain parts of the module can carry hazardous voltage (eg. primary connection, power supply).
Ignoring this warning can lead to injury and/or cause serious damage.
This transducer is a build-in device, whose conducting parts must be inaccessible after installation.
A protective housing or additional shield could be used.
Main supply must be able to be disconnected.