chanhvinh.com

XS3A4053

Triple low-ohmic single-pole double-throw analog switch

Rev. 1 — 11 February 2022 Product data sheet

1. General description

The XS3A4053 is a triple low-ohmic single-pole double-throw analog switch, suitable for use as an analog or digital multiplexer/demultiplexer. Each switch has a digital select input (nS), two independent inputs/outputs (nY0 and nY1) and a common input/output (nZ). All three switches share an enable input ($\overline{E}$). A digital enable pin $\overline{E}$ is common to all switches.When $\overline{E}$ is HIGH, the switches are turned off.

Schmitt trigger action at the digital inputs makes the circuit tolerant to slower input rise and fall times. Low threshold digital inputs allows this device to be driven by 1.8 V logic levels in 3.3 V applications without significant increase in supply current I_{CC}. This makes it possible for the XS3A4053 to switch 4.3 V signals with a 1.8 V digital controller, eliminating the need for logic level translation. The XS3A4053 allows signals with amplitude up to V_{CC} to be transmitted from nZ to nY0 or nY1; or from nY0 or nY1 to nZ. Its low ON resistance (0.5 Ω) and flatness (0.13 Ω) ensures minimal attenuation and distortion of transmitted signals.

2. Features and benefits

- Wide supply voltage range from 1.4 V to 4.3 V
- Very low ON resistance (peak):
  - 1.6 Ω (typical) at V_{CC} = 1.4 V
  - 1.0 Ω (typical) at V_{CC} = 1.65 V
  - 0.55 Ω (typical) at V_{CC} = 2.3 V
  - 0.5 Ω (typical) at V_{CC} = 2.7 V
  - 0.5 Ω (typical) at V_{CC} = 4.3 V
- Break-before-make switching
- High noise immunity
- ESD protection:
  - HBM ANSI/ESDA/JEDEC JS-001 exceeds 4000 V
  - CDM ANSI/ESDA/JEDEC JS-002 exceeds 1000 V
  - IEC61000-4-2 contact discharge exceeds 8000 V for switch ports
- CMOS low-power consumption
- Latch-up performance exceeds 100 mA per JESD78 Class II Level A
- 1.8 V control logic at V_{CC} = 3.6 V
- Control input accepts voltages above supply voltage
- Very low supply current, even when input is below V_{CC}
- High current handling capability (350 mA continuous current under 3.3 V supply)
- Specified from -40 °C to +85 °C and from -40 °C to +125 °C

3. Applications

- Appliances
- Communication Systems
- Medical Equipment
- Analog Sensor Monitoring
- Audio Routing/Switching
- Test and Measurement

nexperia

chanhvinh.com

4. Ordering information

Table 1. Ordering information

Type number	Package			
	Temperature range	Name	Description	Version
XS3A4053PW	-40 °C to +125 °C	TSSOP16	plastic thin shrink small outline package; 16 leads; body width 4.4 mm	SOT403-1

5. Functional diagram




Fig. 1. Logic symbol

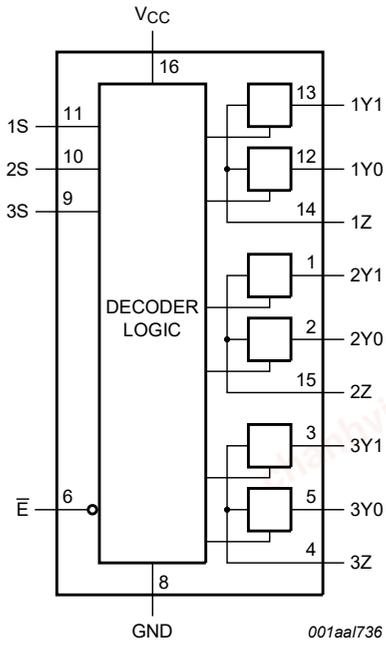


Fig. 2. Logic diagram

6. Pinning information

6.1. Pinning

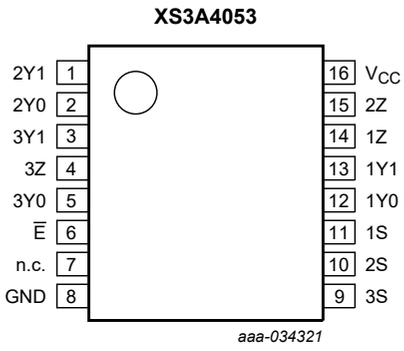


Fig. 3. Pin configuration SOT403-1 (TSSOP16)

All information provided in this document is subject to legal disclaimers.

© Nexperia B.V. 2022. All rights reserved

chanhvinh.com

6.2. Pin description

Table 2. Pin description

Symbol	Pin	Description
$\overline{E}$	6	enable input (active LOW)
n.c.	7	not connected
GND	8	ground (0 V)
1S, 2S, 3S	11, 10 ,9	select input
1Y0, 2Y0, 3Y0	12, 2, 5	independent input or output
1Y1, 2Y1, 3Y1	13, 1, 3	independent input or output
1Z , 2Z, 3Z	14, 15, 4	independent output or input
V_{CC}	16	supply voltage

7. Functional description

Table 3. Function table

Inputs		Channel on
$\overline{E}$	nS	
L	L	nY0 to nZ
L	H	nY1 to nZ
H	X	switches off

8. Limiting values

Table 4. Limiting values

In accordance with the Absolute Maximum Rating System (IEC 60134). Voltages are referenced to GND (ground = 0 V).

Symbol	Parameter	Conditions	Min	Max	Unit
V_{CC}	supply voltage		-0.5	+4.6	V
V_I	input voltage	nS and $\overline{E}$ [1]	-0.5	+4.6	V
V_{SW}	switch voltage	[2]	-0.5	V_{CC} + 0.5	V
I_{IK}	input clamping current	V_I < -0.5 V	-50	-	mA
I_{SK}	switch clamping current	V_I < -0.5 V or V_I > V_{CC} + 0.5 V	-	±50	mA
I_{SW}	switch current	V_{SW} > -0.5 V or V_{SW} < V_{CC} + 0.5 V; source or sink current	-	±350	mA
		V_{SW} > -0.5 V or V_{SW} < V_{CC} + 0.5 V; pulsed at 1 ms duration, < 10 % duty cycle; peak current	-	±500	mA
T_{stg}	storage temperature		-65	+150	°C
P_{tot}	total power dissipation	T_{amb} = -40 °C to +125 °C [3]	-	500	mW

[1] The minimum input voltage rating may be exceeded if the input current rating is observed.
[2] The minimum and maximum switch voltage ratings may be exceeded if the switch clamping current rating is observed but may not exceed 4.6 V.
[3] For SOT403-1 (TSSOP16) package: P_{tot} derates linearly with 8.5 mW/K above 91 °C.

All information provided in this document is subject to legal disclaimers.
© Nexperia B.V. 2022. All rights reserved

chanhvinh.com

9. Recommended operating conditions

Table 5. Recommended operating conditions

Symbol	Parameter	Conditions	Min	Max	Unit
V_{CC}	supply voltage		1.4	4.3	V
V_I	input voltage	nS and $\overline{E}$	0	4.3	V
V_{SW}	switch voltage	[1]	0	V_{CC}	V
T_{amb}	ambient temperature		-40	+125	°C
$\Delta t/\Delta V$	input transition rise and fall rate	nS and $\overline{E}$; V_{CC} = 1.4 V to 4.3 V	-	200	ns/V

[1] To avoid sinking GND current from terminal nZ when switch current flows in terminal nYn, the voltage drop across the bidirectional switch must not exceed 0.4 V. If the switch current flows into terminal nZ, no GND current will flow from terminal nYn. In this case, there is no limit for the voltage drop across the switch.

10. Static characteristics

Table 6. Static characteristics

At recommended operating conditions; voltages are referenced to GND (ground 0 V).

Symbol	Parameter	Conditions	T_{amb} = 25 °C			T_{amb} = -40 °C to +85 °C		T_{amb} = -40 °C to +125 °C		Unit
			Min	Typ	Max	Min	Max	Min	Max	
V_{IH}	HIGH-level input voltage	V_{CC} = 1.4 V to 1.6 V	0.9	-	-	0.9	-	0.9	-	V
		V_{CC} = 1.65 V to 1.95 V	0.9	-	-	0.9	-	0.9	-	V
		V_{CC} = 2.3 V to 2.7 V	1.1	-	-	1.1	-	1.1	-	V
		V_{CC} = 2.7 V to 3.6 V	1.3	-	-	1.3	-	1.3	-	V
		V_{CC} = 3.6 V to 4.3 V	1.4	-	-	1.4	-	1.4	-	V
V_{IL}	LOW-level input voltage	V_{CC} = 1.4 V to 1.6 V	-	-	0.3	-	0.3	-	0.3	V
		V_{CC} = 1.65 V to 1.95 V	-	-	0.4	-	0.4	-	0.3	V
		V_{CC} = 2.3 V to 2.7 V	-	-	0.4	-	0.4	-	0.4	V
		V_{CC} = 2.7 V to 3.6 V	-	-	0.5	-	0.5	-	0.5	V
		V_{CC} = 3.6 V to 4.3 V	-	-	0.6	-	0.6	-	0.6	V
I_I	input leakage current	nS and $\overline{E}$; V_I = GND to 4.3 V; V_{CC} = 1.4 V to 4.3 V	-	-	-	-	±0.5	-	±1	µA
$I_{S(OFF)}$	OFF-state leakage current	nY0 and nY1 port; see Fig. 4								
		V_{CC} = 1.4 V to 3.6 V	-	-	±5	-	±50	-	±500	nA
		V_{CC} = 3.6 V to 4.3 V	-	-	±10	-	±50	-	±500	nA
$I_{S(ON)}$	ON-state leakage current	nZ port; see Fig. 5								
		V_{CC} = 1.4 V to 3.6 V	-	-	±15	-	±150	-	±1500	nA
		V_{CC} = 3.6 V to 4.3 V	-	-	±20	-	±150	-	±1500	nA
I_{CC}	supply current	V_I = V_{CC} or GND; V_{SW} = GND or V_{CC}								
		V_{CC} = 3.6 V	-	-	100	-	500	-	5000	nA
		V_{CC} = 4.3 V	-	-	150	-	800	-	6000	nA


All information provided in this document is subject to legal disclaimers.

© Nexperia B.V. 2022. All rights reserved

chanhvinh.com

Symbol	Parameter	Conditions	T_{amb} = 25 °C			T_{amb} = -40 °C to +85 °C		T_{amb} = -40 °C to +125 °C		Unit
			Min	Typ	Max	Min	Max	Min	Max	
ΔI_{CC}	additional supply current	V_{SW} = GND or V_{CC}								
		V_I = 2.6 V; V_{CC} = 4.3 V	-	2.0	4.0	-	7	-	7	µA
		V_I = 2.6 V; V_{CC} = 3.6 V	-	0.35	0.7	-	1	-	1	µA
		V_I = 1.8 V; V_{CC} = 4.3 V	-	7.0	10.0	-	15	-	15	µA
		V_I = 1.8 V; V_{CC} = 3.6 V	-	2.5	4.0	-	5	-	5	µA
		V_I = 1.8 V; V_{CC} = 2.5 V	-	50	200	-	300	-	500	nA
C_I	input capacitance	nS and $\overline{E}$	-	1.0	-	-	-	-	-	pF
$C_{S(OFF)}$	OFF-state capacitance		-	35	-	-	-	-	-	pF
$C_{S(ON)}$	ON-state capacitance		-	130	-	-	-	-	-	pF


10.1. Test circuits

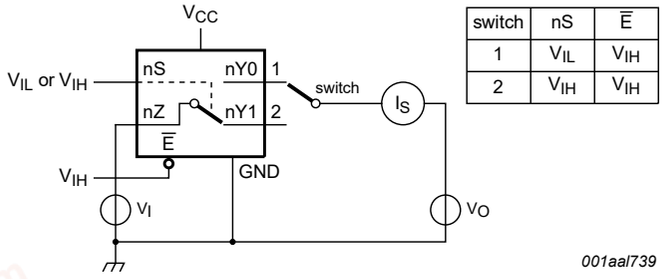

switch	nS	$\overline{E}$
1	V_{IL}	V_{IH}
2	V_{IH}	V_{IH}

V_I = 0.3 V or V_{CC} - 0.3 V; V_O = V_{CC} - 0.3 V or 0.3 V.

Fig. 4. Test circuit for measuring OFF-state leakage current

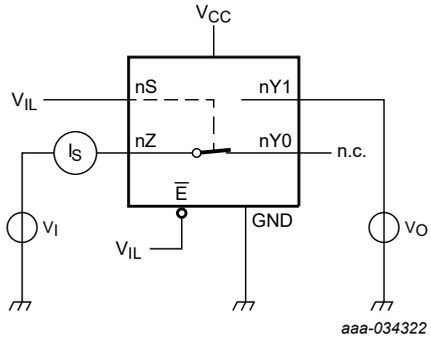

V_I = 0.3 V or V_{CC} - 0.3 V; V_O = V_{CC} - 0.3 V or 0.3 V.

Fig. 5. Test circuit for measuring ON-state leakage current

All information provided in this document is subject to legal disclaimers.

© Nexperia B.V. 2022. All rights reserved

chanhvinh.com

10.2. ON resistance

Table 7. ON resistance

At recommended operating conditions; voltages are referenced to GND (ground = 0 V); for graphs see Fig. 7 to Fig. 13.


Symbol	Parameter	Conditions	T_{amb} = -40 °C to +85 °C			T_{amb} = -40 °C to +125 °C		Unit
			Min	Typ[1]	Max	Min	Max	
$R_{ON(peak)}$	ON resistance (peak)	V_I = GND to V_{CC}; I_{SW} = 100 mA; see Fig. 6						
		V_{CC} = 1.4 V	-	1.6	3.7	-	4.1	Ω
		V_{CC} = 1.65 V	-	1.0	1.6	-	1.7	Ω
		V_{CC} = 2.3 V	-	0.55	0.8	-	0.9	Ω
		V_{CC} = 2.7 V	-	0.5	0.75	-	0.9	Ω
		V_{CC} = 4.3 V	-	0.5	0.75	-	0.9	Ω
ΔR_{ON}	ON resistance mismatch between channels	V_I = GND to V_{CC}; I_{SW} = 100 mA [2]						
		V_{CC} = 1.4 V; V_{SW} = 0.4 V	-	0.09	0.38	-	0.38	Ω
		V_{CC} = 1.65 V; V_{SW} = 0.5 V	-	0.07	0.28	-	0.38	Ω
		V_{CC} = 2.3 V; V_{SW} = 0.7 V	-	0.06	0.15	-	0.18	Ω
		V_{CC} = 2.7 V; V_{SW} = 0.8 V	-	0.06	0.15	-	0.18	Ω
		V_{CC} = 4.3 V; V_{SW} = 0.8 V	-	0.05	0.15	-	0.18	Ω
$R_{ON(flat)}$	ON resistance (flatness)	V_I = GND to V_{CC}; I_{SW} = 100 mA [3]						
		V_{CC} = 1.4 V	-	1.0	3.3	-	3.6	Ω
		V_{CC} = 1.65 V	-	0.5	1.2	-	1.3	Ω
		V_{CC} = 2.3 V	-	0.15	0.3	-	0.35	Ω
		V_{CC} = 2.7 V	-	0.13	0.3	-	0.35	Ω
		V_{CC} = 4.3 V	-	0.2	0.4	-	0.45	Ω

[1] Typical values are measured at T_{amb} = 25 °C.
[2] Measured at identical V_{CC}, temperature and input voltage.
[3] Flatness is defined as the difference between the maximum and minimum value of ON resistance measured at identical V_{CC} and temperature.

All information provided in this document is subject to legal disclaimers.
© Nexperia B.V. 2022. All rights reserved

chanhvinh.com


10.3. ON resistance test circuit and graphs

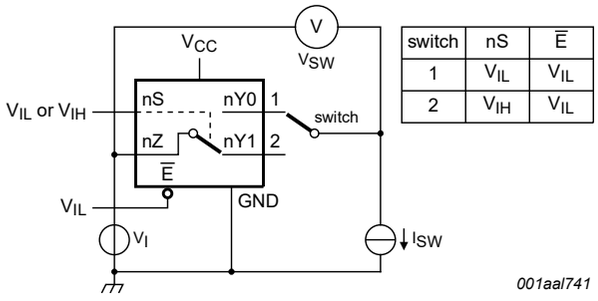

switch	nS	$\overline{E}$
1	V_{IL}	V_{IL}
2	V_{IH}	V_{IL}


$R_{ON} = V_{SW} / I_{SW}$.

Fig. 6. Test circuit for measuring ON resistance

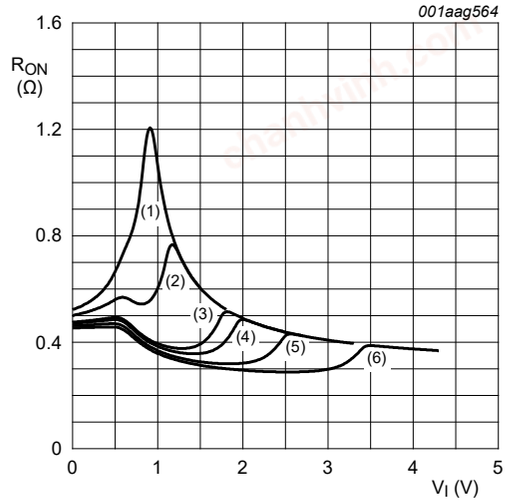


(1) V_{CC} = 1.5 V
(2) V_{CC} = 1.8 V
(3) V_{CC} = 2.5 V
(4) V_{CC} = 2.7 V
(5) V_{CC} = 3.3 V
(6) V_{CC} = 4.3 V
Measured at T_{amb} = 25 °C.

Fig. 7. Typical ON resistance as a function of input voltage

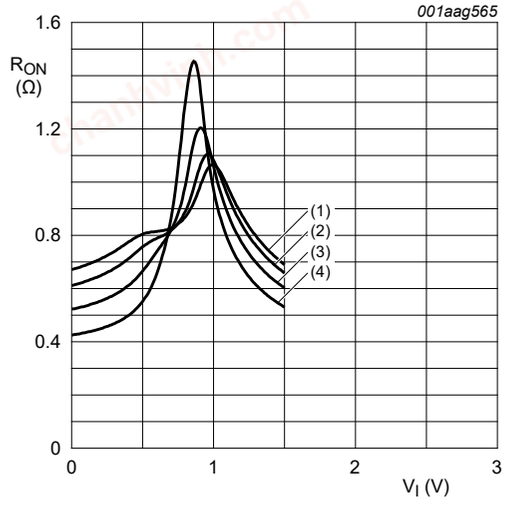

(1) T_{amb} = 125 °C
(2) T_{amb} = 85 °C
(3) T_{amb} = 25 °C
(4) T_{amb} = -40 °C

Fig. 8. ON resistance as a function of input voltage; V_{CC} = 1.5 V

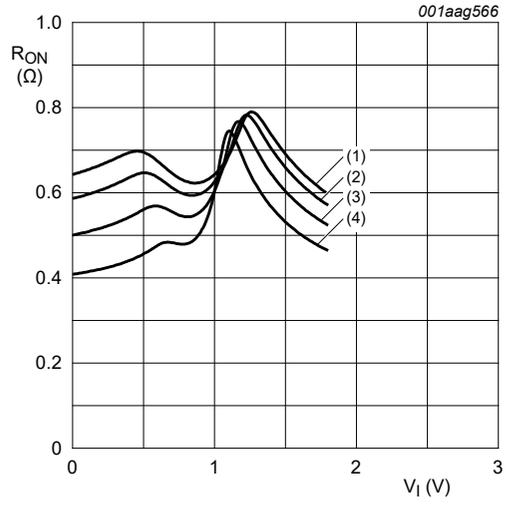


(1) T_{amb} = 125 °C
(2) T_{amb} = 85 °C
(3) T_{amb} = 25 °C
(4) T_{amb} = -40 °C

Fig. 9. ON resistance as a function of input voltage; V_{CC} = 1.8 V

All information provided in this document is subject to legal disclaimers.


© Nexperia B.V. 2022. All rights reserved

chanhvinh.com

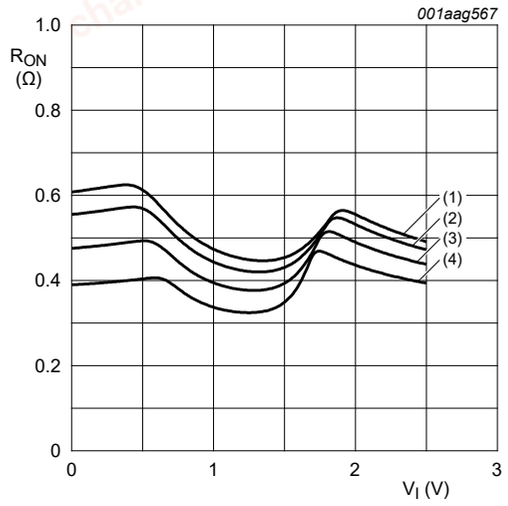


(1) T_{amb} = 125 °C
(2) T_{amb} = 85 °C
(3) T_{amb} = 25 °C
(4) T_{amb} = -40 °C

Fig. 10. ON resistance as a function of input voltage; V_{CC} = 2.5 V

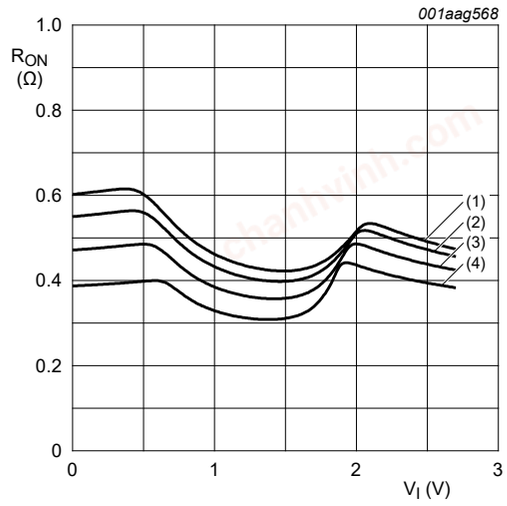


(1) T_{amb} = 125 °C
(2) T_{amb} = 85 °C
(3) T_{amb} = 25 °C
(4) T_{amb} = -40 °C

Fig. 11. ON resistance as a function of input voltage; V_{CC} = 2.7 V

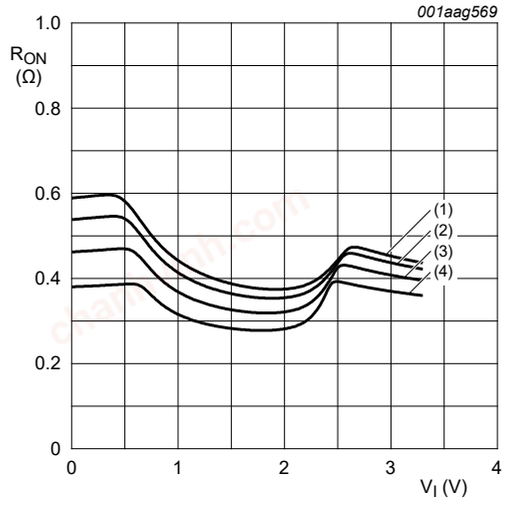

(1) T_{amb} = 125 °C
(2) T_{amb} = 85 °C
(3) T_{amb} = 25 °C
(4) T_{amb} = -40 °C

Fig. 12. ON resistance as a function of input voltage; V_{CC} = 3.3 V

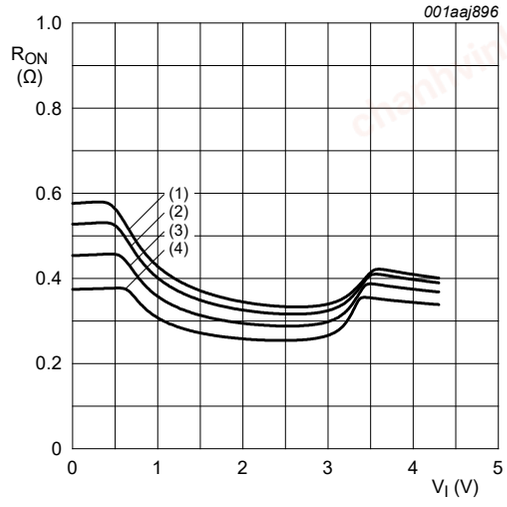

(1) T_{amb} = 125 °C
(2) T_{amb} = 85 °C
(3) T_{amb} = 25 °C
(4) T_{amb} = -40 °C

Fig. 13. ON resistance as a function of input voltage; V_{CC} = 4.3 V

All information provided in this document is subject to legal disclaimers.

© Nexperia B.V. 2022. All rights reserved

chanhvinh.com

11. Dynamic characteristics


Table 8. Dynamic characteristics

At recommended operating conditions; voltages are referenced to GND (ground = 0 V); for test circuit see Figure 17.

Symbol	Parameter	Conditions	T_{amb} = 25 °C			T_{amb} = -40 °C to +85 °C		T_{amb} = -40 °C to +125 °C		Unit
			Min	Typ[1]	Max	Min	Max	Min	Max	
t_{en}	enable time	$\overline{E}$, nS to nZ or nYn; see Fig. 14								
		V_{CC} = 1.4 V to 1.6 V	-	50	100	-	120	-	120	ns
		V_{CC} = 1.65 V to 1.95 V	-	36	70	-	80	-	90	ns
		V_{CC} = 2.3 V to 2.7 V	-	24	45	-	50	-	55	ns
		V_{CC} = 2.7 V to 3.6 V	-	22	40	-	45	-	50	ns
		V_{CC} = 3.6 V to 4.3 V	-	22	40	-	45	-	50	ns
t_{dis}	disable time	$\overline{E}$, nS to nZ or nYn; see Fig. 14								
		V_{CC} = 1.4 V to 1.6 V	-	32	80	-	80	-	90	ns
		V_{CC} = 1.65 V to 1.95 V	-	20	55	-	60	-	65	ns
		V_{CC} = 2.3 V to 2.7 V	-	12	25	-	30	-	35	ns
		V_{CC} = 2.7 V to 3.6 V	-	10	20	-	25	-	30	ns
		V_{CC} = 3.6 V to 4.3 V	-	10	20	-	25	-	30	ns
t_{b-m}	break-before-make time	see Fig. 15 [2]								
		V_{CC} = 1.4 V to 1.6 V	-	19	-	9	-	9	-	ns
		V_{CC} = 1.65 V to 1.95 V	-	17	-	7	-	7	-	ns
		V_{CC} = 2.3 V to 2.7 V	-	13	-	4	-	4	-	ns
		V_{CC} = 2.7 V to 3.6 V	-	10	-	3	-	3	-	ns
		V_{CC} = 3.6 V to 4.3 V	-	10	-	2	-	2	-	ns

[1] Typical values are measured at T_{amb} = 25 °C and V_{CC} = 1.5 V, 1.8 V, 2.5 V, 3.3 V and 4.3 V respectively.
[2] Break-before-make guaranteed by design.

11.1. Waveform and test circuits

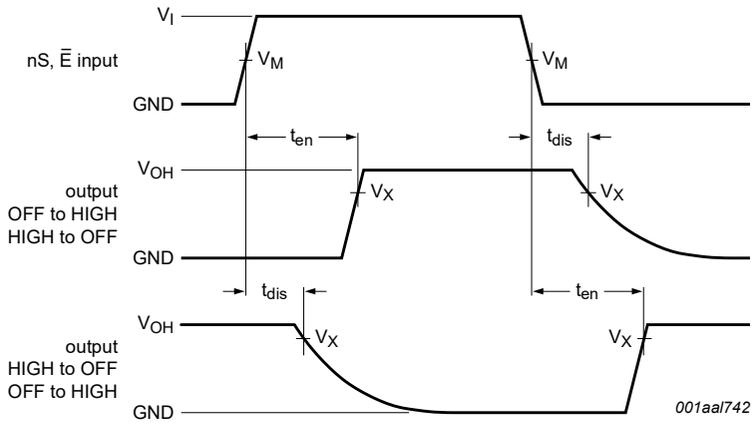

Measurement points are given in Table 9.

Logic level: V_{OH} is typical output voltage level that occurs with the output load.

Fig. 14. Enable and disable times


All information provided in this document is subject to legal disclaimers.

© Nexperia B.V. 2022. All rights reserved

chanhvinh.com

Table 9. Measurement points


Supply voltage	Input	Output
V_{CC}	V_M	V_X
1.4 V to 4.3 V	$0.5V_{CC}$	$0.9V_{OH}$

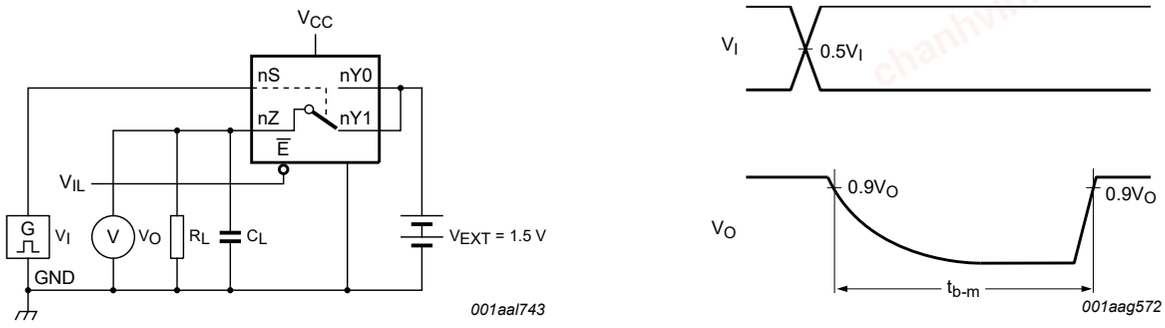

a. Test circuit

b. Input and output measurement points

Fig. 15. Test circuit for measuring break-before-make timing

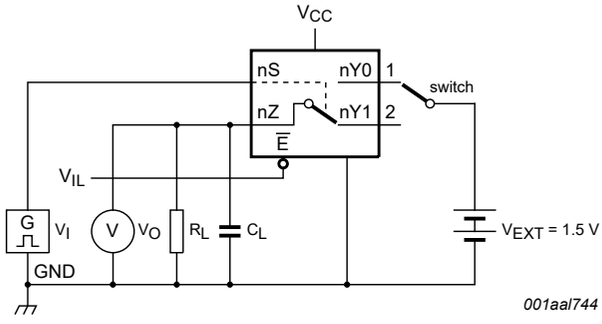

Test data is given in Table 10.

Definitions test circuit:

R_L = Load resistance.

C_L = Load capacitance including jig and probe capacitance.

V_{EXT} = External voltage for measuring switching times.

V_I may be connected to nS or $\overline{E}$.

Fig. 16. Test circuit for measuring switching times

Table 10. Test data

Supply voltage	Input		Load	
V_{CC}	V_I	t_r, t_f	C_L	R_L
1.4 V to 4.3 V	V_{CC}	≤ 2.5 ns	35 pF	50 Ω

All information provided in this document is subject to legal disclaimers.

© Nexperia B.V. 2022. All rights reserved

chanhvinh.com

11.2. Additional dynamic characteristics


Table 11. Additional dynamic characteristics

At recommended operating conditions; voltages are referenced to GND (ground = 0 V); V_I = GND or V_{CC} (unless otherwise specified); $t_r = t_f \leq 2.5$ ns.

Symbol	Parameter	Conditions	T_{amb} = 25 °C			Unit
			Min	Typ	Max	
THD	total harmonic distortion	f_i = 20 Hz to 20 kHz; R_L = 32 Ω; see Fig. 17 [1]				
		V_{CC} = 1.4 V; V_I = 1 V (p-p)	-	0.17	-	%
		V_{CC} = 1.65 V; V_I = 1.2 V (p-p)	-	0.10	-	%
		V_{CC} = 2.3 V; V_I = 1.5 V (p-p)	-	0.05	-	%
		V_{CC} = 2.7 V; V_I = 2 V (p-p)	-	0.04	-	%
		V_{CC} = 4.3 V; V_I = 2 V (p-p)	-	0.01	-	%
$f_{(-3dB)}$	-3 dB frequency response	R_L = 50 Ω; see Fig. 18 [1]				
		V_{CC} = 1.4 V to 4.3 V	-	40	-	MHz
α_{iso}	isolation (OFF-state)	f_i = 100 kHz; R_L = 50 Ω; see Fig. 19 [1]				
		V_{CC} = 1.4 V to 4.3 V	-	-90	-	dB
V_{ct}	crosstalk voltage	between digital inputs and switch; f_i = 1 MHz; C_L = 50 pF; R_L = 50 Ω; see Fig. 20				
		V_{CC} = 1.4 V to 3.6 V	-	0.4	-	V
		V_{CC} = 3.6 V to 4.3 V	-	0.6	-	V
Xtalk	crosstalk	between switches; f_i = 100 kHz; R_L = 50 Ω; see Fig. 21 [1]				
		V_{CC} = 1.4 V to 4.3 V	-	-90	-	dB
Q_{inj}	charge injection	f_i = 1 MHz; C_L = 0.1 nF; R_L = 1 MΩ; V_{gen} = 0 V; R_{gen} = 0 Ω; see Fig. 22				
		V_{CC} = 1.5 V	-	3	-	pC
		V_{CC} = 1.8 V	-	4	-	pC
		V_{CC} = 2.5 V	-	6	-	pC
		V_{CC} = 3.3 V	-	9	-	pC
		V_{CC} = 4.3 V	-	15	-	pC

[1] f_i is biased at $0.5V_{CC}$.

11.3. Test circuits

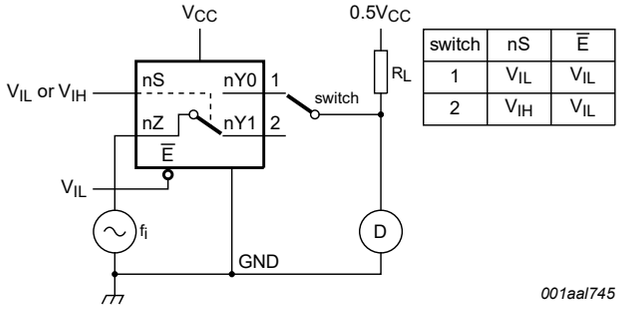


switch	nS	$\overline{E}$
1	V_{IL}	V_{IL}
2	V_{IH}	V_{IL}

Fig. 17. Test circuit for measuring total harmonic distortion

All information provided in this document is subject to legal disclaimers.
© Nexperia B.V. 2022. All rights reserved


chanhvinh.com

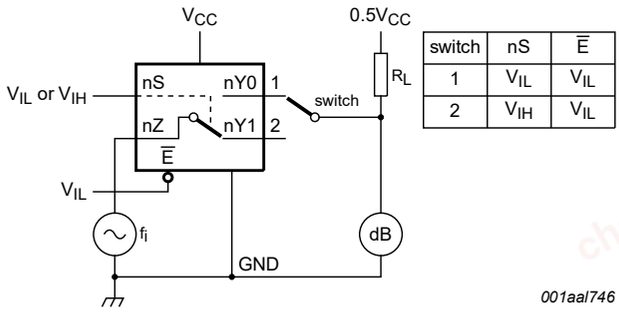

switch	nS	$\overline{E}$
1	V_{IL}	V_{IL}
2	V_{IH}	V_{IL}

Adjust f_i voltage to obtain 0 dBm level at output. Increase f_i frequency until dB meter reads -3 dB.


Fig. 18. Test circuit for measuring the frequency response when channel is in ON-state

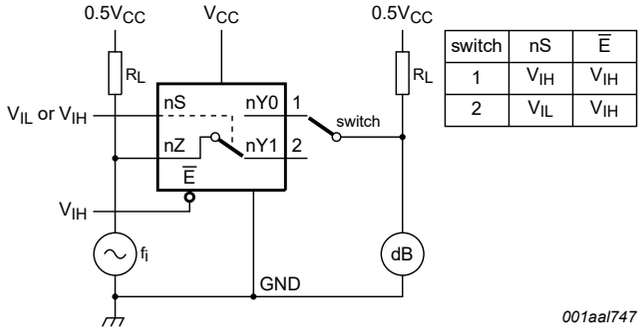

switch	nS	$\overline{E}$
1	V_{IH}	V_{IH}
2	V_{IL}	V_{IH}

Adjust f_i voltage to obtain 0 dBm level at input.

Fig. 19. Test circuit for measuring isolation (OFF-state)

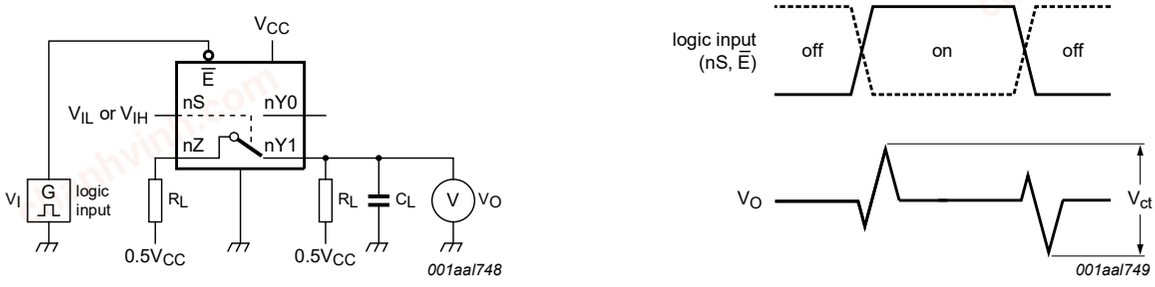

a. Test circuit

b. Input and output pulse definitions

Fig. 20. Test circuit for measuring crosstalk voltage between digital inputs and switch


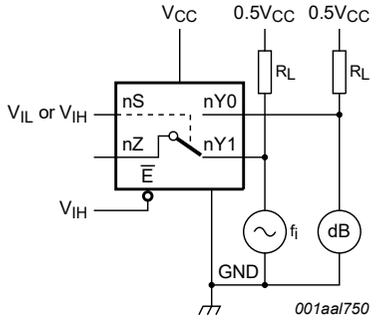


Fig. 21. Test circuit for measuring crosstalk between switches


All information provided in this document is subject to legal disclaimers.

© Nexperia B.V. 2022. All rights reserved

chanhvinh.com

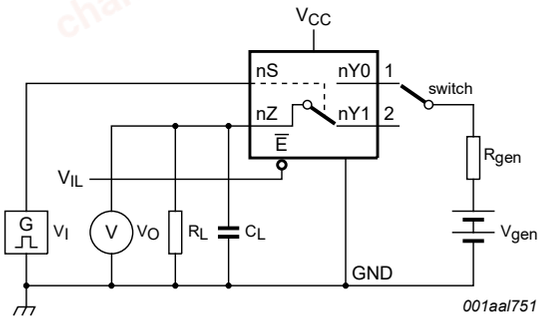

a. Test circuit

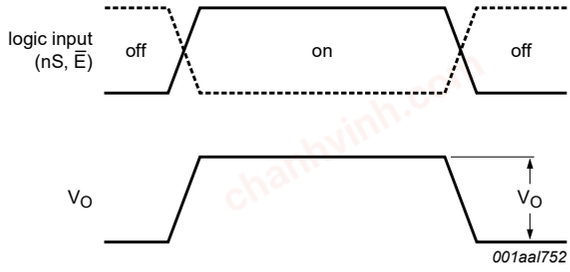

b. Input and output pulse definitions

Definition: $Q_{inj} = \Delta V_O \times C_L$.
ΔV_O = output voltage variation.
R_{gen} = generator resistance.
V_{gen} = generator voltage.
V_I may be connected to nS or $\overline{E}$.

Fig. 22. Test circuit for measuring charge injection


All information provided in this document is subject to legal disclaimers.

© Nexperia B.V. 2022. All rights reserved

chanhvinh.com

12. Package outline

TSSOP16: plastic thin shrink small outline package; 16 leads; body width 4.4 mm **SOT403-1**

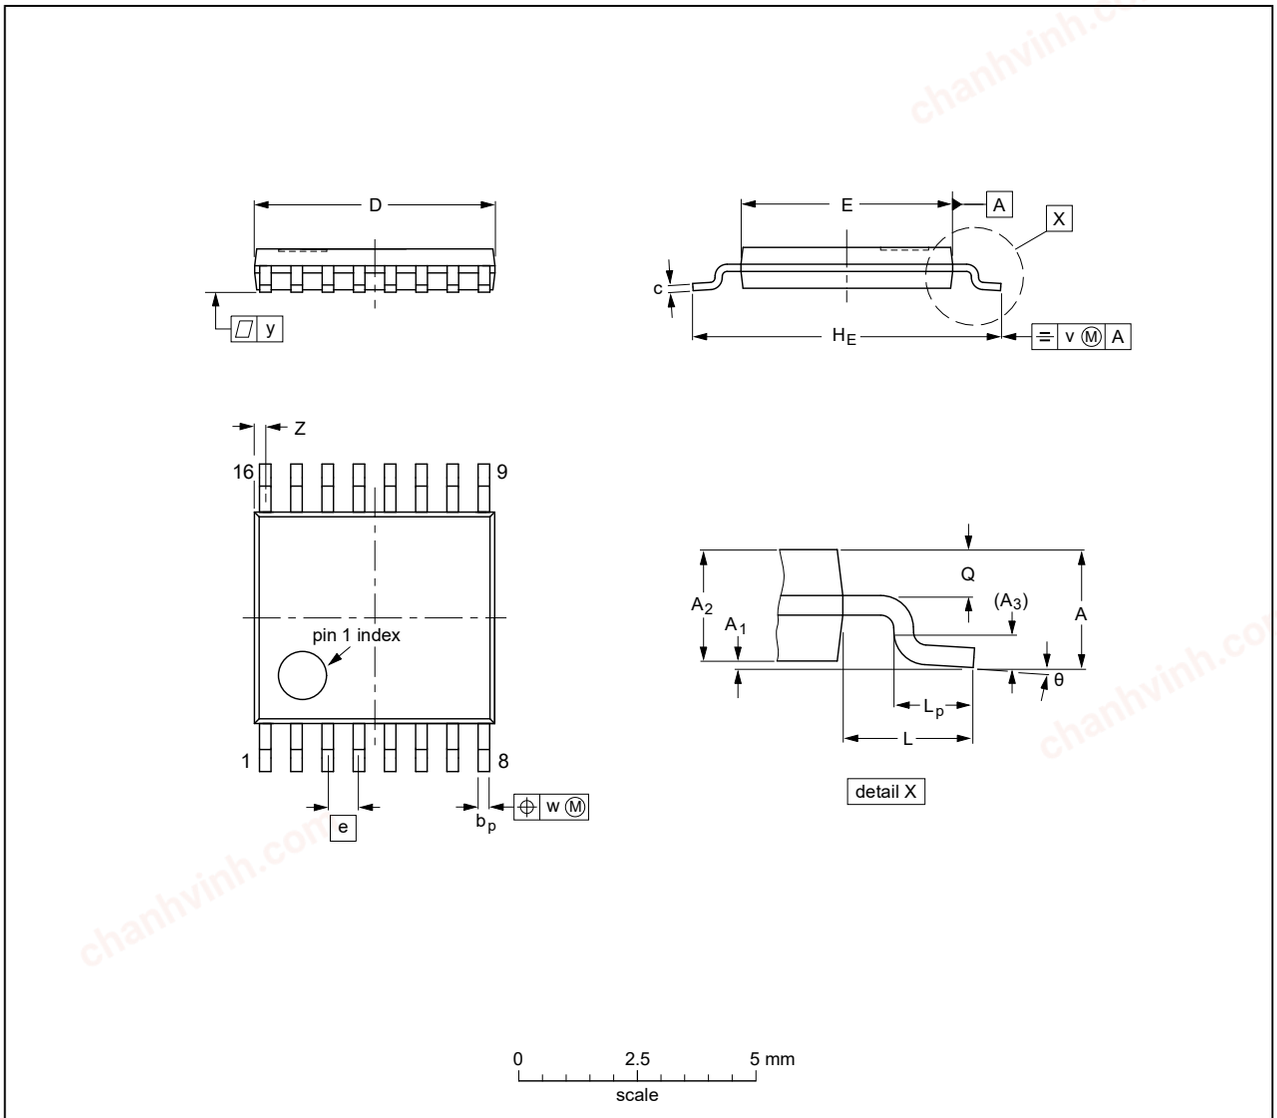

DIMENSIONS (mm are the original dimensions)

UNIT	A max.	A_1	A_2	A_3	b_p	c	D (1)	E (2)	e	H_E	L	L_p	Q	v	w	y	Z (1)	θ
mm	1.1	0.15 0.05	0.95 0.80	0.25	0.30 0.19	0.2 0.1	5.1 4.9	4.5 4.3	0.65	6.6 6.2	1	0.75 0.50	0.4 0.3	0.2	0.13	0.1	0.40 0.06	8° 0°

Notes

1. Plastic or metal protrusions of 0.15 mm maximum per side are not included.
2. Plastic interlead protrusions of 0.25 mm maximum per side are not included.

OUTLINE VERSION	REFERENCES				EUROPEAN PROJECTION	ISSUE DATE
	IEC	JEDEC	JEITA			
SOT403-1		MO-153				~~99-12-27~~ 03-02-18

Fig. 23. Package outline SOT403-1 (TSSOP16)

All information provided in this document is subject to legal disclaimers.

© Nexperia B.V. 2022. All rights reserved

chanhvinh.com

13. Abbreviations

Table 12. Abbreviations

Acronym	Description
CDM	Charged Device Model
CMOS	Complementary Metal-Oxide Semiconductor
ESD	ElectroStatic Discharge
HBM	Human Body Model

14. Revision history

Table 13. Revision history

Document ID	Release date	Data sheet status	Change notice	Supersedes
XS3A4053 v.1	20220211	Product data sheet	-	-

All information provided in this document is subject to legal disclaimers.

© Nexperia B.V. 2022. All rights reserved

chanhvinh.com

15. Legal information

Data sheet status

Document status [1][2]	Product status [3]	Definition
Objective [short] data sheet	Development	This document contains data from the objective specification for product development.
Preliminary [short] data sheet	Qualification	This document contains data from the preliminary specification.
Product [short] data sheet	Production	This document contains the product specification.

[1] Please consult the most recently issued document before initiating or completing a design.
[2] The term 'short data sheet' is explained in section "Definitions".
[3] The product status of device(s) described in this document may have changed since this document was published and may differ in case of multiple devices. The latest product status information is available on the internet at https://www.nexperia.com.

Definitions

Draft — The document is a draft version only. The content is still under internal review and subject to formal approval, which may result in modifications or additions. Nexperia does not give any representations or warranties as to the accuracy or completeness of information included herein and shall have no liability for the consequences of use of such information.

Short data sheet — A short data sheet is an extract from a full data sheet with the same product type number(s) and title. A short data sheet is intended for quick reference only and should not be relied upon to contain detailed and full information. For detailed and full information see the relevant full data sheet, which is available on request via the local Nexperia sales office. In case of any inconsistency or conflict with the short data sheet, the full data sheet shall prevail.

Product specification — The information and data provided in a Product data sheet shall define the specification of the product as agreed between Nexperia and its customer, unless Nexperia and customer have explicitly agreed otherwise in writing. In no event however, shall an agreement be valid in which the Nexperia product is deemed to offer functions and qualities beyond those described in the Product data sheet.

Disclaimers

Limited warranty and liability — Information in this document is believed to be accurate and reliable. However, Nexperia does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information. Nexperia takes no responsibility for the content in this document if provided by an information source outside of Nexperia.

In no event shall Nexperia be liable for any indirect, incidental, punitive, special or consequential damages (including - without limitation - lost profits, lost savings, business interruption, costs related to the removal or replacement of any products or rework charges) whether or not such damages are based on tort (including negligence), warranty, breach of contract or any other legal theory.

Notwithstanding any damages that customer might incur for any reason whatsoever, Nexperia's aggregate and cumulative liability towards customer for the products described herein shall be limited in accordance with the Terms and conditions of commercial sale of Nexperia.

Right to make changes — Nexperia reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

Suitability for use — Nexperia products are not designed, authorized or warranted to be suitable for use in life support, life-critical or safety-critical systems or equipment, nor in applications where failure or malfunction of an Nexperia product can reasonably be expected to result in personal injury, death or severe property or environmental damage. Nexperia and its suppliers accept no liability for inclusion and/or use of Nexperia products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

Quick reference data — The Quick reference data is an extract of the product data given in the Limiting values and Characteristics sections of this document, and as such is not complete, exhaustive or legally binding.

Applications — Applications that are described herein for any of these products are for illustrative purposes only. Nexperia makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

Customers are responsible for the design and operation of their applications and products using Nexperia products, and Nexperia accepts no liability for any assistance with applications or customer product design. It is customer's sole responsibility to determine whether the Nexperia product is suitable and fit for the customer's applications and products planned, as well as for the planned application and use of customer's third party customer(s). Customers should provide appropriate design and operating safeguards to minimize the risks associated with their applications and products.

Nexperia does not accept any liability related to any default, damage, costs or problem which is based on any weakness or default in the customer's applications or products, or the application or use by customer's third party customer(s). Customer is responsible for doing all necessary testing for the customer's applications and products using Nexperia products in order to avoid a default of the applications and the products or of the application or use by customer's third party customer(s). Nexperia does not accept any liability in this respect.

Limiting values — Stress above one or more limiting values (as defined in the Absolute Maximum Ratings System of IEC 60134) will cause permanent damage to the device. Limiting values are stress ratings only and (proper) operation of the device at these or any other conditions above those given in the Recommended operating conditions section (if present) or the Characteristics sections of this document is not warranted. Constant or repeated exposure to limiting values will permanently and irreversibly affect the quality and reliability of the device.

Terms and conditions of commercial sale — Nexperia products are sold subject to the general terms and conditions of commercial sale, as published at http://www.nexperia.com/profile/terms, unless otherwise agreed in a valid written individual agreement. In case an individual agreement is concluded only the terms and conditions of the respective agreement shall apply. Nexperia hereby expressly objects to applying the customer's general terms and conditions with regard to the purchase of Nexperia products by customer.

No offer to sell or license — Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights.

Export control — This document as well as the item(s) described herein may be subject to export control regulations. Export might require a prior authorization from competent authorities.

Non-automotive qualified products — Unless this data sheet expressly states that this specific Nexperia product is automotive qualified, the product is not suitable for automotive use. It is neither qualified nor tested in accordance with automotive testing or application requirements. Nexperia accepts no liability for inclusion and/or use of non-automotive qualified products in automotive equipment or applications.

In the event that customer uses the product for design-in and use in automotive applications to automotive specifications and standards, customer (a) shall use the product without Nexperia's warranty of the product for such automotive applications, use and specifications, and (b) whenever customer uses the product for automotive applications beyond Nexperia's specifications such use shall be solely at customer's own risk, and (c) customer fully indemnifies Nexperia for any liability, damages or failed product claims resulting from customer design and use of the product for automotive applications beyond Nexperia's standard warranty and Nexperia's product specifications.

Translations — A non-English (translated) version of a document is for reference only. The English version shall prevail in case of any discrepancy between the translated and English versions.

Trademarks

Notice: All referenced brands, product names, service names and trademarks are the property of their respective owners.

All information provided in this document is subject to legal disclaimers.

© Nexperia B.V. 2022. All rights reserved

chanhvinh.com

Contents

1. General description....1
2. Features and benefits....1
3. Applications....1
4. Ordering information....2
5. Functional diagram....2
6. Pinning information....2
6.1. Pinning....2
6.2. Pin description....3
7. Functional description....3
8. Limiting values....3
9. Recommended operating conditions....4
10. Static characteristics....4
10.1. Test circuits....5
10.2. ON resistance....6
10.3. ON resistance test circuit and graphs....7
11. Dynamic characteristics....9
11.1. Waveform and test circuits....9
11.2. Additional dynamic characteristics....11
11.3. Test circuits....11
12. Package outline....14
13. Abbreviations....15
14. Revision history....15
15. Legal information....16

© Nexperia B.V. 2022. All rights reserved

For more information, please visit: http://www.nexperia.com
For sales office addresses, please send an email to: salesaddresses@nexperia.com
Date of release: 11 February 2022