
chanhvinh.com

Ultrasonic distance measuring sensors

UNDK 30U6112/S14

dimension drawing

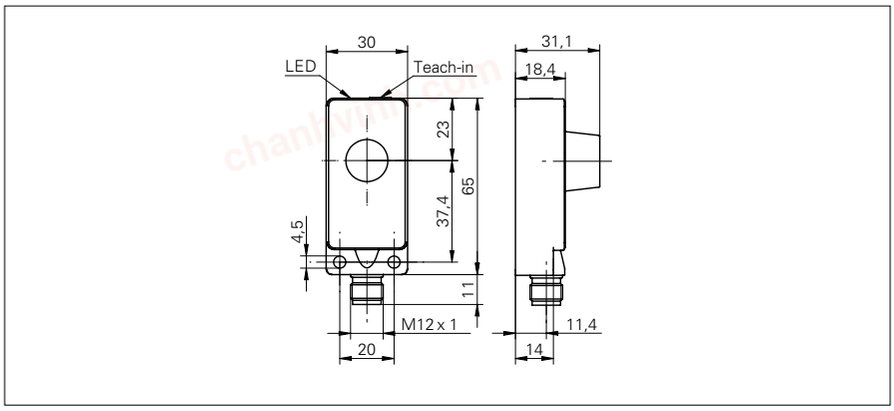

general data	
scanning range Sd	60 ... 400 mm
scanning range close limit Sdc	60 ... 400 mm
scanning range far limit Sde	60 ... 400 mm
repeat accuracy	< 0,5 mm
resolution	< 0,3 mm
response time ton	< 60 ms
release time toff	< 60 ms
temperature drift	< 2 % of distance to target So
sonic frequency	400 kHz
adjustment	Teach-in
alignment aid	target indication flashing
light indicator	yellow LED / red LED

electrical data	
voltage supply range +Vs	15 ... 30 VDC
current consumption max. (no load)	35 mA
output circuit	voltage output
output signal	0 ... 10 V / 10 ... 0 V
output current	< 20 mA
residual ripple	< 10 % Vs
short circuit protection	yes
reverse polarity protection	yes


mechanical data	
type	rectangular
housing material	polyester / die-cast zinc
width / diameter	30 mm
height / length	65 mm
depth	31 mm
connection types	connector M12

ambient conditions	
operating temperature	-10 ... +60 °C
protection class	IP 67

photo



connection diagram

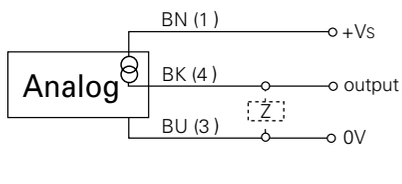


- Analog voltage output 0 - 10 V

chanhvinh.com

Ultrasonic distance measuring sensors

UNDK 30U6112/S14

typical sonic cone profile

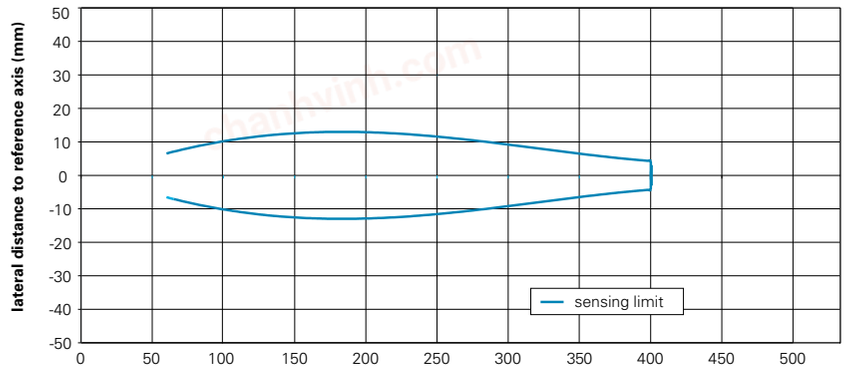

standard target with 30 x 30mm, directed rectangular to sensor's reference axis