

chanhvinh.com

| DATE | REV | ECN | APP'D. BY |
|---|---|---|---|
| 5/29/19 | A0 | RELEASED | – |
| 10/15/20 | A1 | 11639 | JE |
| 05/12/25 | A2 | 12557 | KAW |

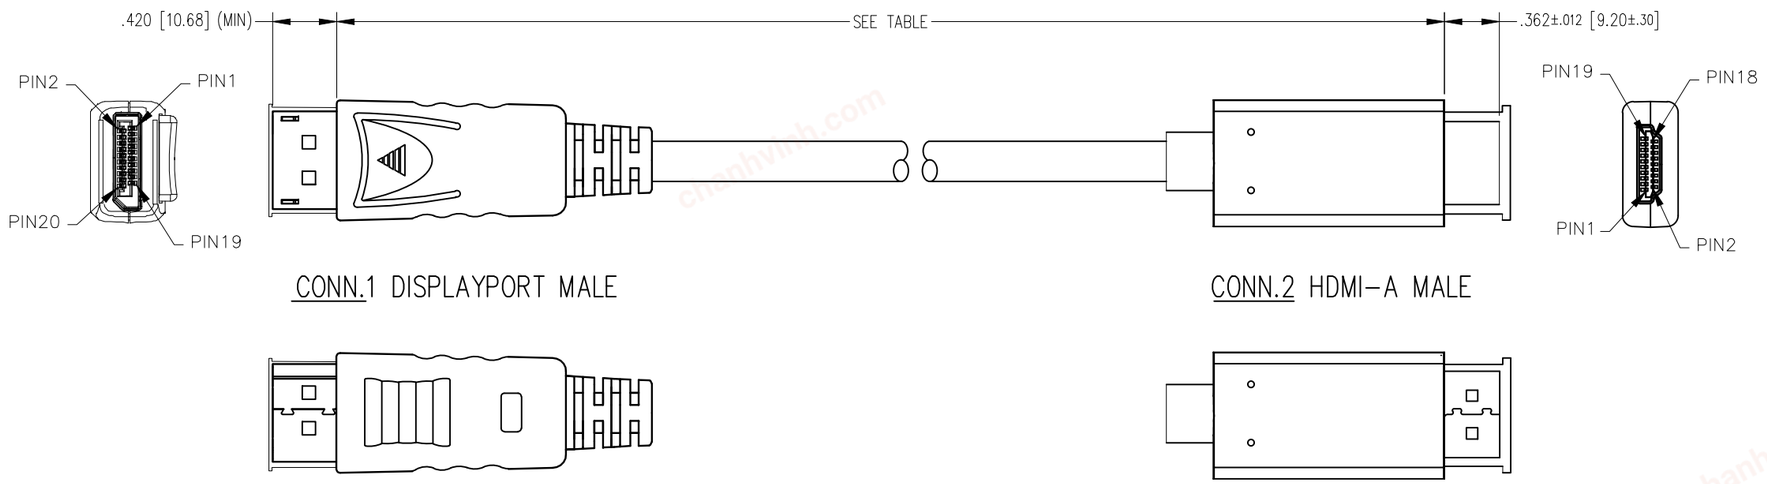



## WIRING DIAGRAM

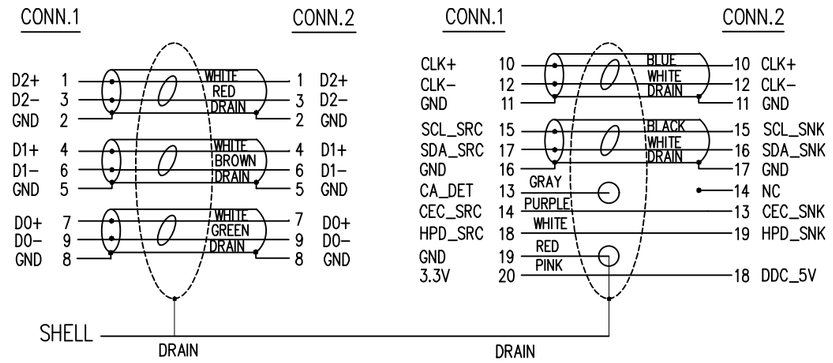


NOTES:

1. SUPPORTS DISPLAYPORT 1.2a INPUT AND HDMI 1.4b OUTPUT.
2. CONNECTOR COMPONENTS:
   TRANSPARENT DUST COVER
   INSIDE MOLDING: PE
   STRAIN RELIEF MOLDING: 45P PVC, BLACK
   OUTSIDE MOLDING:
      DISPLAYPORT: ABS, BLACK
      HDMI-A: 45P PVC, BLACK
   SHELL PLATING: GOLD FLASH
   CONTACT: GOLD PLATING
   DISPLAYPORT CABLE UL20276 (7/0.127TA*PR+EAM)
      *5+7/0.127TA*5C+AEB 85% OD:.29 [7.3] BLACK
3. ELECTRICAL TESTING:
   100% OPEN & SHORT & CONTINUITY WIRE TEST
   CONTACT RESISTANCE: 6 OHM(MAX)
   INSULATION RESISTANCE: 10M OHM(MIN)
   HI-POT TEST: DC 100V/10ms
4. PACKAGING
   ONE CABLE PER BAG




| P/N | LENGTH |
|---|---|
| BC-DH003F | 36±1.2 [915±30] |
| BC-DH006F | 72±1.2 [1830±30] |
| BC-DH010F | 120±1.6 [3050±40] |

RoHS 2002/95/EC

THIRD ANGLE PROJECTION

DO NOT SCALE DRAWING

DRAWING IS SUBJECT TO CHANGE WITHOUT NOTICE

DIMENSIONS: INCHES [METRIC]

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE ±.005 [0.13] ANGLES ARE ± 1°

SHEET NO. 1 OF 1

bel
206 Van Vorst Street
Jersey City, NJ 07302
+1 201 432 0463
http://www.belfuse.com

TITLE: DISPLAYPORT MALE TO HDMI-A MALE CABLE

THIS DRAWING AND THE SUBJECT MATTER SHOWN THEREON ARE CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF BEL FUSE, INC. AND SHALL NOT BE REPRODUCED, COPIED, OR USED IN ANY MANNER WITHOUT PRIOR WRITTEN CONSENT OF BEL FUSE, INC.

| DRN BY: | DATE |
|---|---|
| JMM | 05/16/19 |
| APPD BY: ADB | DATE 05/29/19 |
| DWG NO. CT999192 | REV. A2 |

ASSEMBLY FORMAT REV. 6/3/05

AutoCAD

Please read our datasheet & drawing disclaimer here.