chanhvinh.com

G3VM-□AR□/□DR□

MOS FET Relays DIP 4-pin, High-current and Low-ON-resistance Type

MOS FET Relays in DIP 4-pin packages that achieve the low ON resistance and high switching capacity of a mechanical relay

- **Load voltage: 20 V, 30V, 40 V, 60 V, 100 V, or 200 V**
- **20-V Relay: Continuous load current of 3 A max.**
- **30-V Relay: Continuous load current of 4 A max.**
- **40-V Relay: Continuous load current of 2.5 A max.**
- **60-V Relay: Continuous load current of 3 A max.**
- **100-V Relay: Continuous load current of 2 A max.**
- **200-V Relay: Continuous load current of 0.7 A max.**



Note: The actual product is marked differently from the image shown here.

RoHS Compliant


■Application Examples

- **Communication equipment**
- **Security equipment**
- **Power circuit**
- **Test & Measurement equipment**
- **Industrial equipment**


■Package (Unit : mm, Average)

DIP 4-pin

PCB Terminals



Surface-mounting Terminals



Note: The actual product is marked differently from the image shown here.

■Model Number Legend

G3VM-□□□□□
1 2 3 4 5

1. Load Voltage
2 : 20 V
3 : 30 V
4 : 40 V
6 : 60 V
10 : 100 V
20 : 200 V

2. Contact form
1 : 1a (SPST-NO)

3. Package
A : DIP 4-pin with PCB terminals
D : DIP 4-pin with surface-mounting terminals

4. Additional functions
R: Low ON resistance

5. Other informations
When specifications overlap, serial code is added in the recorded order.

■Ordering Information

Package	Contact form	Load voltage (peak value) ✻	Continuous load current (peak value) ✻	Stick packaging			Tape packaging	
				Model		Minimum package quantity	Model	Minimum package quantity
				PCB Terminals	Surface-mounting Terminals		Surface-mounting Terminals	
DIP4	1a (SPST-NO)	20 V	3 A	G3VM-21AR	G3VM-21DR	100 pcs.	G3VM-21DR(TR)	1,500 pcs.
		30 V	4 A	G3VM-31AR	G3VM-31DR		G3VM-31DR(TR05)	500 pcs.
		40 V	2.5 A	G3VM-41AR	G3VM-41DR		G3VM-41DR(TR)	1,500 pcs.
		60 V	2 A	G3VM-61AR	G3VM-61DR		G3VM-61DR(TR)	1,500 pcs.
			3 A	G3VM-61AR1	G3VM-61DR1		G3VM-61DR1(TR05)	500 pcs.
		100 V	1 A	G3VM-101AR	G3VM-101DR		G3VM-101DR(TR)	1,500 pcs.
			2 A	G3VM-101AR1	G3VM-101DR1		G3VM-101DR1(TR05)	500 pcs.
		200 V	0.7 A	G3VM-201AR	G3VM-201DR		G3VM-201DR(TR05)	500 pcs.

✻ The AC peak and DC value are given for the load voltage and continuous load current.
Note: To order tape packaging for Relays with surface-mounting terminals, add "(TR)" or "(TR05)" to the end of the model number.

chanhvinh.com

■Absolute Maximum Ratings (Ta = 25°C)

Item		Symbol	G3VM-21AR G3VM-21DR	G3VM-31AR G3VM-31DR	G3VM-41AR G3VM-41DR	G3VM-61AR G3VM-61DR	G3VM-61AR1 G3VM-61DR1	G3VM-101AR G3VM-101DR	G3VM-101AR1 G3VM-101DR1	G3VM-201AR G3VM-201DR	Unit	Measurement conditions
Input	LED forward current	I_F	30								mA	
	Repetitive peak LED forward current	I_{FP}	1								A	100 μs pulses, 100 pps
	LED forward current reduction rate	ΔI_F/°C	-0.3								mA/°C	Ta ≥ 25°C
	LED reverse voltage	V_R	5	6	5		6	5	6		V	
	Connection temperature	T_J	125								°C	
Output	Load voltage (AC peak/DC)	V_{OFF}	20	30	40	60	60	100		200	V	
	Continuous load current (AC peak/DC)	I_O	3	4	2.5	2	3	1	2	0.7	A	
	ON current reduction rate	ΔI_O/°C	-30	-40	-25	-20	-30	-10	-20	-7	mA/°C	Ta ≥ 25°C
	Pulse ON current	I_{OP}	9	9	7.5	6	9	3	6	2.1	A	t=100 ms, Duty=1/10
	Connection temperature	T_J	125								°C	
Dielectric strength between I/O ✻		V_{I-O}	2,500								Vrms	AC for 1 min
Ambient operating temperature		Ta	-40 to +85	-40 to +110	-40 to +85		-40 to +110	-40 to +85	-40 to +110		°C	With no icing or condensation
Ambient storage temperature		Tstg	-55 to +125								°C	
Soldering temperature		–	260								°C	10 s


✻ The dielectric strength between the input and output was checked by applying voltage between all pins as a group on the LED side and all pins as a group on the light-receiving side.

chanhvinh.com

■Electrical Characteristics (Ta = 25°C)

Item		Symbol		G3VM-21AR G3VM-21DR	G3VM-31AR G3VM-31DR	G3VM-41AR G3VM-41DR	G3VM-61AR G3VM-61DR	G3VM-61AR1 G3VM-61DR1	G3VM-101AR G3VM-101DR	G3VM-101AR1 G3VM-101DR1	G3VM-201AR G3VM-201DR	Unit	Measurement conditions
Input	LED forward voltage	V_F	Minimum	1.18	1.5	1.18		1.5	1.18	1.5		V	I_F=10 mA
			Typical	1.33	1.64	1.33		1.64	1.33	1.64			
			Maximum	1.48	1.8	1.48		1.8	1.48	1.8			
	Reverse current	I_R	Maximum	10								μA	V_R=5 V
	Capacitance between terminals	C_T	Typical	70								pF	V=0, f=1 MHz
	Trigger LED forward current	I_{FT} (I_{FC})	Typical	0.7	0.3	0.5		0.3	0.5	0.4	0.3	mA	G3VM-201AR/201DR: I_O=0.7A Others: I_O=1A
			Maximum	3									
	Release LED forward current	I_{FC} (I_{FT})	Minimum	0.1								mA	I_{OFF}=10 μA
			Typical	0.1	0.2	0.1		0.2	0.1	0.2			
Output	Maximum resistance with output ON	R_{ON}	Typical	40	25	50	80	45	250	110	900	mΩ	G3VM-31AR/31DR I_F=5mA, t<1s, I_O=4A G3VM-61AR1/61DR1 I_F=5mA, t<1s, I_O=3A G3VM-21AR/21DR/ 41AR/41DR/61AR/ 61DR/101AR1/101DR1: I_F=5mA, t<1s, I_O=2A G3VM-101AR/101DR: I_F=5mA, t<1s, I_O=1A G3VM-201AR/201DR: I_F=5mA, t<1s, I_O=0.7A
			Maximum	80	50	150	200	100	700	200	2000		
	Current leakage when the relay is open	I_{LEAK}	Typical	–	0.01	–		0.005	–	0.01	0.04	μA	V_{OFF}=Load voltage ratings
			Maximum	1									
	Capacitance between terminals	C_{OFF}	Typical	300	450	300	250		200	110		pF	V=0, f=1 MHz
Capacitance between I/O terminals		C_{I-O}	Typical	0.8								pF	f=1 MHz, V_S=0 V
Insulation resistance between I/O terminals		R_{I-O}	Minimum	1000								MΩ	V_{I-O}=500 VDC, RoH≤60%
			Typical	10^8									
Turn-ON time		t_{ON}	Typical	1	0.6	0.8		0.45	0.8	0.4	0.13	ms	I_F=5 mA, R_L=200 Ω, V_{DD}=20 V ✻
			Maximum	5	3	5		2	5	2	1		
Turn-OFF time		t_{OFF}	Typical	0.3				0.2	0.3	0.2	0.14		
			Maximum	1						0.5			

✻ Turn-ON and Turn-OFF Times



chanhvinh.com

■Recommended Operating Conditions

For usage with high reliability, Recommended Operation Conditions is a measure that takes into account the derating of Absolute Maximum Ratings and Electrical Characteristics.

Each item on this list is an independent condition, so it is not simultaneously satisfy several conditions.

Item	Symbol		G3VM-21AR G3VM-21DR	G3VM-31AR G3VM-31DR	G3VM-41AR G3VM-41DR	G3VM-61AR G3VM-61DR	G3VM-61AR1 G3VM-61DR1	G3VM-101AR G3VM-101DR	G3VM-101AR1 G3VM-101DR1	G3VM-201AR G3VM-201DR	Unit
Load voltage (AC peak/DC)	V_{DD}	Maximum	16	24	32	48		80		160	V
Operating LED forward current	I_F	Minimum	5								mA
		Typical	10								
		Maximum	25								
Continuous load current (AC peak/DC)	I_O	Maximum	3	4	2.5	2	3	1	2	0.7	A
Ambient operating temperature	Ta	Minimum	-20								°C
		Maximum	65	85	65		85	65	85		

■Spacing and Insulation


Item	Minimum	Unit
Creepage distances	7.0	mm
Clearance distances	7.0	
Internal isolation thickness	0.4	

chanhvinh.com


■Engineering Data

●LED forward current vs. Ambient temperature

G3VM-21AR/21DR/41AR/41DR/61AR/61DR/101AR/101DR

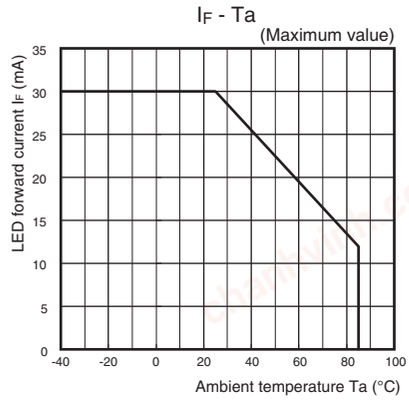


G3VM-31AR/31DR/61AR1/61DR1/101AR1/101DR1/201AR/201DR

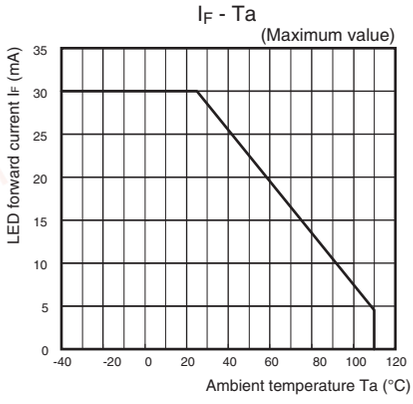


●Continuous load current vs. Ambient temperature

G3VM-21AR/21DR/41AR/41DR/61AR/61DR/101AR/101DR

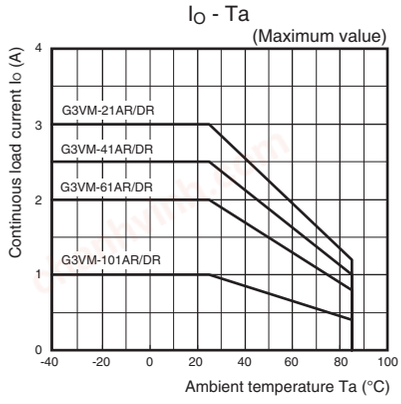


G3VM-31AR/31DR/61AR1/61DR1/101AR1/101DR1/201AR/201DR

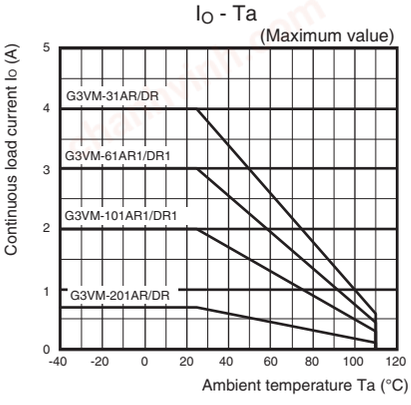


●LED forward current vs. LED forward voltage

G3VM-21AR/21DR/41AR/41DR/61AR/61DR/101AR/101DR

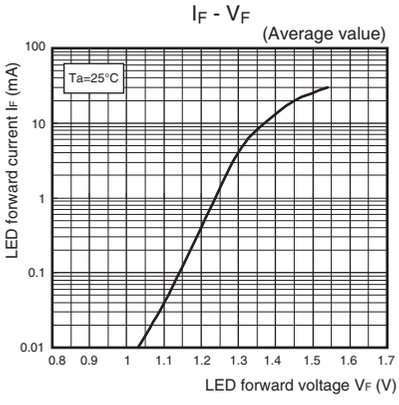


G3VM-31AR/31DR/61AR1/61DR1/101AR1/101DR1/201AR/201DR

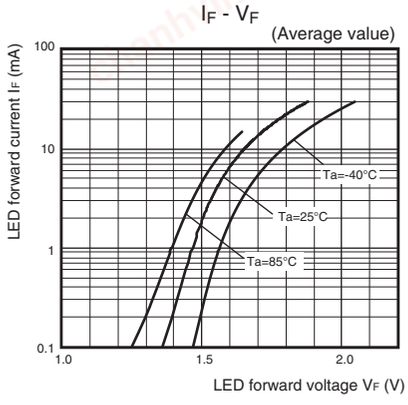


●Continuous load current vs. On-state voltage


G3VM-21AR/21DR/41AR/41DR/61AR/61DR/101AR/101DR

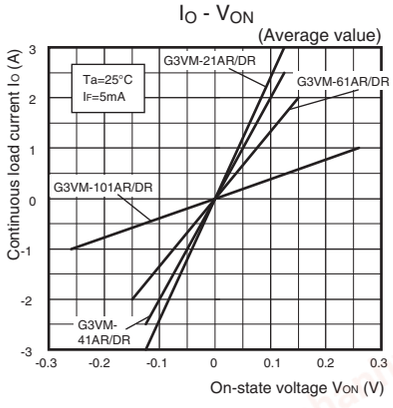

G3VM-31AR/31DR/61AR1/61DR1/101AR1/101DR1

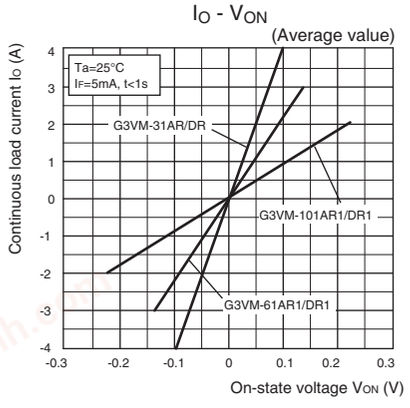

G3VM-201AR/201DR

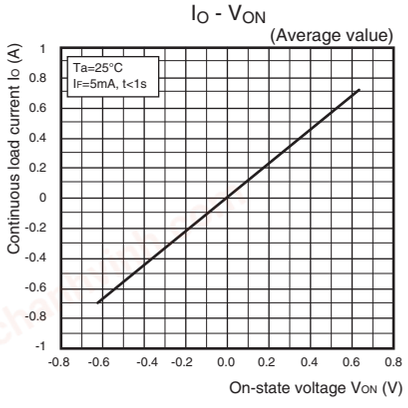


chanhvinh.com


■Engineering Data

●On-state resistance vs. Ambient temperature


G3VM-21AR/21DR/41AR/41DR/61AR/61DR/101AR/101DR

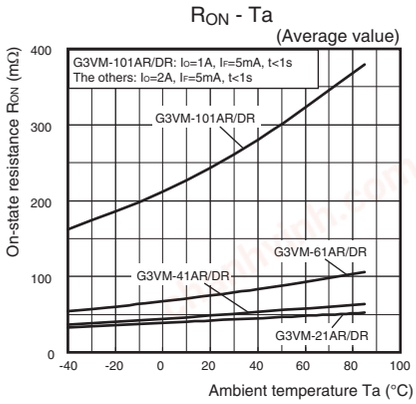

G3VM-31AR/31DR/61AR1/61DR1/101AR1/101DR1/201AR/201DR

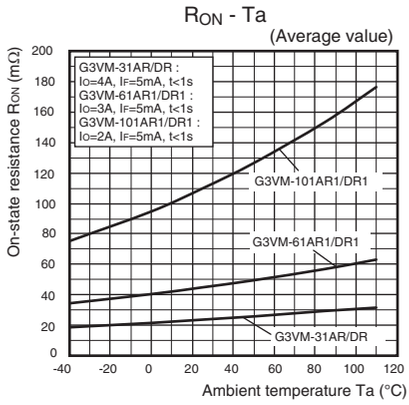


G3VM-201AR/201DR

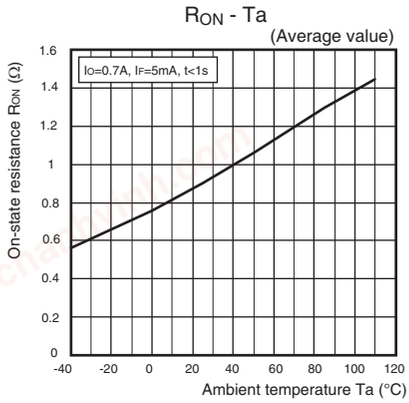


●Trigger LED forward current vs. Ambient temperature

G3VM-21AR/21DR/41AR/41DR/61AR/61DR/101AR/101DR

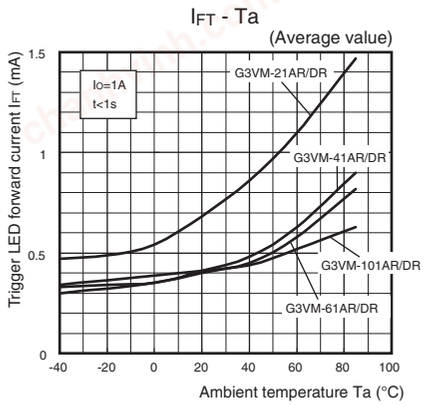


G3VM-31AR/31DR/61AR1/61DR1/101AR1/101DR1/201AR/201DR

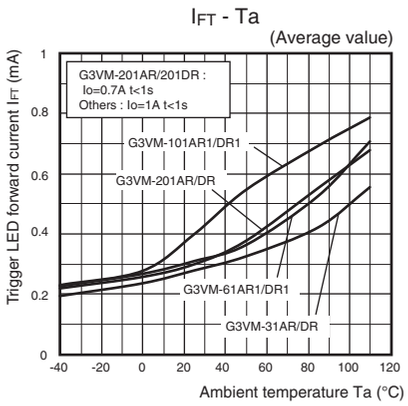


●Turn ON, Turn OFF time vs. LED forward current


G3VM-21AR/21DR/41AR/41DR

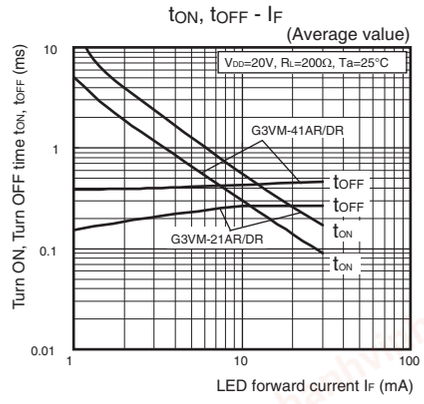

G3VM-61AR/61DR/101AR/101DR

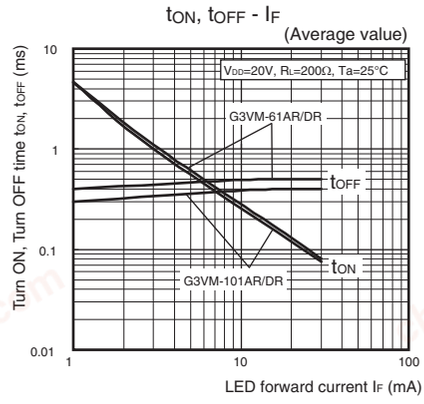

G3VM-31AR/31DR/61AR1/61DR1/101AR1/101DR1/201AR/201DR

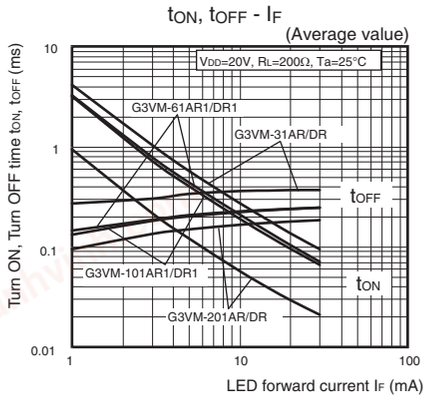


chanhvinh.com


■Engineering Data

● **Turn ON, Turn OFF time vs. Ambient temperature**


G3VM-21AR/21DR/41AR/41DR

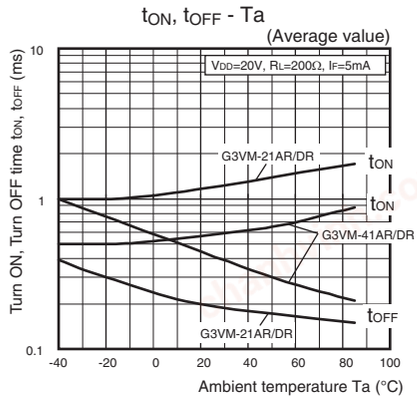

G3VM-61AR/61DR/101AR/101DR

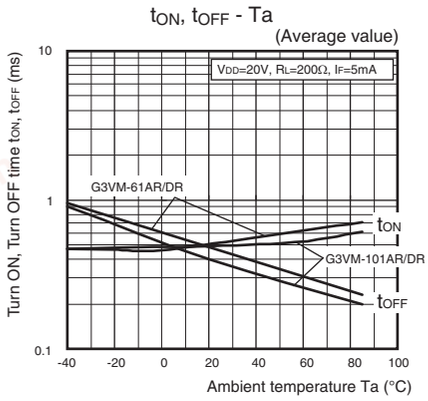


G3VM-31AR/31DR/61AR1/61DR1/ 101AR1/101DR1/201AR/201DR

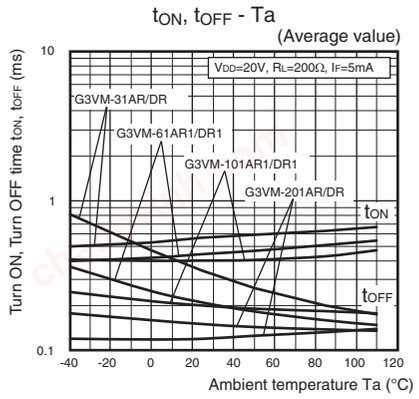


● **Current leakage vs. Ambient temperature**

G3VM-21AR/21DR/41AR/41DR/61AR/ 61DR/101AR/101DR

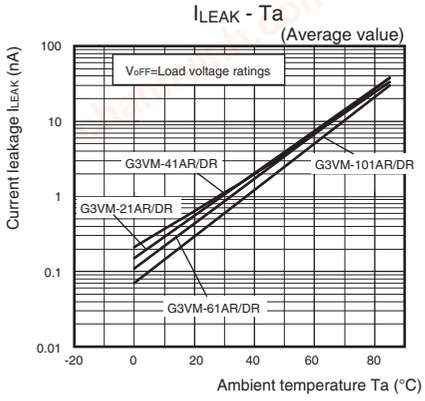

G3VM-31AR/31DR/61AR1/61DR1/ 101AR1/101DR1/201AR/201DR

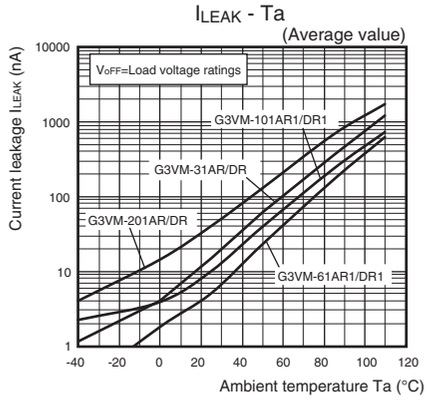


chanhvinh.com

■Appearance / Terminal Arrangement / Internal Connections


●Appearance

DIP (Dual Inline Package)

DIP 4-pin

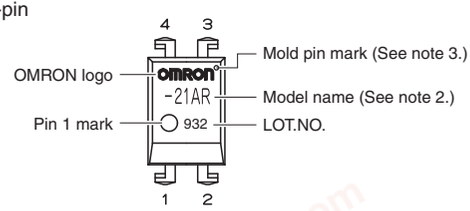

●Terminal Arrangement/Internal Connections (Top View)




Note: 1. The actual product is marked differently from the image shown here.
Note: 2. "G3VM" does not appear in the model number on the Relay.
Note: 3. The indentation in the corner diagonally opposite from the pin 1 mark is from a pin on the mold.

■Dimensions (Unit: mm)



PCB Terminals


Weight: 0.25 g

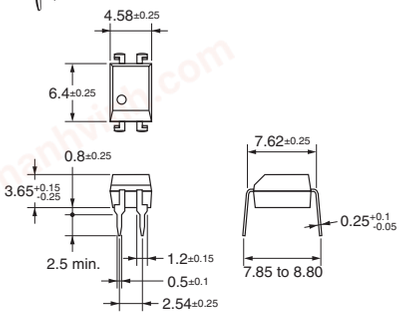




Surface-mounting Terminals

Weight: 0.25 g

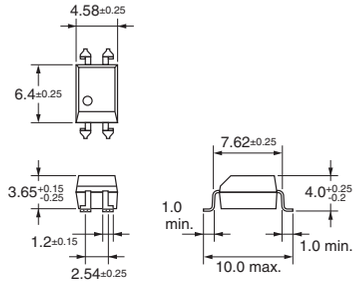


PCB Dimensions (BOTTOM VIEW)



Actual Mounting Pad Dimensions

(Recommended Value, Top View)



Note: The actual product is marked differently from the image shown here.

■Approved Standards

UL recognized

Approved Standards	Contact form	File No.
UL (recognized)	1a (SPST-NO)	E80555

■Safety Precautions

• Refer to the *Common Precautions for All MOS FET Relays* for precautions that apply to all MOS FET Relays.

chanhvinh.com

chanhvinh.com

Please check each region's Terms & Conditions by region website.

OMRON Corporation
Electronic and Mechanical Components Company

Regional Contact

Americas
https://www.components.omron.com/

Europe
http://components.omron.eu/

Asia-Pacific
https://ecb.omron.com.sg/

China
https://www.ecb.omron.com.cn/

Korea
https://www.omron-ecb.co.kr/

Japan
https://www.omron.co.jp/ecb/

© OMRON Corporation 2018-2019 All Rights Reserved.
In the interest of product improvement, specifications are subject to change without notice.

Cat. No. K302-E1-03
1019(0318)(O)