
chanhvinh.com

NOTES:
1. SEALED TO IP67 RATING
2. ROHS COMPLIANT
3. LIGHT PIPE PRE-ASSEMBLED WITH INSERT AND HOUSING. MOUNTING HARDWARE SHIPPED NON-ASSEMBLED


REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	ENGINEERING RELEASE	1/18/2021	A.V.
B	Updated Component Tables	2/16/2021	A.V.
C	Updated Component Tables	2/19/2021	A.V.
D	Updated Descriptions	3/17/2021	A.V.

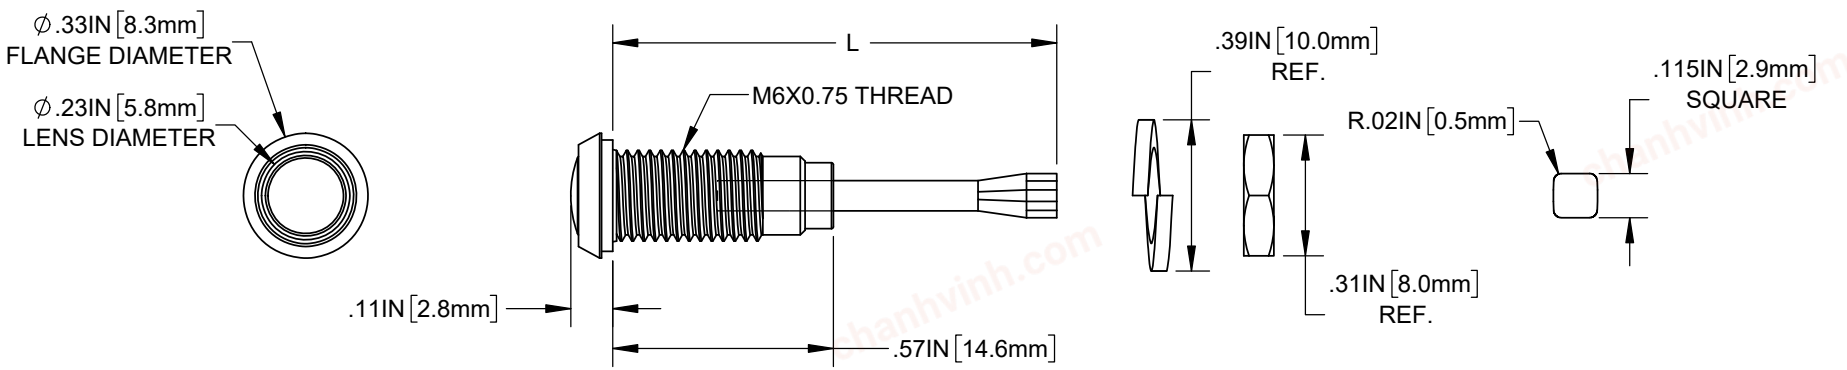


PART NUMBER CONFIGURATION

RHD-XXXX-F6PX67PR

- LENGTH (L) SEE TABLE 1, PAGE 2
- 6mm LENS
- LENS APPEARANCE SEE TABLE 2, PAGE 2

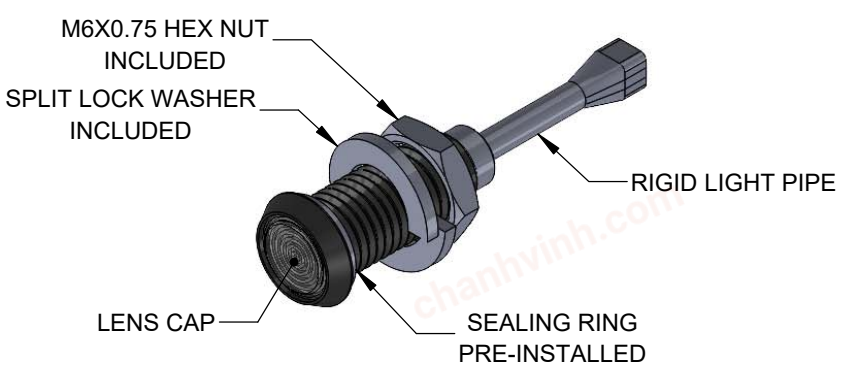

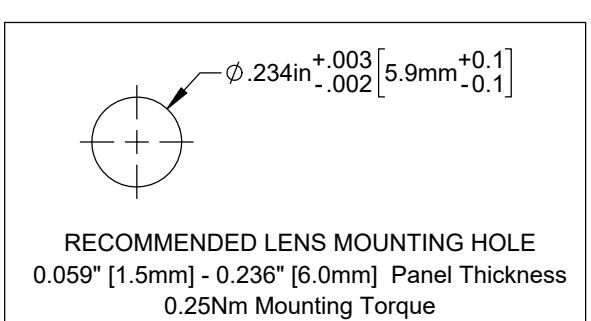

RECOMMENDED LENS MOUNTING HOLE
0.059" [1.5mm] - 0.236" [6.0mm] Panel Thickness
0.25Nm Mounting Torque

CUSTOMER USE DRAWING

STANDARD TOLERANCE
(UNLESS OTHERWISE SPECIFIED)

DECIMALS		ANGULAR
.X	± .1	X° ± 1°
.XX	± .02	
.XXX	± .010	

BIVAR®
4 THOMAS, IRVINE, CA. 92618
TEL: (949) 951-8808 FAX: (949) 951-3974

DESIGNED: K. BARON	DATE: 01/18/2021	TITLE: IP67 Rigid Heavy Duty Light Pipe	
REVISED: K. BARON	DATE: 03/17/2021	DRAWING NO: RHD-XXXX-F6PX67PR	REVISION: D
CHECKED: A. VALDEZ	DATE: 03/17/2021	SHEET SIZE: A	CAGE CODE: 32559
		SCALE: 2:1	SHEET # 1 OF 2


CAD GENERATED DOCUMENT, DO NOT MEASURE DRAWING

chanhvinh.com

TABLE 1 - LENGTH	
ORDER CODE	**LENGTH (L)**
0910	0.906 [23.0mm]
1160	1.156 [29.4mm]
1410	1.406 [35.7mm]
1660	1.656 [42.1mm]
1910	1.906 [48.4mm]
2160	2.156 [54.8mm]

TABLE 2 - LENS APPEARANCE	
ORDER CODE	LENS APPEARANCE
Z	FRESNEL CLEAR
ZB	FRESNEL BLUE
ZG	FRESNEL GREEN
ZR	FRESNEL RED
ZY	FRESNEL YELLOW
(BLANK)	CLEAR
D	DIFFUSED
S	SMOKED

SAMPLE PART NUMBER

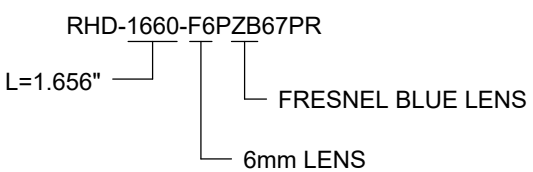

CUSTOMER USE DRAWING

BIVAR®

CAGE CODE:	**32559**	**DRAWING NO:** RHD-XXXX-F6PX67PR	REVISION: D
SHEET SIZE:	**A**	SCALE: 2:1	**SHEET # 2 OF 2**
		CAD GENERATED DOCUMENT, DO NOT MEASURE DRAWING	