chanhvinh.com



FAIRCHILD SEMICONDUCTOR®

August 2008

# FIN1028 — 3.3V LVDS 2-Bit High-Speed Differential Receiver

## Features

- Greater than 400Mbs Data Rate
- Power Supply Operation: 3.3V
- Maximum Differential Pulse Skew: 0.4ns
- Maximum Propagation Delay: 2.5ns
- Low-Power Dissipation
- Power-Off Protection
- Fail-Safe Protection for Open-Circuit, Shorted, and Terminated Conditions
- Meets or Exceeds the TIA/EIA-644 LVDS Standard
- Flow-through Pinout Simplifies PCB Layout

## Description

This dual receiver is designed for high-speed interconnects utilizing Low Voltage Differential Signaling (LVDS) technology. The receiver translates LVDS levels, with a typical differential input threshold of 100mV, to LVTTL signal levels. LVDS provides low EMI at ultra-low power dissipation, even at high frequencies. This device is ideal for high-speed transfer of clock and data signals.

The FIN1028 can be paired with its companion driver, the FIN1027, or any other LVDS driver.

## Ordering Information

| Part Number | Operating Temperature Range | Eco Status | Package | Packing Method |
|---|---|---|---|---|
| FIN1028M | -40 to +85°C | RoHS | 8-Lead Small Outline Package (SOIC) JEDEC MS-012, 0.150 inch Narrow | Trays |
| FIN1028MX | -40 to +85°C | RoHS | 8-Lead Small Outline Package (SOIC) JEDEC MS-012, 0.150 inch Narrow | Tape and Reel |

*For Fairchild's definition of "green" Eco Status, please visit: http://www.fairchildsemi.com/company/green/rohs_green.html.*

© 2001 Fairchild Semiconductor Corporation

chanhvinh.com



## Pin Configuration

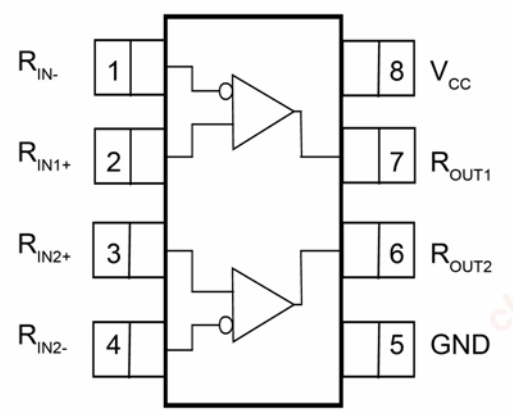



**Figure 1. SOIC Pin Assignments (Top View)**

## Pin Definitions

| Pin # | Name | Description |
|---|---|---|
| 1 | $R_{IN1-}$ | Inverting LVDS Input |
| 2 | $R_{IN1+}$ | Non-Inverting LVDS Input |
| 3 | $R_{IN2+}$ | Non-Inverting LVDS Input |
| 4 | $R_{IN2-}$ | Inverting LVDS Input |
| 5 | GND | Ground |
| 6 | $R_{OUT2}$ | LVTTL Data Output |
| 7 | $R_{OUT1}$ | LVTTL Data Output |
| 8 | $V_{CC}$ | Power Supply |

## Function Table

| Inputs | | Outputs |
|---|---|---|
| $R_{IN+}$ | $R_{IN-}$ | $R_{OUT}$ |
| LOW | HIGH | LOW |
| HIGH | LOW | HIGH |
| Fail-Safe Conditions(1) | | HIGH |

**Note:**

1. Fail-safe=open, shorted, terminated.

© 2001 Fairchild Semiconductor Corporation

chanhvinh.com



## Absolute Maximum Ratings

Stresses exceeding the absolute maximum ratings may damage the device. The device may not function or be operable above the recommended operating conditions and stressing the parts to these levels is not recommended. In addition, extended exposure to stresses above the recommended operating conditions may affect device reliability. The absolute maximum ratings are stress ratings only.

| Symbol | Parameter | Min. | Max. | Unit |
|---|---|---|---|---|
| $V_{CC}$ | Supply Voltage | -0.5 | 4.6 | V |
| $R_{INx+}$, $R_{INx-}$ | DC Input Voltage | -0.5 | 4.7 | V |
| $R_{OUTx}$ | DC Output Voltage | -0.5 | 6.0 | V |
| $I_O$ | DC Output Current | | 16 | mA |
| $T_{STG}$ | Storage Temperature Range | -65 | +150 | °C |
| $T_J$ | Maximum Junction Temperature | | +150 | °C |
| $T_L$ | Lead Temperature, Soldering 10 Seconds | | +260 | °C |
| ESD | Human Body Model, JESD22-A114 | | ≥6500 | V |
| | Machine Model, JESD22-A115 | | ≥300 | |

## Recommended Operating Conditions

The Recommended Operating Conditions table defines the conditions for actual device operation. Recommended operating conditions are specified to ensure optimal performance to the datasheet specifications. Fairchild does not recommend exceeding them or designing to Absolute Maximum Ratings.

| Symbol | Parameter | Min. | Max. | Unit |
|---|---|---|---|---|
| $V_{CC}$ | Supply Voltage | 3.0 | 3.6 | V |
| $V_{IN}$ | Input Voltage | 0 | $V_{CC}$ | V |
| $\lvert V_{ID} \rvert$ | Magnitude of Differential Voltage | 100 | $V_{CC}$ | mV |
| $V_{IC}$ | Common-Mode Input Voltage | 0.05 | 2.35 | V |
| $T_A$ | Operating Temperature | -40 | +85 | °C |

© 2001 Fairchild Semiconductor Corporation

chanhvinh.com



## DC Electrical Characteristics

Typical values are at $T_A$=25°C and with $V_{CC}$=3.3V. Over-supply voltage and operating temperature ranges, unless otherwise noted.

| Symbol | Parameter | Conditions | Min. | Typ. | Max. | Units |
|---|---|---|---|---|---|---|
| $V_{TH}$ | Differential Input Threshold HIGH | Figure 2, Table 1 | | | 100 | mV |
| $V_{TL}$ | Differential Input Threshold LOW | Figure 2, Table 1 | -100 | | | mV |
| $I_{IN}$ | Input Current | $V_{IN}$=0V or $V_{CC}$ | | | ±20 | µA |
| $I_{I(OFF)}$ | Power-off Input Current | $V_{CC}$=0V, $V_{IN}$=0V or 3.6V | | | ±20 | µA |
| $V_{OH}$ | Output HIGH Voltage | $I_{OH}$=-100µA | $V_{CC}$-0.2 | | | V |
| | | $I_{OH}$=-8mA | 2.4 | | | |
| $V_{OL}$ | Output LOW Voltage | $I_{OL}$=100µA | | | 0.2 | V |
| | | $I_{OL}$=8mA | | | 0.5 | |
| $V_{IK}$ | Input Clamp Voltage | $I_{IK}$=-18mA | -1.5 | | | V |
| $I_{CC}$ | Power Supply Current | $R_{IN+}$=1V and $R_{IN-}$=1.4V or $R_{IN+}$=1.4V and $R_{IN-}$=1V | | | 9 | mA |
| $C_{IN}$ | Input Capacitance | | | 4 | | pF |
| $C_{OUT}$ | Output Capacitance | | | 6 | | pF |

## DC Electrical Characteristics

Typical values are at $T_A$=25°C and with $V_{CC}$=3.3V. Over-supply voltage and operating temperature ranges, unless otherwise noted.

| Symbol | Parameter | Conditions | Min. | Typ. | Max. | Units |
|---|---|---|---|---|---|---|
| $t_{PLH}$ | Differential Propagation Delay, LOW-to-HIGH | $\|V_{ID}\|$=400mV, $C_L$=10pF Figure 2, Figure 3 | 0.9 | | 2.5 | ns |
| $t_{PHL}$ | Differential Propagation Delay, HIGH-to-LOW | | 0.9 | | 2.5 | ns |
| $t_{TLH}$ | Output Rise Time (20% to 80%) | | | 0.5 | | ns |
| $t_{THL}$ | Output Fall Time (80% to 20%) | | | 0.5 | | ns |
| $t_{SK(P)}$ | Pulse Skew $\|t_{PLH} - t_{PHL}\|$ | | | | 0.4 | ns |
| $t_{SK(LH)}$, $t_{SK(HL)}$ | Channel-to-Channel Skew(2) | | | | 0.3 | ns |
| $t_{SK(PP)}$ | Part-to-Part Skew(3) | | | | 1.0 | ns |

**Notes:**

2. $t_{SK(LH)}$, $t_{SK(HL)}$ is the skew between specified outputs of a single device when the outputs have identical loads and are switching in the same direction.
3. $t_{SK(PP)}$ is the magnitude of the difference in propagation delay times between any specified terminals of two devices switching in the same direction (either LOW-to-HIGH or HIGH-to-LOW) when both devices operate with the same supply voltage, same temperature, and have identical test circuits.

© 2001 Fairchild Semiconductor Corporation

chanhvinh.com



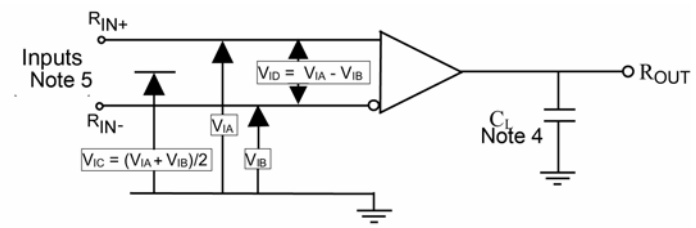



**Figure 2. Differential Driver Propagation Delay and Transition Time Test Circuit**

**Notes:**

4. $C_L$ includes all probe and fixture capacitances.
5. All input pulses have frequency = 10MHz, $t_R$ or $t_F$=1ns.

**Table 1. Receiver Minimum and Maximum Input Threshold Test Voltages**

| Applied Voltages (V) | | Resulting Differential Input Voltage (mV) | Resulting Common Mode Input Voltage (V) |
|---|---|---|---|
| $V_{IA}$ | $V_{IB}$ | $V_{ID}$ | $V_{IC}$ |
| 1.25 | 1.15 | 100 | 1.2 |
| 1.15 | 1.25 | -100 | 1.2 |
| 2.4 | 2.3 | 100 | 2.35 |
| 2.3 | 2.4 | -100 | 2.35 |
| 0.1 | 0 | 100 | 0.05 |
| 0 | 0.1 | -100 | 0.05 |
| 1.5 | 0.9 | 600 | 1.2 |
| 0.9 | 1.5 | -600 | 1.2 |
| 2.4 | 1.8 | 600 | 2.1 |
| 1.8 | 2.4 | -600 | 2.1 |
| 0.6 | 0 | 600 | 0.3 |
| 0 | 0.6 | -600 | 0.3 |

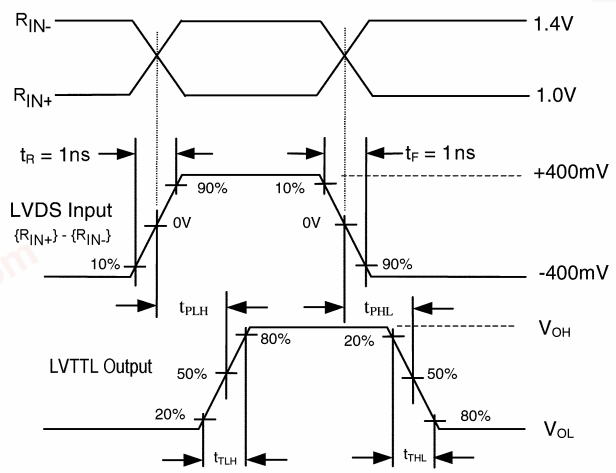



**Figure 3. AC Waveforms**

chanhvinh.com



## Typical Performance Characteristics

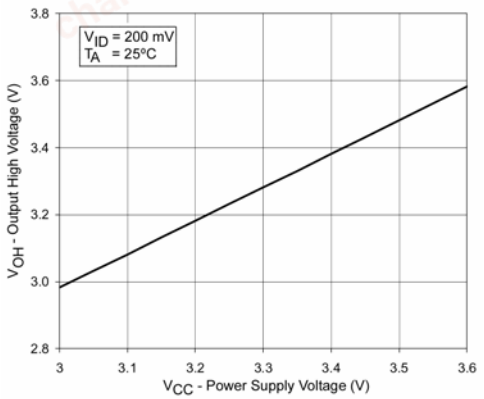



**Figure 4. Output High Voltage vs. Power Supply Voltage**

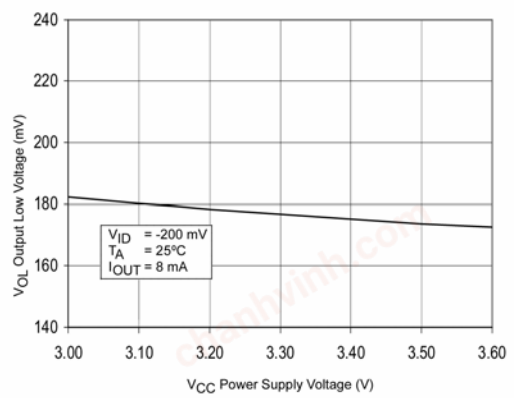



**Figure 5. Output Low Voltage vs. Power Supply Voltage**

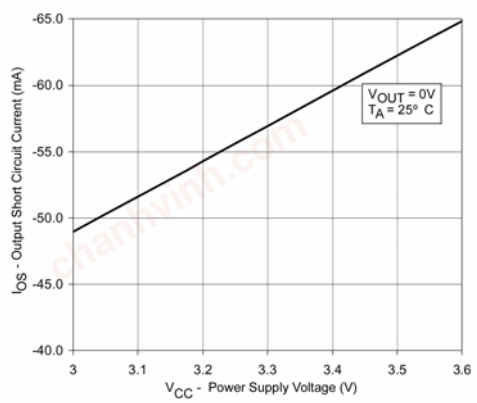



**Figure 6. Output Short Circuit Current vs. Power Supply Voltage**

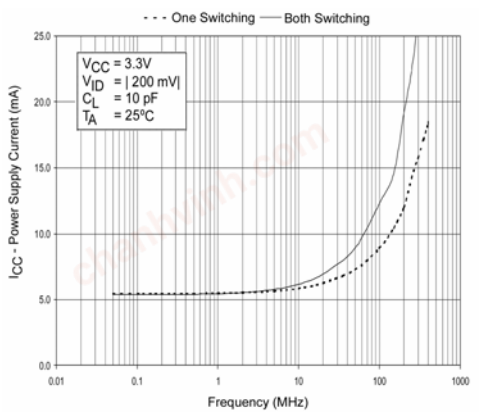



**Figure 7. Power Supply Current vs. Frequency**

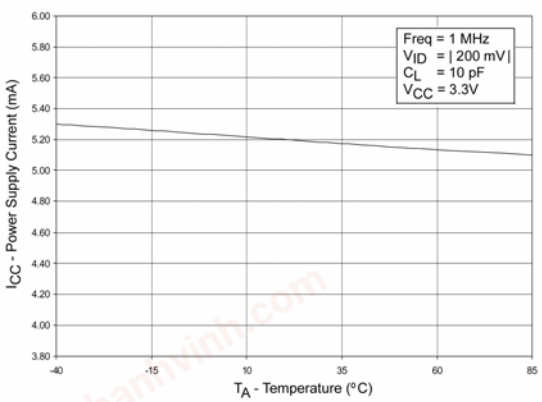



**Figure 8. Power Supply Current vs. Ambient Temperature**

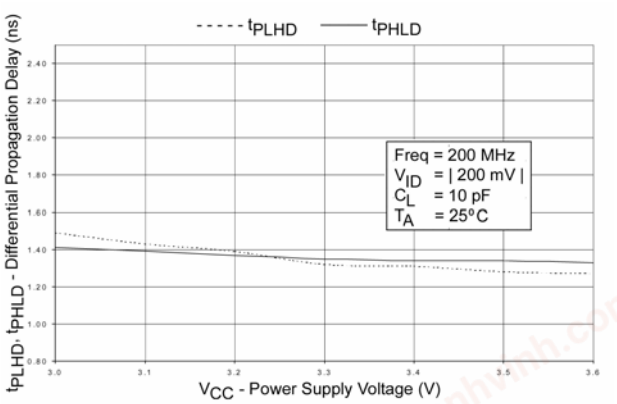



**Figure 9. Differential Propagation Delay vs. Power Supply Voltage**

© 2001 Fairchild Semiconductor Corporation

chanhvinh.com



## Typical Performance Characteristics (Continued)

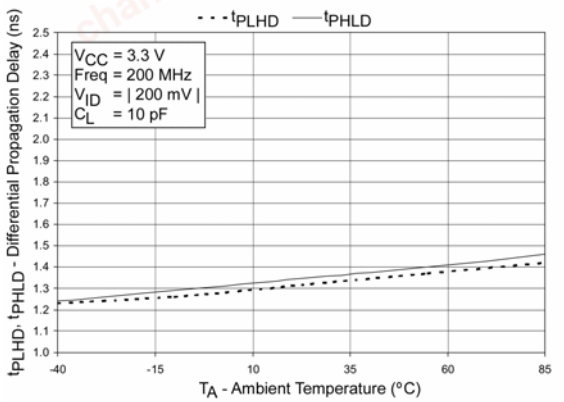



**Figure 10. Differential Propagation Delay vs. Ambient Temperature**

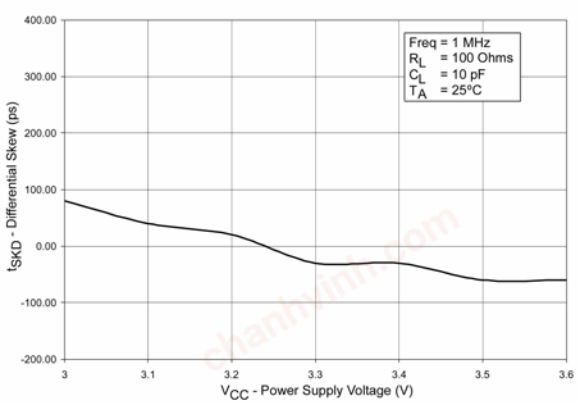



**Figure 11. Differential Skew ($t_{PLH}$-$t_{PHL}$) vs. Power Supply Voltage**

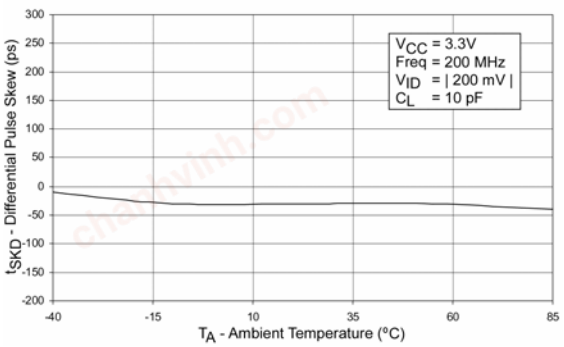



**Figure 12. Differential Skew ($t_{PHL}$-$t_{PHL}$) vs. Ambient Temperature**

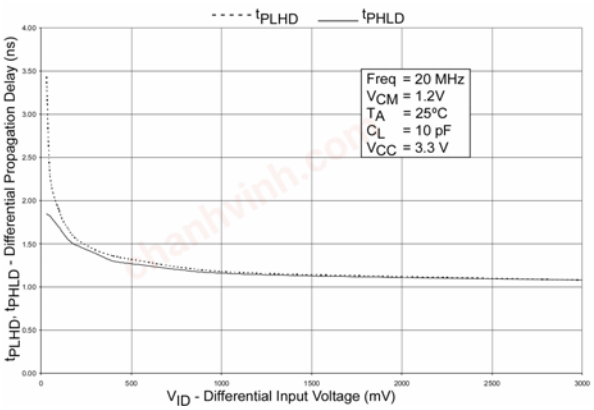



**Figure 13. Differential Propagation Delay vs. Differential Input Voltage**

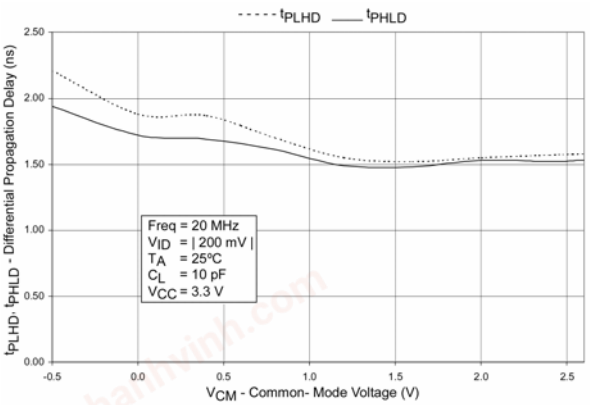



**Figure 14. Differential Propagation Delay vs. Common-Mode Voltage**

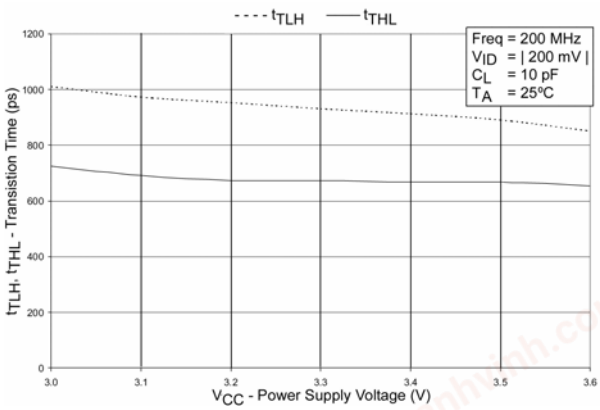



**Figure 15. Transition Time vs. Power Supply Voltage**

© 2001 Fairchild Semiconductor Corporation

chanhvinh.com



## Typical Performance Characteristics (Continued)

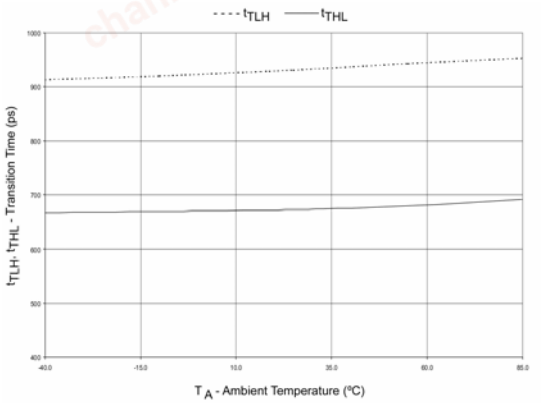



**Figure 16. Transition Time vs. Ambient Temperature**

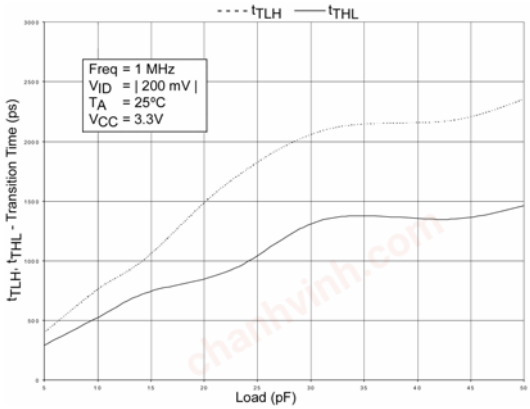



**Figure 17. Differential Propagation Delay vs. Load**

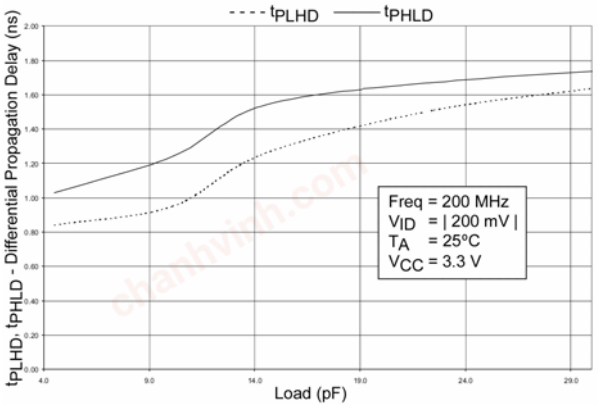



**Figure 18. Differential Propagation Delay vs. Load**

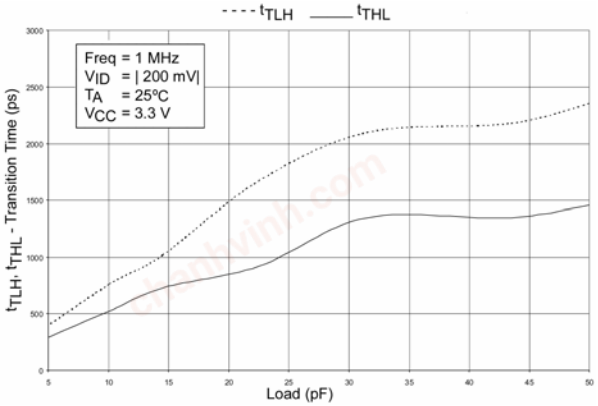



**Figure 19. Transition Time vs. Load**

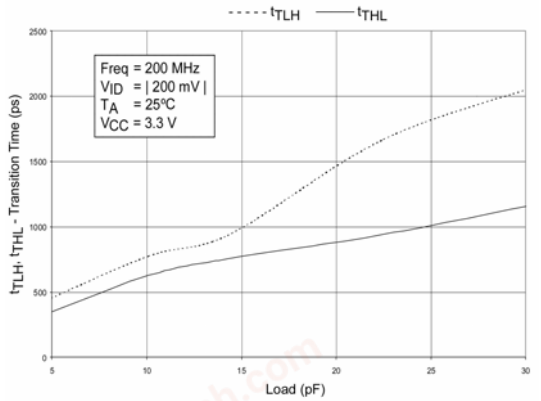



**Figure 20. Transition Time vs. Load**

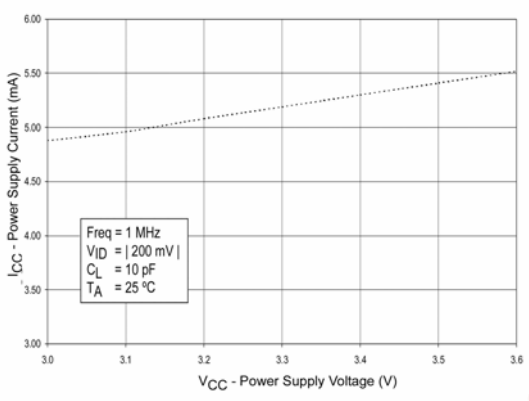



**Figure 21. Power Supply Current vs. Power Supply Voltage**

© 2001 Fairchild Semiconductor Corporation

chanhvinh.com



## Physical Dimensions

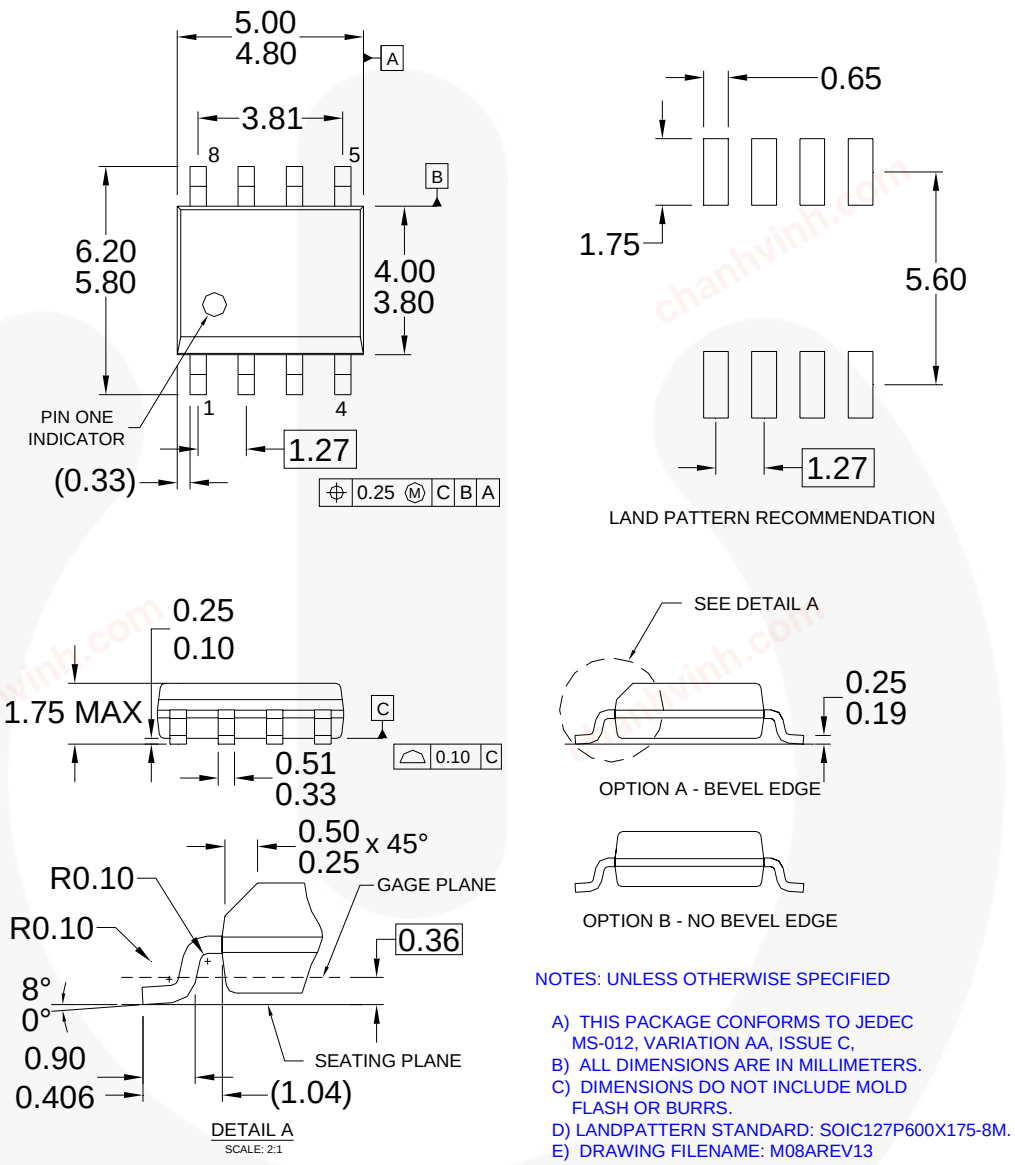



**Figure 22. 8-Lead, Small Outline Package (SOIC), JEDEC MS-012, 0.150-inch, Narrow Body**

***Click here for tape and reel specifications, available at:***

***http://www.fairchildsemi.com/products/discrete/pdf/soic8_tr.pdf***

*Package drawings are provided as a service to customers considering Fairchild components. Drawings may change in any manner without notice. Please note the revision and/or date on the drawing and contact a Fairchild Semiconductor representative to verify or obtain the most recent revision. Package specifications do not expand the terms of Fairchild's worldwide terms and conditions, specifically the warranty therein, which covers Fairchild products.*

*Always visit Fairchild Semiconductor's online packaging area for the most recent package drawings:*
*http://www.fairchildsemi.com/packaging/.*

© 2001 Fairchild Semiconductor Corporation

chanhvinh.com



FAIRCHILD SEMICONDUCTOR®

## TRADEMARKS

The following includes registered and unregistered trademarks and service marks, owned by Fairchild Semiconductor and/or its global subsidiaries, and is not intended to be an exhaustive list of all such trademarks.

Build it Now™
CorePLUS™
CorePOWER™
*CROSSVOLT*™
CTL™
Current Transfer Logic™
EcoSPARK®
EfficentMax™
EZSWITCH™ *
™
®
Fairchild®
Fairchild Semiconductor®
FACT Quiet Series™
FACT®
FAST®
FastvCore™
FlashWriter®*
FPS™
F-PFS™
FRFET®
Global Power Resource℠
Green FPS™
Green FPS™ e-Series™
GTO™
IntelliMAX™
ISOPLANAR™
MegaBuck™
MICROCOUPLER™
MicroFET™
MicroPak™
MillerDrive™
MotionMax™
Motion-SPM™
OPTOLOGIC®
OPTOPLANAR®
®
PDP SPM™
Power-SPM™
PowerTrench®
Programmable Active Droop™
QFET®
QS™
Quiet Series™
RapidConfigure™
Saving our world, 1mW at a time™
SmartMax™
SMART START™
SPM®
STEALTH™
SuperFET™
SuperSOT™-3
SuperSOT™-6
SuperSOT™-8
SupreMOS™
SyncFET™
SYSTEM ® GENERAL
The Power Franchise®
the power franchise
TinyBoost™
TinyBuck™
TinyLogic®
TINYOPTO™
TinyPower™
TinyPWM™
TinyWire™
µSerDes™
SerDes
UHC®
Ultra FRFET™
UniFET™
VCX™
VisualMax™

* EZSWITCH™ and FlashWriter® are trademarks of System General Corporation, used under license by Fairchild Semiconductor.

## DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION, OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS. THESE SPECIFICATIONS DO NOT EXPAND THE TERMS OF FAIRCHILD'S WORLDWIDE TERMS AND CONDITIONS, SPECIFICALLY THE WARRANTY THEREIN, WHICH COVERS THESE PRODUCTS.

## LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR CORPORATION.

As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
2. A critical component in any component of a life support, device, or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

## ANTI-COUNTERFEITING POLICY

Fairchild Semiconductor Corporation's Anti-Counterfeiting Policy. Fairchild's Anti-Counterfeiting Policy is also stated on our external website, www.fairchildsemi.com, under Sales Support.

Counterfeiting of semiconductor parts is a growing problem in the industry. All manufacturers of semiconductor products are experiencing counterfeiting of their parts. Customers who inadvertently purchase counterfeit parts experience many problems such as loss of brand reputation, substandard performance, failed applications, and increased cost of production and manufacturing delays. Fairchild is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. Fairchild strongly encourages customers to purchase Fairchild parts either directly from Fairchild or from Authorized Fairchild Distributors who are listed by country on our web page cited above. Products customers buy either from Fairchild directly or from Authorized Fairchild Distributors are genuine parts, have full traceability, meet Fairchild's quality standards for handling and storage and provide access to Fairchild's full range of up-to-date technical and product information. Fairchild and our Authorized Distributors will stand behind all warranties and will appropriately address any warranty issues that may arise. Fairchild will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources. Fairchild is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.

## PRODUCT STATUS DEFINITIONS

**Definition of Terms**

| Datasheet Identification | Product Status | Definition |
|---|---|---|
| Advance Information | Formative / In Design | Datasheet contains the design specifications for product development. Specifications may change in any manner without notice. |
| Preliminary | First Production | Datasheet contains preliminary data; supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve design. |
| No Identification Needed | Full Production | Datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve the design. |
| Obsolete | Not In Production | Datasheet contains specifications on a product that is discontinued by Fairchild Semiconductor. The datasheet is for reference information only. |

Rev. I35

© 2001 Fairchild Semiconductor Corporation