chanhvinh.com

LDO Regulator - Very Low Dropout, CMOS, Bias Rail 1 A

NCP59771

The NCP59771 is a 1 A VLDO equipped with NMOS pass transistor and a separate bias supply voltage (V_{BIAS}). The device provides very stable, accurate output voltage with low noise suitable for space constrained, noise sensitive applications. In order to optimize performance for battery operated portable applications, the NCP59771 features low I_Q consumption. The WLCSP6 1.4 mm x 0.8 mm Chip Scale package is optimized for use in space constrained applications.

Features

- Input Voltage Range: V_{OUT} to 5.5 V
- Bias Voltage Range: 2.5 V to 5.5 V
- Adjustable Voltage Version Available
- Output Voltage Range: 0.4 V to 3.0 V
- ±1% Accuracy over Temperature, 0.5% V_{OUT} @ 25°C
- Ultra−Low Dropout: Typ. 50 mV at 1 A
- Very Low Bias Input Current of Typ. 80 μA
- Very Low Bias Input Current in Disable Mode: Typ. 0.5 μA
- Logic Level Enable Input for ON/OFF Control
- Output Active Discharge Option Available
- Stable with a 4.7 μF Ceramic Capacitor
- Available in WLCSP6 – 1.4 mm x 0.8 mm, 0.4 mm pitch Package
- These Devices are Pb−Free, Halogen Free/BFR Free and are RoHS Compliant

Typical Applications

- Battery−powered Equipment
- Smartphones, Tablets
- Cameras, DVRs, STB and Camcorders

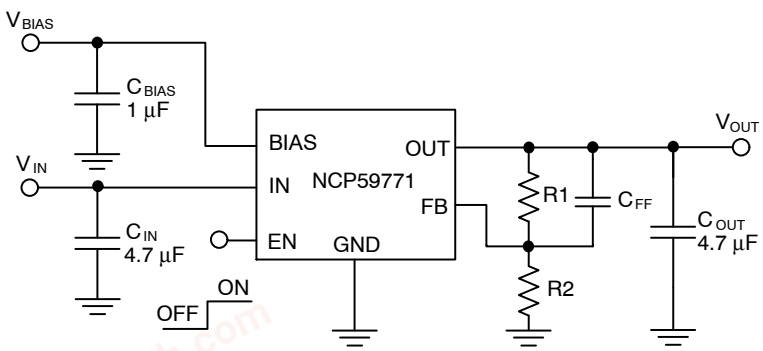


Figure 1. Typical Application Schematic


ON Semiconductor®

www.onsemi.com




WLCSP6, 1.4x0.8x0.37
CASE 567YU

MARKING DIAGRAM



XX = Specific Device Code
M = Month Code
▪ = Pb−Free Package

PIN CONNECTIONS

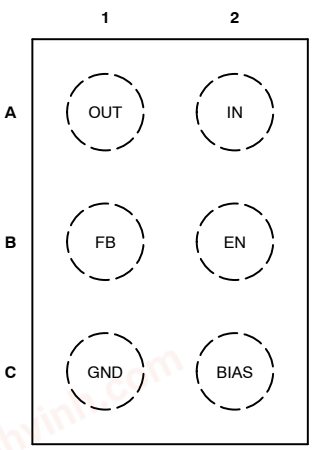


Top View

ORDERING INFORMATION

See detailed ordering, marking and shipping information on page 8 of this data sheet.

© Semiconductor Components Industries, LLC, 2020

chanhvinh.com

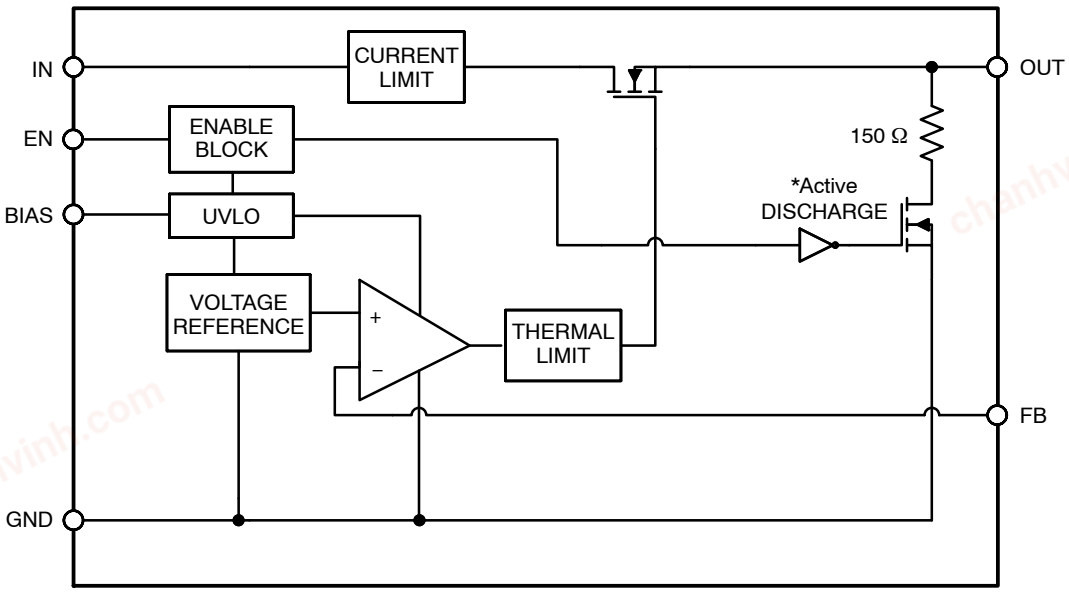

*Active output discharge function is present only in NCP59771A option devices.

Figure 2. Simplified Schematic Block Diagram

chanhvinh.com

PIN FUNCTION DESCRIPTION

Pin No. WLCSP6	Pin Name	Description
A1	OUT	Regulated Output Voltage pin
A2	IN	Input Voltage Supply pin
B1	FB	Feedback pin. Connect resistor divider to set requested output voltage.
B2	EN	Enable pin. Driving this pin high enables the regulator. Driving this pin low puts the regulator into shutdown mode.
C1	GND	Ground pin
C2	BIAS	Bias voltage supply for internal control circuits. This pin is monitored by internal Under-Voltage Lockout Circuit.

ABSOLUTE MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Input Voltage (Note 1)	V_{IN}	−0.3 to 6	V
Output Voltage	V_{OUT}	−0.3 to (V_{IN}+0.3) ≤ 6	V
Chip Enable, Bias and SNS Input	V_{EN}, V_{BIAS}, V_{FB}	−0.3 to 6	V
Output Short Circuit Duration	t_{SC}	unlimited	s
Maximum Junction Temperature	T_J	150	°C
Storage Temperature	T_{STG}	−55 to 150	°C
ESD Capability, Human Body Model (Note 2)	ESD_{HBM}	2000	V
ESD Capability, Machine Model (Note 2)	ESD_{MM}	200	V

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

1. Refer to ELECTRICAL CHARACTERISTICS and APPLICATION INFORMATION for Safe Operating Area.
2. This device series incorporates ESD protection (except OUT pin) and is tested by the following methods:
   ESD Human Body Model tested per EIA/JESD22−A114
   ESD Machine Model tested per EIA/JESD22−A115
   Latchup Current Maximum Rating tested per JEDEC standard: JESD78.

THERMAL CHARACTERISTICS

Rating	Symbol	Value	Unit
Thermal Characteristics, WLCSP6 1.4 mm x 0.8 mm Thermal Resistance, Junction−to−Air (Note 3)	$R_{\theta JA}$	69	°C/W

3. This junction−to−ambient thermal resistance under natural convection was derived by thermal simulations based on the JEDEC JESD51 series standards methodology. Only a single device mounted at the center of a high_K (2s2p) 80 mm x 80 mm multilayer board with 1−ounce internal planes and 2−ounce copper on top and bottom. Top copper layer has a dedicated 1.6 sqmm copper area.

chanhvinh.com

ELECTRICAL CHARACTERISTICS $-40°C \le T_J \le 85°C$; V_{BIAS} = 2.7 V or (V_{OUT} + 1.6 V), whichever is greater, $V_{IN} = V_{OUT(NOM)}$ + 0.3 V, I_{OUT} = 1 mA, V_{EN} = 1 V, C_{IN} = 4.7 μF, C_{OUT} = 10 μF, C_{BIAS} = 1 μF, unless otherwise noted. Typical values are at T_J = +25°C. Min/Max values are for $-40°C \le T_J \le 85°C$ unless otherwise noted. (Note 4)

Parameter	Test Conditions	Symbol	Min	Typ	Max	Unit
Operating Input Voltage Range		V_{IN}	V_{OUT} + V_{DO}		5.5	V
Operating Bias Voltage Range		V_{BIAS}	(V_{OUT} + 1.50) ≥ 2.5		5.5	V
Undervoltage Lock−out	V_{BIAS} Rising Hysteresis	UVLO		1.6 0.2		V
Output Voltage Accuracy		V_{OUT}		±0.5		%
Reference voltage	T_J = 25°C	V_{REF}		0.4		V
Output Voltage Accuracy	$-40°C \le T_J \le 85°C$, $V_{OUT(NOM)}$ + 0.1 V ≤ V_{IN} ≤ $V_{OUT(NOM)}$ + 1.0 V, 2.7 V or ($V_{OUT(NOM)}$ + 1.6 V), whichever is greater < V_{BIAS} < 5.5 V, 1 mA < I_{OUT} < 1 A	V_{OUT}	−1.0		+1.0	%
V_{IN} Line Regulation	$V_{OUT(NOM)}$ + 0.1 V ≤ V_{IN} ≤ 5.0 V	$Line_{Reg}$		0.01		%/V
V_{BIAS} Line Regulation	2.7 V or ($V_{OUT(NOM)}$ + 1.6 V), whichever is greater < V_{BIAS} < 5.5 V	$Line_{Reg}$		0.01		%/V
Load Regulation	I_{OUT} = 1 mA to 1 A	$Load_{Reg}$		1.5		mV
V_{IN} Dropout Voltage	I_{OUT} = 1 A (Note 5)	V_{DO}		50	80	mV
V_{BIAS} Dropout Voltage	I_{OUT} = 1 A, V_{IN} = V_{BIAS} (Notes 5, 6)	V_{DO}		1.1	1.5	V
Output Current Limit	V_{OUT} = 90% $V_{OUT(NOM)}$	I_{CL}	1500	2000	2600	mA
FB Pin Operating Current		I_{FB}		0.1	0.5	μA
Bias Pin Quiescent Current	V_{BIAS} = 2.7 V, I_{OUT} = 0 mA	I_{BIASQ}		70	110	μA
Bias Pin Disable Current	V_{EN} ≤ 0.4 V	$I_{BIAS(DIS)}$		0.5	1	μA
Input Pin Disable Current	V_{EN} ≤ 0.4 V	$I_{VIN(DIS)}$		0.5	1	μA
EN Pin Threshold Voltage	EN Input Voltage “H”	$V_{EN(H)}$	0.9			V
	EN Input Voltage “L”	$V_{EN(L)}$			0.4	
EN Pull Down Current	V_{EN} = 5.5 V	I_{EN}		0.3	1	μA
Power Supply Rejection Ratio	V_{IN} to V_{OUT}, f = 1 kHz, I_{OUT} = 10 mA, $V_{IN} \ge V_{OUT}$ +0.5 V, $V_{OUT(NOM)}$ = 1.2 V, V_{BIAS} = 3.0 V	PSRR(V_{IN})		75		dB
	V_{BIAS} to V_{OUT}, f = 1 kHz, I_{OUT} = 10 mA, $V_{IN} \ge V_{OUT}$ +0.5 V, $V_{OUT(NOM)}$ = 1.2 V, V_{BIAS} = 3.0 V	PSRR(V_{BIAS})		80		dB
Output Noise Voltage	V_{IN} = V_{OUT} +0.5 V, f = 10 Hz to 100 kHz	V_N		35 x V_{OUT}/ V_{REF}		μV_{RMS}
Thermal Shutdown Threshold	Temperature increasing			160		°C
	Temperature decreasing			140		
Output Discharge Pull−Down	V_{EN} ≤ 0.4 V, V_{OUT} = 0.5 V, Only ‘A’ option	R_{DISCH}		150		Ω
Delay time	From assertion of V_{EN} to output voltage increase	t_{DELAY}		73		μs
Rise time	V_{OUT} rise from 10% to 90% $V_{OUT(NOM)}$	t_{RISE}		15		
Turn−On Time	From assertion of V_{EN} to V_{OUT} = 98% $V_{OUT(NOM)}$	t_{ON}		98		

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

4. Performance guaranteed over the indicated operating temperature range by design and/or characterization. Production tested at T_A = 25°C. Low duty cycle pulse techniques are used during the testing to maintain the junction temperature as close to ambient as possible.
5. Dropout voltage is characterized when V_{OUT} falls 3% below $V_{OUT(NOM)}$.
6. For output voltages below 1.5 V, V_{BIAS} dropout does not apply due to a minimum Bias operating voltage of 2.5 V.

chanhvinh.com

TYPICAL CHARACTERISTICS

At T_J = +25°C, V_{IN} = $V_{OUT(NOM)}$ + 0.3 V, V_{BIAS} = 2.8 V, V_{EN} = V_{BIAS}, $V_{OUT(NOM)}$ = 1.2 V, I_{OUT} = 700 mA, C_{IN} = 4.7 μF, C_{BIAS} = 1 μF, and C_{OUT} = 10 μF (effective capacitance), unless otherwise noted.

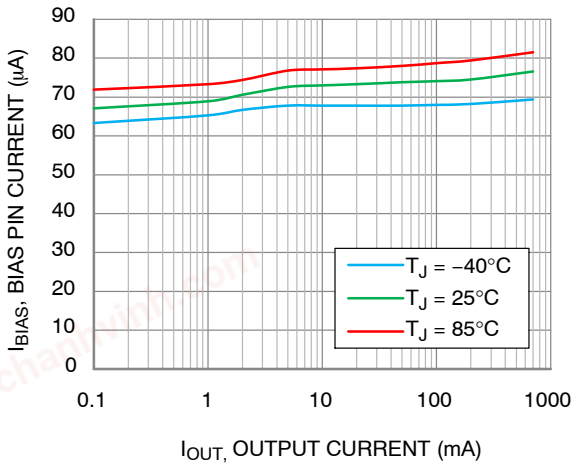


Figure 3. BIAS Pin Current vs. I_{OUT} and T_J

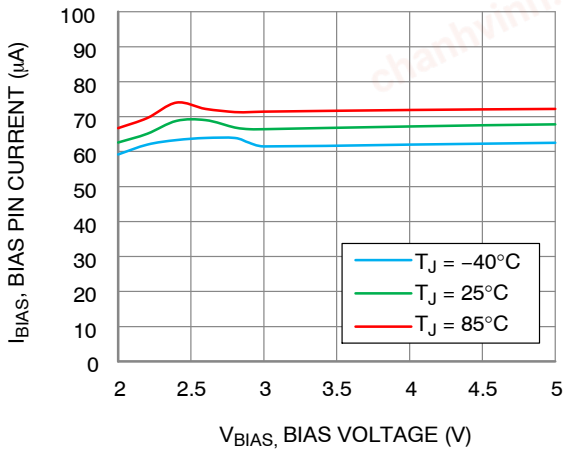


Figure 4. BIAS Pin Current vs. V_{BIAS} and T_J

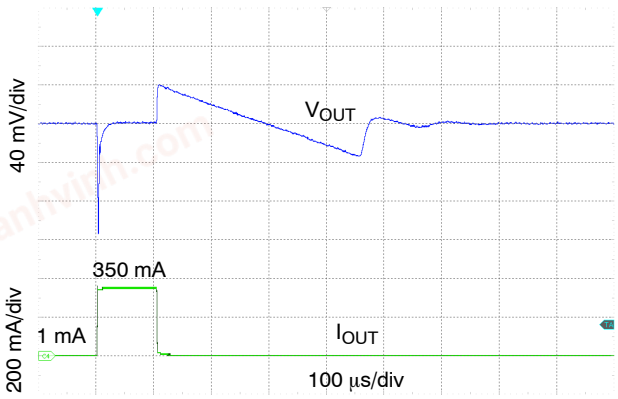


Figure 5. Load Transient Response, I_{OUT} = 1 mA to 350 mA in 1 μs, C_{OUT} = 4.7 μF

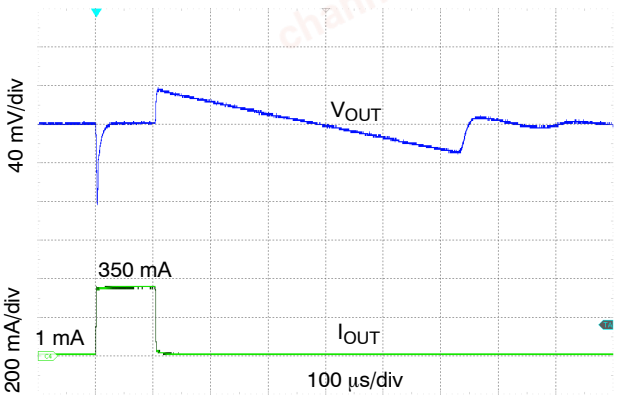


Figure 6. Load Transient Response, I_{OUT} = 1 mA to 350 mA in 1 μs, C_{OUT} = 10 μF

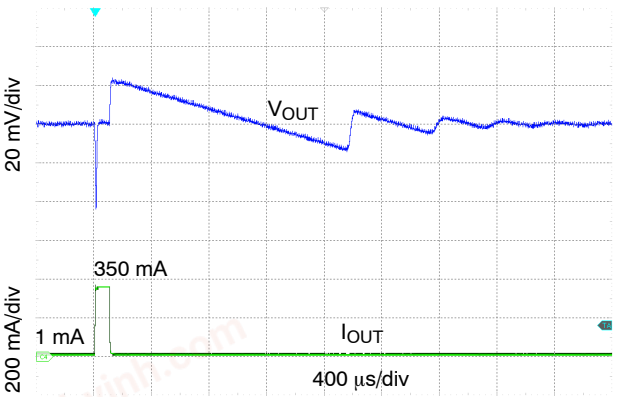


Figure 7. Load Transient Response, I_{OUT} = 1 mA to 350 mA in 1 μs, C_{OUT} = 47 μF

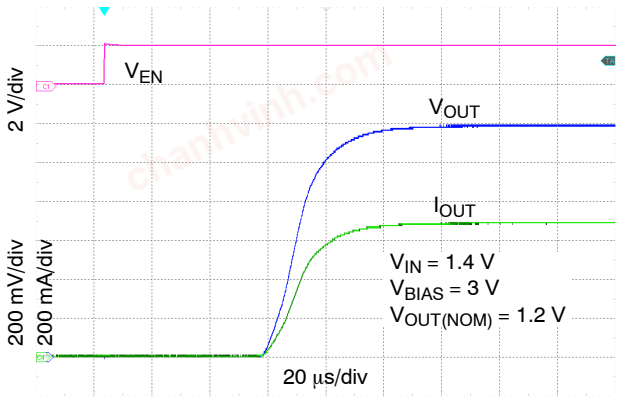


Figure 8. Enable Transient Response, C_{OUT} = 10 μF, I_{OUT} = 700 mA − A Option (Normal)

chanhvinh.com

TYPICAL CHARACTERISTICS (continued)

At T_J = +25°C, V_{IN} = $V_{OUT(NOM)}$ + 0.3 V, V_{BIAS} = 2.8 V, V_{EN} = V_{BIAS}, $V_{OUT(NOM)}$ = 1.2 V, I_{OUT} = 700 mA, C_{IN} = 4.7 μF, C_{BIAS} = 1 μF, and C_{OUT} = 10 μF (effective capacitance), unless otherwise noted.

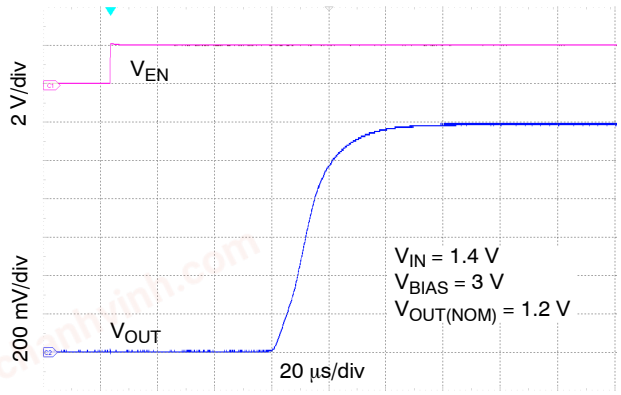


Figure 9. Enable Transient Response, C_{OUT} = 10 μF, I_{OUT} = 0 mA – A Option (Normal)

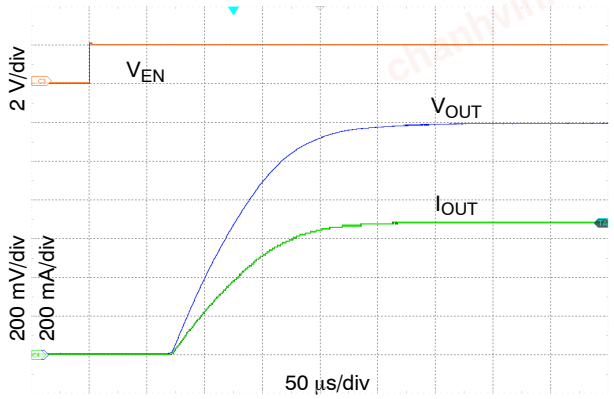


Figure 10. Enable Transient Response, C_{OUT} = 10 μF, I_{OUT} = 700 mA – C Option (Slow)

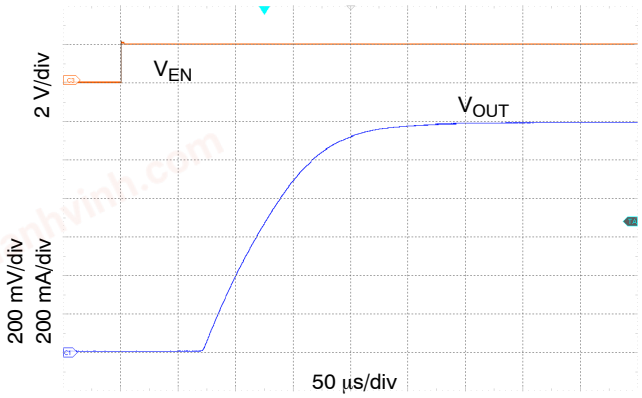


Figure 11. Enable Transient Response, C_{OUT} = 10 μF, I_{OUT} = 0 mA – C Option (Slow)

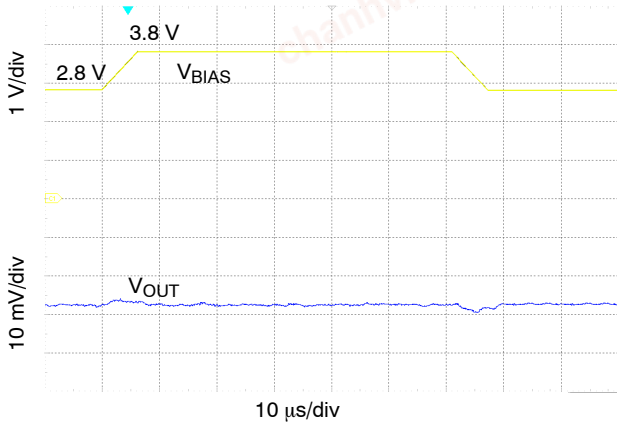


Figure 12. BIAS Line Transient Response, V_{BIAS} = 2.8 V to 3.8 V in 5 μs

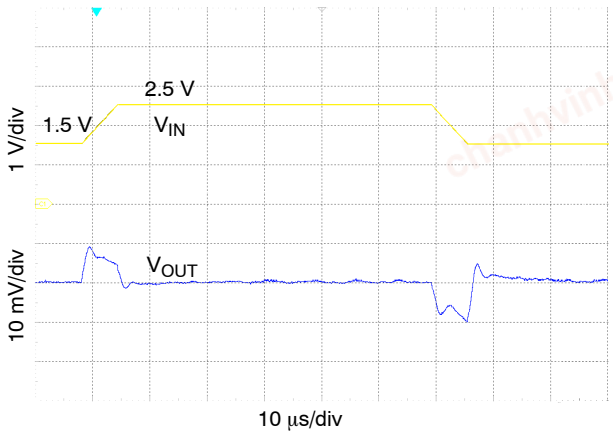


Figure 13. IN Line Transient Response, V_{IN} = 1.5 V to 2.5 V in 5 μs

chanhvinh.com

APPLICATIONS INFORMATION

The NCP59771 dual−rail very low dropout voltage regulator is using NMOS pass transistor for output voltage regulation from V_{IN} voltage. All the low current internal control circuitry is powered from the V_{BIAS} voltage.

The use of an NMOS pass transistor offers several advantages in applications. Unlike PMOS topology devices, the output capacitor has reduced impact on loop stability. Vin to Vout operating voltage difference can be very low compared with standard PMOS regulators in very low Vin applications.

The NCP59771 offers smooth monotonic start-up. The controlled voltage rising limits the inrush current.

The Enable (EN) input is equipped with internal hysteresis.

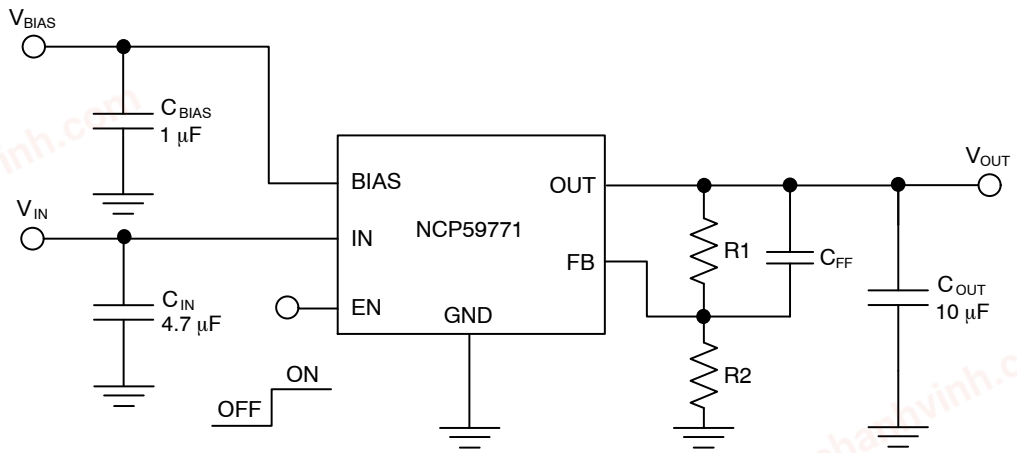


Figure 14. Typical Application Schematic

Output Voltage Adjustment

The required output voltage can be adjusted from 0.4 V to 1.8 V using two external resistors. Typical application schematic is shown on Figure 14. Output voltage is calculated according to Equation 1. When resistor's value is in kΩ range last term (I_{FB} x R_1) can be omitted because its effect on output voltage accuracy is negligible. In other cases it should be consider especially when tight output voltage accuracy is requested.

$$V_{OUT} = V_{FB} \cdot \left(1 + \frac{R_1}{R_2}\right) + I_{FB} \cdot R_1 \qquad \text{(eq. 1)}$$

Voltage Calculation Example – V_{OUT} = 0.8 V:

a) $R_1 = R_2 = 5.1\ k\Omega$, no $(I_{FB} \times R_1)$ $\quad V_{OUT} = 0.4 \cdot \left(1 + \frac{5.1\ k\Omega}{5.1\ k\Omega}\right) = 0.8\ V$ $\quad$ Error − 0%

b) $R_1 = R_2 = 5.1\ k\Omega$ $\quad V_{OUT} = 0.4 \cdot \left(1 + \frac{5.1\ k\Omega}{5.1\ k\Omega}\right) + 100\ nA \cdot 5.1\ k\Omega = 0.80051\ V$ $\quad$ Error − 0.06%

b) $R_1 = R_2 = 51\ k\Omega$ $\quad V_{OUT} = 0.4 \cdot \left(1 + \frac{5.1\ k\Omega}{5.1\ k\Omega}\right) + 100\ nA \cdot 51\ k\Omega = 0.8051\ V$ $\quad$ Error − 0.63%

It is recommended to keep the total resistance of resistors (R1 + R2) no greater than a few hundred kΩ. If total resistance is too big the dynamic performance could get worse due to PCB parasitic capacitance. Big resistors value in combination with parasitic capacitance create low−pass filter and virtually slow−down LDO control loop.

OUTPUT VOLTAGE EXAMPLE

V_{OUT} (V)	R_1 (kΩ) (Note 7)	R_2 (kΩ) (Note 7)	C_{FF} (nF)
0.80	5.1	5.1	5.6
1.05	3.9	2.4	5.6
1.10	8.2	4.7	5.6
1.20	24	12	5.6

7. To increase power efficiency, current flows through resistor divider can be reduced by multiply all resistor values by 10.

chanhvinh.com

Feed Forward Capacitor C_{FF}

Feed forward capacitor is recommended to improve PSRR, load transient and noise performance. Recommended value for NCP59771 device is about 5.6 nF. The capacitor can also improve LDO stability.

Dropout Voltage

Because of two power supply inputs V_{IN} and V_{BIAS} and one V_{OUT} regulator output, there are two Dropout voltages specified.

The first, the V_{IN} Dropout voltage is the voltage difference ($V_{IN} - V_{OUT}$) when V_{OUT} starts to decrease by percent specified in the Electrical Characteristics table. V_{BIAS} is high enough; specific value is published in the Electrical Characteristics table.

The second, V_{BIAS} dropout voltage is the voltage difference ($V_{BIAS} - V_{OUT}$) when V_{IN} and V_{BIAS} pins are joined together and V_{OUT} starts to decrease.

Input and Output Capacitors

The NCP59771 device is designed to be stable for ceramic output capacitors with Effective capacitance in the range from 4.7 μF to 47 μF. The device is also stable with multiple capacitors in parallel, having the total effective capacitance in the specified range.

In applications where no low input supplies impedance available (PCB inductance in V_{IN} and/or V_{BIAS} inputs as example), the recommended C_{IN} = 1 μF and C_{BIAS} = 0.1 μF or greater. Ceramic capacitors are recommended**.** For the best performance all the capacitors should be connected to the NCP59771 respective pins directly in the device PCB copper layer, not through vias having not negligible impedance.

When using small ceramic capacitor, their capacitance is not constant but varies with applied DC biasing voltage, temperature and tolerance. The effective capacitance can be much lower than their nominal capacitance value, most importantly in negative temperatures and higher LDO output voltages. That is why the recommended Output capacitor capacitance value is specified as Effective value in the specific application conditions.

Enable Operation

The enable pin will turn the regulator on or off. The threshold limits are covered in the electrical characteristics table in this data sheet. To get the full functionality of Soft Start, it is recommended to turn on the V_{IN} and V_{BIAS} supply voltages first and activate the Enable pin no sooner than V_{IN} and V_{BIAS} are on their nominal levels. If the enable function is not to be used then the pin should be connected to V_{IN} or V_{BIAS}.

If the EN pin voltage is < 0.4 V the device is guaranteed to be disabled. The pass transistor is turned off so that there is virtually no current flow between the IN and OUT. The active discharge transistor is active (devices with Output Active Discharge feature only) so that the output voltage V_{OUT} is pulled down to GND through a 150 Ω resistor. In the disable state the device consumes as low as typ. 0.5 μA from the V_{IN} and 0.5 μA from V_{BIAS}. If the EN pin voltage > 0.9 V the device is guaranteed to be enabled. The NCP59771 regulates the output voltage and the active discharge transistor is turned off. The EN pin has internal pull−down current source with typ. value of 0.3 μA which assures that the device is turned off when the EN pin is not connected.

Current Limitation

The internal Current Limitation circuitry allows the device to supply the full nominal current and surges but protects the device against Current Overload or Short.

Thermal Protection

Internal thermal shutdown (TSD) circuitry is provided to protect the integrated circuit in the event that the maximum junction temperature is exceeded. When TSD activated , the regulator output turns off. When cooling down under the low temperature threshold, device output is activated again. This TSD feature is provided to prevent failures from accidental overheating.

Activation of the thermal protection circuit indicates excessive power dissipation or inadequate heatsinking. For reliable operation, junction temperature should be limited to +105°C maximum.

ORDERING INFORMATION

Device	Nominal Output Voltage	Marking	Option	Package	Shipping†
NCP59771AFCRCADJT2G	Adjustable	2A	Output Active Discharge, Back Side Coating	WLCSP6 Case 567YU (Pb−Free)	5000 / Tape & Reel

†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.


To order other package and voltage variants, please contact your ON Semiconductor sales representative.

chanhvinh.com


NCP59771

PACKAGE DIMENSIONS


WLCSP6 1.4x0.8x0.37
CASE 567YU
ISSUE O

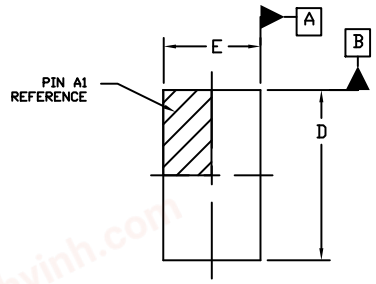


TOP VIEW



DETAIL A

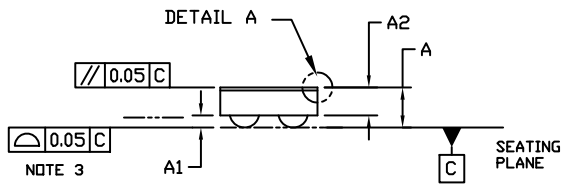

SIDE VIEW

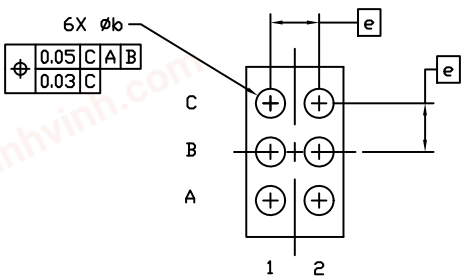


BOTTOM VIEW

NOTES:

1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1994.
2. CONTROLLING DIMENSION: MILLIMETERS
3. COPLANARITY APPLIES TO THE SPHERICAL CROWNS OF THE SOLDER BALLS.
4. DATUM C, THE SEATING PLANE, IS DEFINED BY THE SPHERICAL CROWNS OF THE SOLDER BALLS.
5. DIMENSION b IS MEASURED AT THE MAXIMUM SOLDER BALL DIAMETER PARALLEL TO DATUM C.
6. BACKSIDE COATING IS OPTIONAL.

DIM	MILLIMETERS		
	MIN.	NOM.	MAX.
A	---	0.330	0.370
A1	0.080	0.100	0.120
A2	0.230 REF		
A3	0.020	0.025	0.030
b	0.220	0.240	0.260
D	1.370	1.400	1.430
E	0.770	0.800	0.830
e	0.400 BSC		



RECOMMENDED
MOUNTING FOOTPRINT

* For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

ON Semiconductor and ON are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that ON Semiconductor was negligent regarding the design or manufacture of the part. ON Semiconductor is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

PUBLICATION ORDERING INFORMATION

LITERATURE FULFILLMENT:
Email Requests to: orderlit@onsemi.com

ON Semiconductor Website: www.onsemi.com

TECHNICAL SUPPORT
North American Technical Support:
Voice Mail: 1 800-282-9855 Toll Free USA/Canada
Phone: 011 421 33 790 2910

Europe, Middle East and Africa Technical Support:
Phone: 00421 33 790 2910
For additional information, please contact your local Sales Representative

◊