chanhvinh.com

SAT 300
Revised : 02.2004

Product Auto Transformer **Type No.** SAT 300

Technical Details

Safety Standards	VDE 0570, EN 61558-1 with EN 61558-2-13
Designated Voltage	Input: 230Vac
Designated Voltage	Output: 115Vac
Designated Current	Output: 2,6Aac
Designated Frequency	50-60Hz.
Protection Index	IP 20
Protection Class	I
Insulation Class	A (105°C)
Ambient Temperature	Max. 40°C
Short-Circuit Protection	Short-circuit-proof
Protection Device	Fuse-Link 5x20mm 2,5AT in output circuit
Input Connector	Approx. 2m flexible 3 core cable with a BS 1363 three pin plug
Output Connector	Approx. 1m flexible 3 core cable with USA 15A/125V three pin socket
Construction	Plastic enclosure
Weight	approx. 3,9Kg

Schematic Plan

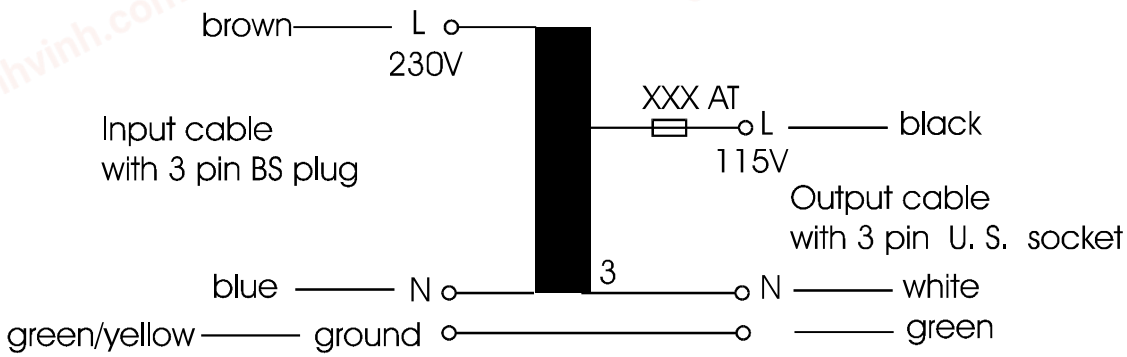

Description

Short-circuit-proof auto transformer fully encapsulated in plastic enclosure.
Integrated fuse protection against short Circuit and overload.
No isolation from mains.

Marking:

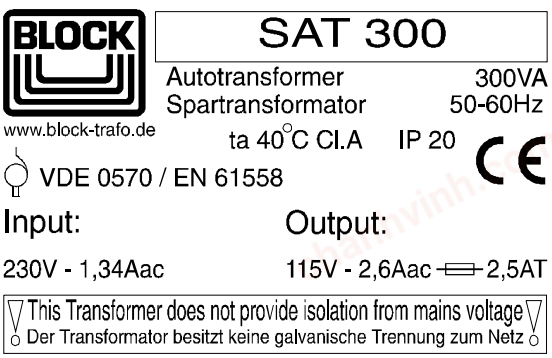

Approvals

-

chanhvinh.com

BLOCK

SAT 300
Revised : 02.2004

Dimensions

