chanhvinh.com

SiC Power Module


BSM250D17P2E004

Datasheet

●Application

- Motor drive
- Inverter, Converter
- Photovoltaics, wind power generation.
- Induction heating equipment.

●Circuit diagram

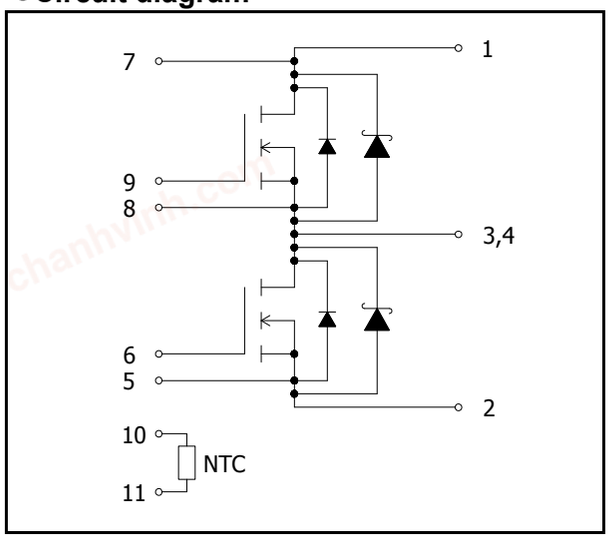

●Features

1) Low surge, low switching loss.


2) High-speed switching possible.

3) Reduced temperature dependence.

●Construction

This product is a half bridge module consisting of SiC-DMOSFET and SiC-SBD from ROHM.

●Dimensions & Pin layout (Unit : mm)

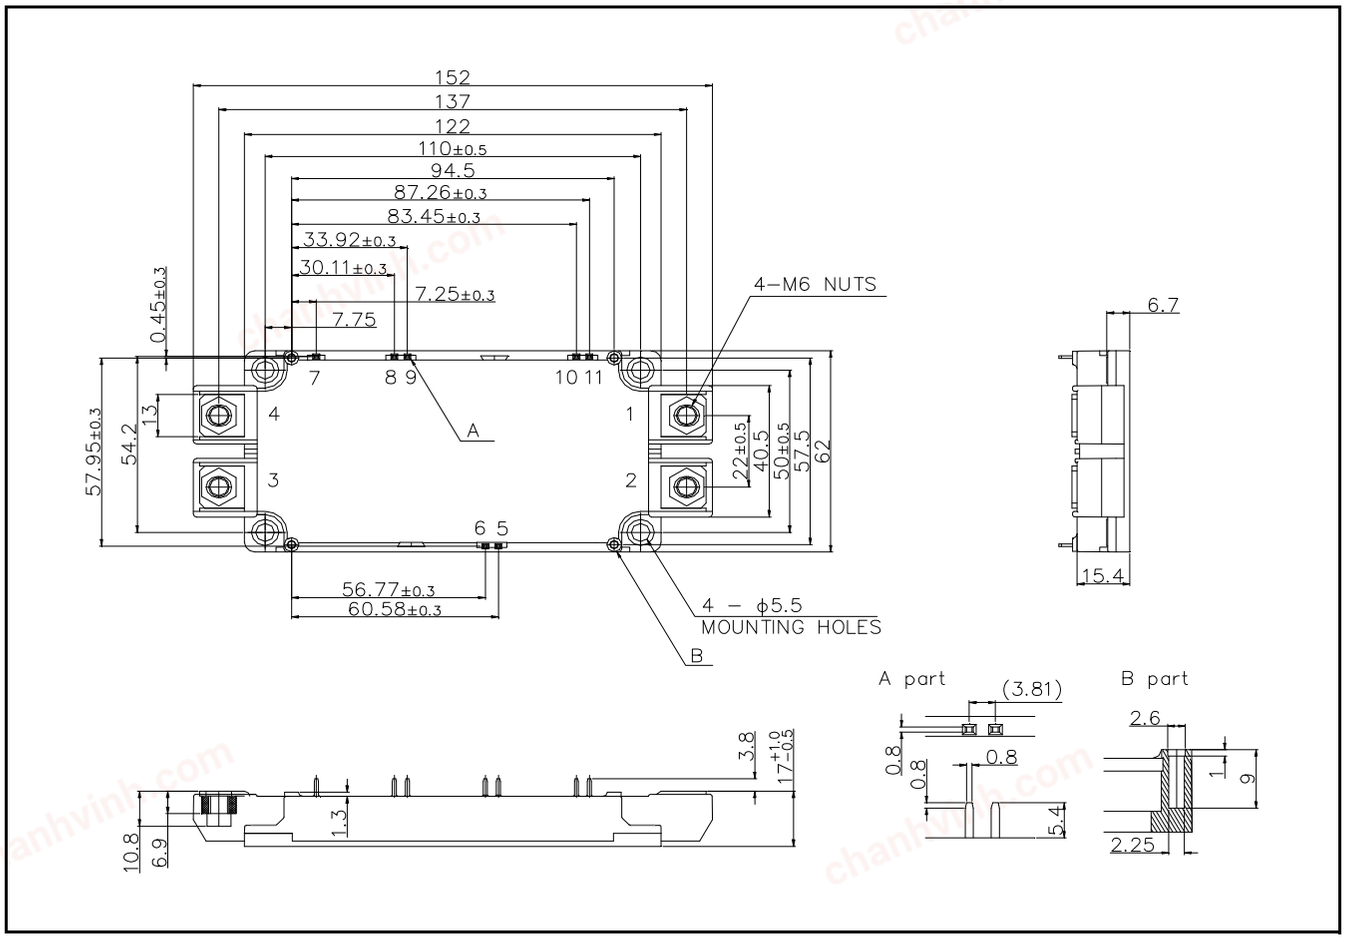

© 2018 ROHM Co., Ltd. All rights reserved.


chanhvinh.com

●Absolute maximum ratings (T_j = 25°C)

Parameter	Symbol	Conditions	Ratings	Unit
Drain - Source Voltage	V_{DSS}	G-S short	1700	V
Gate - Source Voltage (+)	V_{GSS}	D-S short	22	
Gate - Source Voltage (-)	V_{GSS}	D-S short	-6	
G - S Voltage (t_{surge}<300nsec)	$V_{GSSsurge}$	D-S short	-10 to 26	
Drain Current Note 1)	I_D	DC(Tc=60°C) VGS=18V	250	A
	I_{DRM}	Pulse (Tc = 60°C) 1ms VGS=18V Note 2)	500	
Source Current Note 1)	I_S	DC(Tc=60°C) VGS=18V	250	
	I_S	DC(Tc=60°C) VGS=0V	200	
	I_{SRM}	Pulse (Tc = 60°C) 1ms VGS=18V Note 2)	500	
Total Power Dissipation Note 3)	Ptot	Tc = 25°C	1800	W
Max Junction Temperature	Tjmax		175	°C
Junction Temperature	Tjop		-40 to 150	
Storage Temperature	Tstg		-40 to 125	
Isolation Voltage	Visol	Terminals to baseplate f = 60Hz AC 1 min.	3400	Vrms
Mounting Torque	-	Main Terminals : M6 screw	4.5	N・m
		Mounting to heat sink M5 screw	3.5	

Note 1) Case temperature (Tc) is defined on the surface of base plate just under the chips.
Note 2) Repetition rate should be kept within the range where temperature rise if die should not exceed Tjmax.
Note 3) Tj is less than 175°C.

Example of acceptable VGS waveform

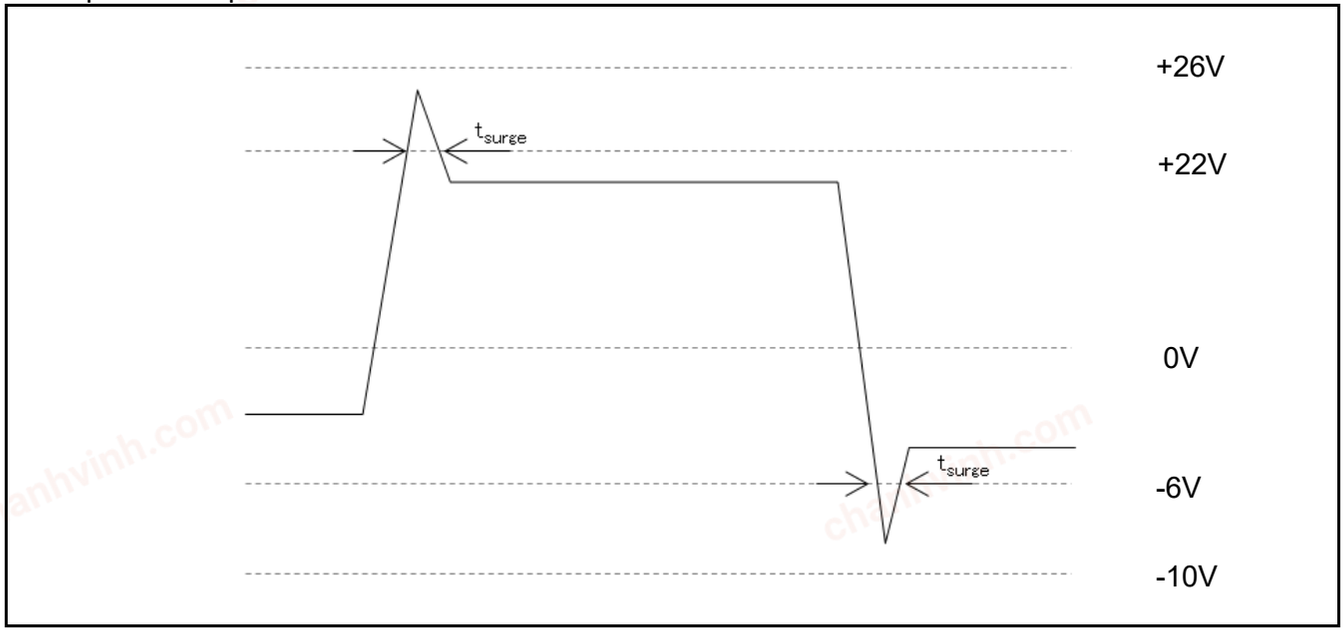

© 2018 ROHM Co., Ltd. All rights reserved.

chanhvinh.com

●Electrical characteristics (T_j=25°C)


Parameter	Symbol	Conditions		Ratings Min.	Ratings Typ.	Ratings Max.	Unit
On-state static Drain-Source Voltage	V_{DS}(on)	ID=250A,VGS=18V	Tj=25°C	—	2.0	2.8	V
			Tj=125°C	—	3.2	—	
			Tj=150°C	—	3.7	5.1	
Drain Cutoff Current	I_{DSS}	V_{DS}=1200V,V_{GS}=0V		—	—	1.0	mA
Souce-Drain Voltage	V_{SD}	VGS=0V,IS=250A	Tj=25°C	—	2.3	2.7	V
			Tj=125°C	—	3.2	—	
			Tj=150°C	—	3.5	4.8	
		VGS=18V,IS=250A	Tj=25°C	—	1.5	—	
			Tj=125°C	—	2.0	—	
			Tj=150°C	—	2.2	—	
Gate-Source Threshold Voltage	V_{GS}(th)	V_{DS}=10V,I_D=66mA		1.6	—	4	V
Gate-Source Leak Current	I_{GSS}	V_{GS}=22V,V_{DS}=0V		—	—	0.5	μA
		V_{GS}=-6V,V_{DS}=0V		-0.5	—	—	
Switching Characteristics	td(on)	VGS(on)=18V、VGS(off)=0V VDS=1000V ID=250A RG(on)=1.0 ohm, RG(off)=0.2 ohm Inductive load		—	55	—	ns
	tr			—	55	—	
	trr			—	50	—	
	td (off)			—	195	—	
	tf			—	70	—	
Input Capacitance	Ciss	V_{DS}=10V,V_{GS}=0V,200kHz		—	30	—	nF
Gate Registance	R_{Gint}	Tj=25°C		—	1.4	—	Ω
NTC Rated Resistance	R_{25}			—	5.0	—	kΩ
NTC B Value	$B_{50/25}$			—	3370	—	K
Stray Inductance	Ls			—	13.3	—	nH
Creepage Distance	-	Terminal to heat sink		—	14.5	—	mm
		Terminal to terminal		—	15.0	—	mm
Clearance Distance	-	Terminal to heat sink		—	12.0	—	mm
		Terminal to terminal		—	9.0	—	mm
Junction-to -Case Thermal Resistance	Rth(j-c)	DMOSFET（1/2 module） Note 4)		—	—	83	°C/kW
		SBD（1/2 module） Note 4)		—	—	115	
Case-to -heat sink Thermal Resistance	Rth(c-f)	Case to heat sink, per 1 module. Thermal grease applied. Note 5）		—	35	—	

Note 4) Measurement of Tc is to be done at the point just under the chip.

Note 5) Typical value is measured by using thermally conductive grease of λ=0.9W/(m･K).

Note 6) If the Product is used beyond absolute maximum ratings defined in the Specifications, as its internal structure may be dameged, please replace such Product with a new one.

＜Wavelength for Switching Test＞

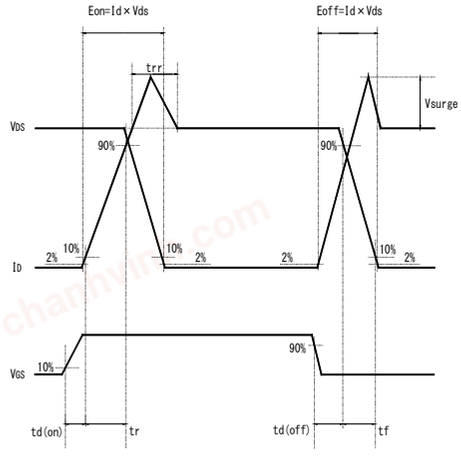

© 2018 ROHM Co., Ltd. All rights reserved.

chanhvinh.com

●Electrical characteristic curves (Typical)

Fig.1 Output characteristic 25°C (TYP)

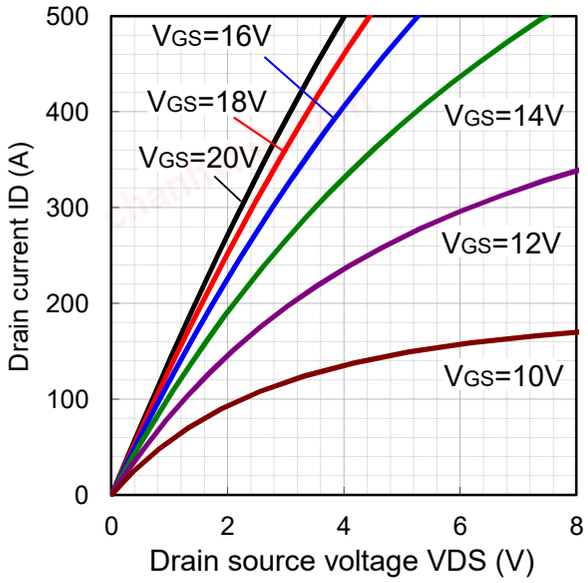


Fig.2 Drain source voltage characteristic (TYP)

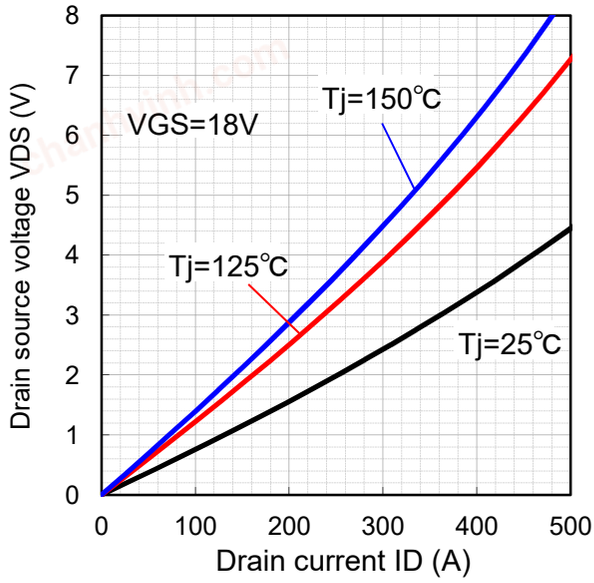


Fig.3 Drain source voltage characteristic 25°C (TYP)


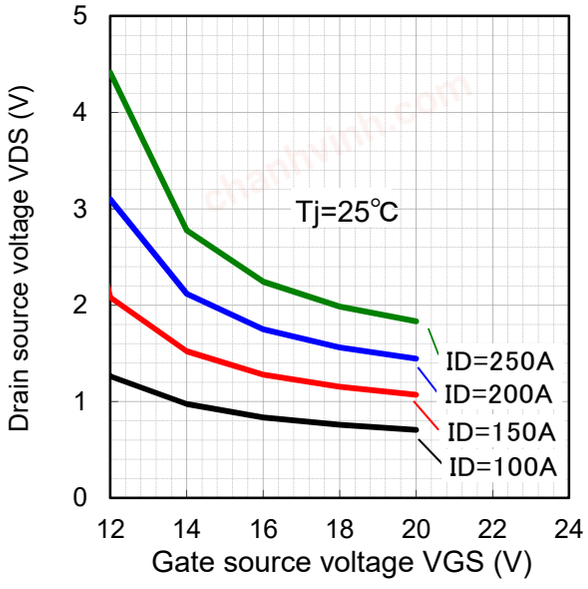


Fig.4 Ron vs Tj characteristic (TYP)

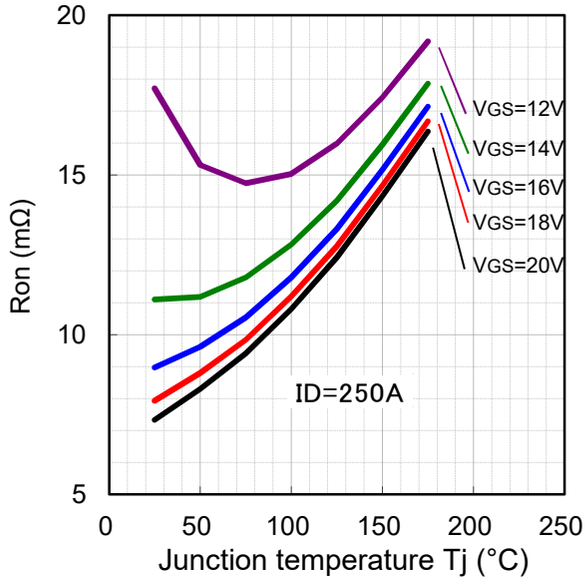

© 2018 ROHM Co., Ltd. All rights reserved.

chanhvinh.com

●**Electrical characteristic curves** (Typical)

Fig.5 Forward characteristic of Diode (TYP)

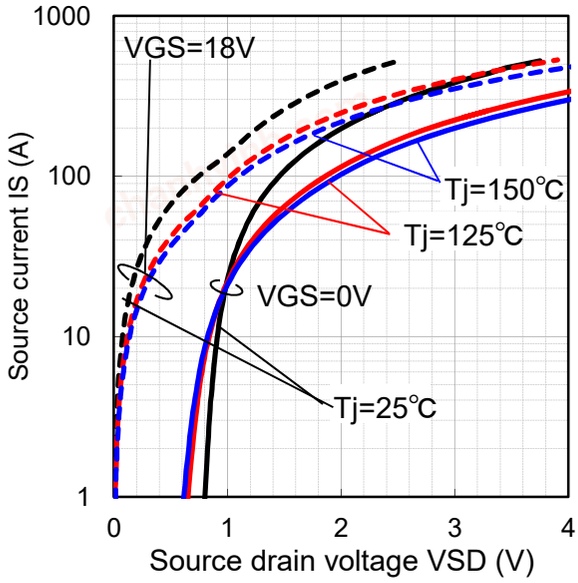


Fig.6 Forward characteristic of Diode (TYP)

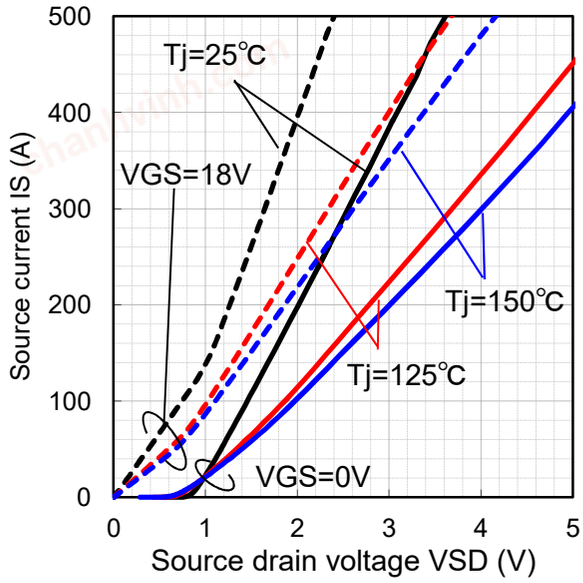


Fig.7 Drain Current vs Gate Voltage (TYP)


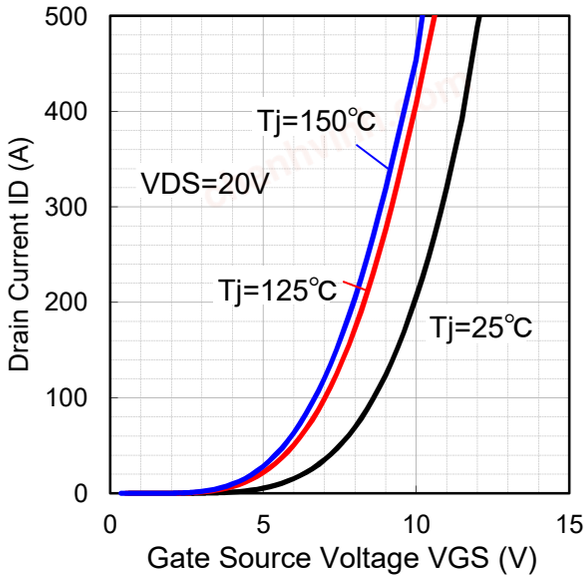


Fig.8 Drain Current vs Gate Voltage (TYP)

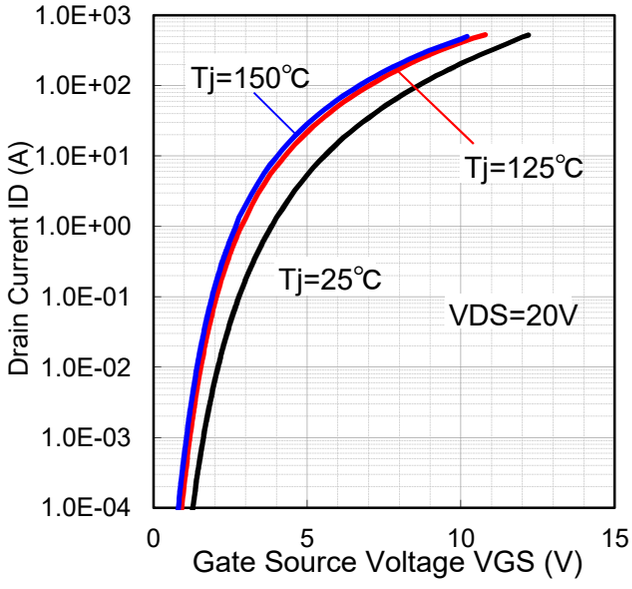

© 2018 ROHM Co., Ltd. All rights reserved.

chanhvinh.com

●Electrical characteristic curves (Typical)

Fig.9 Switching time vs drain current at 25°C (TYP)

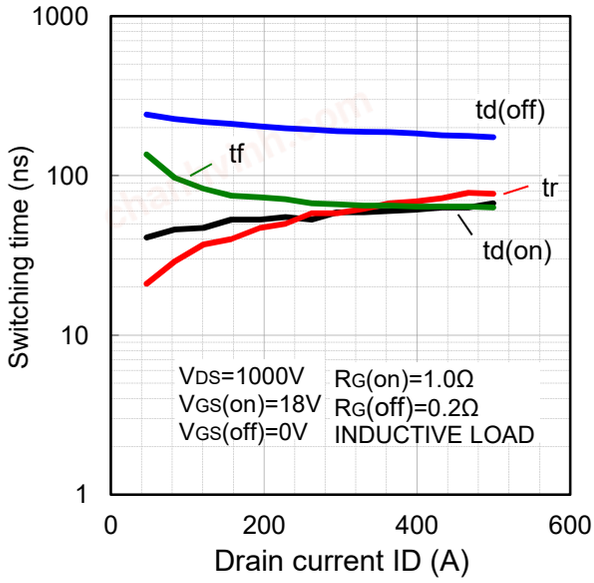


Fig.10 Switching time vs drain current at 125°C (TYP)

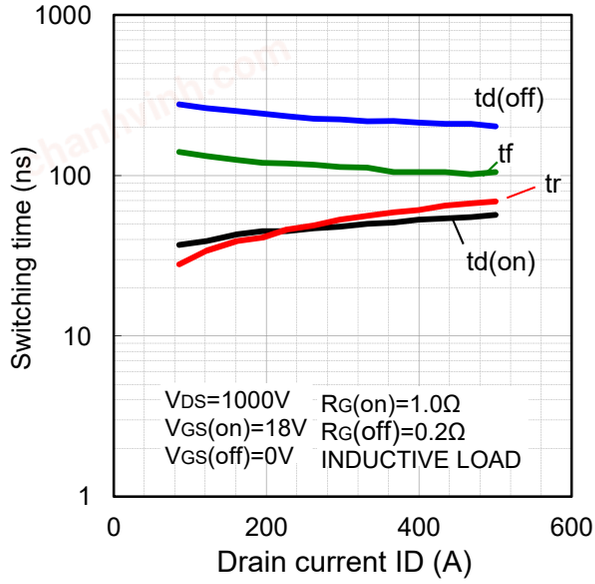


Fig.11 Switching time vs drain current at 150°C (TYP)


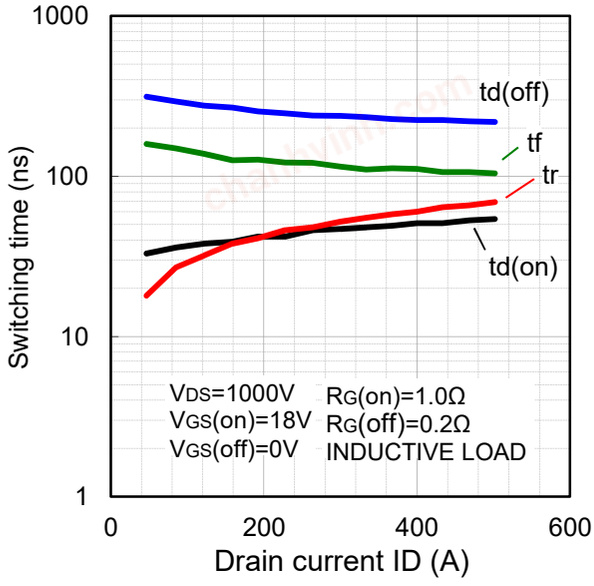


Fig.12 Switching loss vs drain current at 25°C (TYP)

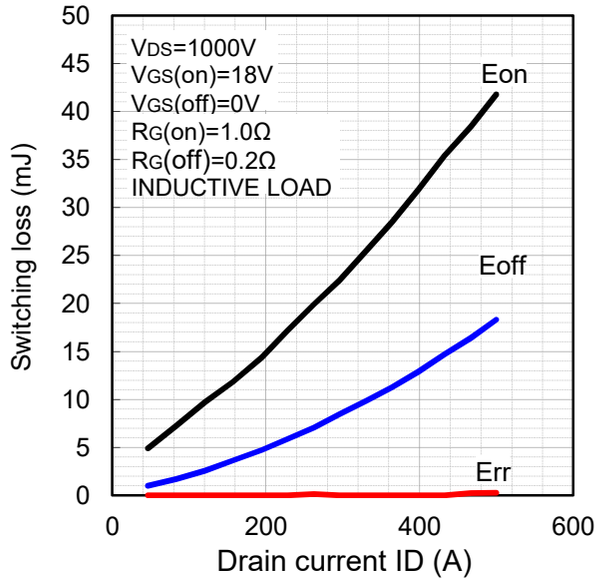

© 2018 ROHM Co., Ltd. All rights reserved.

chanhvinh.com

●Electrical characteristic curves (Typical)

Fig.13 Switching loss vs drain current at 125°C (TYP)

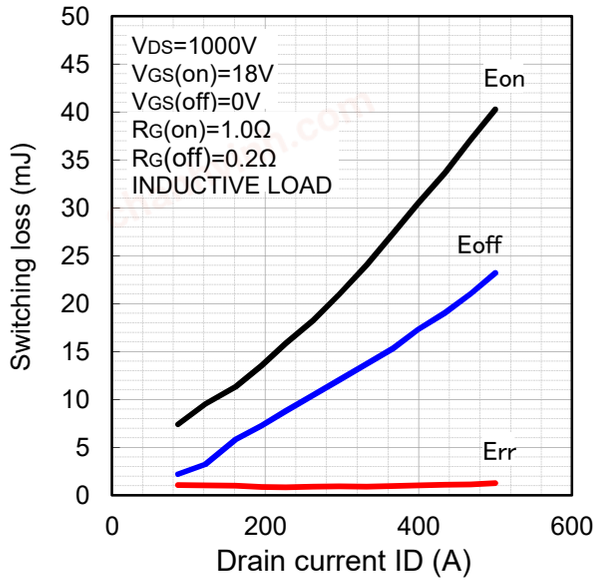


Fig.14 Switching loss vs drain current at 150°C (TYP)

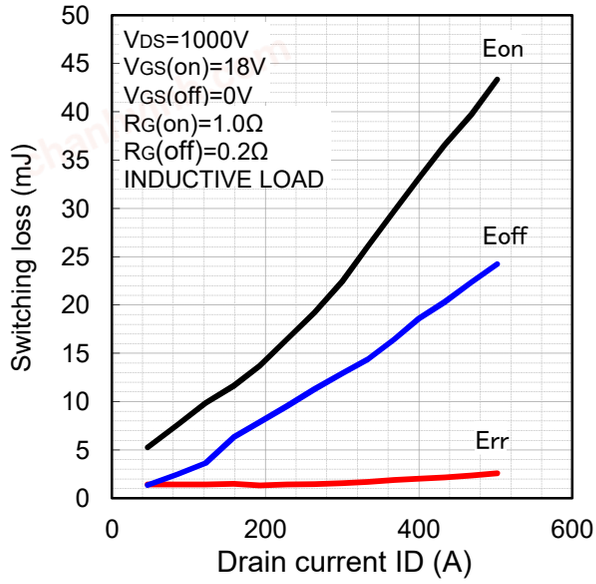


Fig.15 Recovery characteristic vs drain current at 25°C (TYP)


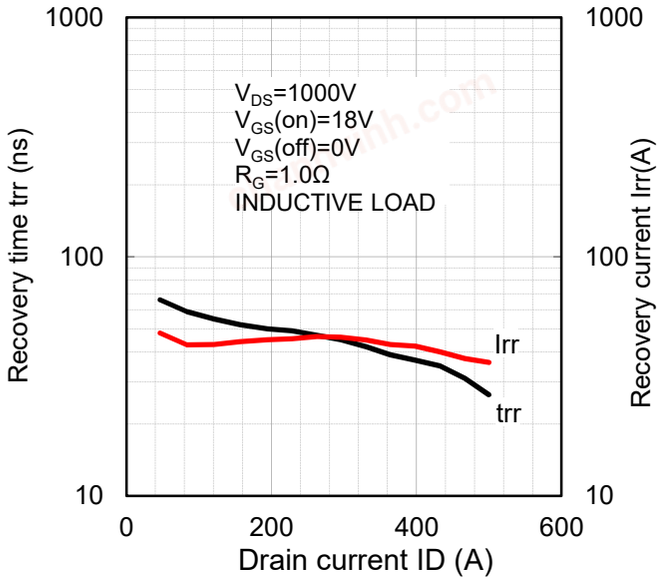


Fig.16 Recovery characteristic vs drain current at 125°C (TYP)

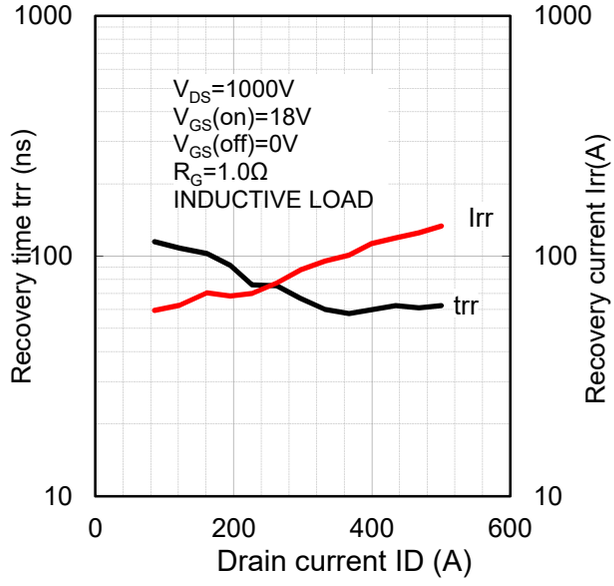

© 2018 ROHM Co., Ltd. All rights reserved.

chanhvinh.com

●Electrical characteristic curves (Typical)

Fig.17 Recovery characteristic vs drain current at 150°C (TYP)

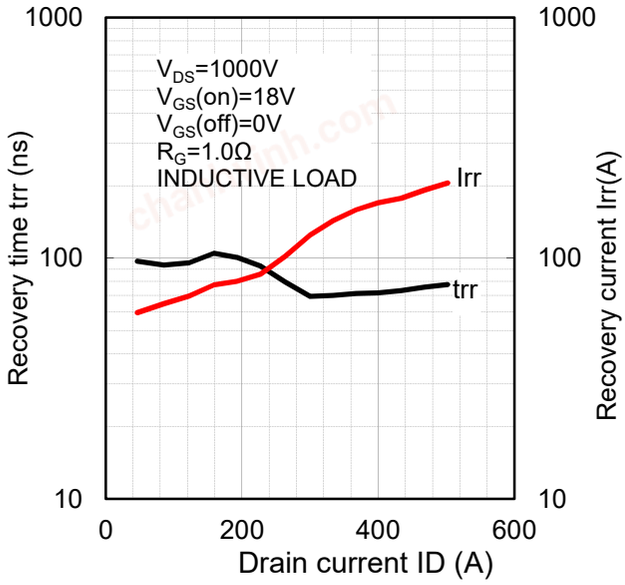


Fig.18 Switching time vs gate resistance at 25°C (TYP)

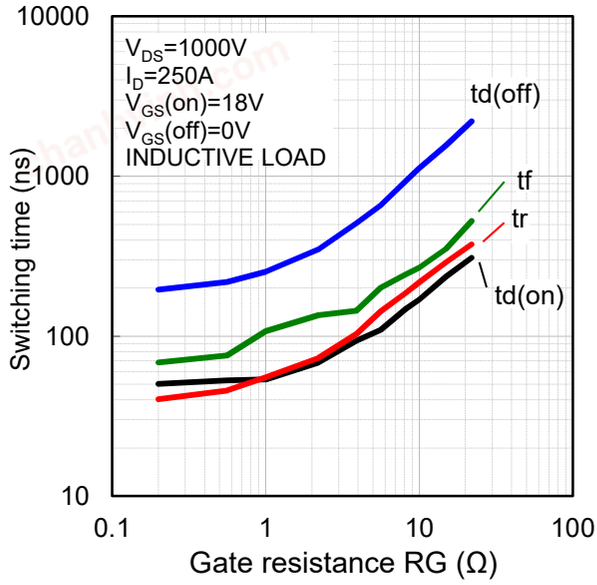


Fig.19 Switching time vs gate resistance at 125°C (TYP)


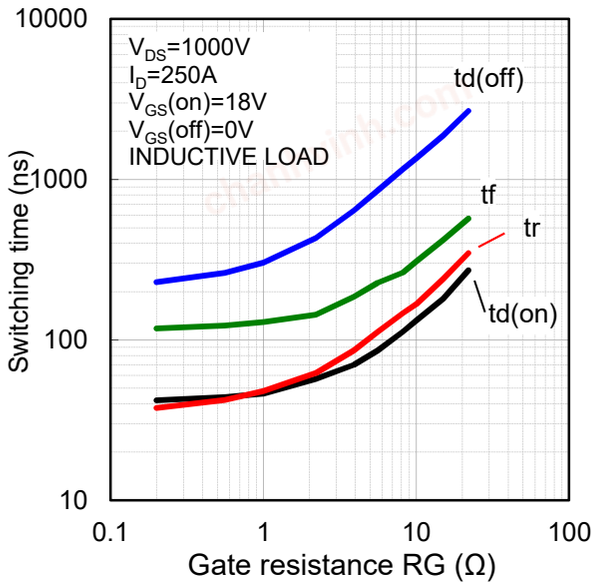


Fig.20 Switching time vs gate resistance at 150°C (TYP)

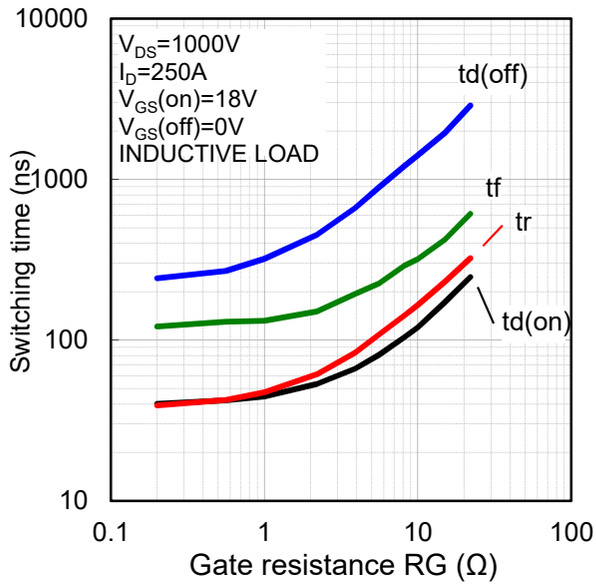

© 2018 ROHM Co., Ltd. All rights reserved.

chanhvinh.com

●Electrical characteristic curves (Typical)

Fig.21 Switching loss vs gate resistance at 25°C (TYP)

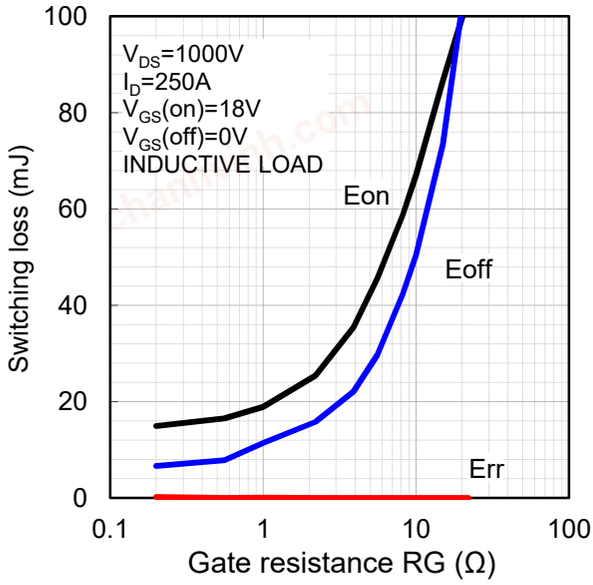


Fig.22 Switching loss vs gate resistance at 125°C (TYP)


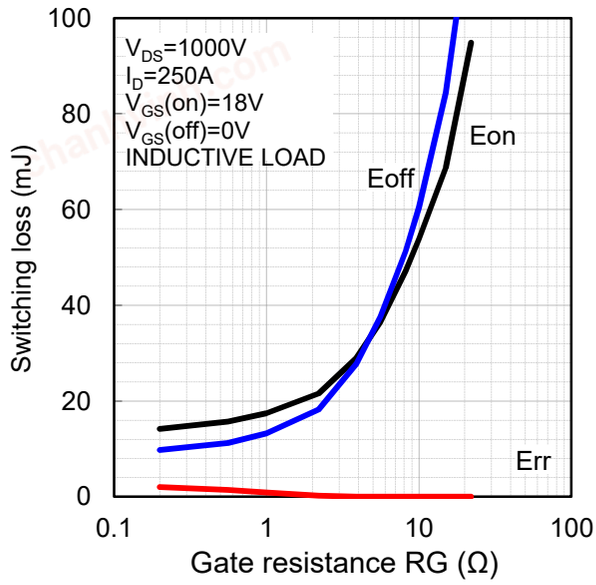


Fig.23 Switching loss vs gate resistance at 150°C (TYP)

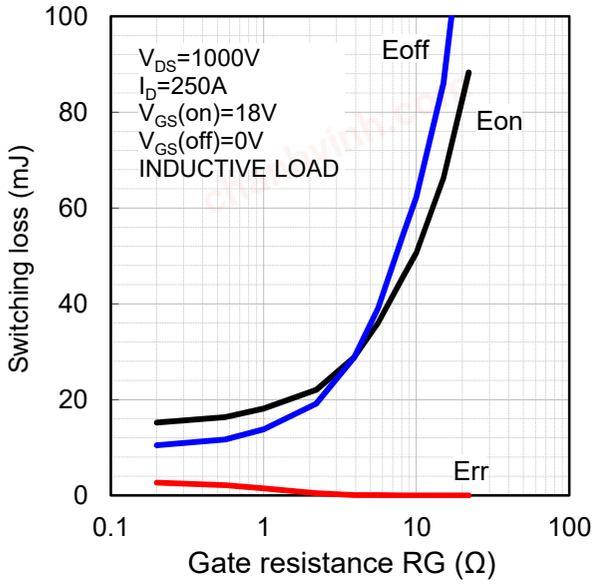

© 2018 ROHM Co., Ltd. All rights reserved.

chanhvinh.com

●Electrical characteristic curves (Typical)

Fig.24 Capacitance vs Drain source voltage (TYP)

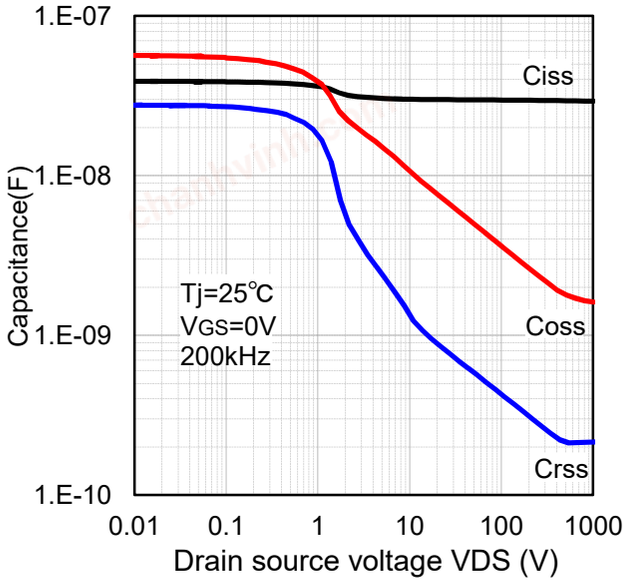


Fig.25 Gate charge characteristic (TYP)


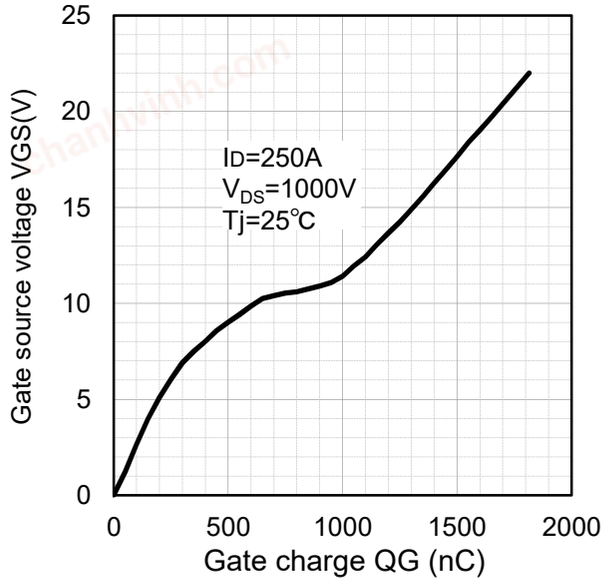


Fig.26 Transient thermal impedance (TYP)

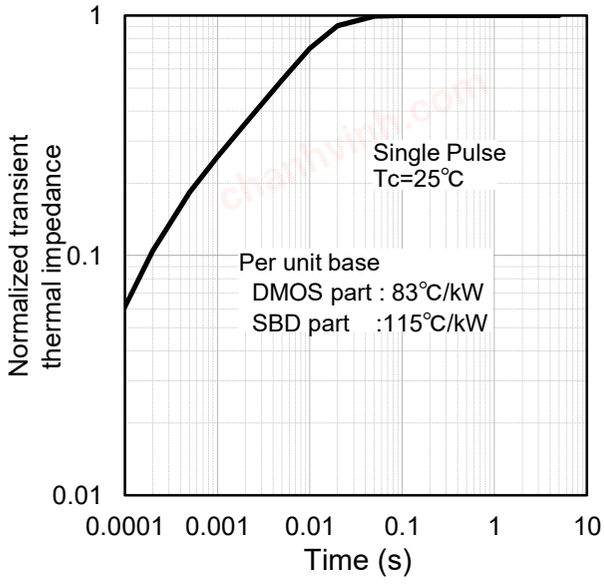

© 2018 ROHM Co., Ltd. All rights reserved.

chanhvinh.com

Notes

1) The information contained herein is subject to change without notice.

2) Before you use our Products, please contact our sales representative and verify the latest specifications.

3) Although ROHM is continuously working to improve product reliability and quality, semiconductors can break down and malfunction due to various factors.
Therefore, in order to prevent personal injury or fire arising from failure, please take safety measures such as complying with the derating characteristics, implementing redundant and fire prevention designs, and utilizing backups and fail-safe procedures. ROHM shall have no responsibility for any damages arising out of the use of our Poducts beyond the rating specified by ROHM.

4) Examples of application circuits, circuit constants and any other information contained herein are provided only to illustrate the standard usage and operations of the Products. The peripheral conditions must be taken into account when designing circuits for mass production.

5) The technical information specified herein is intended only to show the typical functions of and examples of application circuits for the Products. ROHM does not grant you, explicitly or implicitly, any license to use or exercise intellectual property or other rights held by ROHM or any other parties. ROHM shall have no responsibility whatsoever for any dispute arising out of the use of such technical information.

6) The Products specified in this document are not designed to be radiation tolerant.

7) For use of our Products in applications requiring a high degree of reliability (as exemplified below), please contact and consult with a ROHM representative : transportation equipment (i.e. cars, ships, trains), primary communication equipment, traffic lights, fire/crime prevention, safety equipment, medical systems, and power transmission systems.

8) Do not use our Products in applications requiring extremely high reliability, such as aerospace equipment, nuclear power control systems, and submarine repeaters.

9) ROHM shall have no responsibility for any damages or injury arising from non-compliance with the recommended usage conditions and specifications contained herein.

10) ROHM has used reasonable care to ensure the accuracy of the information contained in this document. However, ROHM does not warrants that such information is error-free, and ROHM shall have no responsibility for any damages arising from any inaccuracy or misprint of such information.

11) Please use the Products in accordance with any applicable environmental laws and regulations, such as the RoHS Directive. For more details, including RoHS compatibility, please contact a ROHM sales office. ROHM shall have no responsibility for any damages or losses resulting non-compliance with any applicable laws or regulations.

12) When providing our Products and technologies contained in this document to other countries, you must abide by the procedures and provisions stipulated in all applicable export laws and regulations, including without limitation the US Export Administration Regulations and the Foreign Exchange and Foreign Trade Act.

13) This document, in part or in whole, may not be reprinted or reproduced without prior consent of ROHM.

ROHM SEMICONDUCTOR

Thank you for your accessing to ROHM product informations.
More detail product informations and catalogs are available, please contact us.

ROHM Customer Support System

http://www.rohm.com/contact/

© 2012 ROHM Co., Ltd. All rights reserved.