chanhvinh.com

Datasheet

Automotive IPD series

1ch High-side Switch IC

BV1HD090FJ-C

Features

- AEC-Q100 qualified (Note 1)
- Built-in overcurrent limiting circuit (OCP)
- Built-in thermal shutdown circuit (TSD)
- Built-in open load detection function (at output OFF)
- Direct control enabled from CMOS logic IC, etc.
- Built-in under voltage lockout function
- Built-in Output State Pin
- On-Resistance R_{ON}=90mΩ(Typ) (V_{BB}=14V, Tj=25°C, I_{OUT}=0.5A)
- Monolithic power management IC with the control block (CMOS) and power MOS FET mounted on a single chip
- Enables operation at low voltage down to 4.2V (Note 1:Grade1)

Product Summary

Wide Operating Input Range	4.5V to 36V
On-state Resistance (Tj=25°C, Typ)	90mΩ
Overcurrent limit (Tj=25°C, Typ)	5.5A
Active Clamp Energy (Tj=150°C)	68mJ

Package

SOP-J8

W(Typ) x D(Typ) x H(Max)
4.90mm x 6.00mm x 1.65mm



SOP-J8

General Description

BV1HD090FJ-C is an automotive 1ch high side switch IC, which has built-in overcurrent limiting circuit(OCP), thermal shutdown circuit(TSD), open load detection function (OLD) and under voltage lockout function (UVLO). It is also equipped with the diagnostic output when detecting an error (ST).

Applications

- Onboard vehicle device (engine ECU, air conditioner, body-control etc)

Block Diagram

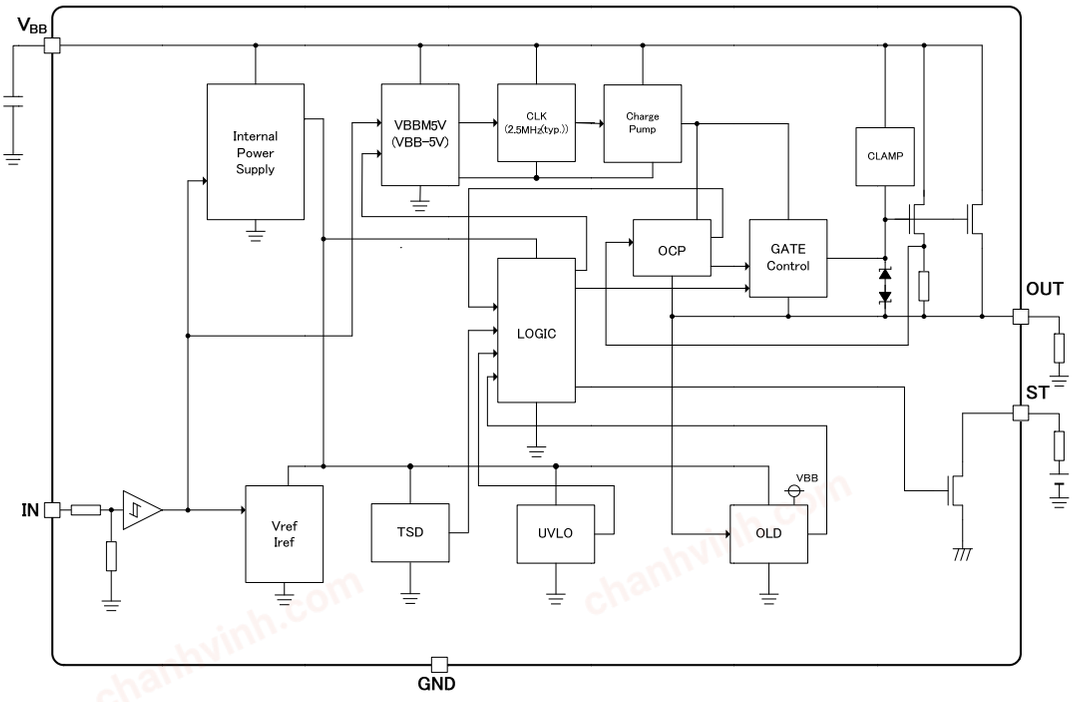


Figure 1. Block Diagram

○Product structure : Silicon monolithic integrated circuit ○This product has no designed protection against radioactive rays

© 2016 ROHM Co., Ltd. All rights reserved.

chanhvinh.com

Pin Configurations

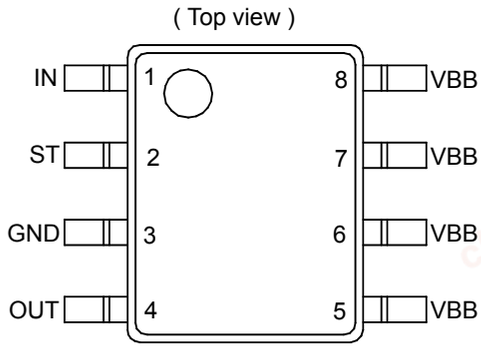


Figure 2. Pin Configurations

Pin Descriptions

Pin No.	Unit	Function
1	IN	Input pin. This input has a pull-down resister.
2	ST	Self-diagnostic output terminal, which outputs “Low” at overcurrent or overtemperature, and “High” at open load. It has an n-channel open drain circuit structure.
3	GND	GND pin
4	OUT	Output terminal, which limits the output current to protect the IC when the load is short-circuited and current exceeding the overcurrent detection value (2.7A min) flows to the output terminal.
5, 6, 7, 8	VBB	Power Supply Voltage

Definition

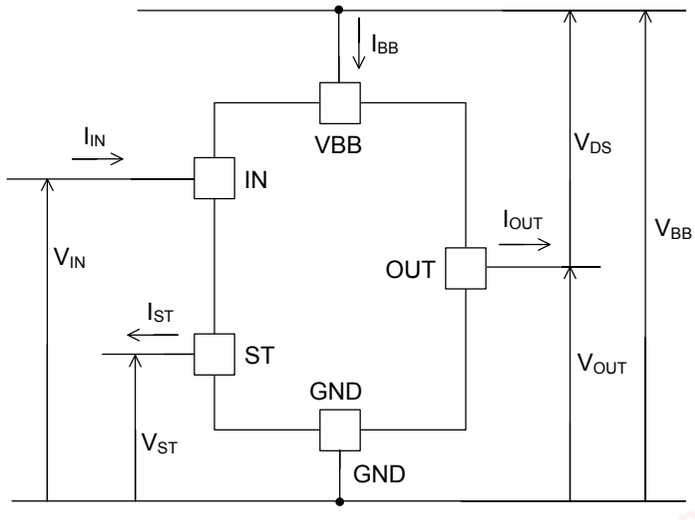


Figure 3. Voltage/Current Definition

© 2016 ROHM Co., Ltd. All rights reserved.

chanhvinh.com

Absolute Maximum Ratings (Tj = 25°C)

Parameter	Symbol	Rating	Unit
VBB-OUT Voltage	V_{DS}	45 (internal limit)	V
Power Supply Voltage	V_{BB}	40	V
Input Voltage	V_{IN}	-0.3 to +7.0	V
Diagnostic Output Voltage	V_{ST}	-0.3 to +7.0	V
Output Current	I_{OUT}	9.0(Internal limit I_{OC}) (Note 1)	A
Diagnostic Output Current	I_{ST}	10	mA
Junction Temperature Range	T_j	-40 to +150	°C
Storage Temperature Range	T_{stg}	-55 to +150	°C
Maximum Junction Temperature	T_{jmax}	+150	°C
Active Clamp Energy (single pulse) $T_{j(start)}$=25°C(Note 2)	$E_{AS(25°C)}$	242	mJ
Active Clamp Energy (single pulse) $T_{j(start)}$=150°C(Note 2) (Note 3)	$E_{AS(150°C)}$	68	mJ

(Note 1) Internally limited by the overcurrent limiting circuit. Value is a maximum.
(Note 2) Maximum Active clamp energy, using single non-repetitive pulse of I_{AR} = 1.5A and V_{BB} = 14V.
During demagnetization of inductive loads, energy must be dissipated in the BV1HD090FJ-C.
This energy can be calculated with following equation:

$$E_{AS} = V_{DS} \times \frac{L}{R_L} \times [\frac{V_{BB} - V_{DS}}{R_L} \times \ln\left(1 - \frac{R_L \times I_{AR}}{V_{BB} - V_{DS}}\right) + I_{AR}]$$

Following equation simplifies under the assumption of R_L=0Ω.

$$E_{AS} = \frac{1}{2} \times L \times I_{AR}^2 \times (1 - \frac{V_{BB}}{V_{BB} - V_{DS}})$$

(Note 3) This active clamp energy is guaranteed by design.

Recommended Operating Conditions (Tj= -40°C to +150°C)

Parameter	Symbol	Min	Typ	Max	Unit
Power Supply Voltage	V_{BB}	4.5	14	36	V

© 2016 ROHM Co., Ltd. All rights reserved.


chanhvinh.com

Thermal Resistance(Note 1)

Parameter	Symbol	Typ	Unit	Condition
SOP-J8				
Between Junction and Surroundings Temperature Thermal Resistance	θ_{JA}	143.7	°C / W	1s(Note 2)
		86.9	°C / W	2s(Note 3)
		67.5	°C / W	2s2p(Note 4)

(Note 1) The thermal impedance is based on JESD51 - 2A (Still - Air) standard. It is used the chip of BV1HD090FJ-C
(Note 2) JESD51 - 3 standard FR4 114.3 mm × 76.2 mm × 1.57 mm 1-layer (1s)
(Top copper foil: ROHM recommended footprint + wiring to measure, 2 oz. copper.)
(Note 3) JESD51 -5 standard FR4 114.3 mm × 76.2 mm × 1.60 mm 2-layer (2s)
(Top copper foil: ROHM recommended footprint + wiring to measure /
Copper foil area on the reverse side of PCB: 74.2 mm x 74.2 mm, 2 oz. copper (top & reverse side))
(Note 4) JESD51 -5 / -7 standard FR4 114.3 mm × 76.2 mm × 1.60 mm 4-layer (2s2p)
(Top copper foil: ROHM recommended footprint + wiring to measure /
2 inner layers and copper foil area on the reverse side of PCB: 74.2 mm x 74.2 mm,
copper (top & reverse side / inner layers) 2oz. / 1oz.)

■ PCB Layout 1 Layer (1s)

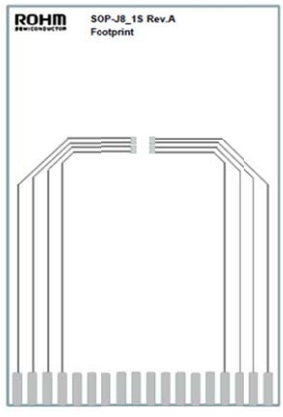

Footprint Only

Figure 4. PCB Layout 1 Layer (1s)

Dimension	Value
Board Finish Thickness	1.57 mm ± 10%
Board Dimension	76.2 mm x 114.3 mm
Board Material	FR4
Copper Thickness (Top/Bottom Layers)	0.070mm (Cu:2oz)

© 2016 ROHM Co., Ltd. All rights reserved.

chanhvinh.com

■ PCB Layout 2 Layers (2s)

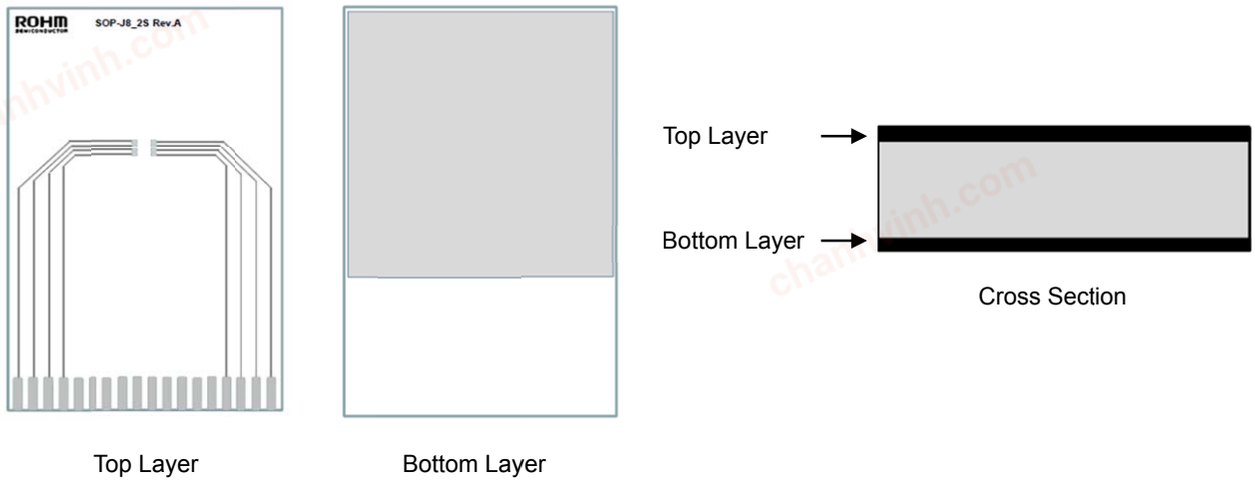


Figure 5. PCB Layout 2 Layers (2s)

Dimension	Value
Board Finish Thickness	1.60 mm ± 10%
Board Dimension	76.2 mm x 114.3 mm
Board Material	FR4
Copper Thickness (Top/Bottom Layers)	0.070mm (Cu + Plating)

■ PCB Layout 4 Layers(2s2p)

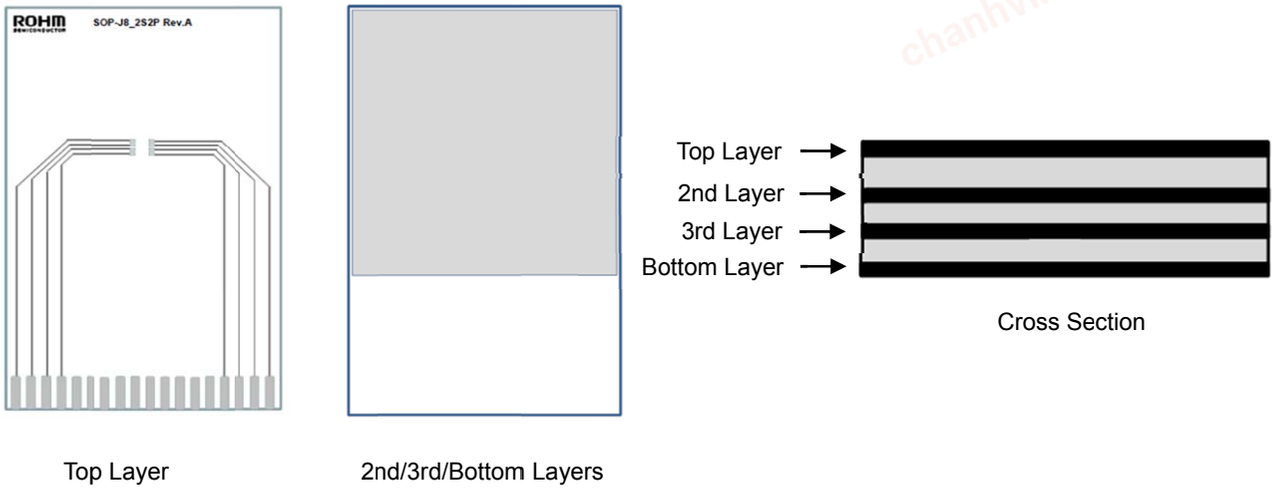


Figure 6. PCB Layout 4 Layers (2s2p)

Dimension	Value
Board Finish Thickness	1.60 mm ± 10%
Board Dimension	76.2 mm x 114.3 mm
Board Material	FR4
Copper Thickness (Top/Bottom Layers)	0.070mm (Cu + Plating)
Copper Thickness (Inner Layers)	0.035mm

© 2016 ROHM Co., Ltd. All rights reserved.

chanhvinh.com

■ Thermal Resistance (Single Pulse)

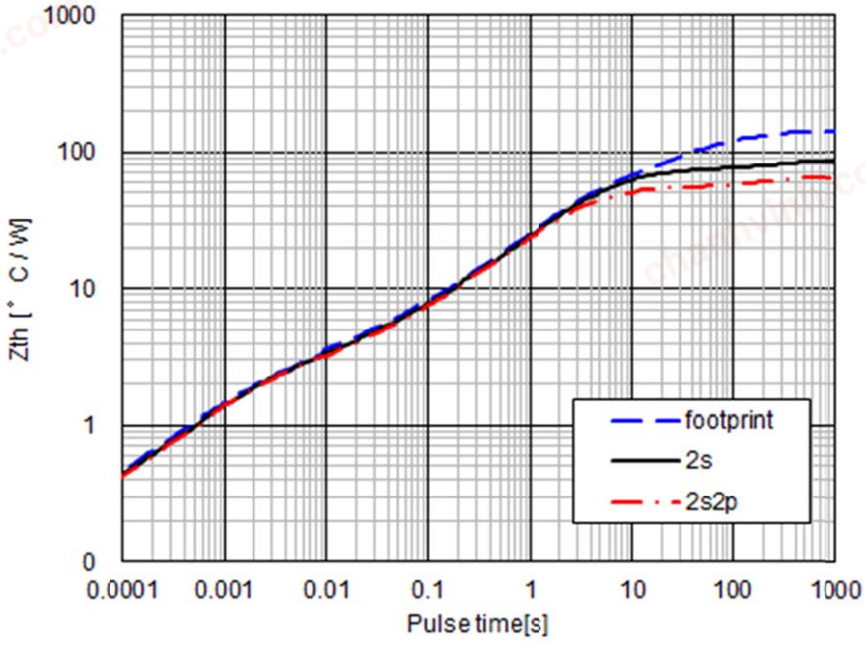


Figure 7. Thermal Resistance

© 2016 ROHM Co., Ltd. All rights reserved.

chanhvinh.com

Electrical Characteristics

(Unless otherwise specified Tj = -40 °C to +150 °C, V_{BB} = 4.5V to 36V)

Parameter	Symbol	Min	Typ	Max	Unit	Conditions
Power Supply						
Standby Current	I_{BBS1}	-	200	330	μA	V_{BB}=14V, V_{IN}=0V, V_{OUT}=0V, Tj=25°C
	I_{BBS2}	-	250	500	μA	V_{BB}=14V, V_{IN}=0V, V_{OUT}=0V, Tj=150°C
Bias Current	I_{BB}	-	3.0	6.0	mA	V_{BB}=14V, V_{IN}=5V, V_{OUT}=open
Under Voltage Lockout Threshold	V_{UVLO}	-	3.6	4.2	V	
Under Voltage Hysteresis Threshold	V_{UVHYS}	-	0.2	-	V	
Input						
High-Level Input Voltage	V_{INH}	2.8	-	-	V	
Low-Level Input Voltage	V_{INL}	-	-	1.5	V	
Input Hysteresis	V_{INHYS}	-	0.4	-	V	
High-Level Input Current	I_{INH}	-	50	150	μA	V_{IN}=5V
Low-Level Input Current	I_{INL}	-10	-	+10	μA	V_{IN}=0V
Power MOS						
On-State Resistance	R_{ON1}	-	90	120	mΩ	V_{BB}=8V to 36V, Tj=25°C
	R_{ON2}	-	160	215	mΩ	V_{BB}=8V to 36V, Tj=150°C
	R_{ON3}	-	-	500	mΩ	V_{BB}=4.2V
Leak Current	I_{OUTL1}	-	130	200	μA	V_{BB}=14V, V_{IN}=0V, V_{OUT}=0V, Tj=25°C
	I_{OUTL2}	-	160	250	μA	V_{BB}=14V, V_{IN}=0V, V_{OUT}=0V, Tj=150°C
	I_{OUTH3}	-160	-90	-	μA	V_{BB}=14V, V_{IN}=0V, V_{OUT}=V_{BB}, Tj=25°C
	I_{OUTH4}	-400	-110	-	μA	V_{BB}=14V, V_{IN}=0V, V_{OUT}=V_{BB}, Tj=150°C
Slew Rate	SR_{ON}	0.23	0.70	-	V/μs	V_{BB}=14V, R_L=10Ω, Tj=25°C
	SR_{OFF}	0.53	1.60	-	V/μs	V_{BB}=14V, R_L=10Ω, Tj=25°C
Propagation Delay at ON	t_{OUTON}	-	30	90	μs	V_{BB}=14V, R_L=10Ω, Tj=25°C
Propagation Delay at OFF	t_{OUTOFF}	-	20	60	μs	V_{BB}=14V, R_L=10Ω, Tj=25°C
Output Clamp Voltage	V_{DS}	45	50	56.5	V	V_{IN}=0V, I_{OUT}=-10mA
Output States						
ST ON Voltage	V_{STL}	-	-	0.3	V	V_{BB}=6V to 36V, V_{IN}=0V, I_{ST}=-0.6mA
ST Leak Current	I_{STH}	-10	-	-	μA	V_{IN}=5V, V_{ST}=5V
Diagnostic Output Delay Time at Input ON	t_{STON}	-	11	33	μs	V_{BB}=14V, R_L=10Ω, Tj=25°C
Diagnostic Output Delay Time at Input OFF	t_{STOFF}	-	30	90	μs	V_{BB}=14V, R_L=10Ω, Tj=25°C
Protection Circuit						
Overcurrent Detection Current	I_{OC}	2.7	5.5	9.0	A	
Overcurrent Detection OFF Time	t_{OCOFF}	-	550	1100	μs	
Overcurrent Detection ON Duty	D_{OC}	-	-	30	%	
Open Load Detection Resistance (Note1)	R_{OLD}	6	-	36	kΩ	V_{IN}=0V
Open Load Detection Voltage (Note1)	V_{OLD}	1.5	-	2.5	V	V_{IN}=0V
TSD Detection Temperature(Note2)	T_{TSD}	175	190	205	°C	
TSD Hysteresis(Note2)	T_{TSDHYS}	-	15	-	°C	

(Note1) The detectable power voltage range for open load is V_{BB} ≥ 6V.
(Note2) This temperature is guaranteed by design.

© 2016 ROHM Co., Ltd. All rights reserved.

chanhvinh.com

Typical Performance Curves

(Unless otherwise specified V_{BB} =14V, V_{IN}=5V, Tj=25°C)

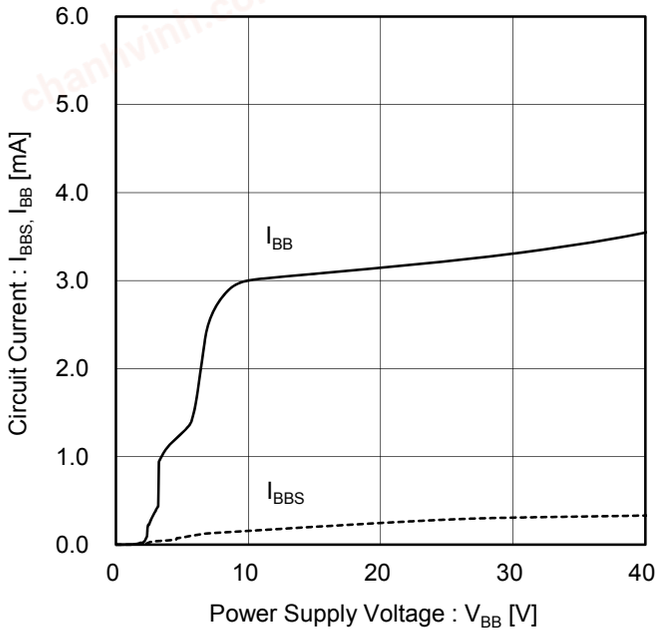


Figure 8. Circuit Current vs. Power Supply Voltage

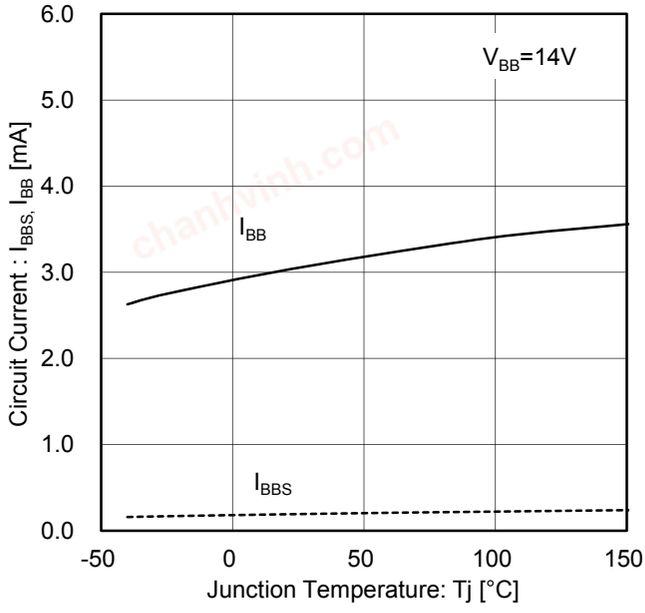


Figure 9. Circuit Current vs. Temperature

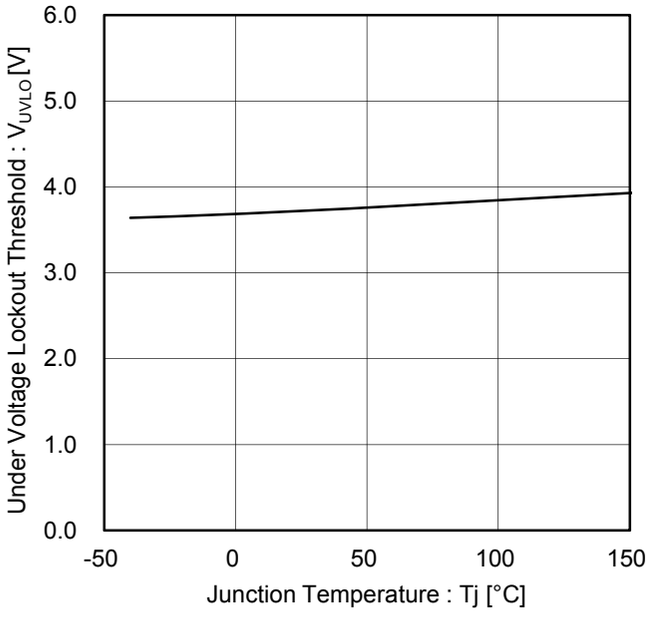


Figure 10. Under Voltage Lockout Threshold vs. Temperature

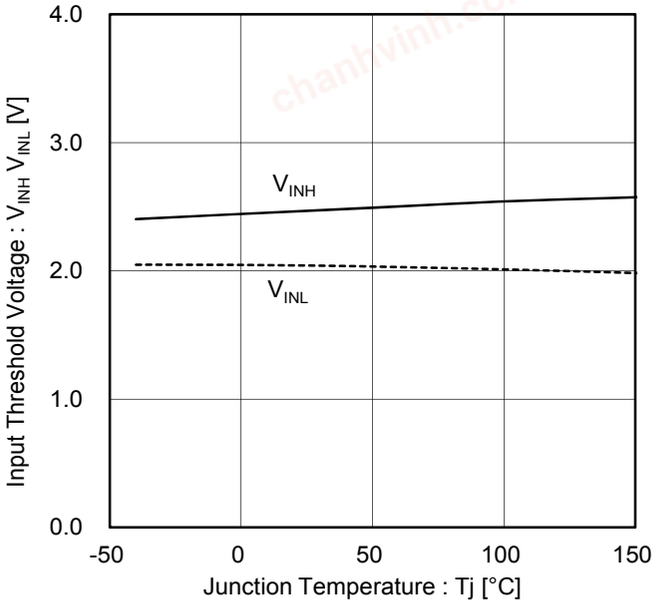


Figure 11. Input Threshold Voltage vs. Temperature

© 2016 ROHM Co., Ltd. All rights reserved.

chanhvinh.com

Typical Performance Curves - continued

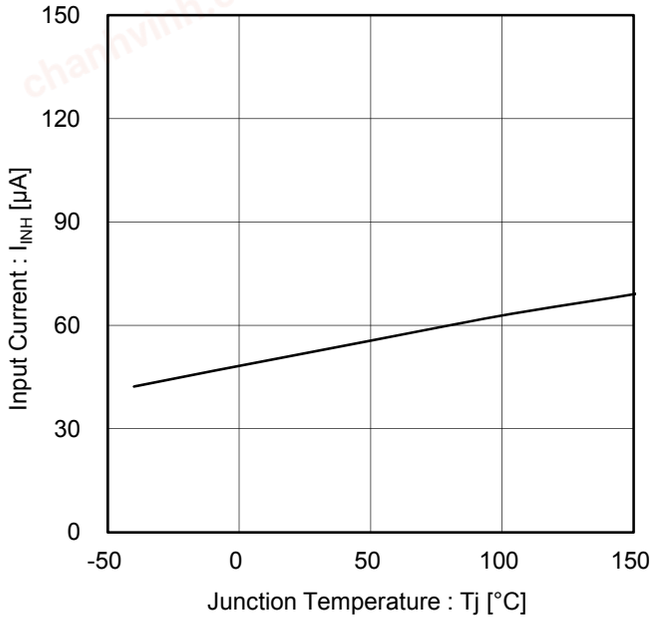


Figure 12. Input Current vs. Temperature

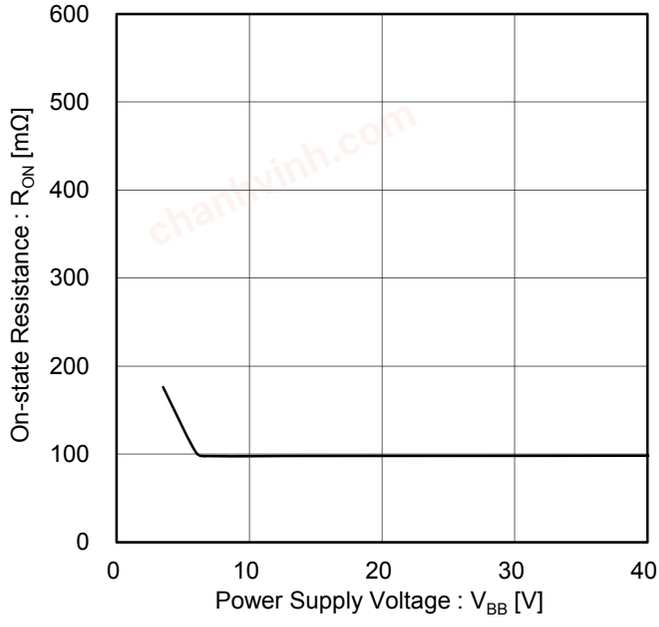


Figure 13. On-state Resistance vs. Power Supply Voltage

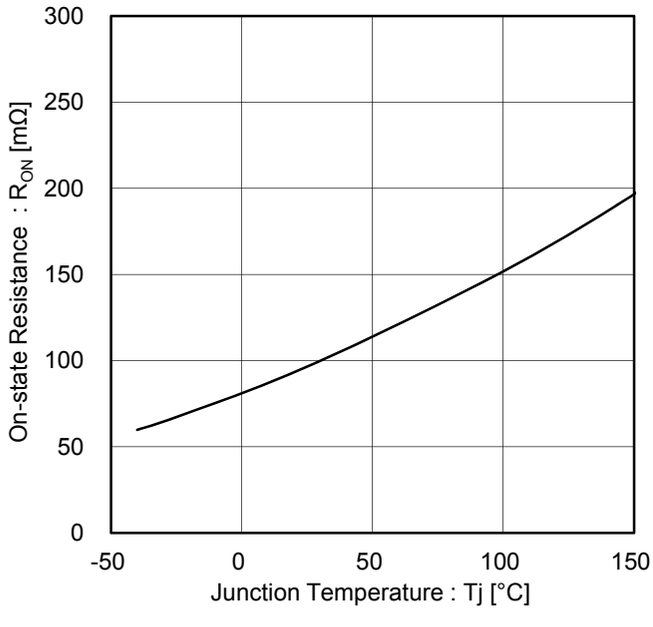


Figure 14. On-state Resistance vs. Temperature

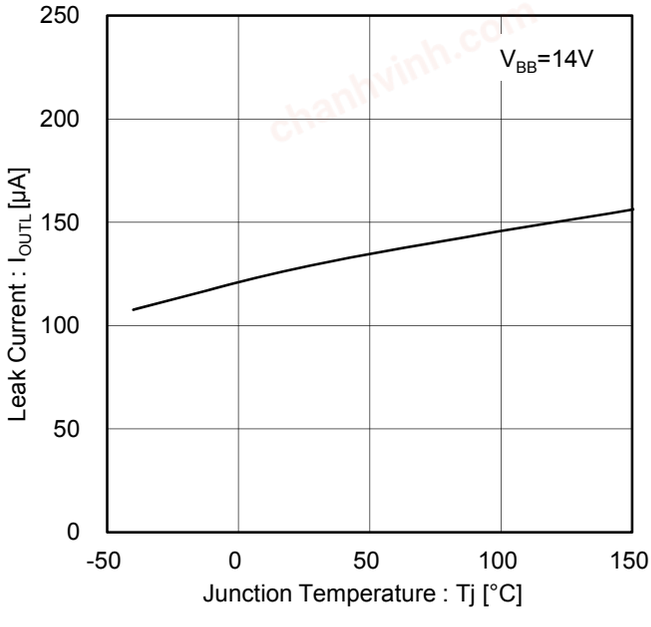


Figure 15. Leak Current vs. Temperature

© 2016 ROHM Co., Ltd. All rights reserved.

chanhvinh.com

Typical Performance Curves - continued

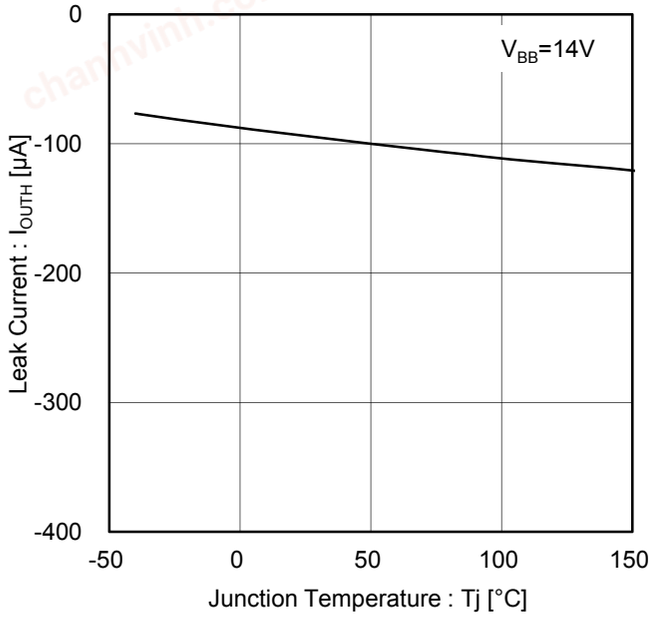


Figure 16. Leak Current vs. Temperature

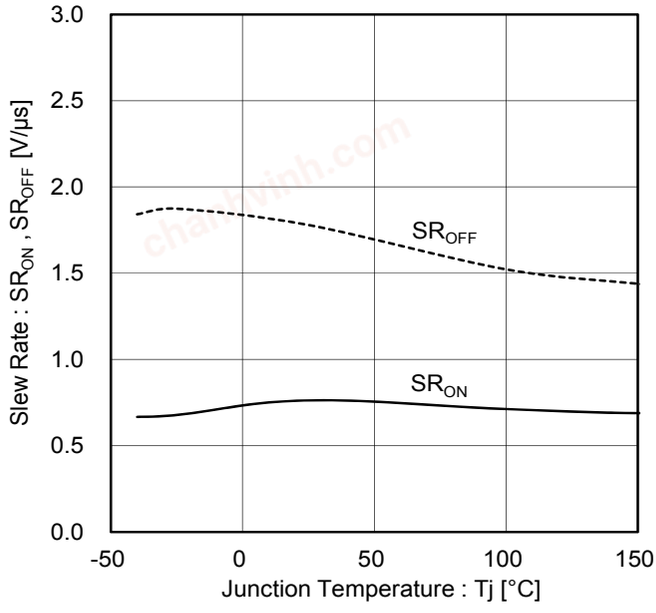


Figure 17. Slew Rate vs. Tempareture

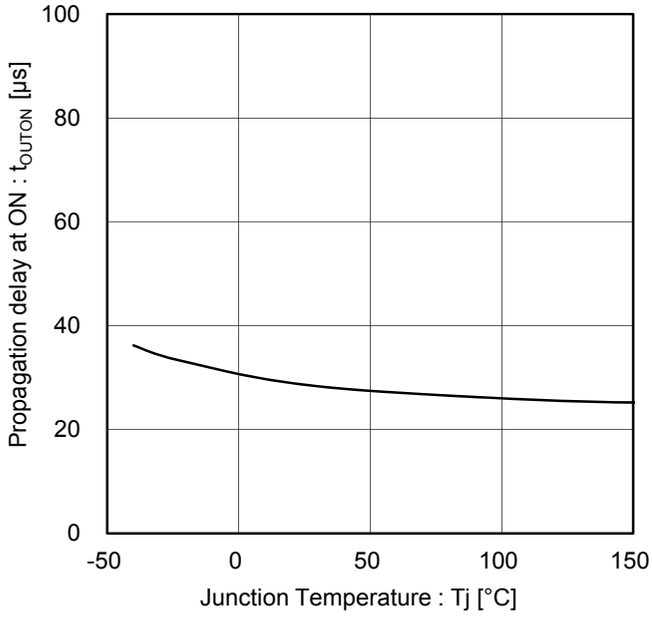


Figure 18. Propagation Delay at ON vs. Temperature

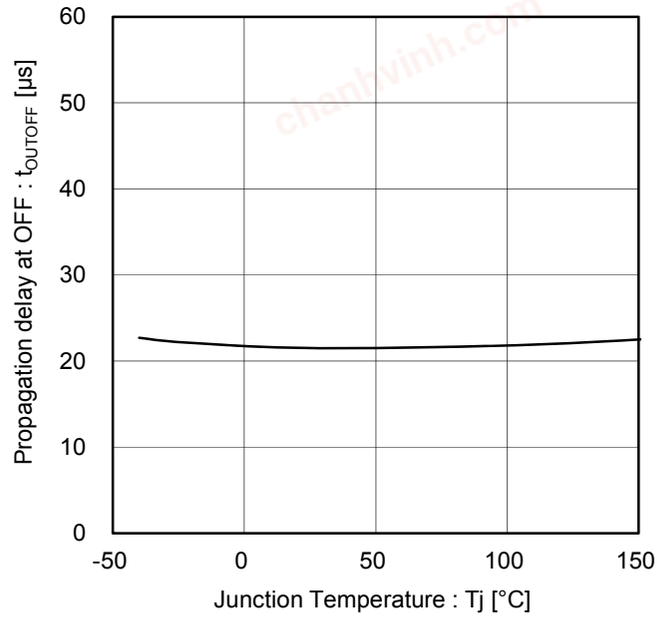


Figure 19. Propagation Delay at OFF vs. Temperature

© 2016 ROHM Co., Ltd. All rights reserved.

chanhvinh.com

Typical Performance Curves - continued

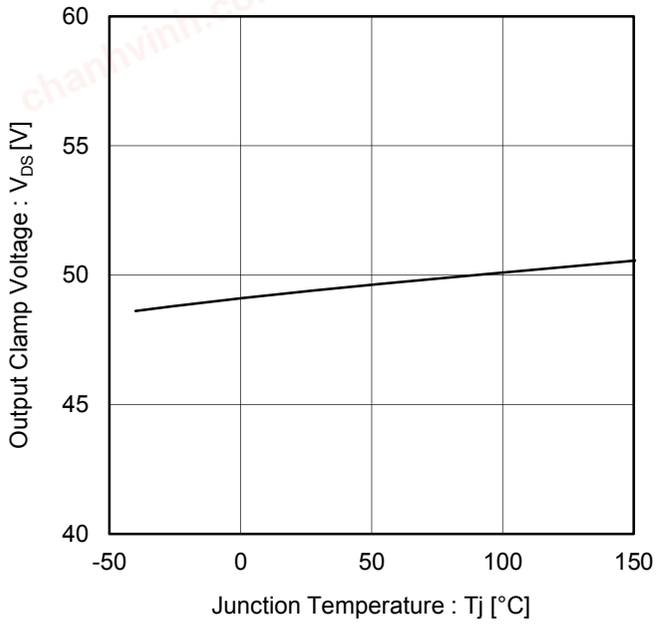


Figure 20. Output Clamp Voltage vs. Temperature

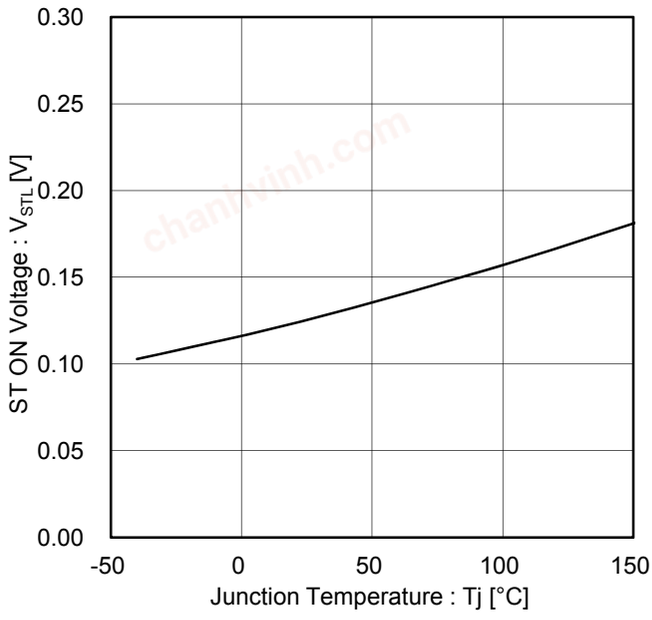


Figure 21. ST ON Voltage vs. Temperature

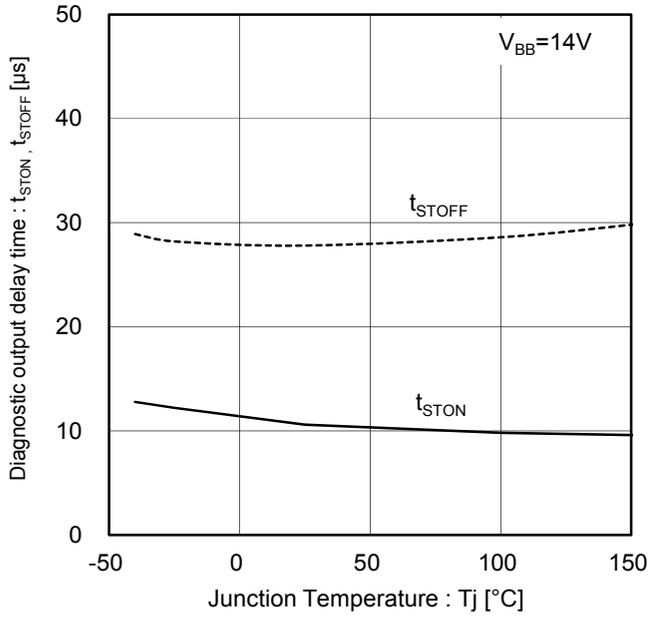


Figure 22. Diagnostic Output Delay Time vs. Temperature

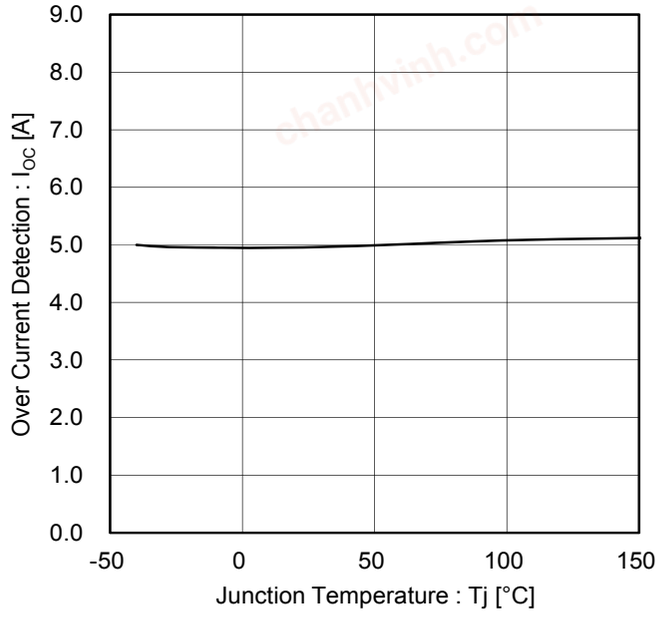


Figure 23. Overcurrent Detection vs. Temperature

© 2016 ROHM Co., Ltd. All rights reserved.

chanhvinh.com

Typical Performance Curves - continued

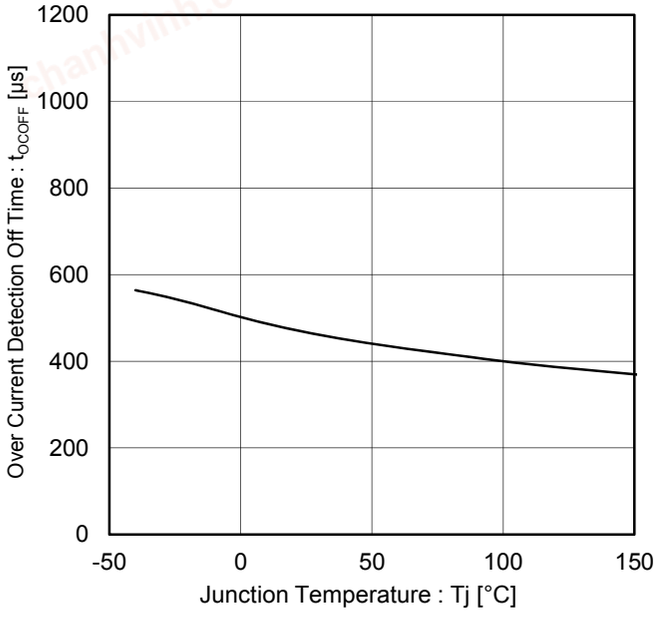


Figure 24. Overcurrent Detection Off Time vs. Temperature

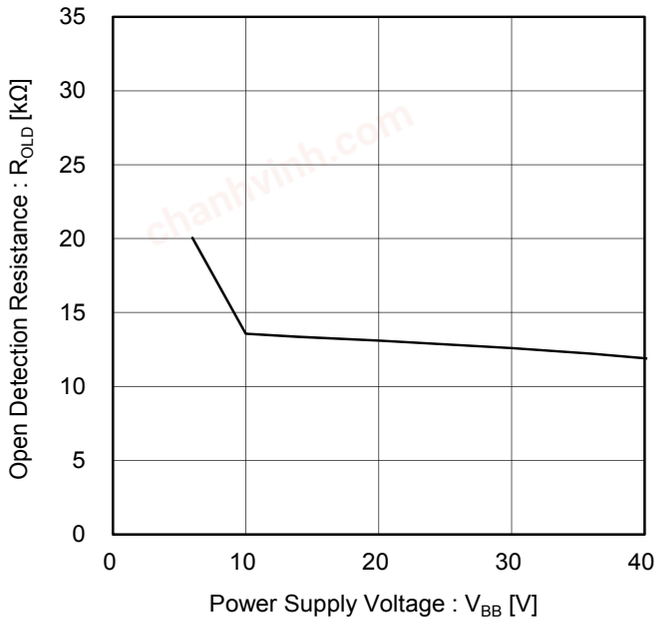


Figure 25. Open Detection Resistance vs. Power Supply Voltage

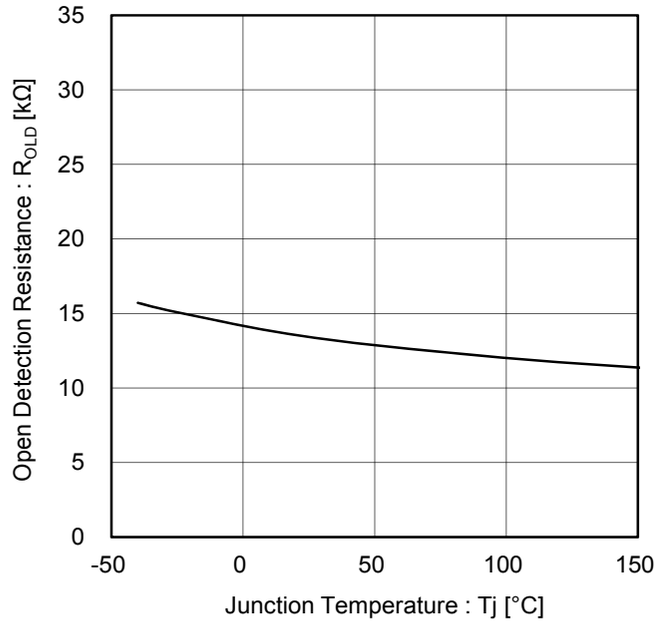


Figure 26. Open Detection Resistance vs. Temperature

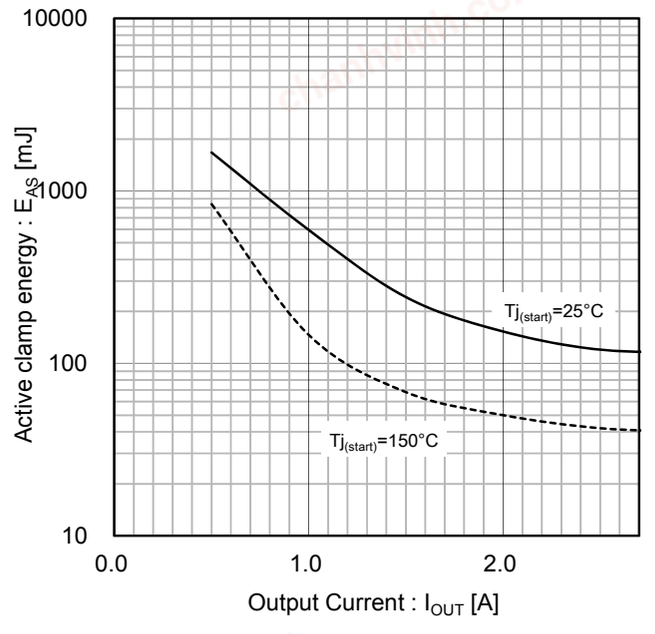


Figure 27. Active Clamp Energy vs. Output Current

© 2016 ROHM Co., Ltd. All rights reserved.

chanhvinh.com

Measurement Circuit




Figure 28. Standby Current
Bias Current
High-level Input Current
Low-level Input Current

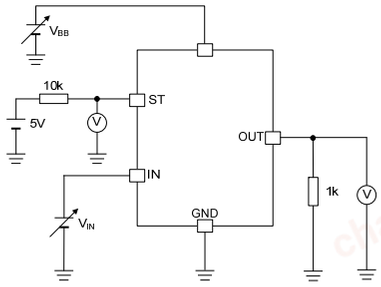


Figure 29. Under Voltage Lockout Threshold
Under Voltage Hysteresis Threshold
High-Level Input Voltage
Low-Level Input Voltage
Input Hysteresis
TSD Detection Temperature
TSD Hysteresis




Figure 30. On-state Resistance
Output Clamp Voltage




Figure 31. Leak Current

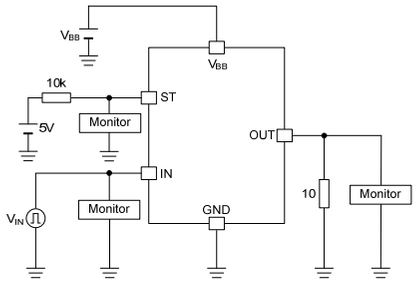


Figure 32. Slew Rate
Propagation Delay at ON
Propagation Delay at OFF
Diagnostic Output Delay Time at Input ON
Diagnostic Output Delay Time at Input OF

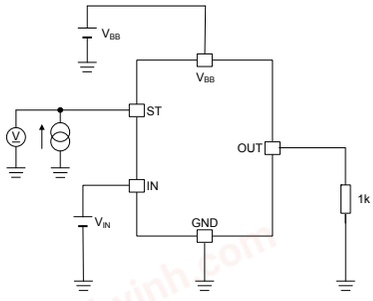


Figure 33. ST ON Voltage

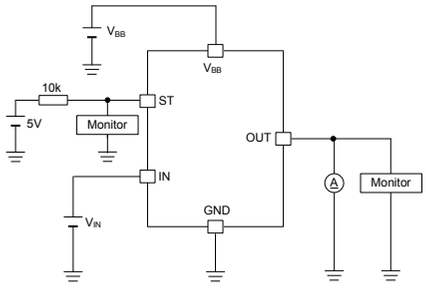


Figure 34. Overcurrent Detection Current
Overcurrent Detection OFF Time
Overcurrent Detection ON Duty




Figure 35. Open Load Detection Resistance
Open Load Detection Voltage

© 2016 ROHM Co., Ltd. All rights reserved.

chanhvinh.com

Measurement conditions

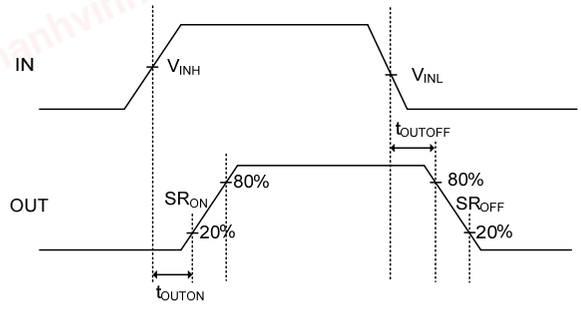


Figure 36. Slew Rate

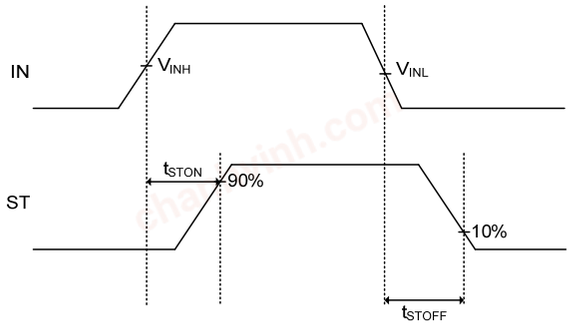


Figure 37. Diagnostic Output Delay Time

I/O Pin Truth Table

Operating Status	Input Signal	Output Level	Diagnostic Output (ST)	Error Detection Reset Condition
Normal	Low	Low	Low	-
	High	High	High	
Overtemperature	Low	Low	Low	Self-Reset
	High	Low	Low	
Overcurrent	Low	Low	Low	Self-Reset
	High	Switching	Low	
Open Load Detected	Low	High	High	Self-Reset
	High	High	High	

Timing Chart


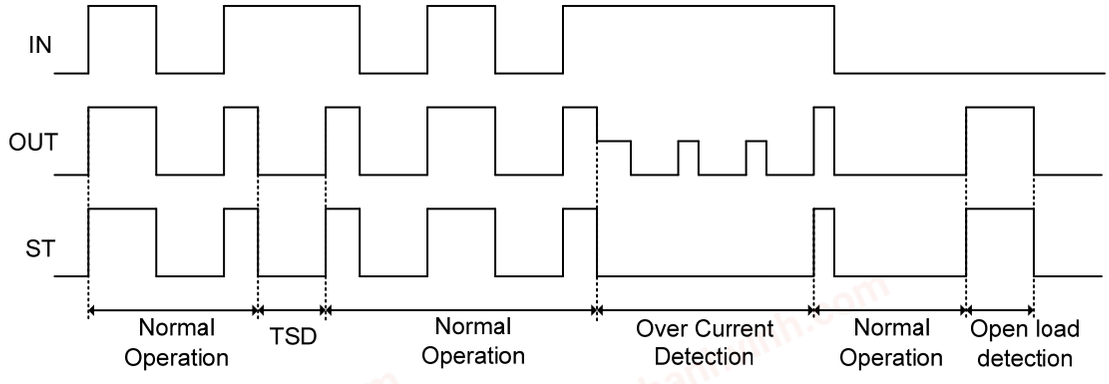


Figure 38. Timing Chart

© 2016 ROHM Co., Ltd. All rights reserved.

chanhvinh.com

I/O Equivalent Circuits

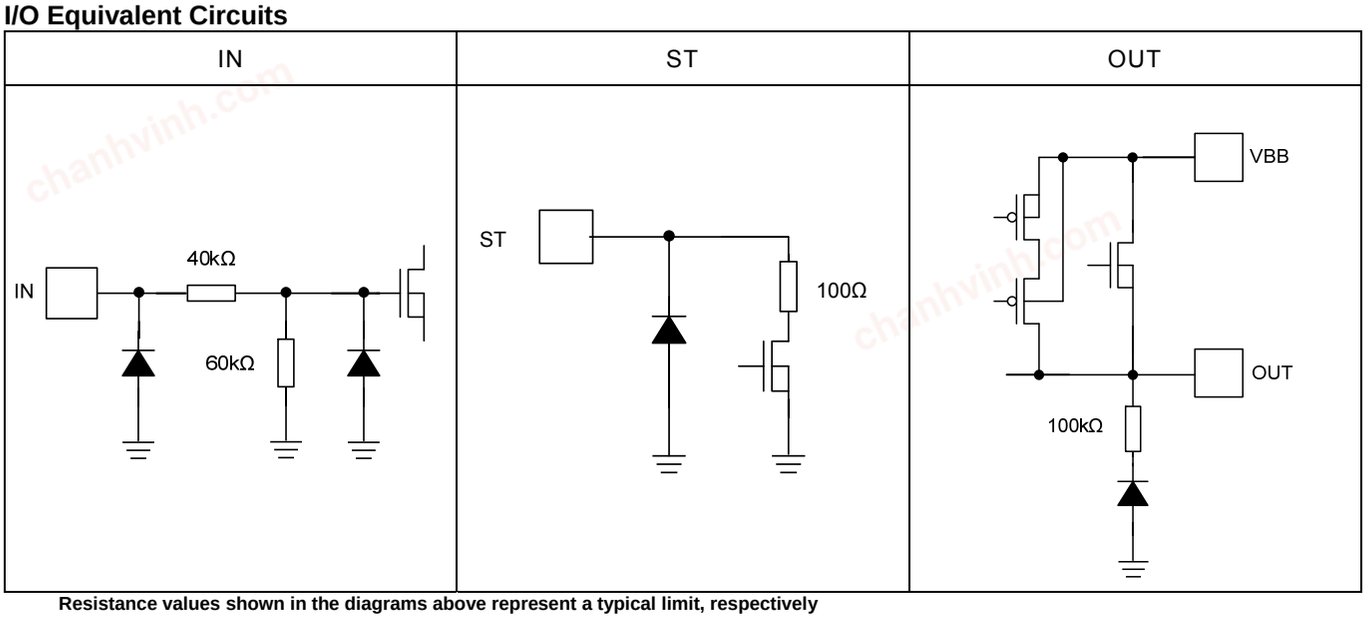

Resistance values shown in the diagrams above represent a typical limit, respectively

Figure 39. I/O Equivalent Circuits

Application Circuits

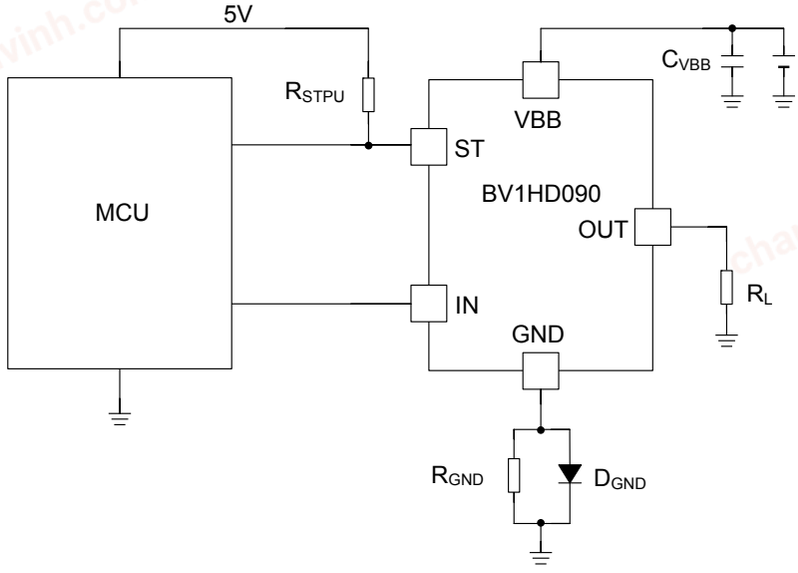


Figure 40. Application Circuits

Symbol	Value	Purpose
R_{STPU}	10kΩ	ST terminal is open drain output. ST terminal is pulled up by MCU power supply.
R_{GND}	1kΩ	Current limitation during reverse battery.
C_{VBB}	100nF	Filter of the voltage spikes on the VBB line.
D_{GND}	-	Protection of the BV1HD090FJ-C during reverse battery.

© 2016 ROHM Co., Ltd. All rights reserved.

chanhvinh.com

Precautions for use

1. **Ground Wiring Pattern**
When both small signal ground and large current ground are provided, it is recommended to isolate the large current ground pattern from the small signal ground pattern and ground at one point at the reference point of the set PCB so as to prevent change of the small signal ground voltage caused by the pattern wiring resistance and large current. Also, pay attention not to change the voltage of ground wiring pattern of the external parts. When wiring the ground line, be sure to set it to low impedance.

2. **Thermal Design**
The generated calorific value Pc is determined by Pc ≒ V_{DS}×I_{OUT}+V_{BB}×I_{BB}, using VBB - OUT potential difference (V_{DS}), amperage flowing through load (I_{OUT}) and operating current (I_{BB}).
In consideration of the thermal resistance value in the actual service condition, complete the thermal design having sufficient margins.
Should the project be used in the condition exceeding Tjmax = 150 °C, the essential IC properties may be deteriorated.
Since the thermal resistance value described in this specification is measured in the PCB conditions and environments recommended by JEDEC, you should remember that the value in the actual service environments may differ from that.

3. **Absolute Maximum Rating**
If the temperature value exceeds the absolute maximum rating due to overvoltage applied or rise in temperature, the IC may be broken. If a special mode is assumed where a short circuit between terminals or an excess of the absolute maximum rating may occur, it is recommended to take physical safety measures such as fuses.

4. **Inspection Using a Set PCB**
In the assembly process, apply grounding as a measure against IC damage caused by static electricity and pay special attention during transportation and storage.
When connecting the IC to or removing the IC from the mount board in the inspection process, be sure to turn OFF the power supply. If a terminal to which a capacitor is connected is included, residual charge may apply stress to the IC. To avoid this, be sure to discharge electricity before performing the following inspection.

5. **Mis-mounting and Short Circuit Between Terminals**
When mounting the IC on the PCB, pay special attention to the IC direction, displacement and short circuit between terminals. Mis-mounting or short circuit between terminals may cause IC damage.

6. **Ceramic Capacitor Characteristic Variation**
When using a ceramic capacitor as the external component, determine the constant in consideration of lowering of nominal capacity due to direct current bias and change of capacity caused by thermal conditions.

7. **Thermal Shut Down Function**
The IC integrates the thermal shut down function. When the IC chip temperature exceeds 190°C (Typ), the function turns OFF the output and sets the diagnostic output (ST) to Low. When the temperature becomes lower than 175°C (Typ), the IC returns to the normal operation.
The thermal shut down function is provided only in order to shut down a thermal runaway, not in order to protect or secure the IC. Since the thermal shut down function turns ON in the state exceeding the absolute maximum rating, be sure to avoid designing a set PCB pre-requiring use of this function.

8. **Overcurrent Protection Function**
The IC integrates the overcurrent protection function. When overcurrent flows, the function limits the output current to 5.5A (Typ), turns OFF the output if the limited state continues for 3μs (Typ) or longer and sets the diagnostic output (ST) to Low. If the output OFF state continues for 550μs (Typ), the IC resets itself. During the erroneous state where overcurrent flows, the function turns ON/OFF the output repeatedly.
The overcurrent protection function is to protect the IC from damage caused only by a sudden abnormality such as a load short circuit and short circuit between terminals. Be sure to avoid designing a set PCB pre-requiring use of this function.

9. **Active Clamp Operation**
The IC integrates the active clamp circuit to internally absorb the counter electromotive force generated when the inductive load is turned OFF. When the active clamp operates, VBB - OUT voltage becomes 50V (Typ) and the IC chip temperature rises. However, since this is the operation at IN=0V, the thermal shut down function does not turn ON. To drive the inductive load, refer to Figure. 27 to determine the load which will be below the active clamp tolerance dose.

10. **Power Supply Line**
Since the power supply line where large current flows may influence the normal operation, design the power supply line so that the power supply pattern wiring resistance will become smaller.

© 2016 ROHM Co., Ltd. All rights reserved.

chanhvinh.com

11. **Reverse Connection of Power Connector (**VBB - GND**)**
A reverse connection of the power connector (between VBB and GND) incurs a risk to break the IC.
In order to prevent the IC from damage at reverse connection, take an appropriate measure, for example, to insert a diode and resistor between the GND terminal of the PCB ground and that of the IC, or to insert a diode between VBB of the power supply and that of the IC. (Refer to Figure No.40)


12. **Power Terminal in The Open State**
When the power terminal (VBB) becomes open at ON (IN=High), the output is switched to OFF irrespective of input voltage.
If an inductive load is connected, the active clamp operates when VBB is open, and then becomes the same potential as that on the ground and the output voltage drops down to - 50V (Typ).

13. **GND Terminal in The Open State**
When the GND terminal becomes open at ON (IN=High), the output is switched to OFF irrespective of input voltage. If an inductive load is connected, the active clamp operates when the GND terminal is open.


© 2016 ROHM Co., Ltd. All rights reserved.

chanhvinh.com

Ordering Information

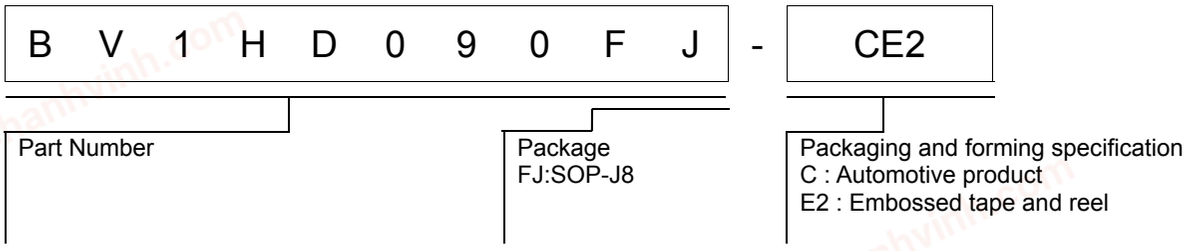

Marking Diagrams

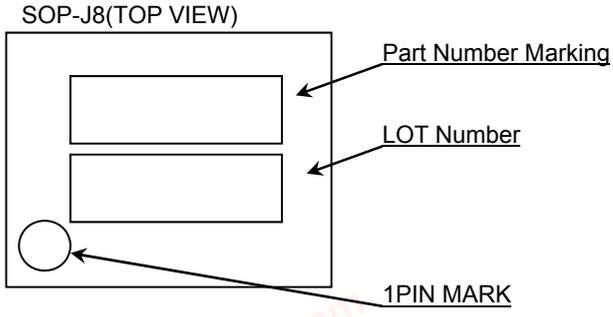


Part Number Marking	Package	Orderable Part Number
1HD90	SOP-J8	BV1HD090FJ-CE2

© 2016 ROHM Co., Ltd. All rights reserved.

chanhvinh.com


Physical Dimension, Tape and Reel Information

Package Name	SOP-J8

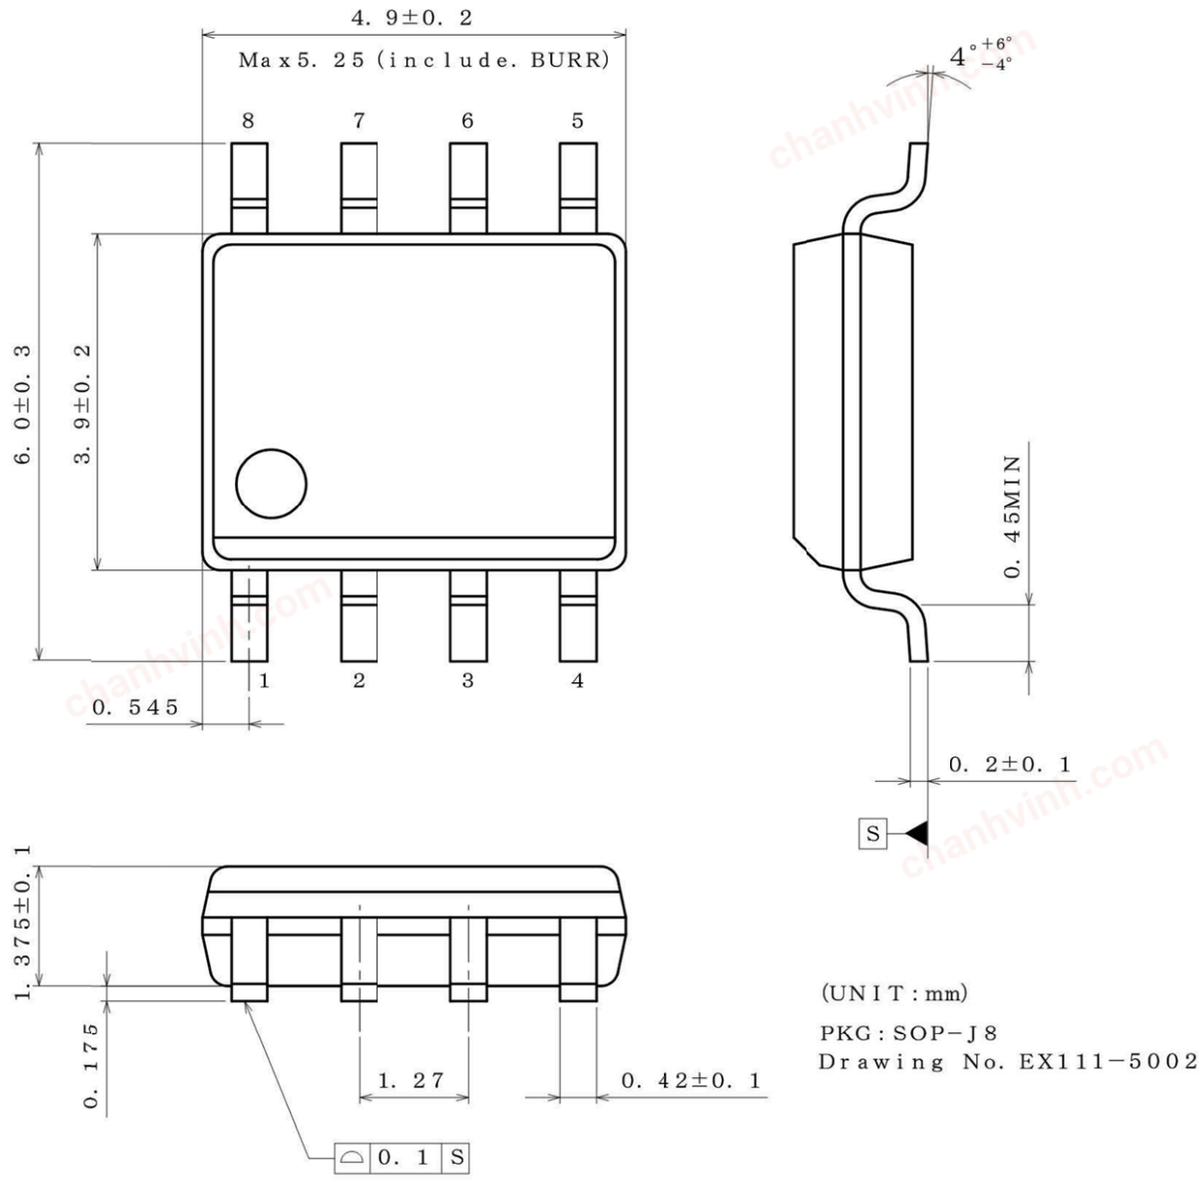

<Tape and Reel information>

Tape	Embossed carrier tape
Quantity	2500pcs
Direction of feed	E2 (The direction is the 1pin of product is at the upper left when you hold reel on the left hand and you pull out the tape on the right hand)

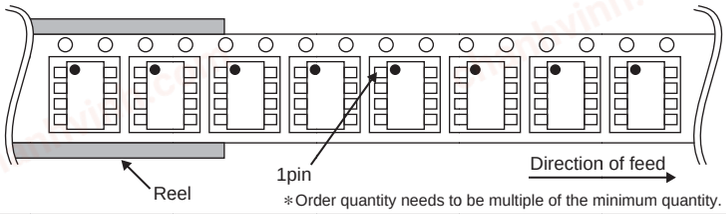

∗Order quantity needs to be multiple of the minimum quantity.

© 2016 ROHM Co., Ltd. All rights reserved.

chanhvinh.com

Revision History

Date	Revision	Changes
27.Dec.2016	001	New Release

chanhvinh.com

© 2016 ROHM Co., Ltd. All rights reserved.

chanhvinh.com

Notice

Precaution on using ROHM Products

1. If you intend to use our Products in devices requiring extremely high reliability (such as medical equipment (Note 1), aircraft/spacecraft, nuclear power controllers, etc.) and whose malfunction or failure may cause loss of human life, bodily injury or serious damage to property ("Specific Applications"), please consult with the ROHM sales representative in advance. Unless otherwise agreed in writing by ROHM in advance, ROHM shall not be in any way responsible or liable for any damages, expenses or losses incurred by you or third parties arising from the use of any ROHM's Products for Specific Applications.

(Note1) Medical Equipment Classification of the Specific Applications

JAPAN	USA	EU	CHINA
CLASSⅢ	CLASSⅢ	CLASSⅡb	CLASSⅢ
CLASSⅣ		CLASSⅢ	

2. ROHM designs and manufactures its Products subject to strict quality control system. However, semiconductor products can fail or malfunction at a certain rate. Please be sure to implement, at your own responsibilities, adequate safety measures including but not limited to fail-safe design against the physical injury, damage to any property, which a failure or malfunction of our Products may cause. The following are examples of safety measures:
   [a] Installation of protection circuits or other protective devices to improve system safety
   [b] Installation of redundant circuits to reduce the impact of single or multiple circuit failure

3. Our Products are not designed under any special or extraordinary environments or conditions, as exemplified below. Accordingly, ROHM shall not be in any way responsible or liable for any damages, expenses or losses arising from the use of any ROHM's Products under any special or extraordinary environments or conditions. If you intend to use our Products under any special or extraordinary environments or conditions (as exemplified below), your independent verification and confirmation of product performance, reliability, etc, prior to use, must be necessary:
   [a] Use of our Products in any types of liquid, including water, oils, chemicals, and organic solvents
   [b] Use of our Products outdoors or in places where the Products are exposed to direct sunlight or dust
   [c] Use of our Products in places where the Products are exposed to sea wind or corrosive gases, including Cl_2, H_2S, NH_3, SO_2, and NO_2
   [d] Use of our Products in places where the Products are exposed to static electricity or electromagnetic waves
   [e] Use of our Products in proximity to heat-producing components, plastic cords, or other flammable items
   [f] Sealing or coating our Products with resin or other coating materials
   [g] Use of our Products without cleaning residue of flux (even if you use no-clean type fluxes, cleaning residue of flux is recommended); or Washing our Products by using water or water-soluble cleaning agents for cleaning residue after soldering
   [h] Use of the Products in places subject to dew condensation

4. The Products are not subject to radiation-proof design.

5. Please verify and confirm characteristics of the final or mounted products in using the Products.

6. In particular, if a transient load (a large amount of load applied in a short period of time, such as pulse. is applied, confirmation of performance characteristics after on-board mounting is strongly recommended. Avoid applying power exceeding normal rated power; exceeding the power rating under steady-state loading condition may negatively affect product performance and reliability.

7. De-rate Power Dissipation depending on ambient temperature. When used in sealed area, confirm that it is the use in the range that does not exceed the maximum junction temperature.

8. Confirm that operation temperature is within the specified range described in the product specification.

9. ROHM shall not be in any way responsible or liable for failure induced under deviant condition from what is defined in this document.

Precaution for Mounting / Circuit board design

1. When a highly active halogenous (chlorine, bromine, etc.) flux is used, the residue of flux may negatively affect product performance and reliability.

2. In principle, the reflow soldering method must be used on a surface-mount products, the flow soldering method must be used on a through hole mount products. If the flow soldering method is preferred on a surface-mount products, please consult with the ROHM representative in advance.

For details, please refer to ROHM Mounting specification

© 2015 ROHM Co., Ltd. All rights reserved.

chanhvinh.com

Precautions Regarding Application Examples and External Circuits

1. If change is made to the constant of an external circuit, please allow a sufficient margin considering variations of the characteristics of the Products and external components, including transient characteristics, as well as static characteristics.

2. You agree that application notes, reference designs, and associated data and information contained in this document are presented only as guidance for Products use. Therefore, in case you use such information, you are solely responsible for it and you must exercise your own independent verification and judgment in the use of such information contained in this document. ROHM shall not be in any way responsible or liable for any damages, expenses or losses incurred by you or third parties arising from the use of such information.

Precaution for Electrostatic

This Product is electrostatic sensitive product, which may be damaged due to electrostatic discharge. Please take proper caution in your manufacturing process and storage so that voltage exceeding the Products maximum rating will not be applied to Products. Please take special care under dry condition (e.g. Grounding of human body / equipment / solder iron, isolation from charged objects, setting of Ionizer, friction prevention and temperature / humidity control).

Precaution for Storage / Transportation

1. Product performance and soldered connections may deteriorate if the Products are stored in the places where:
   - [a] the Products are exposed to sea winds or corrosive gases, including Cl2, H2S, NH3, SO2, and NO2
   - [b] the temperature or humidity exceeds those recommended by ROHM
   - [c] the Products are exposed to direct sunshine or condensation
   - [d] the Products are exposed to high Electrostatic

2. Even under ROHM recommended storage condition, solderability of products out of recommended storage time period may be degraded. It is strongly recommended to confirm solderability before using Products of which storage time is exceeding the recommended storage time period.

3. Store / transport cartons in the correct direction, which is indicated on a carton with a symbol. Otherwise bent leads may occur due to excessive stress applied when dropping of a carton.

4. Use Products within the specified time after opening a humidity barrier bag. Baking is required before using Products of which storage time is exceeding the recommended storage time period.

Precaution for Product Label

A two-dimensional barcode printed on ROHM Products label is for ROHM's internal use only.

Precaution for Disposition

When disposing Products please dispose them properly using an authorized industry waste company.

Precaution for Foreign Exchange and Foreign Trade act

Since concerned goods might be fallen under listed items of export control prescribed by Foreign exchange and Foreign trade act, please consult with ROHM in case of export.

Precaution Regarding Intellectual Property Rights

1. All information and data including but not limited to application example contained in this document is for reference only. ROHM does not warrant that foregoing information or data will not infringe any intellectual property rights or any other rights of any third party regarding such information or data.

2. ROHM shall not have any obligations where the claims, actions or demands arising from the combination of the Products with other articles such as components, circuits, systems or external equipment (including software).

3. No license, expressly or implied, is granted hereby under any intellectual property rights or other rights of ROHM or any third parties with respect to the Products or the information contained in this document. Provided, however, that ROHM will not assert its intellectual property rights or other rights against you or your customers to the extent necessary to manufacture or sell products containing the Products, subject to the terms and conditions herein.

Other Precaution

1. This document may not be reprinted or reproduced, in whole or in part, without prior written consent of ROHM.

2. The Products may not be disassembled, converted, modified, reproduced or otherwise changed without prior written consent of ROHM.

3. In no event shall you use in any way whatsoever the Products and the related technical information contained in the Products or this document for any military purposes, including but not limited to, the development of mass-destruction weapons.

4. The proper names of companies or products described in this document are trademarks or registered trademarks of ROHM, its affiliated companies or third parties.

© 2015 ROHM Co., Ltd. All rights reserved.

chanhvinh.com

General Precaution

1. Before you use our Products, you are requested to carefully read this document and fully understand its contents. ROHM shall not be in any way responsible or liable for failure, malfunction or accident arising from the use of any ROHM's Products against warning, caution or note contained in this document.

2. All information contained in this document is current as of the issuing date and subject to change without any prior notice. Before purchasing or using ROHM's Products, please confirm the latest information with a ROHM sales representative.

3. The information contained in this document is provided on an "as is" basis and ROHM does not warrant that all information contained in this document is accurate and/or error-free. ROHM shall not be in any way responsible or liable for any damages, expenses or losses incurred by you or third parties resulting from inaccuracy or errors of or concerning such information.

© 2015 ROHM Co., Ltd. All rights reserved.