chanhvinh.com

Datasheet

Automotive IPD 1ch Low Side Switch

BV1LA025EFJ-C

Features

- Built-in Dual TSD*1
- AEC-Q100 Qualified*2
- Built-in Over Current Protection Function(OCP)
- Built-in Active Clamp Function
- Direct Control Enabled from CMOS Logic IC, etc.
- On Resistance $R_{DS(ON)}$ = 25 mΩ (Typ)
  (when V_{IN} = 5 V, I_{OUT} = 2.4 A, Tj = 25 °C)
- Monolithic Power Management IC with the Control Block (CMOS) and Power MOS FET Mounted on a Single Chip

*1 This IC has thermal shutdown (Junction temperature detect) and ΔTj Protection (Power-MOS steep temperature rising detect).

*2 Grade1


Key Specifications

On-state Resistance (Tj = 25 °C, Typ)	25 mΩ
Over Current Limitation Level (Tj = 25 °C, Typ)	13 A
Output Clamp Voltage (Min)	42 V
Active Clamp Energy ($Tj_{(START)}$ = 25 °C)	220 mJ

Package

HTSOP-J8

W (Typ) x D (Typ) x H (Max)
4.9 mm x 6.0 mm x 1.0 mm




General Description

The BV1LA025EFJ-C is an automotive 1ch low side switch IC, which has built-in Dual TSD, OCP and active clamp function.

Application

- Driving Resistive, Inductive and Capacitive Load

Block Diagram

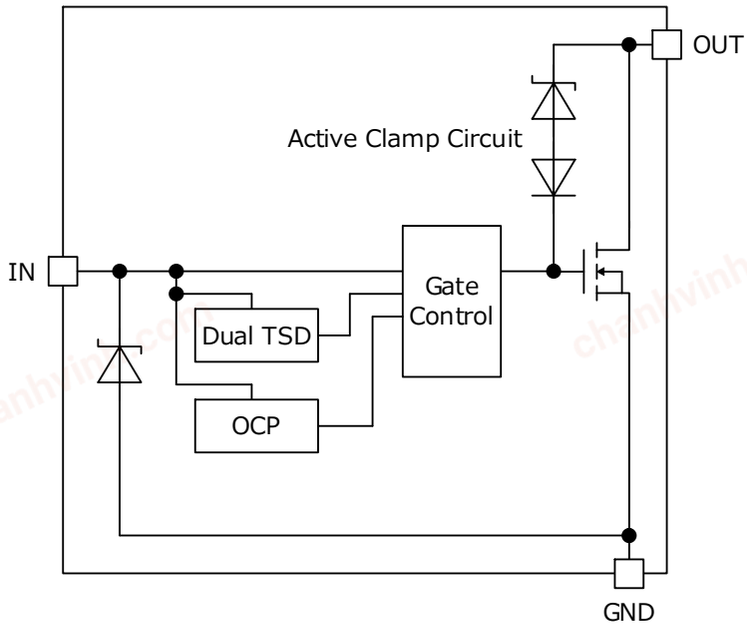

○ Product structure : Silicon integrated circuit ○ This product has no designed protection against radioactive rays.

© 2019 ROHM Co., Ltd. All rights reserved.

chanhvinh.com

Contents


Features 1
General Description 1
Application 1
Key Specifications 1
Package 1
Block Diagram 1
Contents 2
Pin Configuration 3
Pin Description 3
Definition 3
Absolute Maximum Ratings 4
Recommended Operating Conditions 5
Thermal Resistance 5
Electrical Characteristics 9
Typical Performance Curves 10
Measurement Circuit for Typical Performance Curves 15
I/O Pin Truth Table 17
Timing Chart 17
Function Description 18
Operational Notes 19
Ordering Information 21
Marking Diagram 21
Physical Dimension and Packing Information 22
Revision History 23

© 2019 ROHM Co., Ltd. All rights reserved.

chanhvinh.com

Pin Configuration


HTSOP-J8
(TOP VIEW)

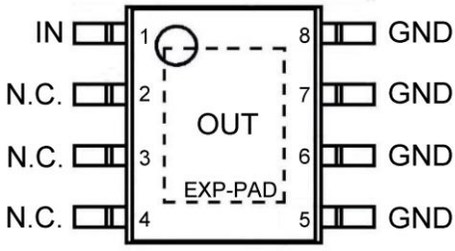

Pin Description

Pin No.	Pin Name	Function
1	IN	Input pin, with internal pull-down resistor.
2	N.C.	No connected to internal circuit. Open or connected to GND or connected IN.
3	N.C.	No connected to internal circuit. Open or connected to GND or connected IN.
4	N.C.	No connected to internal circuit. Open or connected to GND or connected IN.
5	GND	GND pin
6	GND	GND pin
7	GND	GND pin
8	GND	GND pin
EXP-PAD	OUT	Output pin. When output pin shorted to battery, output current is limited to protect IC.

Definition

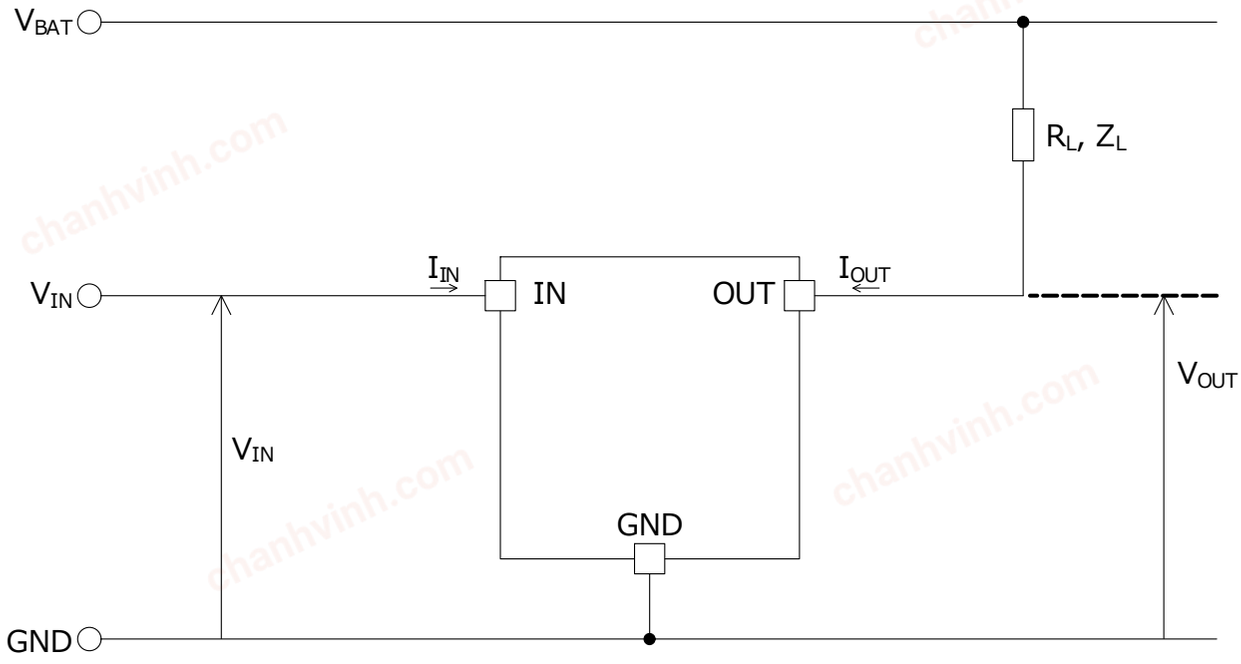

© 2019 ROHM Co., Ltd. All rights reserved.

chanhvinh.com

Absolute Maximum Ratings (Tj = 25°C)

Parameter	Symbol	Ratings	Unit
Output Voltage	V_{OUT}	-0.3 to +42	V
Input Voltage	V_{IN}	-0.3 to +7	V
Output Current	I_{OUT}	9 (inside limited)*1	A
Active Clamp Energy (Single Pulse) $Tj_{(START)}$ = 25 °C, $I_{OUT(START)}$ = 4 A	$E_{AS(25\ °C)}$	220	mJ
Active Clamp Energy (Single Pulse) $Tj_{(START)}$ = 150 °C, $I_{OUT(START)}$ = 4 A *2	$E_{AS(150\ °C)}$	140	
Storage Temperature Range	Tstg	-55 to +150	°C
Maximum Junction Temperature	Tjmax	150	°C

*1 Internally limited by over current protection function.
*2 Not 100 % tested.

Caution 1: *Operating the IC over the absolute maximum ratings may damage the IC. The damage can either be a short circuit between pins or an open circuit between pins and the internal circuitry. Therefore, it is important to consider circuit protection measures, such as adding a fuse, in case the IC is operated over the absolute maximum ratings.*

Caution 2: *Should by any chance the maximum junction temperature rating be exceeded the rise in temperature of the chip may result in deterioration of the properties of the chip. In case of exceeding this absolute maximum rating, design a PCB with thermal resistance taken into consideration by increasing board size and copper area so as not to exceed the maximum junction temperature rating.*

Caution 3: *When IC turns off with an inductive load, reverse energy has to be dissipated in the BV1LA025EFJ-C. This energy can be calculated by the following equation:*

$$E_L = \frac{1}{2} L I_{OUT(START)}{}^2 \times \left(1 - \frac{V_{BAT}}{V_{BAT} - V_{OUT(CL)}}\right)$$

Where:
L is the inductance of the inductive load.
$I_{OUT(START)}$ is the output current at the time of turning off.
$V_{OUT(CL)}$ is the output clamp voltage.

The IC integrates the active clamp function to internally absorb the reverse energy E_L which is generated when the inductive load is turned off. When the active clamp operates, the thermal shutdown function does not work. Decide a load so that the reverse energy E_L is active clamp tolerance E_{AS} (refer to Figure 1.) or under when inductive load is used.

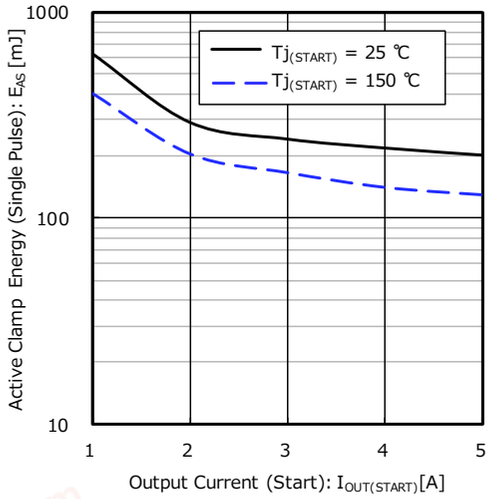


Figure 1. Active Clamp Energy (Single Pulse) vs Output Current (Start)

© 2019 ROHM Co., Ltd. All rights reserved.

chanhvinh.com

Recommended Operating Conditions


Parameter	Symbol	Min	Typ	Max	Unit
Input Voltage	V_{IN}	3.5	5.0	5.5	V
Operating Temperature	Tj	-40	+25	+150	°C

Thermal Resistance*1

Parameter	Symbol	Typ	Unit	Condition
HTSOP-J8				
Between Junction and Surroundings Temperature Thermal Resistance	θ_{JA}	121.7	°C/W	1s *2
		34.0	°C/W	2s *3
		23.3	°C/W	2s2p *4

*1 The thermal impedance is based on JESD51-2A (Still-Air) standard. It is used the chip of BV1LA025EFJ-C.
*2 JESD51-3 standard FR4 114.3 mm x 76.2 mm x 1.57 mm 1-layer (1s)
(Top copper foil: ROHM recommended Footprint + wiring to measure, 2 oz. copper.)
*3 JESD51-5 standard FR4 114.3 mm x 76.2 mm x 1.60 mm 2-layers (2s)
(Top copper foil: ROHM recommended Footprint + wiring to measure/
Copper foil area on the reverse side of PCB: 74.2 mm x 74.2 mm,
copper (top & reverse side) 2 oz.)
*4 JESD51-5, 7 standard FR4 114.3 mm x 76.2 mm x 1.60 mm 4-layers (2s2p)
(Top copper foil: ROHM recommended Footprint + wiring to measure/
2 inner layers and copper foil area on the reverse side of PCB: 74.2 mm x 74.2 mm,
copper (top & reverse side/inner layers) 2 oz./1 oz.)

■ PCB Layout 1 layer (1s)

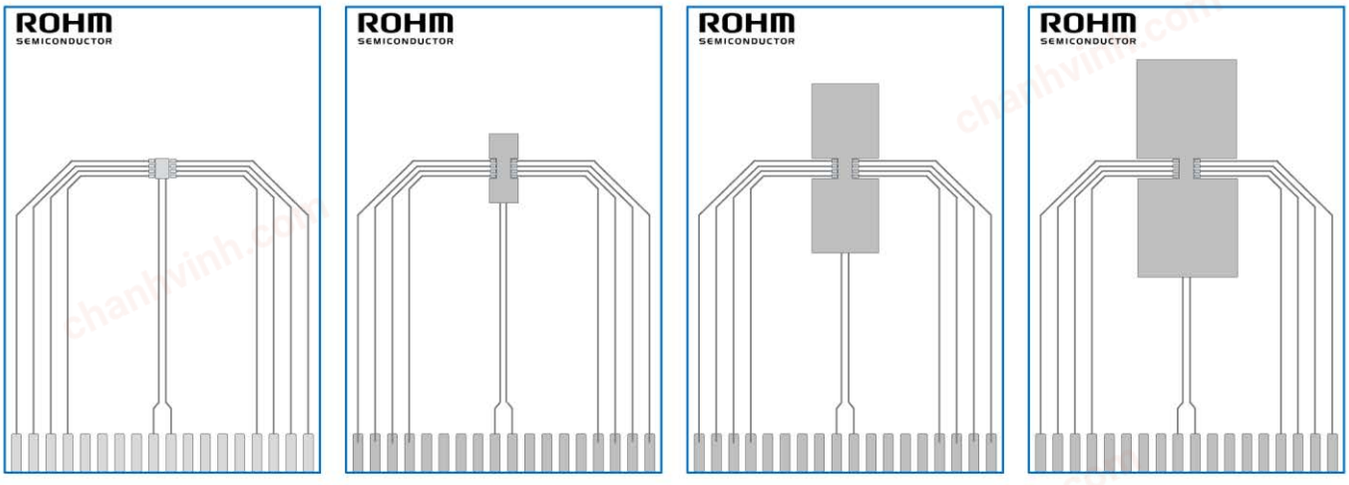

Footprint 100 mm² 600 mm² 1200 mm²


Dimension	Value
Board Finish Thickness	1.57 mm ± 10 %
Board Dimension	76.2 mm x 114.3 mm
Board Material	FR4
Copper Thickness (Top Layer)	0.070 mm (Cu:2 oz)
Copper Foil Area Dimension	Footprint / 100 mm² / 600 mm² / 1200 mm²

© 2019 ROHM Co., Ltd. All rights reserved.


chanhvinh.com

Thermal Resistance – continued

- PCB Layout 2 layers (2s)

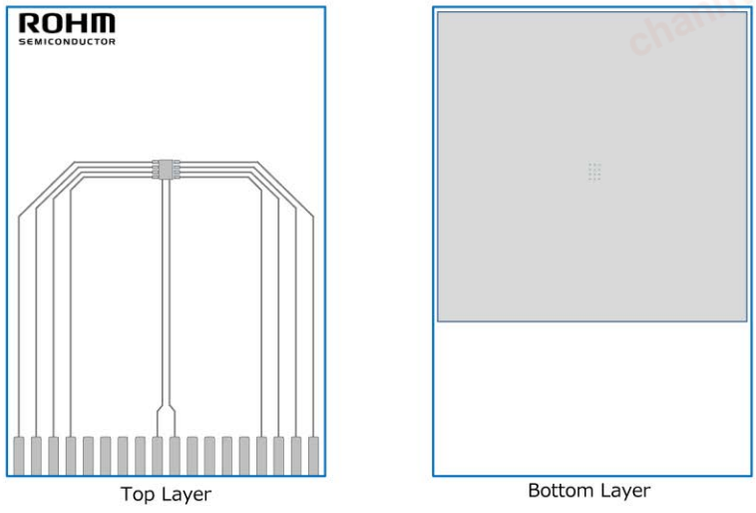

Top Layer Bottom Layer

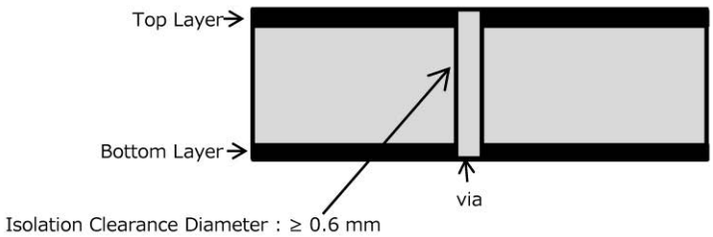

Cross Section


Dimension	Value
Board Finish Thickness	1.60 mm ± 10 %
Board Dimension	76.2 mm x 114.3 mm
Board Material	FR4
Copper Thickness (Top/Bottom Layers)	0.070 mm (Cu + Plating)
Thermal Vias Separation/Diameter	1.2 mm / 0.3 mm

© 2019 ROHM Co., Ltd. All rights reserved.


chanhvinh.com

Thermal Resistance – continued

■ PCB Layout 4 layers (2s2p)

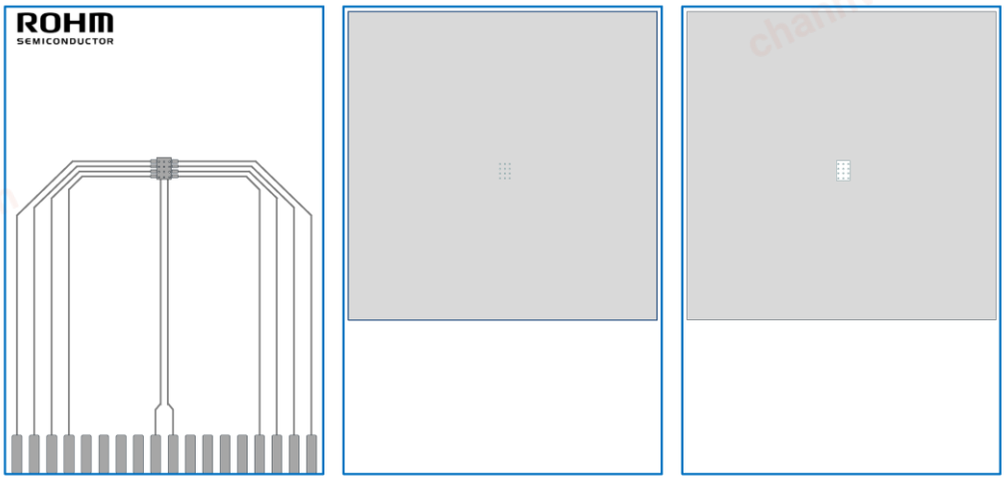

Top Layer　2nd / Bottom Layers　3rd Layer

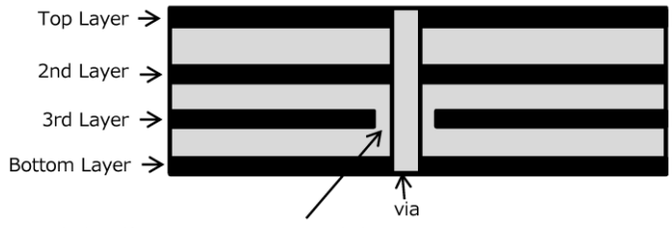

Isolation Clearance Diameter : ≥ 0.6 mm

Cross Section


Dimension	Value
Board Finish Thickness	1.60 mm ± 10 %
Board Dimension	76.2 mm x 114.3 mm
Board Material	FR4
Copper Thickness (Top/Bottom Layers)	0.070 mm (Cu + Plating)
Thermal Vias Separation/Diameter	1.2 mm / 0.3 mm

© 2019 ROHM Co., Ltd. All rights reserved.


chanhvinh.com

Thermal Resistance – continued

■ Transient Thermal Resistance (Single Pulse)

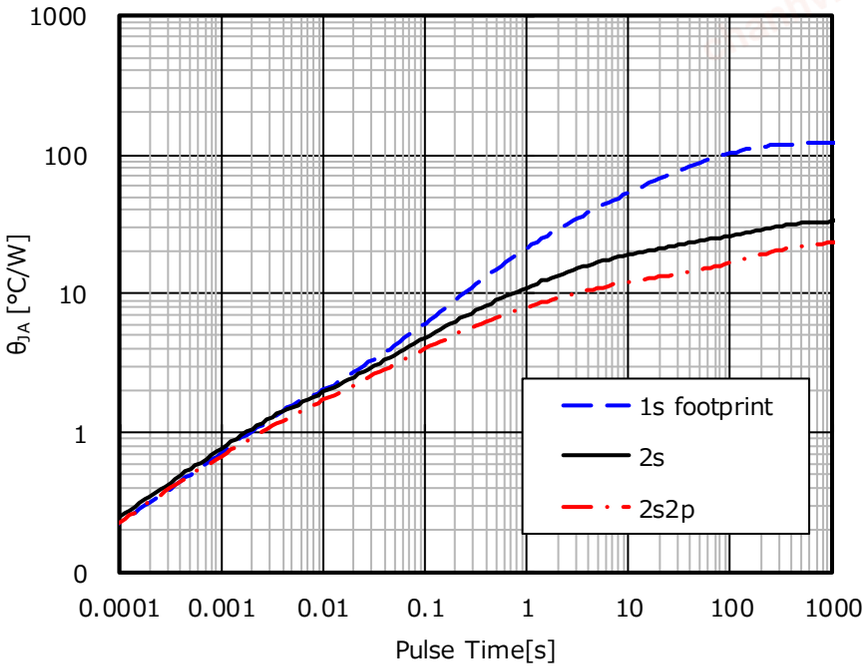

■ Thermal Resistance (θ_{JA} vs Copper foil area (1s))

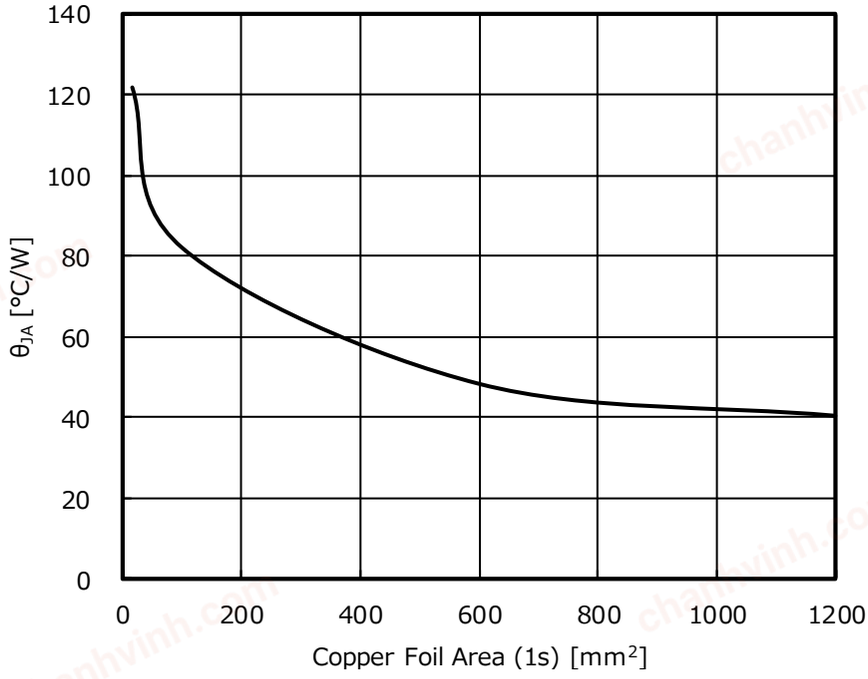

© 2019 ROHM Co., Ltd. All rights reserved.

chanhvinh.com

Electrical Characteristics (Unless otherwise specified, –40 °C ≤ Tj ≤ +150 °C)

Parameter	Symbol	Limit			Unit	Conditions
		Min	Typ	Max		
Input (IN)						
Input Threshold Voltage	$V_{IN(TH)}$	1.1	-	3.5	V	R_L = 4.7 Ω, V_{BAT} = 12 V
High Level Input Current 1 (in Normal Operation)	$I_{IN(H1)}$	-	85	170	μA	V_{IN} = 5 V
High Level Input Current 2 (in Abnormal Operation)*1	$I_{IN(H2)}$	-	-	1000	μA	V_{IN} = 5 V
Low Level Input Current	$I_{IN(L)}$	-10	0	+10	μA	V_{IN} = 0 V
Power MOS Output						
On-state Resistance	$R_{DS(ON)}$	-	25.0	32.5	mΩ	V_{IN} = 5 V, I_{OUT} = 2.4 A, Tj = 25 °C
	$R_{DS(ON)}$	-	44.0	62.5	mΩ	V_{IN} = 5 V, I_{OUT} = 2.4 A, Tj = 150 °C
Leak Current	$I_{OUT(L)}$	-	0.0	0.5	μA	V_{IN} = 0 V, V_{OUT} = 18 V, Tj = 25 °C
	$I_{OUT(L)}$	-	2.5	50.0	μA	V_{IN} = 0 V, V_{OUT} = 18 V, Tj = 150 °C
Output Clamp Voltage	$V_{OUT(CL)}$	42	48	54	V	V_{IN} = 0 V, I_{OUT} = 1 mA
Turn-ON Time	t_{ON}	-	50	100	μs	V_{IN} = 0 V to 5 V, R_L = 4.7 Ω, V_{BAT} = 12 V, Tj = 25 °C
Turn-OFF Time	t_{OFF}	-	60	120	μs	V_{IN} = 5 V to 0 V, R_L = 4.7 Ω, V_{BAT} = 12 V, Tj = 25 °C
Slew Rate On	SR_{ON}	-	0.3	0.6	V/μs	V_{IN} = 0 V to 5 V, R_L = 4.7 Ω, V_{BAT} = 12 V, Tj = 25 °C
Slew Rate Off	SR_{OFF}	-	0.3	0.6	V/μs	V_{IN} = 5 V to 0 V, R_L = 4.7 Ω, V_{BAT} = 12 V, Tj = 25 °C
Protection Function						
Over Current Limitation Level	$I_{OUT(LIM)}$	9	13	17	A	V_{IN} = 5 V, Tj = 25 °C
Thermal Shutdown Detected Temperature *2	T_{TSDD}	150	180	-	°C	V_{IN} = 5 V
Thermal Shutdown Released Temperature*2	T_{TSDR}	135	160	-	°C	V_{IN} = 5 V
Thermal Shutdown Hysteresis Temperature*2	T_{TSDHYS}	-	20	-	°C	V_{IN} = 5 V
ΔTj Protection Detected Temperature*2	T_{DTJD}	-	75	-	°C	V_{IN} = 5 V
ΔTj Protection Released Temperature*2	T_{DTJR}	-	45	-	°C	V_{IN} = 5 V
ΔTj Protection Hysteresis Temperature*2	T_{DTJHYS}	-	30	-	°C	V_{IN} = 5 V

*1 When thermal shutdown function or over current protection function is ON.
*2 Not 100 % tested.

© 2019 ROHM Co., Ltd. All rights reserved.

chanhvinh.com

Typical Performance Curves
(Unless otherwise specified, Tj = 25 °C, V_{IN} = 5 V)

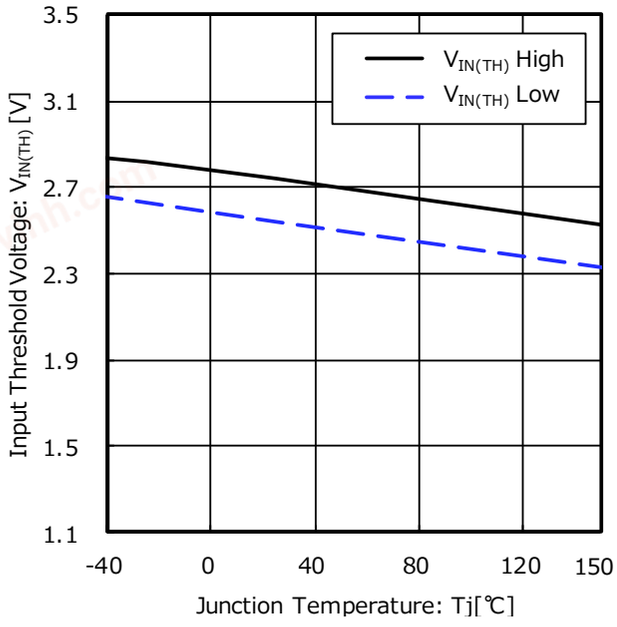


Figure 2. Input Threshold Voltage vs Junction Temperature

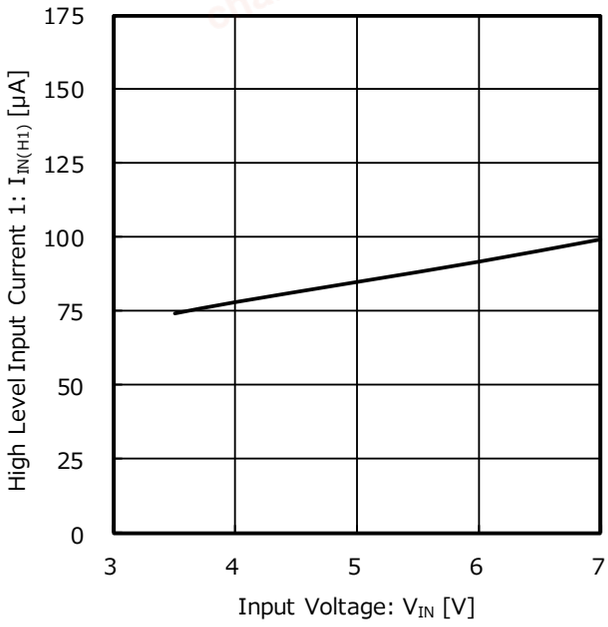


Figure 3. High Level Input Current 1 (in Normal Operation) vs Input Voltage

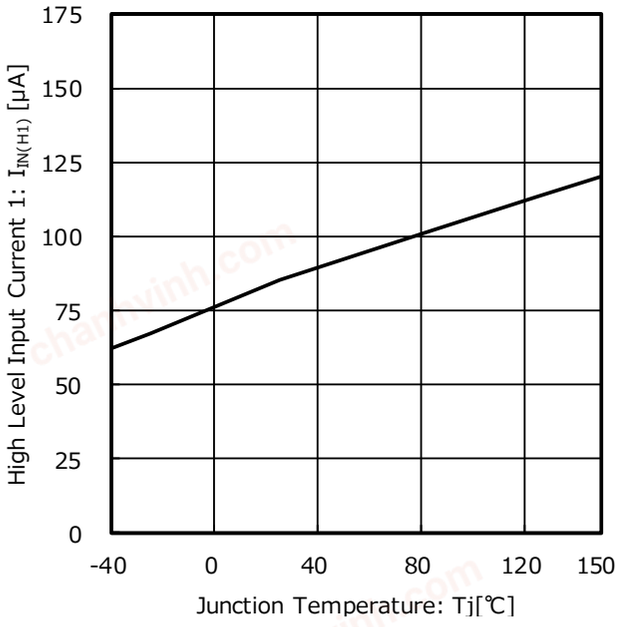


Figure 4. High Level Input Current 1 (in Normal Operation) vs Junction Temperature

© 2019 ROHM Co., Ltd. All rights reserved.

chanhvinh.com

Typical Performance Curves – continued
(Unless otherwise specified, Tj = 25 °C, V_{IN} = 5 V)

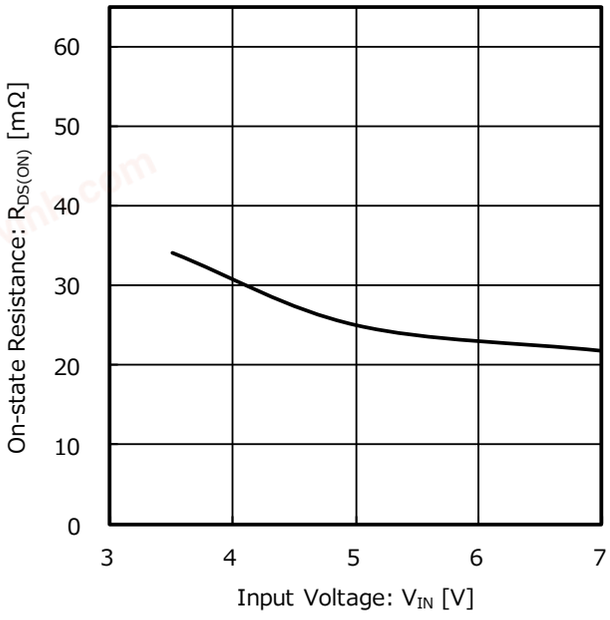


Figure 5. On-state Resistance vs Input Voltage

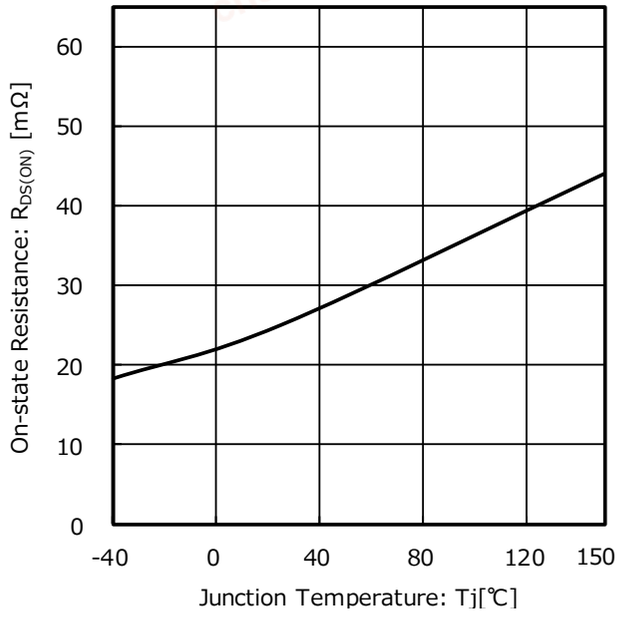


Figure 6. On-state Resistance vs Junction Temperature

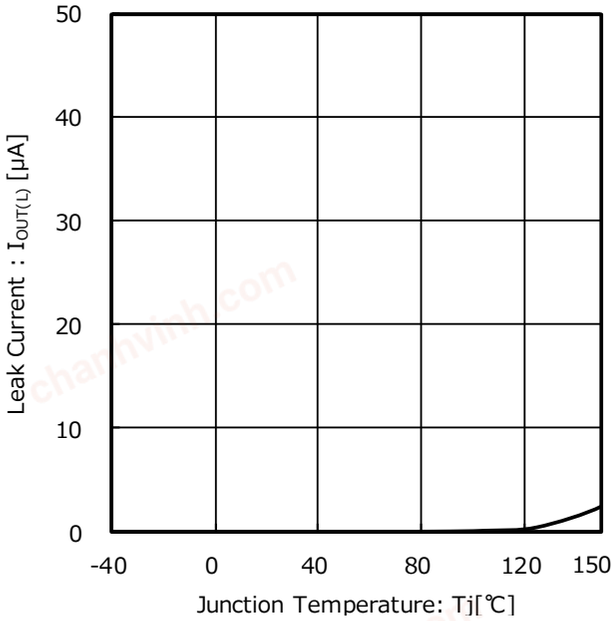


Figure 7. Leak Current vs Junction Temperature

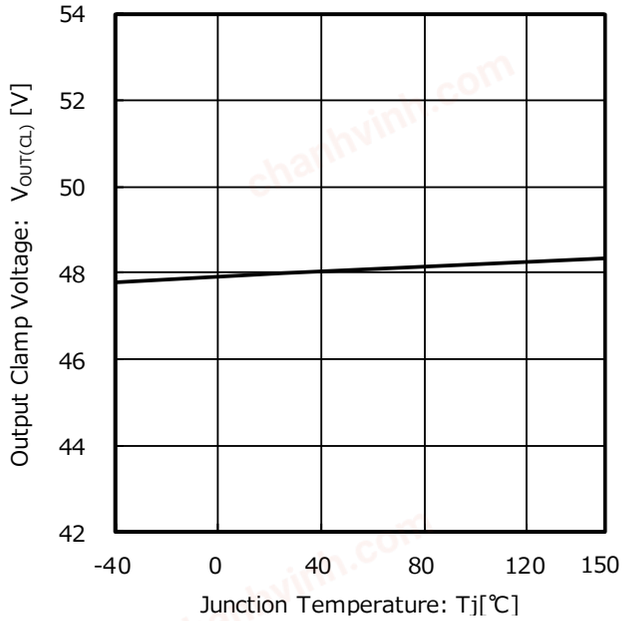


Figure 8. Output Clamp Voltage vs Junction Temperature

© 2019 ROHM Co., Ltd. All rights reserved.

chanhvinh.com

Typical Performance Curves – continued
(Unless otherwise specified, Tj = 25 °C, V_{IN} = 5 V)

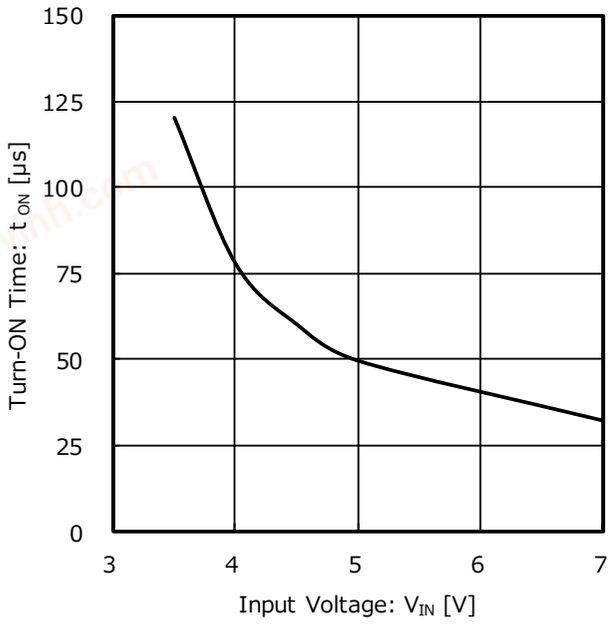


Figure 9. Turn-ON Time vs Input Voltage

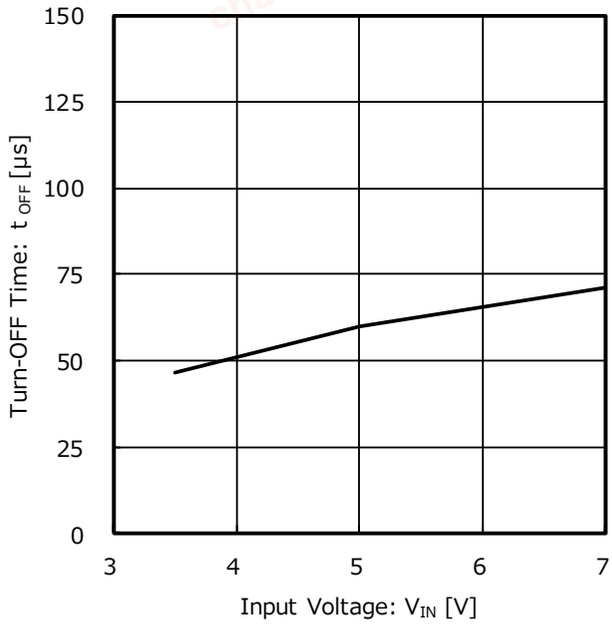


Figure 10. Turn-OFF Time vs Input Voltage

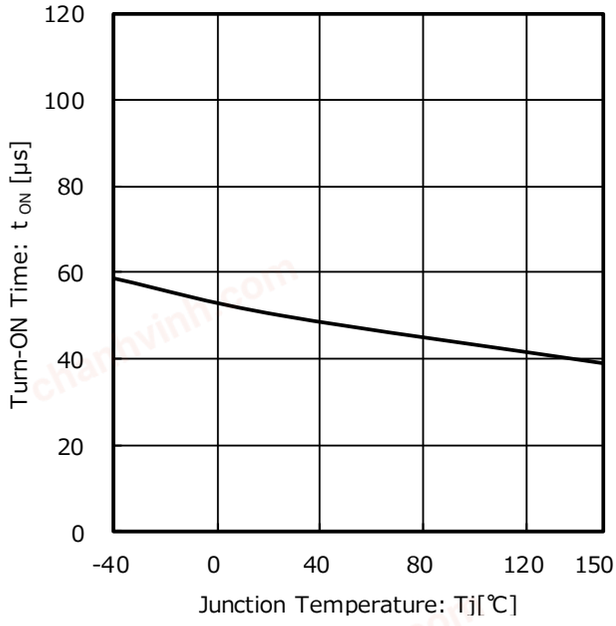


Figure 11. Turn-ON Time vs Junction Temperature

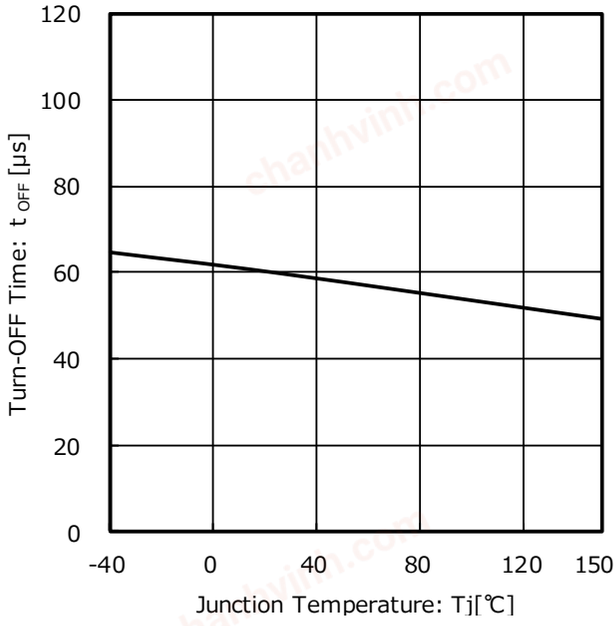


Figure 12. Turn-OFF Time vs Junction Temperature

© 2019 ROHM Co., Ltd. All rights reserved.

chanhvinh.com

Typical Performance Curves – continued
(Unless otherwise specified, Tj = 25 °C, V_{IN} = 5 V)

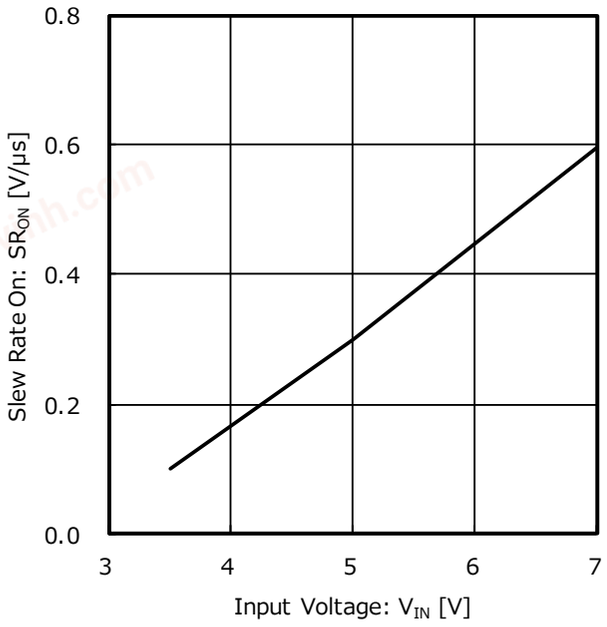


Figure 13. Slew Rate On vs Input Voltage

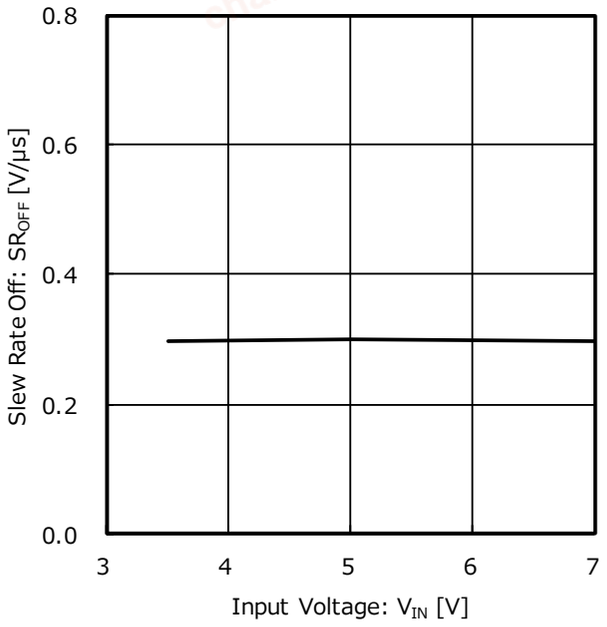


Figure 14. Slew Rate Off vs Input Voltage

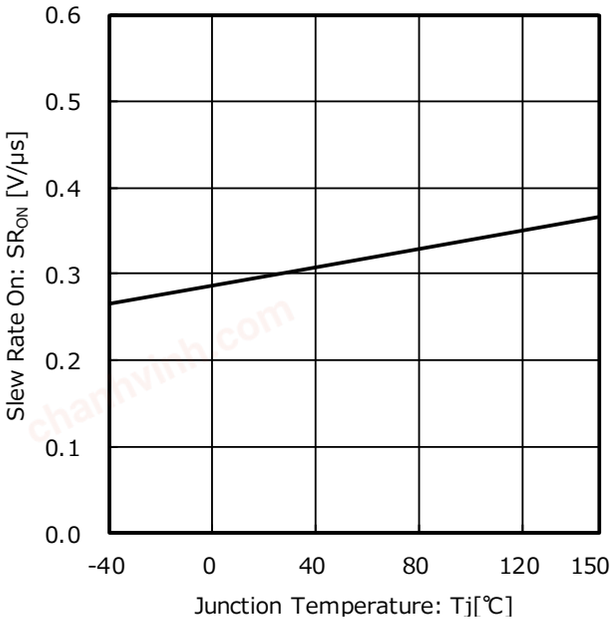


Figure 15. Slew Rate On vs Junction Temperature

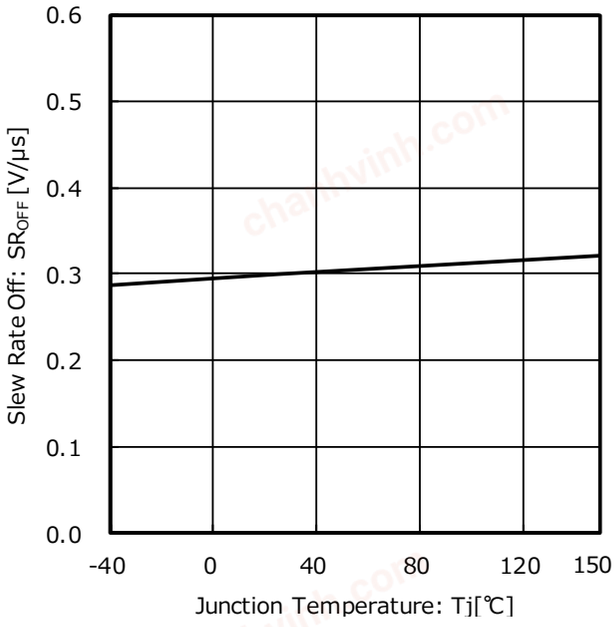


Figure 16. Slew Rate Off vs Junction Temperature

© 2019 ROHM Co., Ltd. All rights reserved.

chanhvinh.com

Typical Performance Curves – continued
(Unless otherwise specified, Tj = 25 °C, V_{IN} = 5 V)


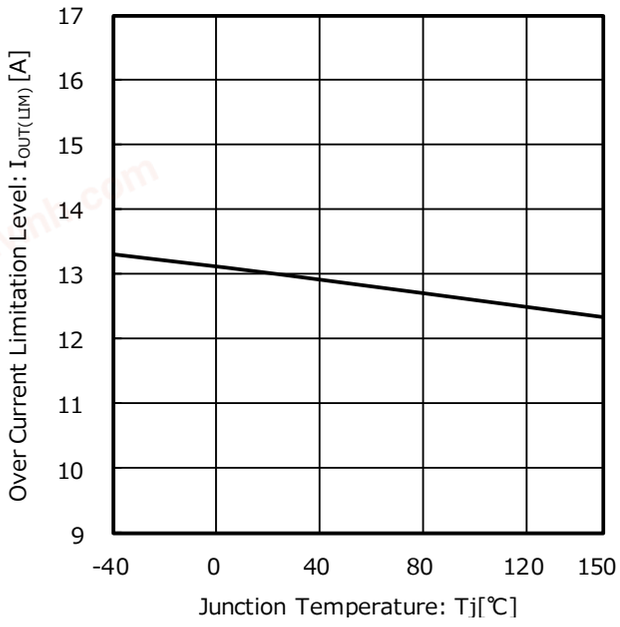


Figure 17. Over Current Limitation Level vs Junction Temperature


© 2019 ROHM Co., Ltd. All rights reserved.

chanhvinh.com


Measurement Circuit for Typical Performance Curves

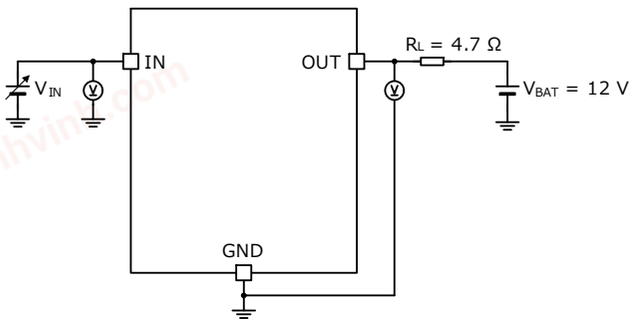


Measurement Circuit for Figure 2

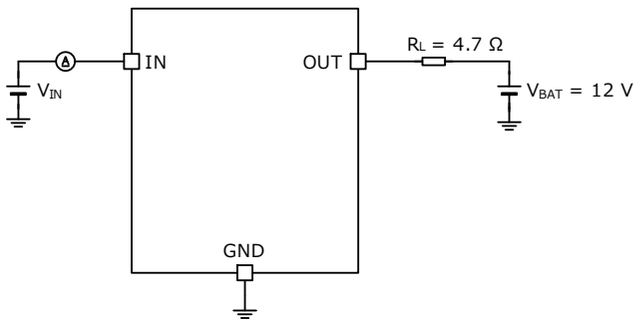


Measurement Circuit for Figure 3 and Figure 4

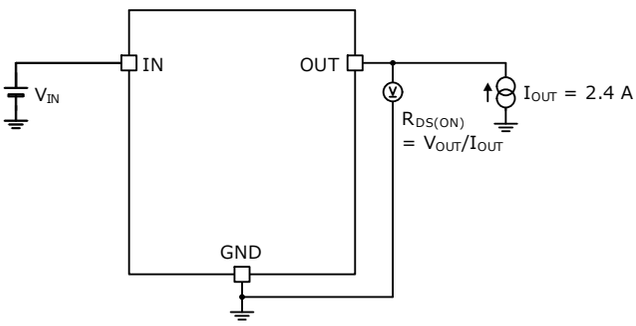


Measurement Circuit for Figure 5 and Figure 6

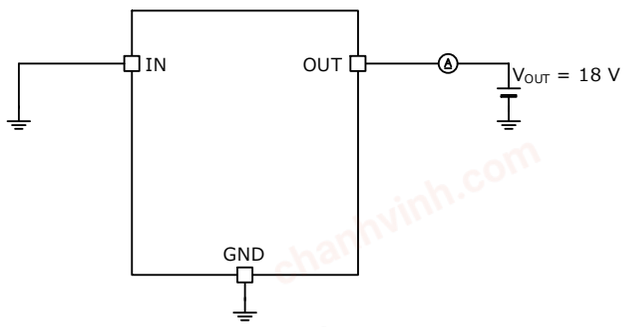

Measurement Circuit for Figure 7

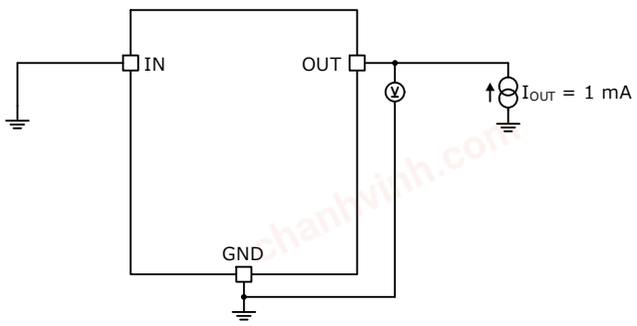

Measurement Circuit for Figure 8

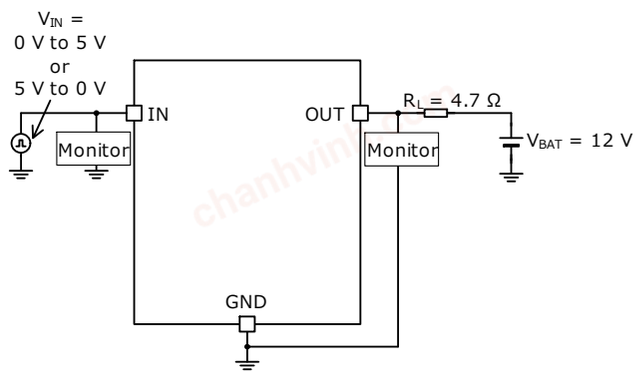


Measurement Circuit for
Figure 9, Figure 10, Figure 11, Figure 12,
Figure 13, Figure 14, Figure 15 and Figure 16

© 2019 ROHM Co., Ltd. All rights reserved.

chanhvinh.com

Measurement Circuit for Typical Performance Curves – continued

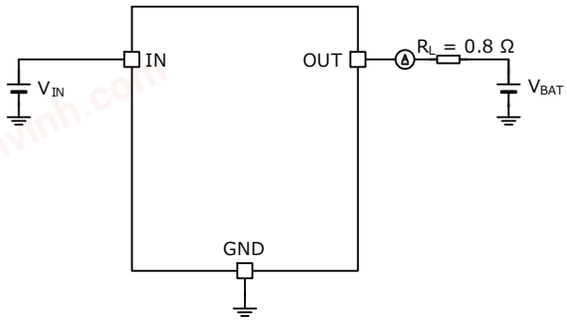

Measurement Circuit for Figure 17

© 2019 ROHM Co., Ltd. All rights reserved.

chanhvinh.com

I/O Pin Truth Table

Priority	IN Pin Voltage	Operating Status	OUT Pin
1	Low	Standby	OFF
2	High	Dual TSD Detection	OFF
3	High	Over Current Limitation	Current Limitation
4	High	Normal	ON

Timing Chart

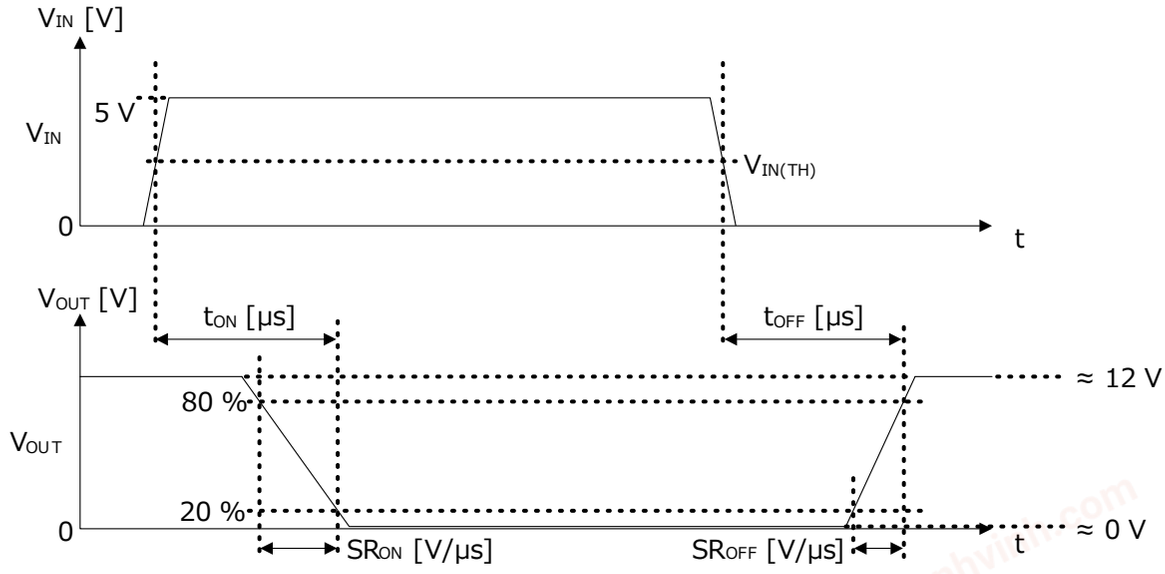


Figure 18. Definition of Turn-ON Time, Turn-OFF Time, and Slew Rate

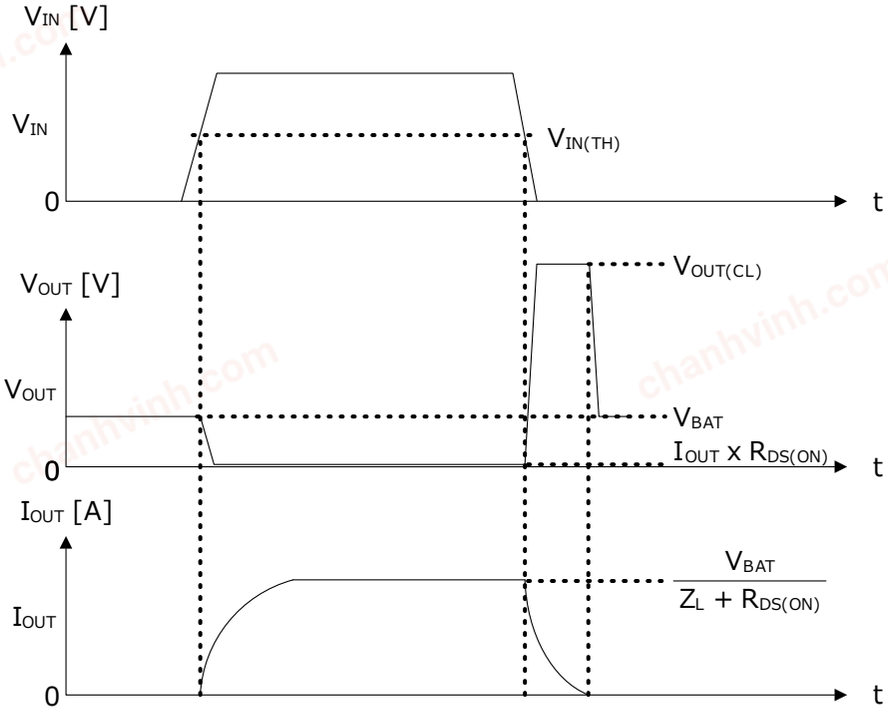


Figure 19. Inductive Load Operation

© 2019 ROHM Co., Ltd. All rights reserved.

chanhvinh.com

Function Description

■ Over Current Protection Function and Dual TSD Function

This IC has OCP function and Dual TSD function. Following shows the behavior when the OUT pin short circuit.

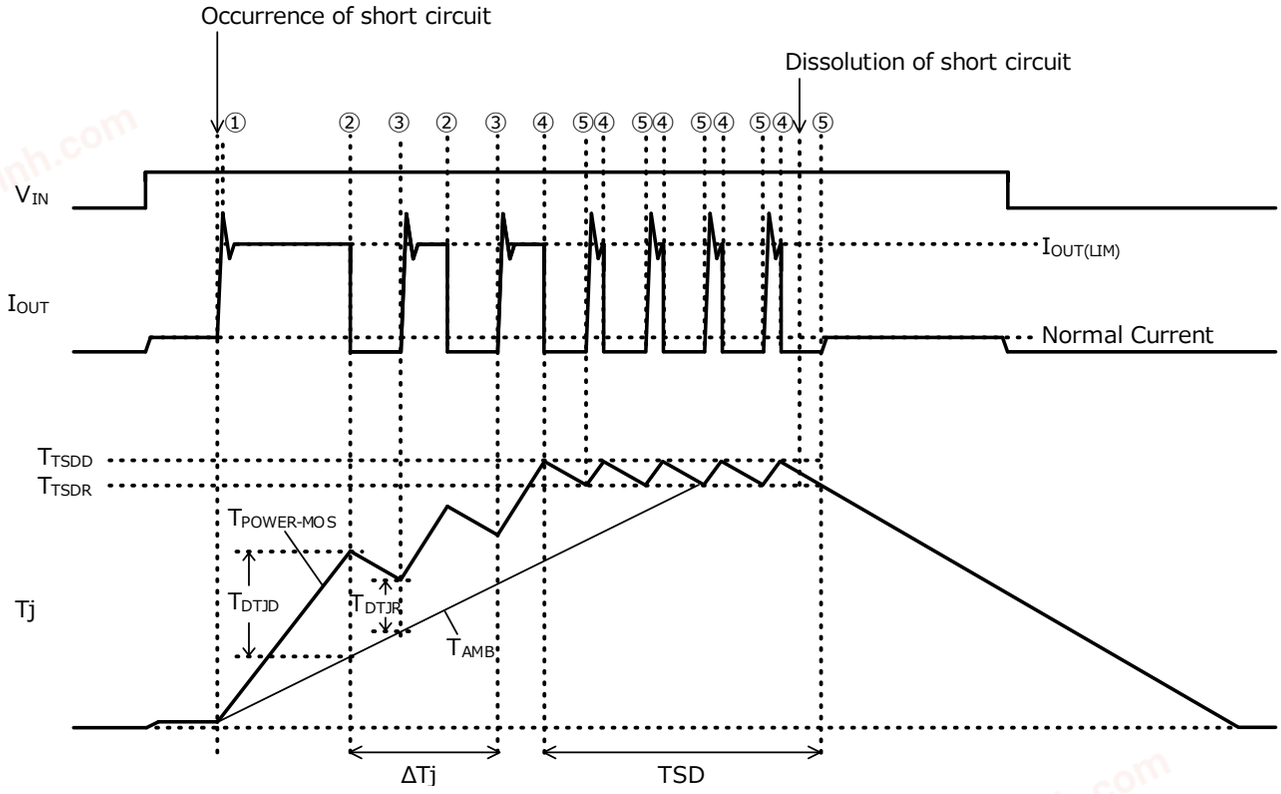


Figure 20. The Behavior when the OUT Pin Short Circuit

① I_{OUT} is limited at Over Current Limitation Level ($I_{OUT(LIM)}$) = 13 A (Typ) when over current is occurred.

② The temperature of Power MOS FET part and the control part in this IC is each $T_{POWER-MOS}$, T_{AMB}. When the temperature difference becomes 75 °C (Typ) or more, the output turns OFF. This temperature defines as ΔTj Protection Detected Temperature (T_{DTJD}).

③ When the temperature difference of $T_{POWER-MOS}$ and T_{AMB} becomes 45 °C (Typ) or less, the output turns automatically ON. This temperature defines as ΔTj Protection Released Temperature (T_{DTJR}).

④ The output is turned off when the temperature of the IC reaches Thermal Shutdown Detected Temperature (T_{TSDD}) = 180 °C (Typ) or more.

⑤ The output returns to its normal state when the temperature of the IC becomes Thermal Shutdown Released Temperature (T_{TSDR}) = 160 °C (Typ) or less.

© 2019 ROHM Co., Ltd. All rights reserved.

chanhvinh.com

Operational Notes

1. **Ground Voltage**
   Ensure that no pins are at a voltage below that of the ground pin at any time, even during transient condition.

2. **Ground Wiring Pattern**
   When using both small-signal and large-current ground traces, the two ground traces should be routed separately but connected to a single ground at the reference point of the application board to avoid fluctuations in the small-signal ground caused by large currents. Also ensure that the ground traces of external components do not cause variations on the ground voltage. The ground lines must be as short and thick as possible to reduce line impedance.

3. **Recommended Operating Conditions**
   The function and operation of the IC are guaranteed within the range specified by the recommended operating conditions. The characteristic values are guaranteed only under the conditions of each item specified by the electrical characteristics.

4. **Testing on Application Boards**
   When testing the IC on an application board, connecting a capacitor directly to a low-impedance output pin may subject the IC to stress. Always discharge capacitors completely after each process or step. The IC's power supply should always be turned off completely before connecting or removing it from the test setup during the inspection process. To prevent damage from static discharge, ground the IC during assembly and use similar precautions during transport and storage.

5. **Inter-pin Short and Mounting Errors**
   Ensure that the direction and position are correct when mounting the IC on the PCB. Incorrect mounting may result in damaging the IC. Avoid nearby pins being shorted to each other especially to ground, power supply and output pin. Inter-pin shorts could be due to many reasons such as metal particles, water droplets (in very humid environment) and unintentional solder bridge deposited in between pins during assembly to name a few.

6. **Ceramic Capacitor**
   When using a ceramic capacitor, determine a capacitance value considering the change of capacitance with temperature and the decrease in nominal capacitance due to DC bias and others.

7. **Thermal Shutdown Function (TSD)**
   This IC has a built-in thermal shutdown function that prevents heat damage to the IC. Normal operation should always be within the IC's maximum junction temperature rating. If however the rating is exceeded for a continued period, the junction temperature (Tj) will rise which will activate the TSD function that will turn OFF power output pins. When the Tj falls below the TSD threshold, the circuits are automatically restored to normal operation.
   Note that the TSD function operates in a situation that exceeds the absolute maximum ratings and therefore, under no circumstances, should the TSD function be used in a set design or for any purpose other than protecting the IC from heat damage.

8. **Over Current Protection Function (OCP)**
   This IC incorporates an integrated overcurrent protection function that is activated when the load is shorted. This protection function is effective in preventing damage due to sudden and unexpected incidents. However, the IC should not be used in applications characterized by continuous operation or transitioning of the protection function.

9. **Active Clamp Operation**
   The IC integrates the active clamp function to internally absorb the reverse energy E_L which is generated when the inductive load is turned off. When the active clamp operates, the thermal shutdown function does not work. Decide a load so that the reverse energy E_L is active clamp tolerance E_{AS} (refer to Figure 1.) or under when inductive load is used.

© 2019 ROHM Co., Ltd. All rights reserved.

chanhvinh.com

Operational Notes – continued

10. Negative Current of Output

When the OUT pin (DRAIN) becomes lower than the GND pin (SOURCE), a current flow from the in pin (the IN pin) to the OUT pin (DRAIN) through a parasitic transistor. As shown in Figure 21 when the input pin is High, a current flow from a power supply of the connection (MCU, and so on) of the input pin to the OUT pin (DRAIN). As shown in Figure 22 when the input pin is Low, a current flow from the GND of parts (MCU, and so on) that connected to the input pin to the OUT pin (DRAIN).

Therefore, set the OUT pin (DRAIN) is -0.3 V or higher. When the OUT pin becomes lower than -0.3V, add a restriction resistance 330 Ω or higher to the IN pin. However, set the value of restriction resistance in consideration of the voltage descent caused by power supply pin and input pins currents.

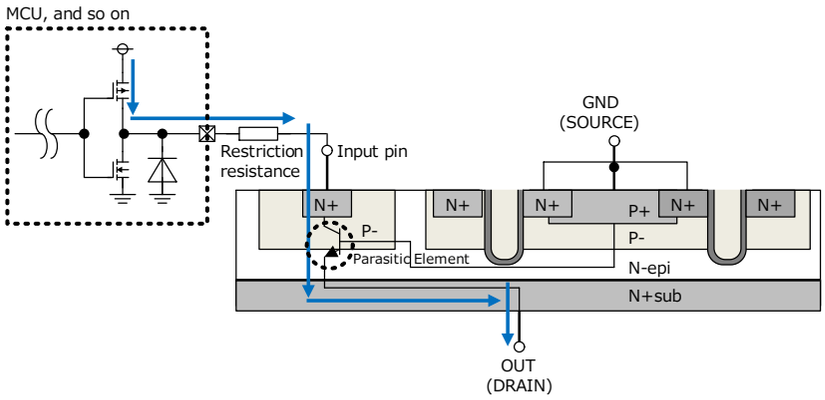


Figure 21. Negative Current Path (when the input pins are High)

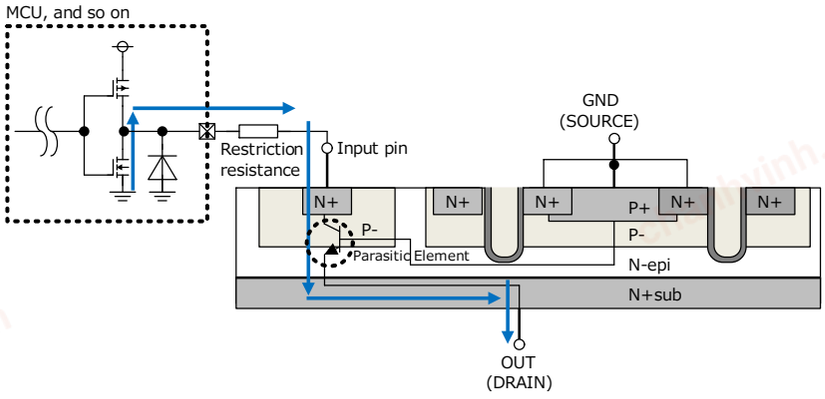


Figure 22. Negative Current Path (when the input pins are Low)

© 2019 ROHM Co., Ltd. All rights reserved.

chanhvinh.com


Ordering Information

B V 1 L A 0 2 5 E F J - C E 2

Package
EFJ: HTSOP-J8

Product Grade
C: for Automotive
Packaging and forming specification
E2: Embossed tape and reel

Marking Diagram

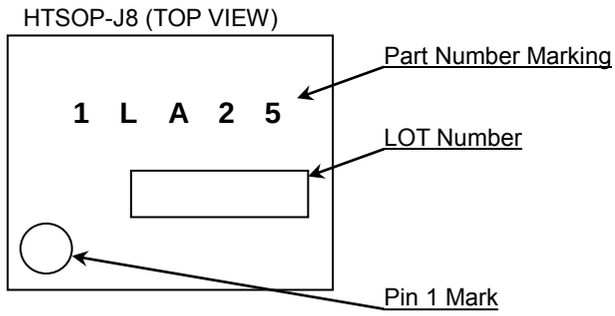


© 2019 ROHM Co., Ltd. All rights reserved.

chanhvinh.com


Physical Dimension and Packing Information

Package Name	HTSOP-J8

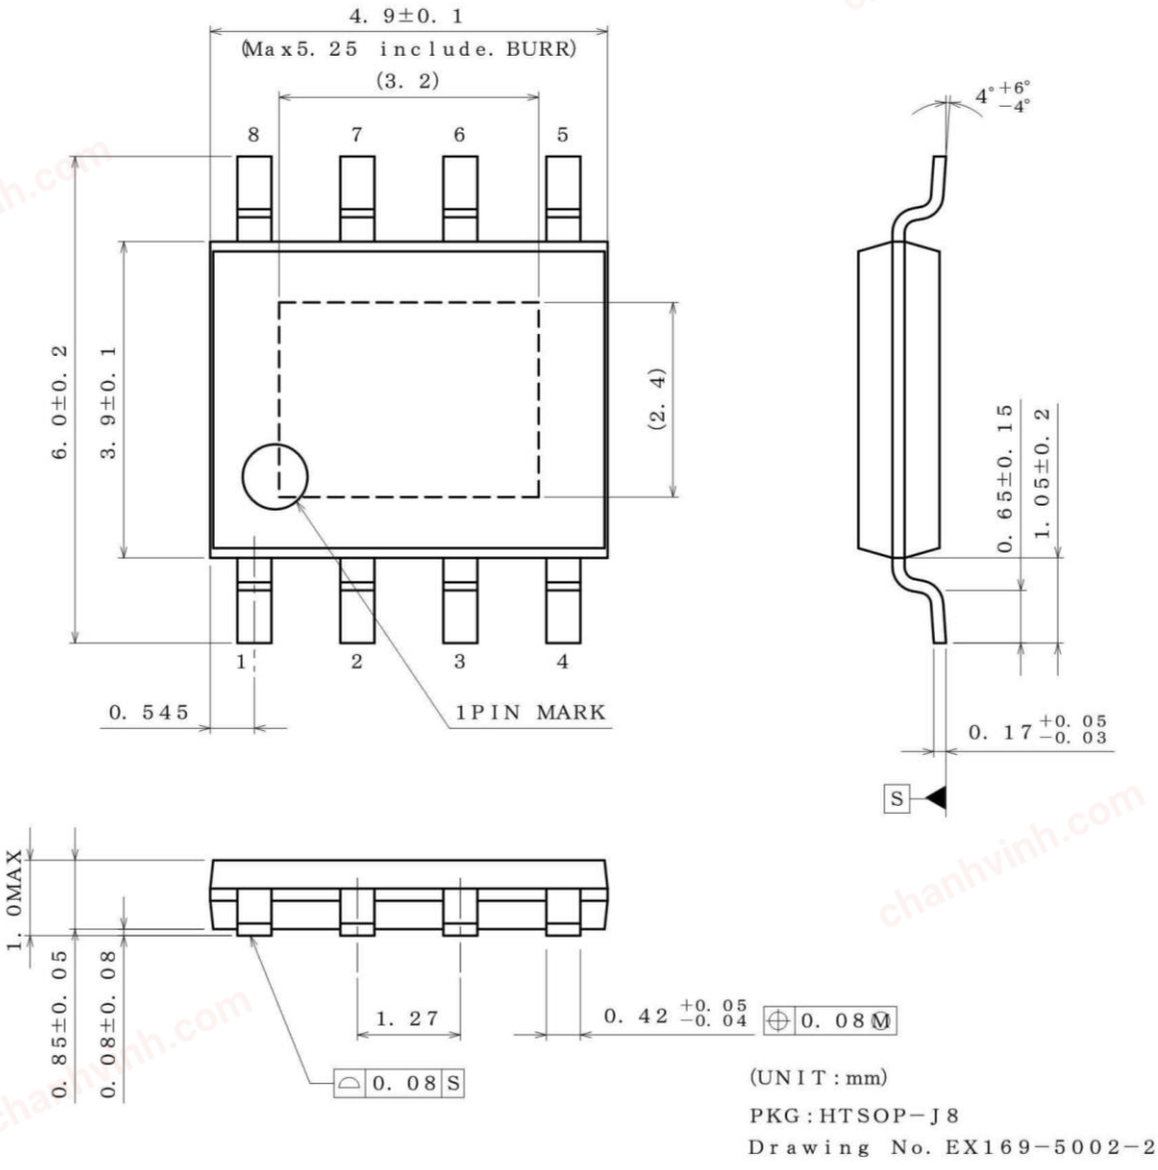

< Tape and Reel Information >

Tape	Embossed carrier tape
Quantity	2500pcs
Direction of feed	E2 The direction is the pin 1 of product is at the upper left when you hold reel on the left hand and you pull out the tape on the right hand

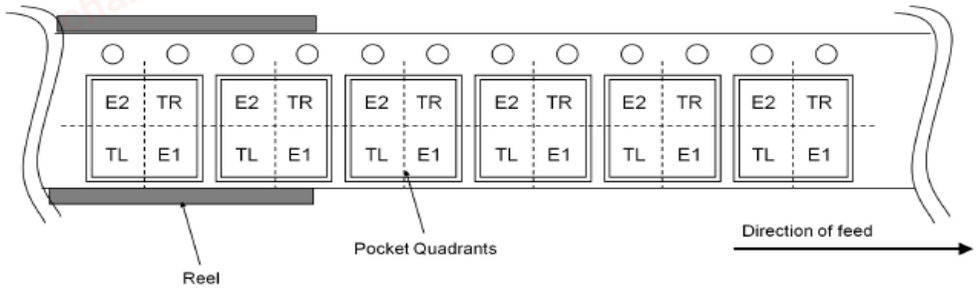

© 2019 ROHM Co., Ltd. All rights reserved.

chanhvinh.com

Revision History

Date	Revision	Changes
19.Aug.2020	001	New Release

chanhvinh.com

© 2019 ROHM Co., Ltd. All rights reserved.

chanhvinh.com

Notice

Precaution on using ROHM Products

1. If you intend to use our Products in devices requiring extremely high reliability (such as medical equipment (Note 1), aircraft/spacecraft, nuclear power controllers, etc.) and whose malfunction or failure may cause loss of human life, bodily injury or serious damage to property ("Specific Applications"), please consult with the ROHM sales representative in advance. Unless otherwise agreed in writing by ROHM in advance, ROHM shall not be in any way responsible or liable for any damages, expenses or losses incurred by you or third parties arising from the use of any ROHM's Products for Specific Applications.

(Note1) Medical Equipment Classification of the Specific Applications

JAPAN	USA	EU	CHINA
CLASSⅢ	CLASSⅢ	CLASSⅡb	CLASSⅢ
CLASSⅣ		CLASSⅢ	

2. ROHM designs and manufactures its Products subject to strict quality control system. However, semiconductor products can fail or malfunction at a certain rate. Please be sure to implement, at your own responsibilities, adequate safety measures including but not limited to fail-safe design against the physical injury, damage to any property, which a failure or malfunction of our Products may cause. The following are examples of safety measures:
   [a] Installation of protection circuits or other protective devices to improve system safety
   [b] Installation of redundant circuits to reduce the impact of single or multiple circuit failure

3. Our Products are not designed under any special or extraordinary environments or conditions, as exemplified below. Accordingly, ROHM shall not be in any way responsible or liable for any damages, expenses or losses arising from the use of any ROHM's Products under any special or extraordinary environments or conditions. If you intend to use our Products under any special or extraordinary environments or conditions (as exemplified below), your independent verification and confirmation of product performance, reliability, etc, prior to use, must be necessary:
   [a] Use of our Products in any types of liquid, including water, oils, chemicals, and organic solvents
   [b] Use of our Products outdoors or in places where the Products are exposed to direct sunlight or dust
   [c] Use of our Products in places where the Products are exposed to sea wind or corrosive gases, including Cl_2, H_2S, NH_3, SO_2, and NO_2
   [d] Use of our Products in places where the Products are exposed to static electricity or electromagnetic waves
   [e] Use of our Products in proximity to heat-producing components, plastic cords, or other flammable items
   [f] Sealing or coating our Products with resin or other coating materials
   [g] Use of our Products without cleaning residue of flux (Exclude cases where no-clean type fluxes is used. However, recommend sufficiently about the residue.); or Washing our Products by using water or water-soluble cleaning agents for cleaning residue after soldering
   [h] Use of the Products in places subject to dew condensation

4. The Products are not subject to radiation-proof design.

5. Please verify and confirm characteristics of the final or mounted products in using the Products.

6. In particular, if a transient load (a large amount of load applied in a short period of time, such as pulse, is applied, confirmation of performance characteristics after on-board mounting is strongly recommended. Avoid applying power exceeding normal rated power; exceeding the power rating under steady-state loading condition may negatively affect product performance and reliability.

7. De-rate Power Dissipation depending on ambient temperature. When used in sealed area, confirm that it is the use in the range that does not exceed the maximum junction temperature.

8. Confirm that operation temperature is within the specified range described in the product specification.

9. ROHM shall not be in any way responsible or liable for failure induced under deviant condition from what is defined in this document.

Precaution for Mounting / Circuit board design

1. When a highly active halogenous (chlorine, bromine, etc.) flux is used, the residue of flux may negatively affect product performance and reliability.

2. In principle, the reflow soldering method must be used on a surface-mount products, the flow soldering method must be used on a through hole mount products. If the flow soldering method is preferred on a surface-mount products, please consult with the ROHM representative in advance.

For details, please refer to ROHM Mounting specification

© 2015 ROHM Co., Ltd. All rights reserved.

chanhvinh.com

Precautions Regarding Application Examples and External Circuits

1. If change is made to the constant of an external circuit, please allow a sufficient margin considering variations of the characteristics of the Products and external components, including transient characteristics, as well as static characteristics.

2. You agree that application notes, reference designs, and associated data and information contained in this document are presented only as guidance for Products use. Therefore, in case you use such information, you are solely responsible for it and you must exercise your own independent verification and judgment in the use of such information contained in this document. ROHM shall not be in any way responsible or liable for any damages, expenses or losses incurred by you or third parties arising from the use of such information.

Precaution for Electrostatic

This Product is electrostatic sensitive product, which may be damaged due to electrostatic discharge. Please take proper caution in your manufacturing process and storage so that voltage exceeding the Products maximum rating will not be applied to Products. Please take special care under dry condition (e.g. Grounding of human body / equipment / solder iron, isolation from charged objects, setting of Ionizer, friction prevention and temperature / humidity control).

Precaution for Storage / Transportation

1. Product performance and soldered connections may deteriorate if the Products are stored in the places where:
   - [a] the Products are exposed to sea winds or corrosive gases, including Cl_2, H_2S, NH_3, SO_2, and NO_2
   - [b] the temperature or humidity exceeds those recommended by ROHM
   - [c] the Products are exposed to direct sunshine or condensation
   - [d] the Products are exposed to high Electrostatic

2. Even under ROHM recommended storage condition, solderability of products out of recommended storage time period may be degraded. It is strongly recommended to confirm solderability before using Products of which storage time is exceeding the recommended storage time period.

3. Store / transport cartons in the correct direction, which is indicated on a carton with a symbol. Otherwise bent leads may occur due to excessive stress applied when dropping of a carton.

4. Use Products within the specified time after opening a humidity barrier bag. Baking is required before using Products of which storage time is exceeding the recommended storage time period.

Precaution for Product Label

A two-dimensional barcode printed on ROHM Products label is for ROHM's internal use only.

Precaution for Disposition

When disposing Products please dispose them properly using an authorized industry waste company.

Precaution for Foreign Exchange and Foreign Trade act

Since concerned goods might be fallen under listed items of export control prescribed by Foreign exchange and Foreign trade act, please consult with ROHM in case of export.

Precaution Regarding Intellectual Property Rights

1. All information and data including but not limited to application example contained in this document is for reference only. ROHM does not warrant that foregoing information or data will not infringe any intellectual property rights or any other rights of any third party regarding such information or data.

2. ROHM shall not have any obligations where the claims, actions or demands arising from the combination of the Products with other articles such as components, circuits, systems or external equipment (including software).

3. No license, expressly or implied, is granted hereby under any intellectual property rights or other rights of ROHM or any third parties with respect to the Products or the information contained in this document. Provided, however, that ROHM will not assert its intellectual property rights or other rights against you or your customers to the extent necessary to manufacture or sell products containing the Products, subject to the terms and conditions herein.

Other Precaution

1. This document may not be reprinted or reproduced, in whole or in part, without prior written consent of ROHM.

2. The Products may not be disassembled, converted, modified, reproduced or otherwise changed without prior written consent of ROHM.

3. In no event shall you use in any way whatsoever the Products and the related technical information contained in the Products or this document for any military purposes, including but not limited to, the development of mass-destruction weapons.

4. The proper names of companies or products described in this document are trademarks or registered trademarks of ROHM, its affiliated companies or third parties.

© 2015 ROHM Co., Ltd. All rights reserved.

chanhvinh.com

General Precaution

1. Before you use our Products, you are requested to carefully read this document and fully understand its contents. ROHM shall not be in any way responsible or liable for failure, malfunction or accident arising from the use of any ROHM's Products against warning, caution or note contained in this document.

2. All information contained in this document is current as of the issuing date and subject to change without any prior notice. Before purchasing or using ROHM's Products, please confirm the latest information with a ROHM sales representative.

3. The information contained in this document is provided on an "as is" basis and ROHM does not warrant that all information contained in this document is accurate and/or error-free. ROHM shall not be in any way responsible or liable for any damages, expenses or losses incurred by you or third parties resulting from inaccuracy or errors of or concerning such information.

© 2015 ROHM Co., Ltd. All rights reserved.