chanhvinh.com

Dear customer

ROHM Co., Ltd. ("ROHM"), on the 1st day of April, 2024,
has absorbed into merger with 100%-owned subsidiary of LAPIS Technology Co., Ltd.

Therefore, all references to "LAPIS Technology Co., Ltd.", "LAPIS Technology"
and/or "LAPIS" in this document shall be replaced with "ROHM Co., Ltd."
Furthermore, there are no changes to the documents relating to our products other than
the company name, the company trademark, logo, etc.

Thank you for your understanding.

ROHM Co., Ltd.
April 1, 2024

chanhvinh.com

chanhvinh.com

ROHM GROUP
LAPIS TECHNOLOGY

FEDL62Q1700-05
Issue Date: Mar 26, 2024

ML62Q1700 Group

16-bit micro controller

GENERAL DESCRIPTION

ML62Q1700 Group is a high performance CMOS 16-bit microcontroller equipped with an 16-bit CPU nX-U16/100 and integrated with program memory (Flash memory), data memory (RAM), data Flash and rich peripheral functions such as the multiplier/divider, CRC generator, DMA controller, Clock generator, Simplified RTC, Timer, General Purpose Ports, UART, Synchronous serial port, I^2C bus interface unit (Master, Slave), Buzzer, Voltage Level Supervisor (VLS), Successive approximation type A/D converter, D/A converter , Analog comparator, LCD driver, Safety function (IEC60730/60335 Class B) and so on.
The CPU nX-U16/100 is capable of efficient instruction execution in 1-instruction 1-clock mode by pipeline architecture parallel processing.
The built-in on-chip debug function enables debugging and programming the software. Also, ISP (In-System Programming) function supports the Flash programming in production line.

- Applications

Consumer and Industrial equipment (e.g., Household appliances, Housing equipment, Office equipment, Measurement instrumentation, etc)

Note:
This product cannot be applicable for automotive use, automatic train control systems, and railway safety systems. Please contact ROHM sales office in advance if contemplating the integration of this product into applications that requires high reliability, such as transportation equipment for ships and railways, communication equipment for trunk lines, traffic signal equipment, power transmission systems, core systems for financial terminals and various safety control devices.

- Product list

The ML62Q1700 Group has seven packages (48pin - 100pin) and ten kinds of memory sizes (32Kbyte - 512Kbyte).

Table 1 ML62Q1700 Group Product List

Program memory	Data memory (RAM)	Data Flash	48pin TQFP48	52pin TQFP52	64pin QFP64 TQFP64	80pin QFP80	100pin QFP100 TQFP100
512Kbyte	32Kbyte	8Kbyte	-	-	ML62Q1729	ML62Q1739	ML62Q1749
384Kbyte			-	-	ML62Q1728	ML62Q1738	ML62Q1748
256Kbyte	16Kbyte	4Kbyte	-	-	ML62Q1727	ML62Q1737	ML62Q1747
192Kbyte			-	-	ML62Q1726	ML62Q1736	ML62Q1746
160Kbyte			-	-	ML62Q1725	ML62Q1735	ML62Q1745
128Kbyte	16Kbyte		-	-	-	ML62Q1734	ML62Q1744
	8Kbyte		ML62Q1704	ML62Q1714	ML62Q1724	-	-
96Kbyte	16Kbyte		-	-	-	ML62Q1733	ML62Q1743
	8Kbyte		ML62Q1703	ML62Q1713	ML62Q1723	-	-
64Kbyte	8Kbyte		ML62Q1702	ML62Q1712	ML62Q1722	-	-
48Kbyte			ML62Q1701	ML62Q1711	ML62Q1721	-	-
32Kbyte			ML62Q1700	ML62Q1710	ML62Q1720	-	-

Please see the last 2 pages “Notes for product usage” and “Notes” in this document on use with this ML62Q1700 group.

ROHM SEMICONDUCTOR

chanhvinh.com

FEATURES

- CPU
  - 16-bit RISC CPU: nX-U16/100 (A35 core)
  - Instruction system: 16-bit length instructions
  - Instruction set: Transfer, arithmetic operations, comparison, logic operations, multiplication/division, bit manipulations, bit logic operations, jump, conditional jump, call return stack manipulations, arithmetic shift, and so on
  - Built-in On-chip debug function
  - Built-in ISP (In-System Programming) function
  - Minimum instruction execution time
    Approximately 30.5µs (at 32.768kHz system clock)
    Approximately 62.5ns/41.6ns (at 16MHz/24MHz system clock)

- Coprocessor for multiplication and division
  - Multiplication : 16bit × 16bit (operation time : 4 cycles)
  - Division : 32bit ÷ 16bit (operation time : 8 cycles)
  - Division : 32bit ÷ 32bit (operation time : 16 cycles)
  - Multiply-accumulate (non-saturating) : 16bit × 16bit + 32bit (operation time : 4 cycles)
  - Multiply-accumulate (saturating) : 16bit × 16bit + 32bit (operation time : 4 cycles)
  - Signed or Unsigned is selectable

- Operating voltage and temperature
  - Operating voltage: VDD = 1.6 to 5.5V (V_{DD} should be 1.8V or over at Power-on)
  - Operating temperature: -40°C to +105°C

- Internal memory
  - Program memory area
    Rewrite count : 100 cycles
    Write unit : 32bit (4byte)
    Erase unit : 16Kbyte/1Kbyte
    Erase/Write temperature : 0°C to +40°C

  - Data Flash memory area
    Rewrite count : 10,000 cycles
    Write unit : 8bit(1byte)
    Erase unit : all area/128byte
    Erase/Write temperature : -40°C to +85°C
    Back Ground Operation (CPU can work while erasing and rewriting)

    This product uses Super Flash® technology licensed from Silicon Storage Technology, Inc.
    Super Flash® is a registered trademark of Silicon Storage Technology, Inc.

  - Data RAM area
    Rewrite unit : 8bit/16bit (1byte/2byte)
    Parity check function is available (interrupt / reset are generatable at Parity error)

- Clock generation circuit
  - Low-speed clock (LSCLK)
    Internal low-speed RC oscillation : Approximately 32.768kHz
    External low-speed clock input : Approximately 32.768kHz
    External low-speed crystal oscillation : 32.768 kHz crystal resonator is connectable
    3 selectable crystal oscillation mode (Tough, Normal, and Low current consumption)
    - Tough mode : Largest oscillation allowance to make highest resistance against leakage between the pins
    - Normal mode : Normal oscillation allowance and current consumption
    - Low current consumption mode: Smallest oscillation allowance to make lower current consumption
  - High-speed clock (HSCLK)
    PLL oscillation : 2 selectable oscillation frequency (24MHz and 16MHz) by code option
  - Watch Dog Timer (WDT) : built-in independent clock for WDT (RC1K: Approximately 1kHz)

- Reset
  - Reset by reset input pin
  - Reset by Power-On Reset
  - Reset by WDT overflow
  - Reset by WDT invalid clear

chanhvinh.com

- Reset by RAM parity error
- Reset by unused ROM area access (instruction access)
- Reset by voltage level supervisor (VLS)
- Software reset by BRK instruction (reset CPU only)
- Reset the peripherals individually
- Collective reset to the all control pins and peripheral circuits

- Power management
  - HALT mode : CPU stops executing instruction, peripheral circuits continue working
  - HALT-H mode : CPU stops executing instruction, high-speed clock oscillation stops and peripheral circuits continue working with low-speed clock
  - STOP mode : CPU and peripheral circuits stops executing instruction, both high-speed oscillation and low-speed oscillation stop.
  - STOP-D mode : CPU and peripheral circuits stops executing instruction, both high-speed oscillation and low-speed oscillation stop. The internal logic voltage (V_{DDL}) goes down to reduce the current consumption (RAM data is retained).
  - Clock gear : High-speed system clock frequency can be changed (1/1, 1/2, 1/4, 1/8, 1/16 or 1/32 of HSCLK)
  - Block Control Function: Powers down the unused function blocks (reset the block or stop supplying the clock)

- Interrupt controller
  - External interrupt ports : max. 12
  - Non-maskable interrupt source : 1 (Internal sources: WDT)
  - Maskable interrupt sources : max. 51
  - Four step interrupt levels

- Watchdog timer (WDT)
  - Selectable Operating clock : select RC1K or LSCLK by code option
  - Overflow period : 8selectable (7.8ms, 15.6ms, 31.3ms, 62.5ms, 125ms, 500ms, 2s and 8s)
  - Selectable window function (enable or disable): configurable clear enable period (50% or 75% of overflow period)
  - Selectable WDT operation : select Enable or Disable by code option
  - Readable WDT counter : WDT counter monitor function

- DMA (Direct Memory Access) controller
  - Channel : 2channel
  - Transfer unit : 8bit/16bit
  - Transfer count : 1 to 1024
  - Transfer cycle : 2 cycle transfer
  - Transfer address : Fixed addressing mode, inclement addressing mode, and decrement addressing mode
  - Transfer target : Special Function Register (SFR)/RAM → SFR/RAM (Transfer from/to Flash is not supported)
  - Transfer request : External pins, Serial communication unit, Successive approximation type A/D converter, 16bit timer, and Functional timer

- Low-speed Time base counter
  - Generate 8 frequency (128Hz to 1Hz) internal pulse signals by dividing the Low-speed clock (LSCLK)
  - Selectable 3 interrupts from eight frequency internal pulse signals
  - 1Hz or 2Hz output from general purpose port
  - Built-in Frequency adjust function: Adjust range: Approximately -488ppm to +488ppm, adjust resolution: Approximately 0.119ppm

- Simplified RTC
  - Channel: 1channel
  - Count by a unit for one second from "00min. 00sec" to "59min. 59sec"
  - Selectable Periodical interrupt request from four periods (0.5s, 1s, 30s or 60s)
  - Built-in minute and second writing error protraction function

chanhvinh.com

- Functional timer
  - Channel: Max. 8channel
  - Built-in timer, capture, and PWM function by 16bit counter
  - One shot mode is available
  - Two types of PWM output with the same period and different duties, and complementary PWM output with the dead time
  - Monitor input signal duty and the period by capture function
  - Generate periodical interrupts, duty interrupts, and interrupts coincided with set value
  - Counter Start, Stop, Counter clear triggered by an external inputs or Timer
  - Generate Emergency stop and emergency stop interrupt triggered by an external input
  - Same start/stop among different channels of the functional timer
  - Selectable counter clock (external clock or divided by 1 to 128 of LSCLK or HSCLK) for each channel

- 16-bit General timers
  - Channel: Max. 8channel
  - 8 bits timer mode and 16-bit timer mode
  - Same start/stop among different channels of 16bit (8bit) timer
  - Timer output (toggled by overflow)
  - Selectable counter clock (external clock or divided by 1 to 128 of LSCLK or HSCLK) for each channel

- Serial communication unit
  - Synchronous Serial Port (SSIO) mode or UART mode is selectable
  - Channel: Max. 6channel

    < Synchronous Serial Port mode>
    – Selectable from Master and Slave
    – Selectable from LSB first or MSB first
    – Selectable 8-bit length or 16-bit length

    < UART mode>
    – Full-duplex communication mode and half-duplex communication mode
    – 5 to 8bit length, parity or no parity, odd parity or even parity, 1 stop bit or 2 stop bits
    – Selectable from Positive logic or Negative logic
    – Selectable from LSB first or MSB first
    – Configurable wide range communication speed
      32.768kHz operation clock: 1bit/s to 4,800 bit/s
      24MHz operation clock: 600bit/s to 3Mbit/s
      16MHz operation clock: 300bit/s to 2Mbit/s
    – Built-in baud rate generator

- I^2C bus unit (Master / Slave)
  - Selectable from Master mode or Slave mode
  - Channel: 1channel

    < Master function >
    – Standard mode (100kbit/s), fast mode (400kbit/s) and 1Mbps mode(1Mbit/s)
    – Handshake (Clock synchronization)
    – 7bit address format (10bit address format is supported)

    < Slave function >
    – Standard mode (100kbit/s), fast mode (400kbit/s) and 1Mbps mode(1Mbit/s)
    – Clock stretch function
    – 7bit address format

- I^2C bus Master
  - Channel: 2channel
  - Standard mode (100kbit/s), fast mode (400kbit/s) and 1Mbps mode(1Mbit/s)
  - Handshake (Clock synchronization)
  - 7bit address format (10bit address format is supported)

chanhvinh.com

- General-purpose ports (GPIO)
  - I/O port : Max. 87 (Including one pin for on-chip debug and pins for other shared functions)
  - Input port : Max. 2 (Including a shared function)
  - External interrupt port : Max. 12
  - LED driver por : Max. 86
  - Carrier frequency output function (for IR communication)

- Successive approximation type A/D converter (SA-ADC)
  - Channel: Max.16channel
  - Resolution: 10bit
  - Conversion time: Min. 2.25µs / channel (When the conversion clock is 8MHz)
  - Reference voltages are selectable
    (V_{DD} pin / Internal reference voltage (V_{REFI} = Approximately 1.55V) / External reference voltage (V_{REF} pin))
  - Selected channel repeat conversion
  - dedicated result register for each channel
  - Interrupt determining by upper limit or lower limit threshold of conversion result

- Voltage Level Supervisor (VLS)
  - Accuracy: ±4%
  - Threshold voltage: 12 selectable (from 1.85V to 4.00V)
  - Functional Voltage level detection reset (VLS reset)
  - Functional Voltage level detection interrupt (VLS0 interrupt)

- Analog comparator
  - Channel: 2channel
  - Selectable interrupt from the comparator output (rising edge or falling edge)
  - Selectable from sampling or without sampling
  - Comparable with external 2 inputs
  - Comparable with external input and internal reference voltage (0.8V)

- D/A converter
  - Channel : Max 2channel
  - Resolution : 8bit
  - Output impedance : 6k ohm (Typ.)
  - R-2R ladder type

- Buzzer
  - 4 buzzer mode (Continuous sound, Single sound, Intermittent sound 1 and Intermittent sound 2)
  - 8frequencies (4.096kHz to 293Hz)
  - 15 step duty (1/16 to 15/16)
  - Selectable from positive logic buzzer output or negative logic buzzer output

- CRC (Cyclic Redundancy Check) generator
  - Generation equation: $X^{16}+X^{12}+X^5+1$
  - Selectable from LSB first or MSB first
  - Built-in Automatic program memory CRC calculation mode in HALT mode

- LCD driver
  - Max. 480 dots (60seg x 8 com) [*1]

    ML62Q1700/1701/1702/1703/1704 : 24seg×8com (com Max.), 29seg×3com (seg Max.)
    ML62Q1710/1711/1712/1713/1714 : 27seg×8com (com Max.), 32seg×3com (seg Max.)
    ML62Q1720/1721/1722/1723/1724/
    1725/1726/1727/1728/1729 : 35seg×8com (com Max.), 40seg×3com (seg Max.)
    ML62Q1733/1734/1735/1736/1737/1738/1739 : 45seg×8com (com Max.), 50seg×3com (seg Max.)
    ML62Q1743/1744/1745/1746/1747/1748/1749 : 60seg×8com (com Max.), 65seg×3com (seg Max.)

    [*1] : Five pins are shared for common or segment, selectable by setting a SFR
  - 1/3 bias (built-in bias generation circuit)
  - Frame frequency (Approximately. 32Hz, 38Hz, 64Hz, 75Hz, 128Hz and 150Hz)
  - Four bias generation modes (Internal voltage boost, External capacitive voltage divide, Internal capacitive voltage divide and External supply voltages)
  - Contrast adjustment (32 steps) is available in the Internal voltage boost mode.

chanhvinh.com

- Safety Function (IEC60730/60335 Class B)
  - Automatic switching to the internal low-speed RC oscillation in case the low-speed crystal oscillation stopped
  - RAM/SFR guard
  - Automatic program memory CRC calculation
  - RAM parity error detection
  - ROM unused area access reset (instruction access)
  - Clock mutual monitoring
  - WDT counter monitoring
  - SA-ADC test
  - UART test
  - Synchronous serial I/O test
  - I^2C bus test
  - GPIO test

chanhvinh.com

- Shipping package

Package	Body size (including lead) [mm × mm]	Pin pitch [mm]	Packing form and Product name	
			Tray	Tape & Reel
48 pin plastic TQFP	7.0 × 7.0 (9.0 × 9.0)	0.50	ML62Q1700-xxxTBZWAX ML62Q1701-xxxTBZWAX ML62Q1702-xxxTBZWAX ML62Q1703-xxxTBZWAX ML62Q1704-xxxTBZWAX	ML62Q1700-xxxTBZWBX ML62Q1701-xxxTBZWBX ML62Q1702-xxxTBZWBX ML62Q1703-xxxTBZWBX ML62Q1704-xxxTBZWBX
52 pin plastic TQFP	10.0 × 10.0 (12.0 × 12.0)	0.65	ML62Q1710-xxxTBZWAX ML62Q1711-xxxTBZWAX ML62Q1712-xxxTBZWAX ML62Q1713-xxxTBZWAX ML62Q1714-xxxTBZWAX	ML62Q1710-xxxTBZWBX ML62Q1711-xxxTBZWBX ML62Q1712-xxxTBZWBX ML62Q1713-xxxTBZWBX ML62Q1714-xxxTBZWBX
64 pin plastic TQFP	10.0 × 10.0 (12.0 × 12.0)	0.50	ML62Q1720-xxxTBZWAX ML62Q1721-xxxTBZWAX ML62Q1722-xxxTBZWAX ML62Q1723-xxxTBZWAX ML62Q1724-xxxTBZWAX ML62Q1725-xxxTBZWAX ML62Q1726-xxxTBZWAX ML62Q1727-xxxTBZWAX ML62Q1728-xxxTBZWAX ML62Q1729-xxxTBZWAX	ML62Q1720-xxxTBZWBX ML62Q1721-xxxTBZWBX ML62Q1722-xxxTBZWBX ML62Q1723-xxxTBZWBX ML62Q1724-xxxTBZWBX ML62Q1725-xxxTBZWBX ML62Q1726-xxxTBZWBX ML62Q1727-xxxTBZWBX ML62Q1728-xxxTBZWBX ML62Q1729-xxxTBZWBX
64 pin plastic QFP	14.0 × 14.0 (16.0 × 16.0)	0.80	ML62Q1720-xxxGAZWAX ML62Q1721-xxxGAZWAX ML62Q1722-xxxGAZWAX ML62Q1723-xxxGAZWAX ML62Q1724-xxxGAZWAX ML62Q1725-xxxGAZWAX ML62Q1726-xxxGAZWAX ML62Q1727-xxxGAZWAX ML62Q1728-xxxGAZWAX ML62Q1729-xxxGAZWAX	-
80 pin plastic QFP	14.0 × 14.0 (16.0 × 16.0)	0.65	ML62Q1733-xxxGAZWAX ML62Q1734-xxxGAZWAX ML62Q1735-xxxGAZWAX ML62Q1736-xxxGAZWAX ML62Q1737-xxxGAZWAX ML62Q1738-xxxGAZWAX ML62Q1739-xxxGAZWAX	-
100 pin plastic TQFP	14.0 × 14.0 (16.0 × 16.0)	0.5	ML62Q1743-xxxTBZWAX ML62Q1744-xxxTBZWAX ML62Q1745-xxxTBZWAX ML62Q1746-xxxTBZWAX ML62Q1747-xxxTBZWAX ML62Q1748-xxxTBZWAX ML62Q1749-xxxTBZWAX	-
100 pin plastic TQFP	20.0 × 14.0 (25.0 × 19.0)	0.65	ML62Q1743-xxxGAZWAX ML62Q1744-xxxGAZWAX ML62Q1745-xxxGAZWAX ML62Q1746-xxxGAZWAX ML62Q1747-xxxGAZWAX ML62Q1748-xxxGAZWAX ML62Q1749-xxxGAZWAX	-

xxx: ROM code number

chanhvinh.com

ML62Q1700 Group how to read the part number

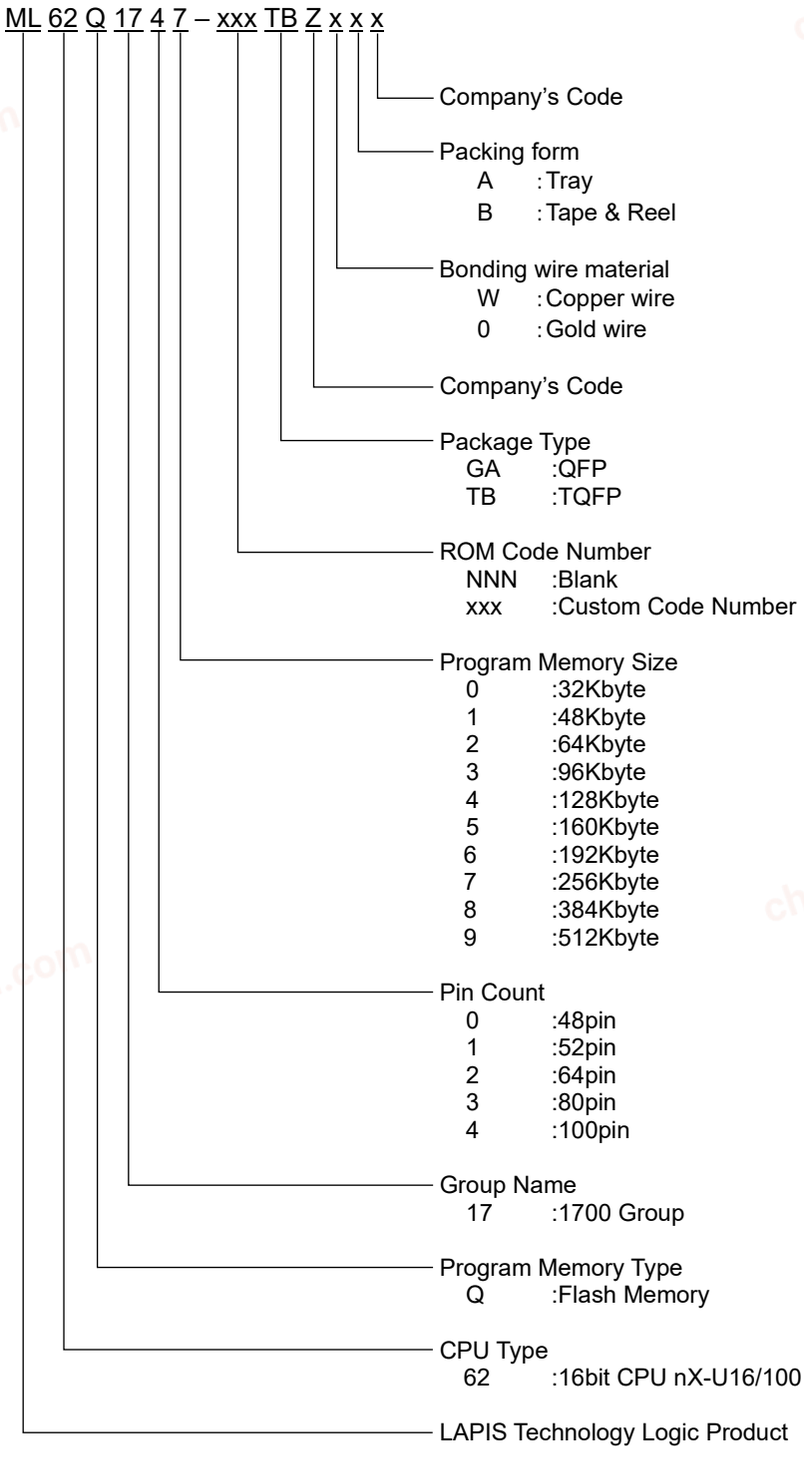


Figure 1 ML62Q1700 Group Part Number

chanhvinh.com

ML62Q1700 Group Main Function List

Table 2 ML62Q1700 Group Main Function List

Part number	Pin						LCD drive pin				Interrupt		Timer			Serial			Analog			
	Total pin-counts	Power pin counts	Reset Input pin	Input port *3	I/O port	LED drive port	LCD common/segment shared pin *4 *5	LCD common pin *5	LCD segment pin *5	LCD bias pin	Internal interrupt [source]	External interrupt [port]	Functional Timer [channel]	16-bit Timer [channel] *1	Simplified RTC [channel]	Serial communication unit (Full-duplex UART or Synchronous serial) [channel h] *2	I²C bus unit (Master/Slave) [channel]	I²C bus interface (Master only) [channel]	Successive approximation type A/D converter [channel]	Analog comparator [channel]	Analog comparator [input pin]	8bit D/A converter [channel]
ML62Q1700	48	3	1	2	37	36	5	3	24	5	31	10	6	6	1	2	1	2	12	2	4	1
ML62Q1701																						
ML62Q1702																						
ML62Q1703																						
ML62Q1704																						
ML62Q1710	52				41	40			27													
ML62Q1711																						
ML62Q1712																						
ML62Q1713																						
ML62Q1714																						
ML62Q1720	64				53	52			35													
ML62Q1721																						
ML62Q1722																						
ML62Q1723																						
ML62Q1724																						
ML62Q1725																						
ML62Q1726																						
ML62Q1727																						
ML62Q1728																						
ML62Q1729																						
ML62Q1733	80	45			67	66			45		43	12	8	8		6			16			2
ML62Q1734																						
ML62Q1735																						
ML62Q1736																						
ML62Q1737																						
ML62Q1738																						
ML62Q1739																						
ML62Q1743	100				87	86			60													
ML62Q1744																						
ML62Q1745																						
ML62Q1746																						
ML62Q1747																						
ML62Q1748																						
ML62Q1749																						

*1 : One 16bit timer is configurable as two 8bit timers

*2 : Synchronous Communication unit includes UART mode and Synchronous Serial Port mode. UART mode and Synchronous Serial Port can not be used at the same time in the same channel.


*3 : Shared with pins for crystal oscillation

*4 : The LCD common/segment shared pins are shared for common or segment, selectable by setting a SFR

*5 : All LCD drive pins are shared with general purpose I/O ports.

chanhvinh.com

BLOCK DIAGRAM

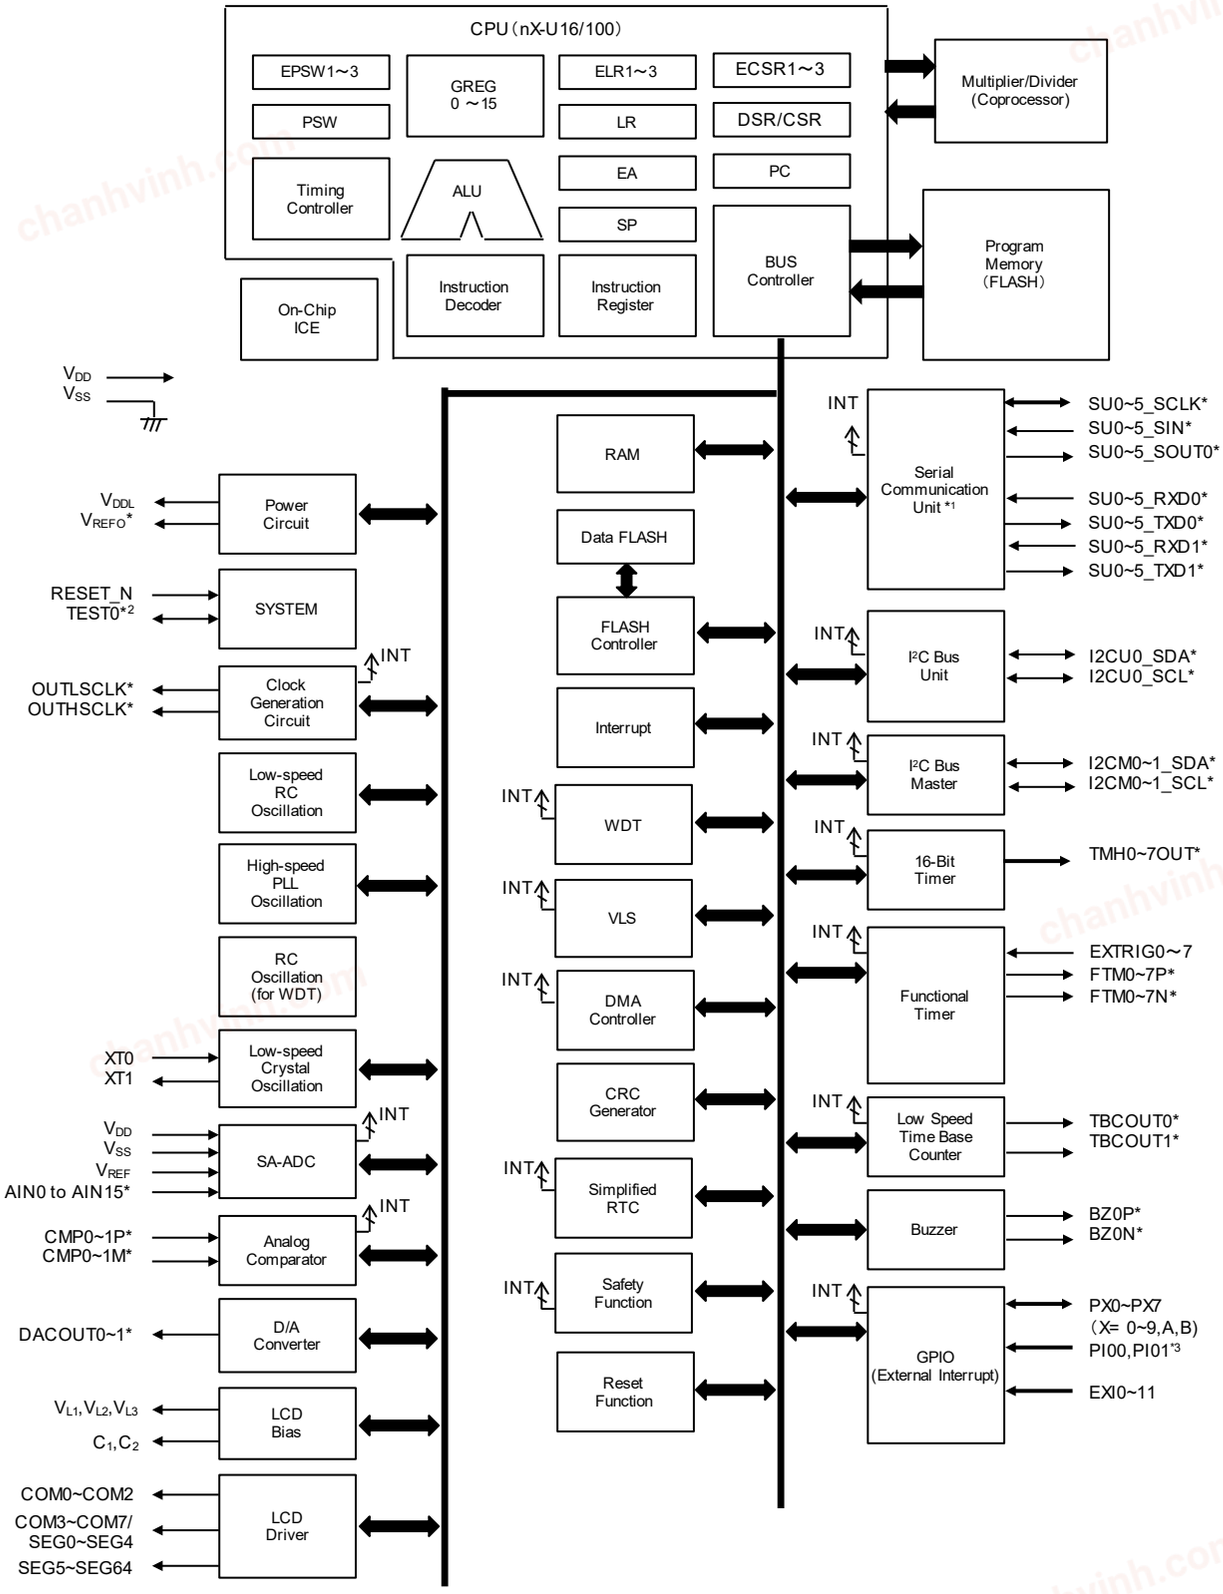

* : Indicates the shared function of general ports.
*1 : Shared UART and Synchronous Serial Port.
*2 : Not available as the input port when connecting to the on-chip debug emulator.
*3 : Not available as the input port when connecting to the crystal resonator.

Figure 2 ML62Q1700 Group Block Diagram

chanhvinh.com

PIN CONFIGURATION

The pin names in the pin-layout indicate 1st-function or LCD function. Refer to Table-3 or Table-4 about other functions.

Pin Layout of 48pin TQFP Package

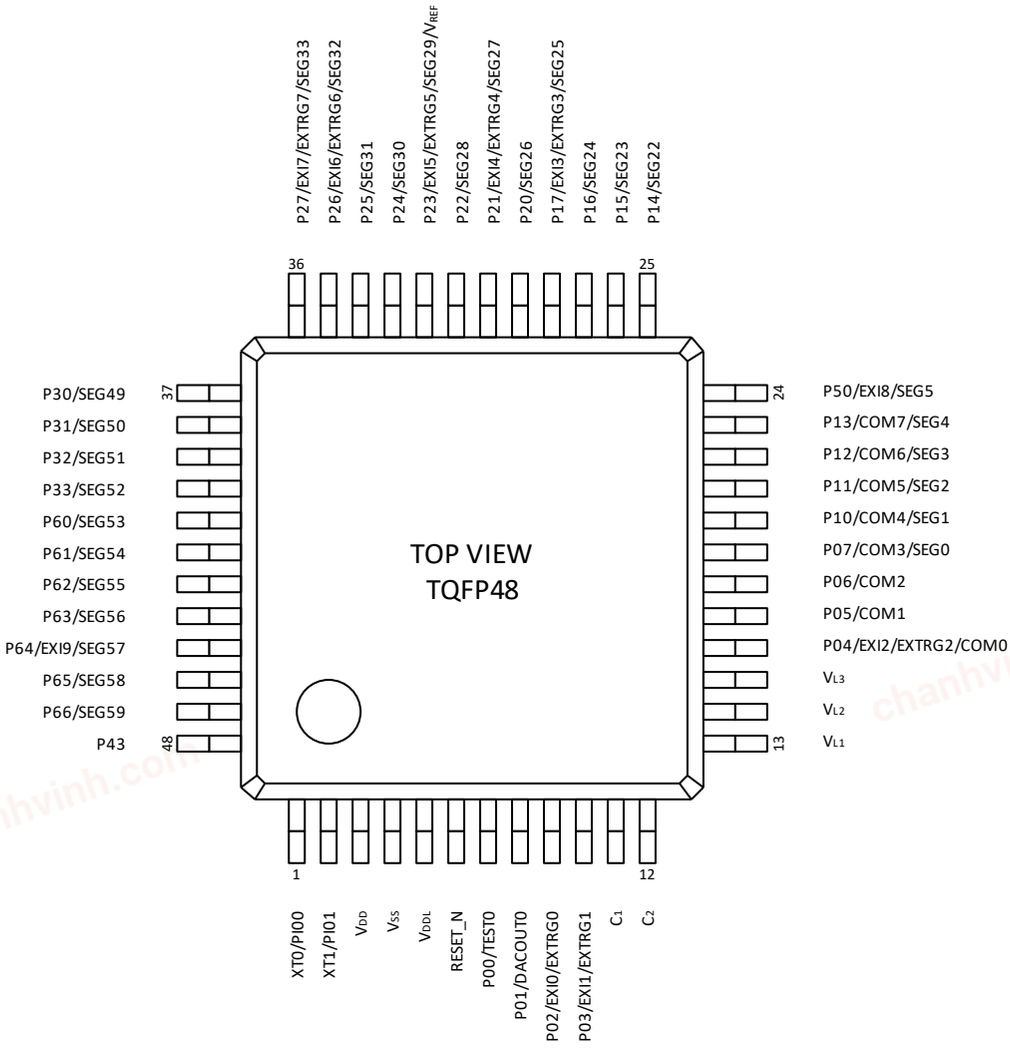


Figure 3 Pin Layout of 48pin TQFP Package

chanhvinh.com

Pin Layout of 52pin TQFP Package

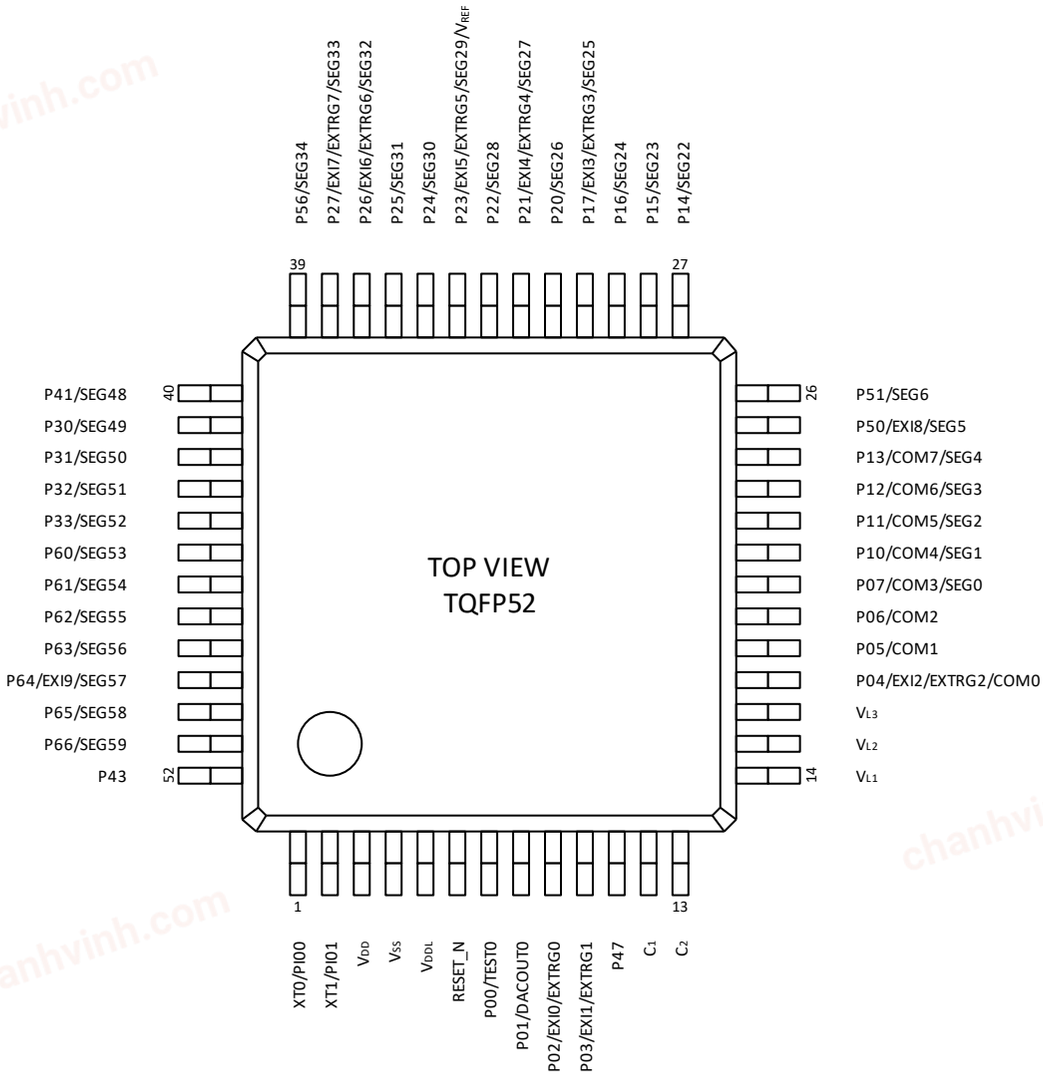


Figure 4 Pin Layout of 52pin TQFP52 Package

chanhvinh.com

Pin Layout of 64pin TQFP/QFP Package

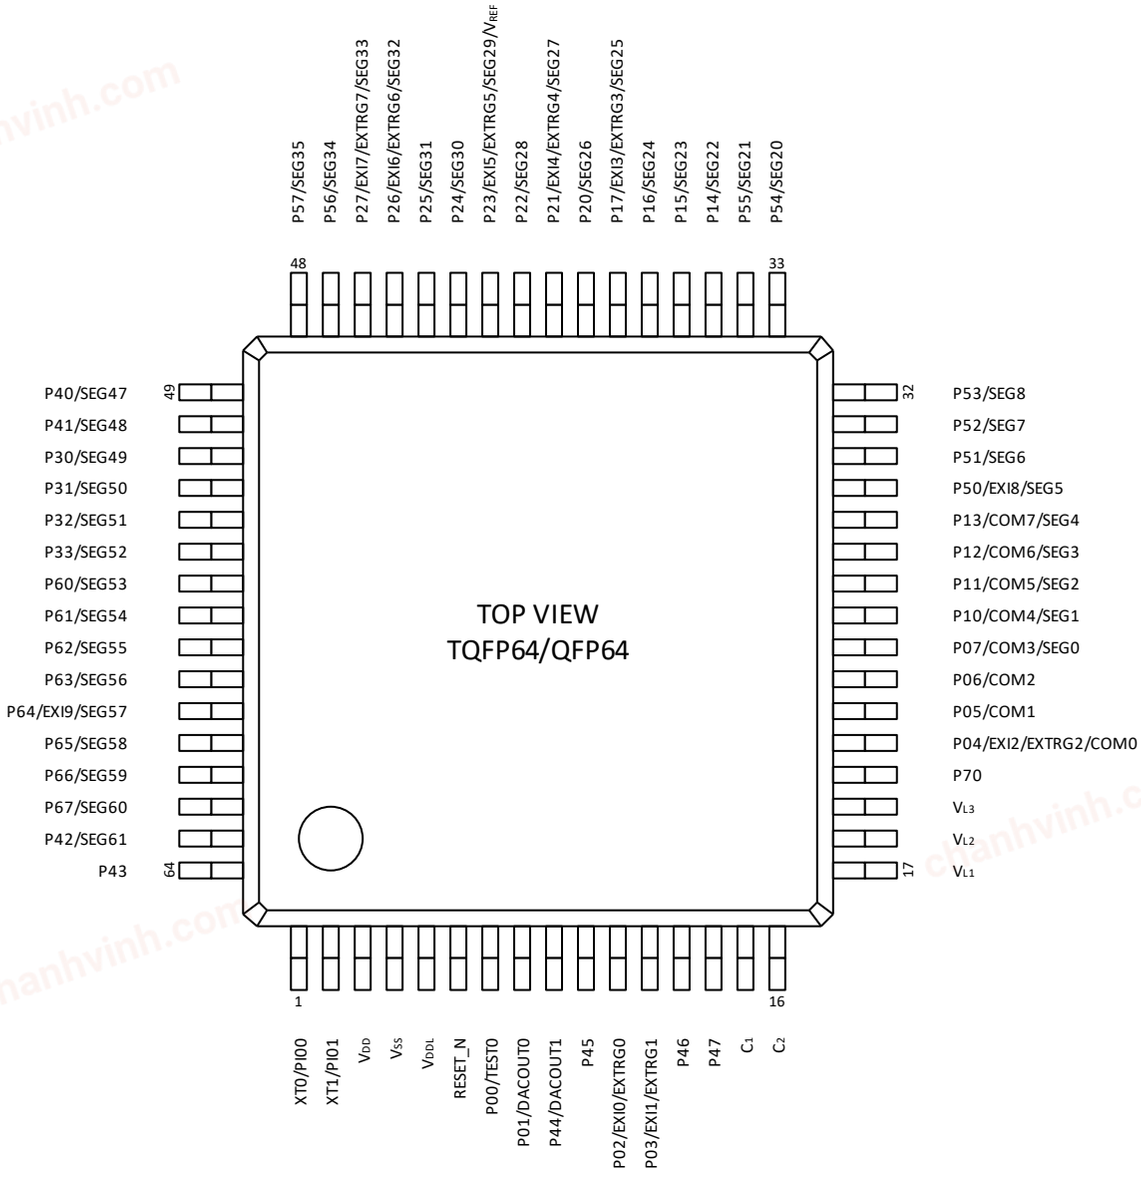


Figure 5 Pin Layout of 64pin TQFP/QFP Package

chanhvinh.com

Pin Layout of 80pin QFP Package

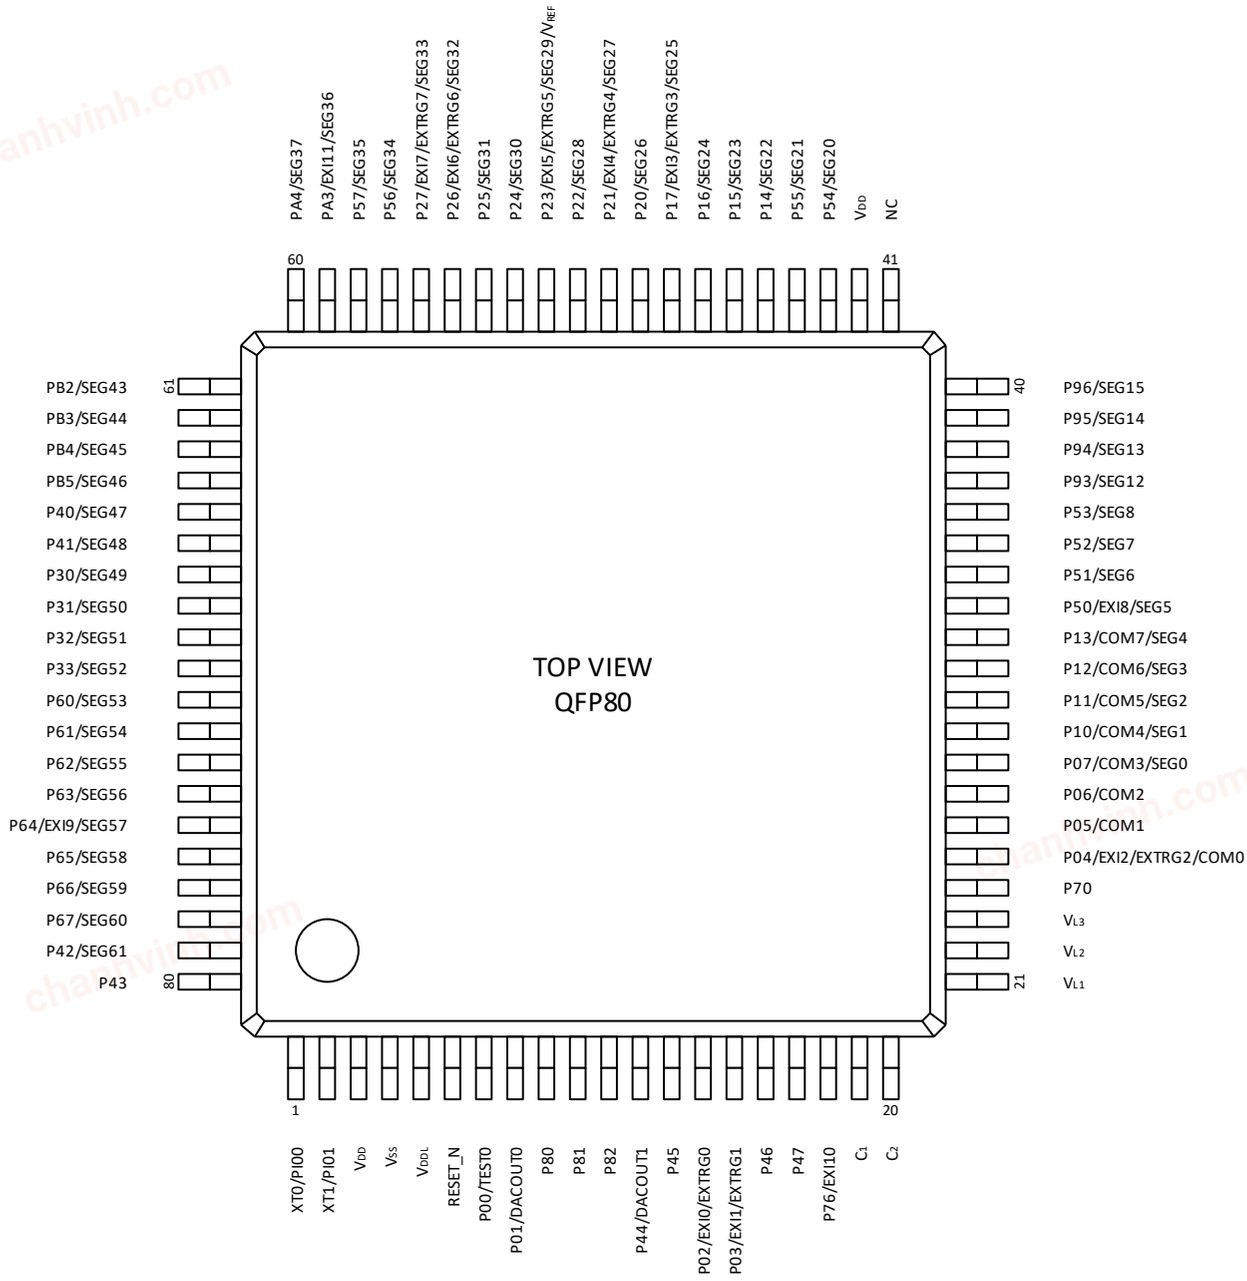


Figure 6 Pin Layout of 80pin QFP Package

chanhvinh.com

Pin Layout of 100pin TQFP Package

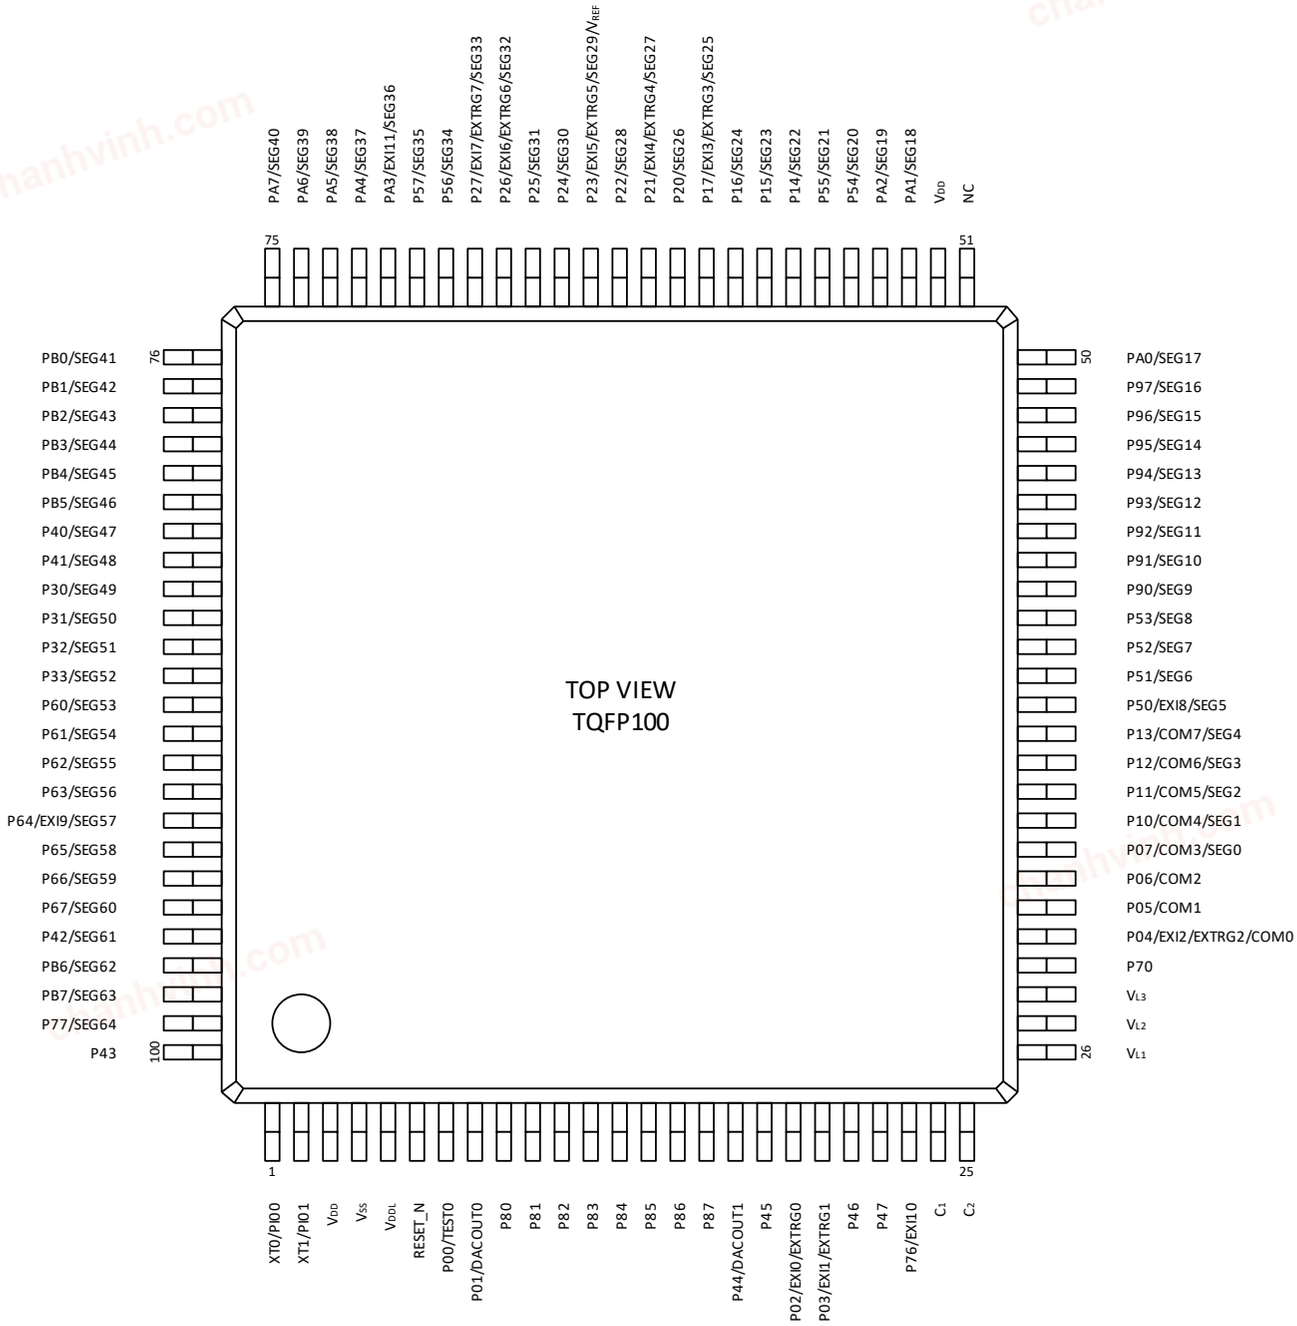


Figure 7 Pin Layout of 100pin TQFP Package

chanhvinh.com

Pin Layout of 100pin QFP Package

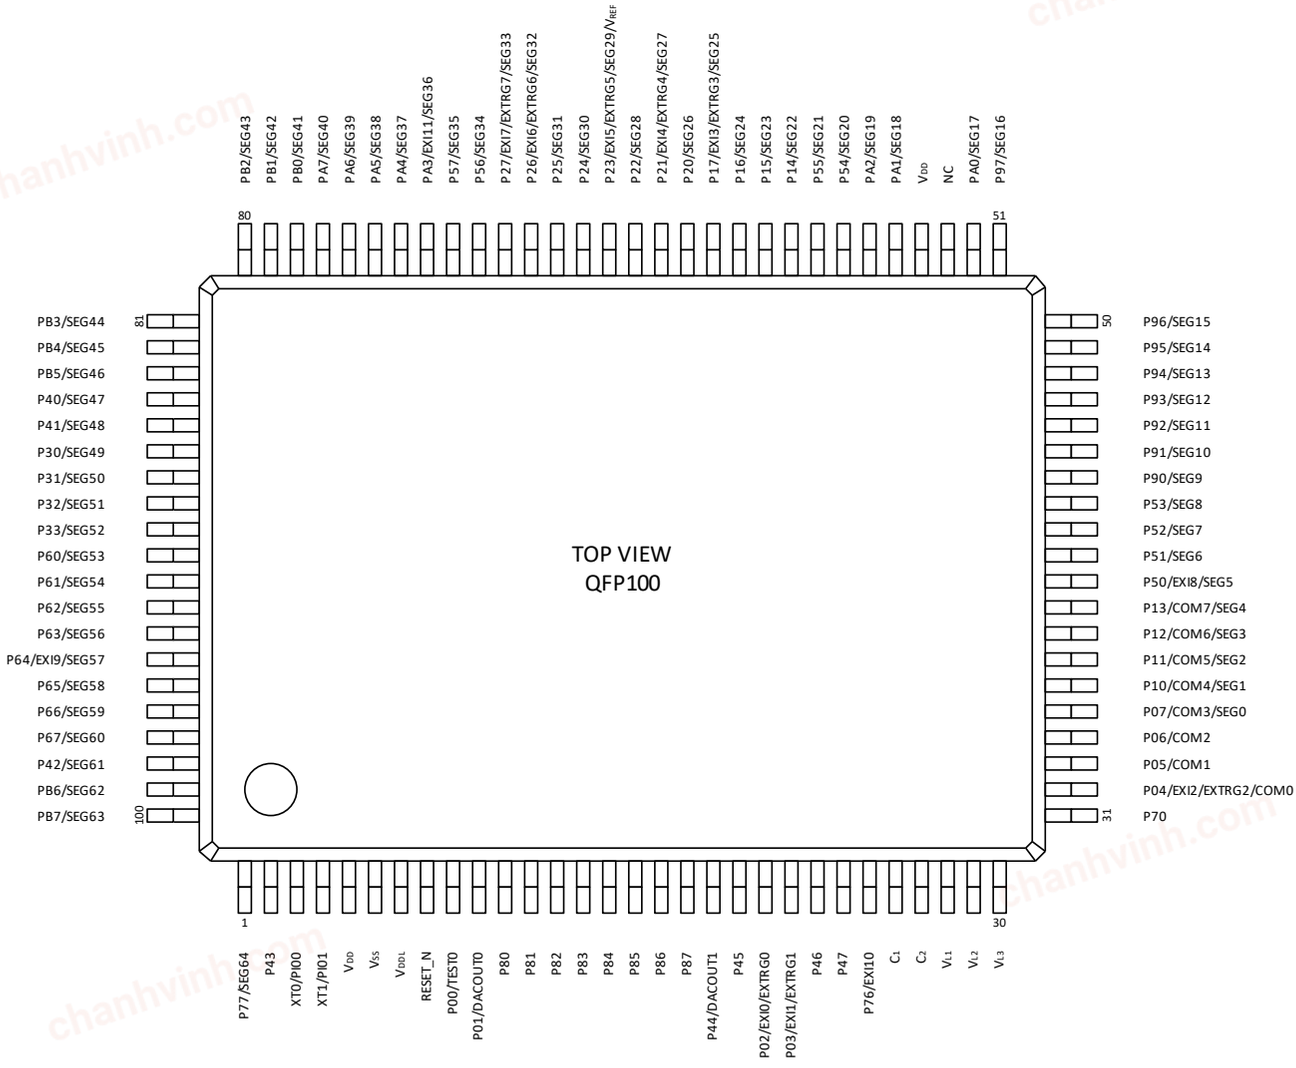


Figure 8 Pin Layout of 100pin QFP Package

chanhvinh.com

PIN LIST

Table 3 Pin List (1/3)

Pin No.						Pin name (1st function)	1st function others	2nd function SIU	3rd function SIU	4th function I2C	5th function Timer	6th function others	7th function others	8th function ADC
48 Pin	52 Pin	64 Pin	80 pin	TQFP100	QFP100									
3	3	3	3	3	5	V_{DD}	-	-	-	-	-	-	-	-
-	-	-	42	52	54	V_{DD}	-	-	-	-	-	-	-	-
4	4	4	4	4	6	V_{SS}	-	-	-	-	-	-	-	-
-	-	-	41	51	53	NC	-	-	-	-	-	-	-	-
5	5	5	5	5	7	V_{DDL}	-	-	-	-	-	-	-	-
1	1	1	1	1	3	XT0	PI00	-	-	-	-	-	-	-
2	2	2	2	2	4	XT1	PI01	-	-	-	-	-	-	-
6	6	6	6	6	8	RESET_N	RESET_N	-	-	-	-	-	-	-
7	7	7	7	7	9	P00	TEST0	-	-	-	-	-	-	-
8	8	8	8	8	10	P01	DACOUT0	-	-	-	FTM3P *1	TBCOUT0	TBCOUT1	-
9	9	11	14	19	21	P02	EXI0 EXTRG0	SU0_RXD0 SU0_SIN	-	I2CU0_SCL *1	FTM0P	OUTLSCLK	CMP0M	-
10	10	12	15	20	22	P03	EXI1 EXTRG1	SU0_TXD0 SU0_SOUT	SU0_TXD1	I2CU0_SDA	FTM0N	OUTHSCLK	CMP0P	AIN11
16	17	21	25	30	32	P04	EXI2 EXTRG2 COM0	SU0_SCLK	-	I2CU0_SCL	TMH0OUT	-	-	-
17	18	22	26	31	33	P05	COM1	-	-	-	-	-	-	-
18	19	23	27	32	34	P06	COM2	-	-	I2CM0_SDA	-	-	-	-
19	20	24	28	33	35	P07	COM3 SEG0	SU0_RXD1	SU0_RXD0	I2CM0_SCL	-	-	-	-
20	21	25	29	34	36	P10	COM4 SEG1	SU0_TXD1	-	-	-	-	-	-
21	22	26	30	35	37	P11	COM5 SEG2	SU0_SCLK	-	-	-	-	-	-
22	23	27	31	36	38	P12	COM6 SEG3	SU0_RXD0 SU0_SIN	-	-	TMH4OUT	-	-	-
23	24	28	32	37	39	P13	COM7 SEG4	SU0_TXD0 SU0_SOUT	SU0_TXD1	-	TMH1OUT	-	TMH3OUT	-
25	27	35	45	57	59	P14	SEG22	-	-	-	-	-	-	-
26	28	36	46	58	60	P15	SEG23	-	-	I2CU0_SDA	-	-	-	-
27	29	37	47	59	61	P16	SEG24	SU1_SCLK	-	I2CU0_SCL	TMH5OUT	-	-	-
28	30	38	48	60	62	P17	EXI3 EXTRG3 SEG25	SU0_RXD1	SU0_RXD0	-	FTM1P	TBCOUT0	BZ0P	AIN0
29	31	39	49	61	63	P20	SEG26	SU0_TXD1	-	-	FTM1N	TBCOUT1	BZ0N	AIN1
30	32	40	50	62	64	P21	EXI4 EXTRG4 SEG27	SU1_RXD0 SU1_SIN	-	-	FTM2P	OUTLSCLK	-	AIN2
31	33	41	51	63	65	P22	SEG28	SU1_TXD0 SU1_SOUT	SU1_TXD1	I2CM0_SDA	FTM2N	OUTHSCLK	-	AIN3
32	34	42	52	64	66	P23	EXI5 EXTRG5 SEG29 V_{REF}	SU1_SCLK	-	I2CM0_SCL	TMH2OUT	-	-	V_{REFO}
33	35	43	53	65	67	P24	SEG30	SU1_RXD0 SU1_SIN	-	-	-	-	-	AIN4
34	36	44	54	66	68	P25	SEG31	SU1_TXD0 SU1_SOUT	SU1_TXD1	-	-	-	-	AIN5
35	37	45	55	67	69	P26	EXI6 EXTRG6 SEG32	SU1_RXD1	SU1_RXD0	I2CU0_SDA	FTM3P	TBCOUT0	BZ0P	AIN6
36	38	46	56	68	70	P27	EXI7 EXTRG7 SEG33	SU1_TXD1	-	I2CU0_SCL	FTM3N	TBCOUT1	BZ0N	AIN7

*1: No assignment to ML62Q1500 Series.

chanhvinh.com

Table 3 Pin List (2/3)

Pin No.						Pin name (1st function)	1st function others	2nd function SIU *3	3rd function SIU *3	4th function I2C	5th function Timer *3	6th function others	7th function others	8th function ADC *3
48 Pin	52 Pin	64 Pin	80 pin	TQFP100	QFP100									
37	41	51	67	84	86	P30	SEG49	-	-	-	-	-	-	-
38	42	52	68	85	87	P31	SEG50	-	-	-	-	TBCOUT0	TBCOUT1	-
39	43	53	69	86	88	P32	SEG51	SU1_RXD1	SU1_RXD0	-	-	-	-	-
40	44	54	70	87	89	P33	SEG52	SU1_TXD1	-	-	TMH3OUT	-	-	-
-	-	49	65	82	84	P40	SEG47	SU5_TXD1	-	-	-	-	-	-
-	40	50	66	83	85	P41	SEG48	-	-	-	-	-	-	-
-	-	63	79	96	98	P42	SEG61	SU3_TXD1	-	-	-	-	-	-
48	52	64	80	100	2	P43	-	-	-	-	-	TBCOUT0	TBCOUT1	AIN10
-	-	9	12	17	19	P44	DACOUT1	SU4_RXD1	SU4_RXD0	-	FTM3N *1	-	-	-
-	-	10	13	18	20	P45	-	SU4_TXD1	-	-	-	-	-	-
-	-	13	16	21	23	P46	-	-	-	I2CU0_SDA *1	FTM1N *1	-	-	-
-	11	14	17	22	24	P47	-	SU0_SCLK *1	-	I2CU0_SCL *2	FTM1P *1	-	-	-
24	25	29	33	38	40	P50	EXI8 SEG5	-	-	-	-	-	-	-
-	26	30	34	39	41	P51	SEG6	-	-	-	-	-	-	-
-	-	31	35	40	42	P52	SEG7	SU4_RXD1	SU4_RXD0	-	-	-	-	-
-	-	32	36	41	43	P53	SEG8	SU4_TXD1	-	-	-	-	-	-
-	-	33	43	55	57	P54	SEG20	SU2_RXD1	SU2_RXD0	-	TMH7OUT	-	-	-
-	-	34	44	56	58	P55	SEG21	SU2_TXD1	-	-	-	-	-	-
-	39	47	57	69	71	P56	SEG34	SU2_RXD0 SU2_SIN	-	-	-	-	-	AIN12
-	-	48	58	70	72	P57	SEG35	SU2_TXD0 SU2_SOUT	SU2_TXD1	-	-	-	-	AIN13
41	45	55	71	88	90	P60	SEG53	-	-	I2CM1_SCL	-	-	-	-
42	46	56	72	89	91	P61	SEG54	-	-	I2CM1_SDA	-	-	-	-
43	47	57	73	90	92	P62	SEG55	-	-	-	FTM4N	-	CMP1P	-
44	48	58	74	91	93	P63	SEG56	-	-	-	FTM4P	-	CMP1M	-
45	49	59	75	92	94	P64	EXI9 SEG57	SU3_RXD0 SU3_SIN	-	-	FTM5P	-	-	-
46	50	60	76	93	95	P65	SEG58	SU3_TXD0 SU3_SOUT	SU3_TXD1	-	FTM5N	-	-	AIN8
47	51	61	77	94	96	P66	SEG59	SU3_SCLK	-	-	-	-	-	AIN9
-	-	62	78	95	97	P67	SEG60	SU3_RXD1	SU3_RXD0	-	-	-	-	-
-	-	20	24	29	31	P70	-	-	-	-	TMH6OUT	-	-	-
15	16	19	23	28	30	V_{L3}	-	-	-	-	-	-	-	-
14	15	18	22	27	29	V_{L2}	-	-	-	-	-	-	-	-
13	14	17	21	26	28	V_{L1}	-	-	-	-	-	-	-	-
12	13	16	20	25	27	C_2	-	-	-	-	-	-	-	-
11	12	15	19	24	26	C_1	-	-	-	-	-	-	-	-
-	-	-	18	23	25	P76	EXI10	-	-	-	-	-	-	-
-	-	-	-	99	1	P77	SEG64	-	-	-	-	-	-	-

*1: No assignment to ML62Q1500 Series.
*2: No assignment to ML62Q1500 Series and products of 52 PIN-package.
*3: The pins of name with DACOUT1, SU2, SU3, SU4, SU5, TMH6, TMH7, AIN12 or AIN13 are not assigned to products of 48/52/64 PIN-packages.

chanhvinh.com

Table 3 Pin List (3/3)

Pin No.						Pin name (1st function)	1st function others	2nd function SIU	3rd function SIU	4th function I2C	5th function Timer	6th function others	7th function others	8th function ADC
48 Pin	52 Pin	64 Pin	80 pin	TQFP100	QFP100									
-	-	-	9	9	11	P80	-	SU4_RXD0 SU4_SIN	-	-	-	-	-	-
-	-	-	10	10	12	P81	-	SU4_TXD0 SU4_SOUT	SU4_TXD1	-	-	-	-	-
-	-	-	11	11	13	P82	-	SU4_SCLK	-	-	-	-	-	-
-	-	-	-	12	14	P83	-	SU5_RXD0	-	-	-	-	-	-
-	-	-	-	13	15	P84	-	SU5_TXD0	SU5_TXD1 *1	-	-	-	-	-
-	-	-	-	14	16	P85	-	-	-	-	-	-	-	-
-	-	-	-	15	17	P86	-	-	-	-	FTM7P *1	-	-	-
-	-	-	-	16	18	P87	-	-	-	-	FTM7N *1	-	-	-
-	-	-	-	42	44	P90	SEG9	-	-	-	-	-	-	-
-	-	-	-	43	45	P91	SEG10	-	-	-	-	-	-	-
-	-	-	-	44	46	P92	SEG11	-	-	-	-	-	-	-
-	-	-	37	45	47	P93	SEG12	SU4_RXD0 SU4_SIN	-	-	FTM6P	-	-	-
-	-	-	38	46	48	P94	SEG13	SU4_TXD0 SU4_SOUT	SU4_TXD1	-	FTM6N	-	-	-
-	-	-	39	47	49	P95	SEG14	SU4_SCLK	-	-	-	-	-	-
-	-	-	40	48	50	P96	SEG15	-	-	-	-	-	-	-
-	-	-	-	49	51	P97	SEG16	-	-	-	-	-	-	-
-	-	-	-	50	52	PA0	SEG17	-	-	-	-	-	-	-
-	-	-	-	53	55	PA1	SEG18	-	-	-	-	-	-	-
-	-	-	-	54	56	PA2	SEG19	-	-	-	-	-	-	-
-	-	-	59	71	73	PA3	EXI11 SEG36	SU2_SCLK	-	-	FTM7P	-	-	AIN14
-	-	-	60	72	74	PA4	SEG37	-	-	-	FTM7N	-	-	AIN15
-	-	-	-	73	75	PA5	SEG38	-	-	-	-	-	-	-
-	-	-	-	74	76	PA6	SEG39	-	-	-	-	-	-	-
-	-	-	-	75	77	PA7	SEG40	-	-	-	-	-	-	-
-	-	-	-	76	78	PB0	SEG41	-	-	-	-	-	-	-
-	-	-	-	77	79	PB1	SEG42	-	-	-	-	-	-	-
-	-	-	61	78	80	PB2	SEG43	SU5_RXD0*1 SU5_SIN	-	-	-	-	-	-
-	-	-	62	79	81	PB3	SEG44	SU5_TXD0*1 SU5_SOUT	SU5_TXD1	-	-	-	-	-
-	-	-	63	80	82	PB4	SEG45	SU5_SCLK	-	-	-	-	-	-
-	-	-	64	81	83	PB5	SEG46	SU5_RXD1	SU5_RXD0	-	-	-	-	-
-	-	-	-	97	99	PB6	SEG62	-	-	-	-	-	-	-
-	-	-	-	98	100	PB7	SEG63	-	-	-	-	-	-	-

*1: No assignment to ML62Q1500 Series.

chanhvinh.com

PIN DESCRIPTION

Table 4 Pin Description (1/7)

Function	Signal name	Pin name	I/O	Description	Logic
Power	-	V_{SS}	-	Negative power supply pin (-)	-
	-	V_{DD}	-	Positive power supply pin (+). Connect a capacitor C_V between this pin and V_{SS}.	-
	-	V_{DDL}	-	Power supply pin for internal logic (internal regulator's output). Connect a capacitor C_L (1µF) between this pin and V_{SS}.	-
Test	TEST0	P00	I/O	Input for testing, is used as on-chip debug interface and ISP function. P00 is initialized as pull-up input mode by the system reset.	-
Un used	NC	NC	-	Connect to V_{SS}.	-
System	V_{REFO}	P23	-	Reference voltage output	-
	RESET_N	RESET_N	I	Reset input. Applying "L" level shifts the MCU in system reset mode. Applying "H" level shifts the CPU in program running mode. Used for on-chip debug interface and ISP function. No pull-up resistor is installed.	Negative
	XT0	XT0	I	Low speed crystal oscillation pins Connect 32.768kHz crystal resonator and Connect capacitors between the pin and V_{SS}.	-
	XT1	XT1	O		-
	OUTLSCLK	P02 P21	O	Low-speed clock output.	-
	OUTHSCLK	P03 P22	O	High-speed clock output.	-
General input port (GPI)	PI00, PI01	XT0, XT1	I	General purpose input. Not available as general inputs when using the crystal resonator.	Positive
General port (GPIO)	P00	P00	I/O	General purpose I/O port - High impedance - Input with Pull-UP (initial value) - Input without Pull-UP - CMOS output - N-channel open drain output Not available to use as I/O pin when using for on-chip debug interface or ISP function.	Positive
	P01 – P07	P01 – P07	I/O	General purpose I/O - High impedance (initial value) - Input with Pull-UP - Input without Pull-UP - CMOS output - N-channel open drain output	Positive
	P10 – P17	P10 – P17			
	P20 – P27	P20 – P27			
	P30 – P33	P30 – P33			
	P40 – P47	P40 – P47			
	P50 – P57	P50 – P57			
	P60 – P67	P60 – P67			
	P70,P76, P77	P70, P76, P77			
	P80 – P87	P80 – P87			
	P90 – P97	P90 – P97			
	PA0 – PA7	PA0 – PA7			
	PB0 – PB7	PB0 – PB7			

chanhvinh.com

Table 4 Pin Description (2/7)

Function	Signal name	Pin name	I/O	Description	Logic
UART	SU0_TXD0	P03	O	Serial communication unit0 UART0 data output	Positive
		P13			
	SU0_RXD0	P02	I	Serial communication unit0 Full-duplex data input Serial communication unit0 UART0 data input	Positive
		P07			
		P12			
		P17			
	SU0_TXD1	P03	O	Serial communication unit0 Full-duplex data output Serial communication unit0 UART1 data output	Positive
		P10			
		P13			
		P20			
	SU0_RXD1	P07	I	Serial communication unit0 UART1 data input	Positive
		P17			
	SU1_TXD0	P22	O	Serial communication unit1 UART0 data output	Positive
		P25			
	SU1_RXD0	P21	I	Serial communication unit1 Full-duplex data input Serial communication unit1 UART0 data input	Positive
		P24			
		P26			
		P32			
	SU1_TXD1	P22	O	Serial communication unit1 Full-duplex data output Serial communication unit1 UART1 data output	Positive
		P25			
		P27			
		P33			
	SU1_RXD1	P26	I	Serial communication unit1 UART1 data input	Positive
		P32			
	SU2_TXD0	P57	O	Serial communication unit2 UART0 data output	Positive
	SU2_RXD0	P54	I	Serial communication unit2 Full-duplex data input Serial communication unit2 UART0 data input	Positive
		P56			
	SU2_TXD1	P55	O	Serial communication unit2 Full-duplex data output Serial communication unit2 UART1 data output	Positive
		P57			
	SU2_RXD1	P54	I	Serial communication unit2 UART1 data input	Positive
	SU3_TXD0	P65	O	Serial communication unit3 UART0 data output	Positive
	SU3_RXD0	P64	I	Serial communication unit3 Full-duplex data input Serial communication unit3 UART0 data input	Positive
		P67			
	SU3_TXD1	P42	O	Serial communication unit3 Full-duplex data output Serial communication unit3 UART1 data output	Positive
		P65			
	SU3_RXD1	P67	I	Serial communication unit3 UART1 data input	Positive
	SU4_TXD0	P81	O	Serial communication unit4 UART0 data output	Positive
		P94			
	SU4_RXD0	P44	I	Serial communication unit4 Full-duplex data input Serial communication unit4 UART0 data input	Positive
		P52			
		P80			
		P93			
	SU4_TXD1	P45	O	Serial communication unit4 Full-duplex data output Serial communication unit4 UART1 data output.	Positive
		P53			
		P81			
		P94			
	SU4_RXD1	P44	I	Serial communication unit4 UART1 data input	Positive
		P52			
	SU5_TXD0	P84	O	Serial communication unit5 UART0 data output	Positive
		PB3			
	SU5_RXD0	P83	I	Serial communication unit5 Full-duplex data input Serial communication unit5 UART0 data input	Positive
		PB2			
		PB5			
	SU5_TXD1	P40	O	Serial communication unit5 Full-duplex data output Serial communication unit5 UART1 data output.	Positive
		P84			
		PB3			
	SU5_RXD1	PB5	I	Serial communication unit5 UART1 data input	Positive

chanhvinh.com

Table 4 Pin Description (3/7)

Function	Signal name	Pin name	I/O	Description	Logic
Synchronous Serial Port	SU0_SIN	P02 P12	I	Serial communication unit0 Synchronous serial data input	Positive
	SU0_SCLK	P04 P11 P47	I/O	Serial communication unit0 Synchronous serial clock I/O	Positive
	SU0_SOUT	P03 P13	O	Serial communication unit0 Synchronous serial data output	Positive
	SU1_SIN	P21 P24	I	Serial communication unit1 Synchronous serial data input	Positive
	SU1_SCLK	P16 P23	I/O	Serial communication unit1 Synchronous serial clock I/O	Positive
	SU1_SOUT	P22 P25	O	Serial communication unit1 Synchronous serial data output	Positive
	SU2_SIN	P56	I	Serial communication unit2 Synchronous serial data	Positive
	SU2_SCLK	PA3	I/O	Serial communication unit2 Synchronous serial clock I/O	Positive
	SU2_SOUT	P57	O	Serial communication unit2 Synchronous serial data output	Positive
	SU3_SIN	P64	I	Serial communication unit3 Synchronous serial data input	Positive
	SU3_SCLK	P66	I/O	Serial communication unit3 Synchronous serial clock I/O	Positive
	SU3_SOUT	P65	O	Serial communication unit3 Synchronous serial data output	Positive
	SU4_SIN	P80 P93	I	Serial communication unit4 Synchronous serial data input	Positive
	SU4_SCLK	P82 P95	I/O	Serial communication unit4 Synchronous serial clock I/O	Positive
	SU4_SOUT	P81 P94	O	Serial communication unit4 Synchronous serial data output	Positive
	SU5_SIN	PB2	I	Serial communication unit5 Synchronous serial data input	Positive
	SU5_SCLK	PB4	I/O	Serial communication unit5 Synchronous serial clock I/O	Positive
	SU5_SOUT	PB3	O	Serial communication unit5 Synchronous serial data output	Positive
I^2C Bus	I2CU0_SDA	P03 P15 P26 P46	I/O	I^2C Unit0 (Master and Salve) Data I/O N-channel open drain Connect a pull-up resistor externally	Positive
	I2CU0_SCL	P02 P04 P16 P27 P47	I/O	I^2C Unit0 (Master and Salve) Clock I/O N-channel open drain output Connect a pull-up resistor externally	Positive
	I2CM0_SDA	P06 P22	I/O	I^2C Master0 Data I/O pin N-channel open drain output Connect a pull-up resistor externally	Positive
	I2CM0_SCL	P07 P23	I/O	I^2C Master0 Clock I/O N-channel open drain output Connect a pull-up resistor externally	Positive
	I2CM1_SDA	P61	I/O	I^2C Master1 Data I/O N-channel open drain output Connect a pull-up resistor externally	Positive
	I2CM1_SCL	P60	I/O	I^2C Master1 Clock I/O N-channel open drain output Connect a pull-up resistor externally	Positive

chanhvinh.com

Table 4 Pin Description (4/7)

Function	Signal name	Pin name	I/O	Description	Logic
Functional Timer (FTM)	FTM0P	P02	O	Functional Timer0 P output	Positive
	FTM0N	P03	O	Functional Timer0 N output	Negative
	FTM1P	P17 P47	O	Functional Timer1 P output	Positive
	FTM1N	P20 P46	O	Functional Timer1 N output	Negative
	FTM2P	P21	O	Functional Timer2 P output	Positive
	FTM2N	P22	O	Functional Timer2 N output	Negative
	FTM3P	P01 P26	O	Functional Timer3 P output	Positive
	FTM3N	P27 P44	O	Functional Timer3 N output	Negative
	FTM4P	P63	O	Functional Timer4 P output	Positive
	FTM4N	P62	O	Functional Timer4 N output	Negative
	FTM5P	P64	O	Functional Timer5 P output	Positive
	FTM5N	P65	O	Functional Timer5 N output	Negative
	FTM6P	P93	O	Functional Timer6 P output	Positive
	FTM6N	P94	O	Functional Timer6 N output	Negative
	FTM7P	P86 PA3	O	Functional Timer7 P output	Positive
	FTM7N	P87 PA4	O	Functional Timer7 N output	Negative
	EXTRG0	P02	I	Functional Timer event trigger input	-
	EXTRG1	P03	I	Functional Timer event trigger input	-
	EXTRG2	P04	I	Functional Timer event trigger input	-
	EXTRG3	P17	I	Functional Timer event trigger input	-
	EXTRG4	P21	I	Functional Timer event trigger input	-
	EXTRG5	P23	I	Functional Timer event trigger input	-
	EXTRG6	P26	I	Functional Timer event trigger input	-
	EXTRG7	P27	I	Functional Timer event trigger input	-
16-bit Timer	TMH0OUT	P04	O	16bit General Timer 0 output	Positive
	TMH1OUT	P13	O	16bit General Timer 1 output	Positive
	TMH2OUT	P23	O	16bit General Timer 2 output	Positive
	TMH3OUT	P13 P33	O	16bit General Timer 3 output	Positive
	TMH4OUT	P12	O	16bit General Timer 4 output	Positive
	TMH5OUT	P16	O	16bit General Timer 5 output	Positive
	TMH6OUT	P70	O	16bit General Timer 6 output	Positive
	TMH7OUT	P54	O	16bit General Timer 7 output	Positive
	EXTRG0	P02	I	16bit Timer trigger input	-
	EXTRG1	P03	I	16bit Timer trigger input	-
Low-speed Time Base Counter (LTBC)	TBCOUT0	P01 P17 P26 P31 P43	O	The virtual frequency adjustment signal output or The low speed time base counter output signal	Positive
	TBCOUT1	P01 P20 P27 P31 P43	O	1Hz/2Hz clock output for the Simplified RTC	Positive
Buzzer	BZ0P	P17 P26	O	Buzzer output (positive phase)	Positive
	BZ0N	P20 P27	O	Buzzer output (negative phase)	Negative

chanhvinh.com

Table 4 Pin Description (5/7)

Function	Signal name	Pin name	I/O	Description	Logic
External Interrupt	EXI0	P02	I	External Interrupt 0 Input	-
	EXI1	P03	I	External Interrupt 1 Input	-
	EXI2	P04	I	External Interrupt 2 Input	-
	EXI3	P17	I	External Interrupt 3 Input	-
	EXI4	P21	I	External Interrupt 4 Input	-
	EXI5	P23	I	External Interrupt 5 Input	-
	EXI6	P26	I	External Interrupt 6 Input	-
	EXI7	P27	I	External Interrupt 7 Input	-
	EXI8	P50	I	External Interrupt 8 Input	-
	EXI9	P64	I	External Interrupt 9 Input	-
	EXI10	P76	I	External Interrupt 10 Input	-
	EXI11	PA3	I	External Interrupt 11 Input	-
Successive approximation type A/D converter (SA-ADC)	V_{REF}	P23	-	SA-ADC external reference voltage input	-
	AIN0	P17	I	SA-ADC channel 0 input	-
	AIN1	P20	I	SA-ADC channel 1 input	-
	AIN2	P21	I	SA-ADC channel 2 input	-
	AIN3	P22	I	SA-ADC channel 3 input	-
	AIN4	P24	I	SA-ADC channel 4 input	-
	AIN5	P25	I	SA-ADC channel 5 input	-
	AIN6	P26	I	SA-ADC channel 6 input	-
	AIN7	P27	I	SA-ADC channel 7 input	-
	AIN8	P65	I	SA-ADC channel 8 input	-
	AIN9	P66	I	SA-ADC channel 9 input	-
	AIN10	P43	I	SA-ADC channel 10 input	-
	AIN11	P03	I	SA-ADC channel 11 input	-
	AIN12	P56	I	SA-ADC channel 12 input	-
	AIN13	P57	I	SA-ADC channel 13 input	-
	AIN14	PA3	I	SA-ADC channel 14 input	-
	AIN15	PA4	I	SA-ADC channel 15 input	-
Analog comparator	CMP0P	P03	I	Comparator input 0 (noninverting input)	-
	CMP0M	P02	I	Comparator input 0 (inverting input)	-
	CMP1P	P62	I	Comparator input 1 (noninverting input)	-
	CMP1M	P63	I	Comparator input 1 (inverting input)	-
D/A converter	DACOUT0	P01	O	D/A converter 0 output	-
	DACOUT1	P44	O	D/A converter 1 output	-

chanhvinh.com

Table 4 Pin Description (6/7)

Function	Signal name	Pin name	I/O	Description	Logic
LCD driver	COM0	P04	-	Common output	-
	COM1	P05	-	Common output	-
	COM2	P06	-	Common output	-
	COM3/SEG0	P07	-	Common/Segment output shared	-
	COM4/SEG1	P10	-	Common/Segment output shared	-
	COM5/SEG2	P11	-	Common/Segment output shared	-
	COM6/SEG3	P12	-	Common/Segment output shared	-
	COM7/SEG4	P13	-	Common/Segment output shared	-
	SEG5	P50	-	Segment output	-
	SEG6	P51	-	Segment output	-
	SEG7	P52	-	Segment output	-
	SEG8	P53	-	Segment output	-
	SEG9	P90	-	Segment output	-
	SEG10	P91	-	Segment output	-
	SEG11	P92	-	Segment output	-
	SEG12	P93	-	Segment output	-
	SEG13	P94	-	Segment output	-
	SEG14	P95	-	Segment output	-
	SEG15	P96	-	Segment output	-
	SEG16	P97	-	Segment output	-
	SEG17	PA0	-	Segment output	-
	SEG18	PA1	-	Segment output	-
	SEG19	PA2	-	Segment output	-
	SEG20	P54	-	Segment output	-
	SEG21	P55	-	Segment output	-
	SEG22	P14	-	Segment output	-
	SEG23	P15	-	Segment output	-
	SEG24	P16	-	Segment output	-
	SEG25	P17	-	Segment output	-
	SEG26	P20	-	Segment output	-
	SEG27	P21	-	Segment output	-
	SEG28	P22	-	Segment output	-
	SEG29	P23	-	Segment output	-
	SEG30	P24	-	Segment output	-
	SEG31	P25	-	Segment output	-
	SEG32	P26	-	Segment output	-
	SEG33	P27	-	Segment output	-
	SEG34	P56	-	Segment output	-
	SEG35	P57	-	Segment output	-
	SEG36	PA3	-	Segment output	-
	SEG37	PA4	-	Segment output	-
	SEG38	PA5	-	Segment output	-
	SEG39	PA6	-	Segment output	-
	SEG40	PA7	-	Segment output	-
	SEG41	PB0	-	Segment output	-
	SEG42	PB1	-	Segment output	-
	SEG43	PB2	-	Segment output	-
	SEG44	PB3	-	Segment output	-
	SEG45	PB4	-	Segment output	-
	SEG46	PB5	-	Segment output	-

chanhvinh.com

Table 4 Pin Description (7/7)

Function	Signal name	Pin name	I/O	Description	Logic
LCD driver	SEG47	P40	-	Segment output	-
	SEG48	P41	-	Segment output	-
	SEG49	P30	-	Segment output	-
	SEG50	P31	-	Segment output	-
	SEG51	P32	-	Segment output	-
	SEG52	P33	-	Segment output	-
	SEG53	P60	-	Segment output	-
	SEG54	P61	-	Segment output	-
	SEG55	P62	-	Segment output	-
	SEG56	P63	-	Segment output	-
	SEG57	P64	-	Segment output	-
	SEG58	P65	-	Segment output	-
	SEG59	P66	-	Segment output	-
	SEG60	P67	-	Segment output	-
	SEG61	P42	-	Segment output	-
	SEG62	PB6	-	Segment output	-
	SEG63	PB7	-	Segment output	-
	SEG64	P77	-	Segment output	-
	C_1,C_2	C_1,C_2	-	LCD bias power source generation capacitor connection	-
	V_{L1}~V_{L3}	V_{L1}~V_{L3}	-	LCD bias power source Connect the capacitors (C_{L1}, C_{L2}, C_{L3}) between the pin and Vss.	-

chanhvinh.com

TERMINATION OF UNUSED PINS

Table 5 Termination of unused pins

Pin	pin termination
NC	Connect to V_{SS}
RESET_N	Connect to V_{DD}
P00/TEST0	Connect to V_{DD} with initial state (pulled-up input mode)
XT0/PI00, XT1/PI01	Open the pins with the internal initial condition of High impedance mode (input/output is disable).
P01 to P07	
P10 to P17	
P20 to P27	
P30 to P33	
P40 to P47	
P50 to P57	
P60 to P67	
P70, P76, P77	
P80 to P87	
P90 to P97	
PA0 to PA7	
PB0 to PB7	
C_1, C_2	Open
V_{L1}, V_{L2}	Open
V_{L3}	It is recommended to connect to V_{DD} through a resistor (1kΩ or more).

Note:
- Terminate unused input pins according to the table 5 in order to avoid unexpected through-current in the pins.

chanhvinh.com

ELECTRICAL CHARACTERISTICS

Absolute Maximum Ratings

(V_{SS} = 0V)

Parameter	Symbol	Condition		Rating	Unit
Power supply voltage 1	V_{DD}	Ta = +25°C		-0.3 to +6.5	V
Power supply voltage 2	V_{DDL}			-0.3 to +2.0	
Power supply voltage 3	V_{L3}			-0.3 to +6.5	
Power supply voltage 4	V_{L1} ,V_{L2}			-0.3 to V_{L3}+0.3*1	
Input voltage	V_{IN}			-0.3 to V_{DD}+0.3*1	
Output voltage1	V_{OUT1}			-0.3 to V_{DD}+0.3*1	
Output voltage2 (COM0～COM7, SEG0～SEG64)	V_{OUT2}	Ta = +25°C		-0.3 to +6.5	
"H" level output current	I_{OUTH}	Ta = +25°C	1pin	-40*2	mA
			Total	-180*2	
"L" level output current	I_{OUTL}	Ta = +25°C	1pin	+40	
			Total	+180	
Power dissipation	PD	Ta = +25°C		1	W
Storage temperature	T_{STG}	-		-55 to +150	°C

*1 6.5V or lower

*2 The current flowing out the LSI through the pin is described in the negative number.
The applicable maximum current is the absolute value.
For example, -1mA means the maximum current 1mA flows out the LSI through the pin.

[Note]
Stresses above the absolute maximum ratings listed in the above table may cause permanent damage to the device.
These are stress ratings only and functional operation of the device at these conditions is not implied.

Recommended Operating Conditions

(V_{SS} = 0V)

Parameter	Symbol	Condition	Range	Unit
Operating temperature (Ambient)	Ta	-	-40 to +105	°C
Operating temperature (Chip-Junction)	Tj	-	-40 to +115	
Operating voltage 1	V_{DD}	-	1.6 to 5.5	V
Operating voltage 2	V_{L3}	External supply method	2.7 to 5.5	
Operating voltage 3	V_{L2}	External supply method	2/3 x V_{L3}	
Operating voltage 4	V_{L1}	External supply method	1/3 x V_{L3}	
Operating frequency (CPU)	f_{OP}	V_{DD} = 1.6 to 5.5V	30k to 4M	Hz
		V_{DD} = 1.8 to 5.5V	30k to 25M	
V_{DDL} pin external capacitance	C_L	-	1.0 ±30%	μF
V_{L1},V_{L2},V_{L3} pin external capacitance	C_{L1},C_{L2}, C_{L3}	-	0.47 ±30% or 1.0 ±30%	
C_1 and C_2 pin external capacitance	C_{12}	-	0.47 ±30% or 1.0 ±30%	

chanhvinh.com

Thermal characteristics

The maximum chip-junction temperature, T_{jmax}, may be calculated using the following equation.

$T_{j\ max} = T_{a\ max} + P_{D\ max} \times \theta_{ja}$
$T_{a\ max}$: maximum ambient temperature
$P_{D\ max}$: LSI maximum power dissipation
θ_{ja} : Package junction to ambient thermal resistance

Design a Mounting board by considering heat radiation such as power dissipation and ambient temperature to satisfy the recommended conditions.

The following table shows the each package's thermal resistance for thermal design reference estimated by simulation based on the PCB (printed circuit board) conditions define as a below.

Parameter	Symbol	Package type	Value		Unit
			L1	L2	
Thermal resistance	θ_{ja}	TQFP48	63.6	57.8	°C/W
		TQFP52	61.7	56.7	
		TQFP64	63.2	58.2	
		QFP64	47.2	43.3	
		QFP80	55.5	51.6	
		TQFP100	48.0	43.3	
		QFP100	104.7	101.3	

PCB conditions:

PCB name	L1	L2	Unit
PCB size（L / W / T）	114.3 / 76.2 / 1.6	114.3 / 76.2 / 1.6	mm
Number of layer	1	2	layer
Wiring density	60% (top layer)	60% (top and bottom layer)	-
Wind condition	No wind (0m/s)		-

chanhvinh.com

Current Consumption 1

Product: ML62Q1700, ML62Q1701, ML62Q1702, ML62Q1703, ML62Q1704, ML62Q1710, ML62Q1711, ML62Q1712, ML62Q1713, ML62Q1714, ML62Q1720, ML62Q1721, ML62Q1722, ML62Q1723, ML62Q1724

(V_{DD} = 1.6 to 5.5V, V_{SS} = 0V, Ta = -40 to +105°C, unless otherwise specified)

Parameter	Symbol	Condition		Min.	Typ.*3	Max.	Unit	Measuring circuit
Supply current 0	IDD0	CPU is in STOP-D state. Low-speed RC1K/RC32K and PLL oscillation are stopped.	Ta = -40 to +85°C	-	0.8	37	μA	1
			Ta = -40 to +105°C	-		75		
Supply current 1	IDD1	CPU is in STOP state. Low-speed RC1K/RC32K and PLL oscillation are stopped.	Ta = -40 to +85°C	-	1.0	40		
			Ta = -40 to +105°C	-		80		
Supply current 2-1	IDD2-1	Low-speed RC32K Oscillating. CPU is in HALT state*1. PLL oscillation is stopped.	Ta = -40 to +85°C	-	4.9	42		
			Ta = -40 to +105°C	-		85		
Supply current 2-2	IDD2-2	Low-speed Crystal Oscillating. *4 CPU is in HALT state*1. PLL oscillation is stopped.	Ta = -40 to +85°C	-	3.3	42		
			Ta = -40 to +105°C	-		85		
Supply current 3	IDD3	CPU: Running with low-speed RC32K oscillation clock*1*2 PLL oscillation is stopped.	Ta = -40 to +105°C	-	17	105		
Supply current 4	IDD4	CPU: Running with 16MHz PLL oscillating clock*2 PLL 16MHz is oscillating. V_{DD} = 1.8 to 5.5V	Ta = -40 to +105°C	-	3.4	4.5	mA	
Supply current 5	IDD5	CPU: Running with 24MHz PLL oscillating clock*2 PLL 24MHz is oscillating. V_{DD} = 1.8 to 5.5V	Ta = -40 to +105°C	-	4.8	6.0		

*1: LTBC and WDT is operating, Significant bits of BCKCON0-3 and BRECON0-3 registers are all “1”

*2: CPU running in wait mode

*3: On the condition of VDD = 3.0V, Ta = +25°C

*4: When the noise filter is not used in the low power consumption mode

chanhvinh.com

Current Consumption 2

Product: ML62Q1725, ML62Q1726, ML62Q1727, ML62Q1733, ML62Q1734, ML62Q1735, ML62Q1736, ML62Q1737, ML62Q1743, ML62Q1744, ML62Q1745, ML62Q1746, ML62Q1747

(V_{DD} = 1.6 to 5.5V, V_{SS} = 0V, Ta = -40 to +105°C, unless otherwise specified)

Parameter	Symbol	Condition		Min.	Typ.*3	Max.	Unit	Measuring circuit
Supply current 0	IDD0	CPU is in STOP-D state. Low-speed RC1K/RC32K and PLL oscillation are stopped.	Ta = -40 to +85°C	-	1.0	55	μA	1
			Ta = -40 to +105°C	-		110		
Supply current 1	IDD1	CPU is in STOP state. Low-speed RC1K/RC32K and PLL oscillation are stopped.	Ta = -40 to +85°C	-	1.5	60		
			Ta = -40 to +105°C	-		120		
Supply current 2-1	IDD2-1	Low-speed RC32K Oscillating. CPU is in HALT state (LTBC and WDT are operating*1). PLL oscillation is stopped.	Ta = -40 to +85°C	-	5.7	76		
			Ta = -40 to +105°C	-		135		
Supply current 2-2	IDD2-2	Low-speed Crystal Oscillating. *4 CPU is in HALT state (LTBC and WDT are operating*1). PLL oscillation is stopped.	Ta = -40 to +85°C	-	4.5	76		
			Ta = -40 to +105°C	-		135		
Supply current 3	IDD3	CPU: Running with low-speed RC32K oscillation clock*1*2 PLL oscillation is stopped.	Ta = -40 to +105°C	-	20	150		
Supply current 4	IDD4	CPU: Running with 16MHz PLL oscillating clock*2 PLL 16MHz is oscillating. V_{DD} = 1.8 to 5.5V	Ta = -40 to +105°C	-	4.0	5.0	mA	
Supply current 5	IDD5	CPU: Running with 24MHz PLL oscillating clock*2 PLL 24MHz is oscillating. V_{DD} = 1.8 to 5.5V	Ta = -40 to +105°C	-	5.7	7.0		

*1: LTBC and WDT is operating, Significant bits of BCKCON0-3 and BRECON0-3 registers are all “1”

*2: CPU running in wait mode

*3: On the condition of VDD = 3.0V, Ta = +25°C

*4: When the noise filter is not used in the low power consumption mode

chanhvinh.com

Current Consumption 3

Product: ML62Q1728, ML62Q1729, ML62Q1738, ML62Q1739, ML62Q1748, ML62Q1749

(V_{DD} = 1.6 to 5.5V, V_{SS} = 0V, Ta = -40 to +105°C, unless otherwise specified)

Parameter	Symbol	Condition		Min.	Typ.*3	Max.	Unit	Measuring circuit
Supply current 0	IDD0	CPU is in STOP-D state. Low-speed RC1K/RC32K and PLL oscillation are stopped.	Ta = -40 to +85°C	-	1.2	57	μA	1
			Ta = -40 to +105°C	-		140		
Supply current 1	IDD1	CPU is in STOP state. Low-speed RC1K/RC32K and PLL oscillation are stopped.	Ta = -40 to +85°C	-	1.8	62		
			Ta = -40 to +105°C	-		150		
Supply current 2-1	IDD2-1	Low-speed RC32K Oscillating. CPU is in HALT state *1. PLL oscillation is stopped.	Ta = -40 to +85°C	-	6.0	78		
			Ta = -40 to +105°C	-		165		
Supply current 2-2	IDD2-2	Low-speed Crystal Oscillating. *4 CPU is in HALT state *1. PLL oscillation is stopped.	Ta = -40 to +85°C	-	4.5	78		
			Ta = -40 to +105°C	-		165		
Supply current 3	IDD3	CPU: Running with low-speed RC32K oscillation clock*1*2 PLL oscillation is stopped.	Ta = -40 to +105°C	-	20	190		
Supply current 4	IDD4	CPU: Running with 16MHz PLL oscillating clock*2 PLL 16MHz is oscillating. V_{DD} = 1.8~5.5V	Ta = -40 to +105°C	-	4.0	5.0	mA	
Supply current 5	IDD5	CPU: Running with 24MHz PLL oscillating clock*2 PLL 24MHz is oscillating. V_{DD} = 1.8~5.5V	Ta = -40 to +105°C	-	5.7	7.0		

*1: LTBC and WDT is operating, Significant bits of BCKCON0-3 and BRECON0-3 registers are all “1”

*2: CPU running in wait mode

*3: On the condition of VDD = 3.0V, Ta = +25°C

*4: When the noise filter is not used in the low power consumption mode

chanhvinh.com

Low speed Crystal Oscillation

(V_{DD} = 1.6 to 5.5V, V_{SS} = 0V, Ta = -40 to +105°C, unless otherwise specified)


Parameter	Symbol	Condition	Range			Unit
			Min.	Typ.	Max.	
Crystal oscillation frequency *1 *2	f_{XTL}	-	-	32.768	-	kHz
Crystal oscillation start time	T_{XTL}	-	-	-	2	s

*1: The oscillation frequency is determined by the oscillation circuit, crystal resonator and the external capacitance (C_{GL}/C_{DL}). As those parameters changes depending the crystal resonator, it requires evaluation on the actual PCB circuit for matching. Ask crystal resonator makers for matching and confirm the oscillation characteristics.

*2: The quality of oscillation characteristics might be lost, depending on material of PCB, condition of wiring capacitance or parasitic capacitance on the external circuits. Note for designing the external circuit.

- Make the wires on the external circuit as short as possible.
- Place the crystal resonator and oscillation circuit as close to the MCU as possible and make the wires between the external capacitance and crystal resonator as short as possible.
- Ensure no signal line flowing big current runs near the oscillation circuit.
- Ensure no signal line runs under and near the oscillation circuit.
- Make ground of external capacitance the same as MCU ground V_{SS} pin and connect them to the ground that has low variation of current and voltage.
  variation.
- The quality of oscillation characteristics might be lost depending on operating environment due to moisture absorption of PCB and condensation of PCB surface, recommended to have measures such as covering the oscillation circuit with resin.

Low speed Crystal Oscillation external circuit example

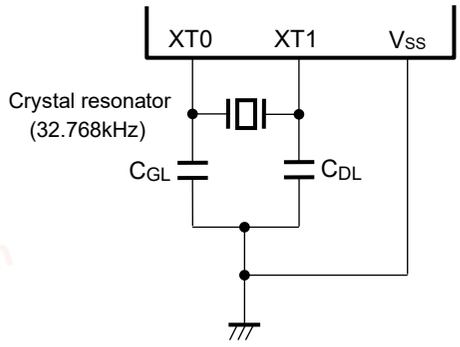

External Clock Input

(V_{DD} = 1.6 to 5.5V, V_{SS} = 0V, Ta= -40 to +105°C, unless otherwise specified)

Parameter	Symbol	Condition	Range			Unit
			Min.	Typ.	Max.	
Input Frequency	f_{EXCK}	-	Typ. -1.0%	32.768	Typ. +1.0%	kHz
Input pulse width	t_{EXCKW}	-	$1/f_{EXCK}$ x 0.4	-	$1/f_{EXCK}$ x 0.6	s

chanhvinh.com

On-chip Oscillator

(V_{DD} = 1.6 to 5.5V, V_{SS} = 0V, Ta = -40 to +105°C, unless otherwise specified)

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit	Measuring circuit
Low-speed RC oscillator frequency accuracy 1 Without software adjustment	f_{RCL1}	Ta= +25°C V_{DD} = 1.8 to 5.5V	Typ. -1.0%	32.768	Typ. +1.0%	kHz	1
		Ta= -40 to +85°C V_{DD} = 1.8 to 5.5V	Typ. -2.5%	32.768	Typ. +2.5%		
		Ta= -40 to +105°C V_{DD} = 1.8 to 5.5V	Typ. -3.0%	32.768	Typ. +3.0%		
		V_{DD} = 1.6 to 1.8V	Typ. -3.5%	32.768	Typ. -3.5%		
Low-speed RC oscillator frequency accuracy 2 With software adjustment	f_{RCL2}	Ta= -40 to +85°C V_{DD} = 1.8 to 5.5V	Typ. -1.0%	32.768	Typ. +1.0%		
		Ta= -40 to +105°C V_{DD} = 1.8 to 5.5V	Typ. -1.5%	32.768	Typ. +1.5%		
PLL oscillation frequency accuracy 1 Without software adjustment	f_{PLL1}	Ta= -40 to +85°C V_{DD} = 1.8 to 5.5V	Typ. -2.5%	16/24	Typ. +2.5%	MHz	
		Ta= -40 to +105°C V_{DD} = 1.8 to 5.5V	Typ. -3.0%	16/24	Typ. +3.0%		
		V_{DD} = 1.6 to 1.8V	Typ. -3.5%	16/24	Typ. +3.5%		
PLL oscillation frequency accuracy 2 With software adjustment	f_{PLL2}	Ta= -40 to +85°C V_{DD} = 1.8 to 5.5V	Typ. -1.0%	16/24	Typ. +1.0%		
		Ta= -40 to +105°C V_{DD} = 1.8 to 5.5V	Typ. -1.5%	16/24	Typ. +1.5%		
PLL oscillation start time	T_{PLL}	V_{DD} = 1.6 to 5.5V	-	-	2	ms	
1kHz Low-speed RC oscillator (for WDT) frequency accuracy	f_{RC1K}	Ta= -40 to +105°C V_{DD} = 1.6 to 5.5V	0.5	1	2.5	kHz	

chanhvinh.com

Input / Output pin 1

(V_{DD} = 1.6 to 5.5V, V_{SS} = 0V, Ta = -40 to +105°C, unless otherwise specified)

Parameter	Symbol	Condition		Min.	Typ.	Max.	Unit	Measuring circuit
Output voltage1 "H"/"L" level (P00-P07) (P10-P17) (P20-P27) (P30-P33) (P40-P47) (P50-P57) (P60-P67) (P70,P76,P77) (P80-P87) (P90-P97) (PA0-PA7) (PB0-PB7)	VOH1	IOH1 = -10mA V_{DD} ≥ 4.5V		V_{DD} -1.5	-	-	V	2
		IOH1 = -1mA V_{DD} ≥ 1.6V		V_{DD} -0.5	-	-		
	VOL1	IOL1 = +10mA V_{DD} ≥ 4.5V		-	-	1.5		
		IOL1 = +1mA V_{DD} ≥ 1.6V		-	-	0.5		
Output voltage2 "L" level (P01-P07) (P10-P17) (P20-P27) (P30-P33) (P40-P47) (P50-P57) (P60-P67) (P70 P76,P77) (P80-P87) (P90-P97) (PA0-PA7) (PB0-PB7)	VOL2	When N-ch open drain output mode is selected	IOL2 = +15mA V_{DD} ≥ 4.5V	-	-	0.5		
			IOL2 = +8mA V_{DD} ≥ 3.0V	-	-	0.5		
			IOL2 = +3mA V_{DD} ≥ 2.0V	-	-	0.4		
			IOL2 = +2mA V_{DD} ≥ 1.6V	-	-	0.4		
Output voltage 3 LCD COM/SEG (COM0~COM7) (SEG0~SEG64)	VOH3M	V_{L3} = 3V, V_{L2} = 2V, V_{L1} = 1V	IOH3M = -0.03mA V_{L3} output	V_{L3} -0.2	-	-	V	2
	VOH3P		IOMH3P = +0.03mA V_{L2} output	-	-	V_{L2} +0.2		
	VOMH3M		IOMH3M = -0.03mA V_{L2} output	V_{L2} -0.2	-	-		
	VOML3P		IOML3P = +0.03mA V_{L1} output	-	-	V_{L1} +0.2		
	VOML3M		IOML3M = -0.03mA V_{L1} output	V_{L1} -0.2	-	-		
	VOL3P		IOL3P = +0.03mA V_{SS} output	-	-	0.2		

chanhvinh.com

Input / Output pin 2

(V_{DD} = 1.6 to 5.5V, V_{SS} = 0V, Ta = -40 to +105°C, unless otherwise specified)

Parameter	Symbol	Condition		Min.	Typ.	Max.	Unit	Measuring circuit
"H" level output current1 *6	IOH1	1pin	V_{DD} ≥ 4.5V	-10*3*5	-	-	mA	3
			V_{DD} ≥ 1.6V	-1*3*5	-	-		
"H" level output current1 *1*4	IOH3	Total of 'P00-P07, P10-P13, P44-P47, P50-P53, P70,P76, P80-P87, P90-P97, PA0' or Total of 'P14-P17, P20-P27, P30-P33, P40-P43, P54-P57 P60-P67,P77, PA1-PA7, PB0-PB7' (duty ≤ 50%)	V_{DD} ≥ 4.5V	-90*5	-	-		
			V_{DD} ≥ 1.6V	-20*5	-	-		
		All pin total (duty ≤5 0%)	V_{DD} ≥ 4.5V	-180*5	-	-		
			V_{DD} ≥ 1.6V	-40*5	-	-		
"L" level output current1 *6	IOL1	1pin (CMOS output mode)	V_{DD} ≥ 4.5V	-	-	10*3		
			V_{DD} ≥ 1.6V	-	-	1*3		
"L" level output current2 *6	IOL2	1pin (N-ch open drain output mode)	V_{DD} ≥ 4.5V	-	-	15*3		
			V_{DD} ≥ 3.0V	-	-	8*3		
			V_{DD} ≥ 2.0V	-	-	3*3		
			V_{DD} ≥ 1.6V	-	-	2*3		
"L" level output total current *2*4	IOL3	Total of P00-P07, P10-P13, P44-P47, P50-P53, P70, P76, P80-P87, P90-P97, PA0' or Total of 'P14-P17, P20-P27, P30-P33, P40-P43, P54-P57 P60-P67,P77, PA1-PA7, PB0-PB7' (N-ch open drain output mode, duty ≤ 50%)	V_{DD} ≥ 4.5V	-	-	90		
			V_{DD} ≥ 3.0V	-	-	40		
			V_{DD} ≥ 2.0V	-	-	15		
			V_{DD} ≥ 1.6V	-	-	10		
		All pin total (N-ch open drain output mode, duty ≤ 50%)	V_{DD} ≥ 4.5V	-	-	180		
			V_{DD} ≥ 1.6V	-	-	20		
Output leak (P00-P07) (P10-P17) (P20-P27) (P30-P33) (P40-P47) (P50-P57) (P60-P67) (P70,P76,P77) (P80-P87) (P90-P97) (PA0-PA7) (PB0-PB7)	IOOH	VOH = V_{DD} (High impedance mode)		-	-	+1	μA	
	IOOL	VOL = V_{SS} (High impedance mode)		-1*5	-	-		

chanhvinh.com

*1: Sink-out current from V_{DD} to the output pin, which can guarantee the device operation.
*2: Sink-in current from the output pin to V_{SS}, which can guarantee the device operation.
*3: Do not exceed total current.
*4: The total current is on the condition of Duty≤50%(same applies to IOH1).
When the duty ＞50% the total current is calculated by following formula.
Total current = IOL3 x 50/n (When the duty is n%)
<For an example> When IOL3 = 100mA and n = 80%,
Total current = IOL3 x 50/80 = 62.5mA
Current allowed per 1pin is independent of the duty and specified as IOL1 and IOL2.
Do not apply current larger than Absolute Maximum Ratings.
*5: The current flowing out the LSI through the pin is described in the negative number.
The applicable maximum current is the absolute value.
For example, -1mA means the maximum current 1mA flows out the LSI through the pin.
*6: VOH1, VOL1, and VOL2 are satisfied with this spec.

chanhvinh.com

Input / Output pin 3

(V_{DD} = 1.6 to 5.5V, V_{SS} = 0V, Ta = -40 to +105°C, unless otherwise specified)

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit	Measuring circuit
Input current1 (RESET_N)	IIH1	VIH1 = V_{DD}	-	-	1	μA	4
	IIL1	VIL1 = V_{SS}	-1*1	-	-		
Input current2 (P00/TEST0)	IIL2	VIL2 = V_{SS} (pull-up mode) *2	-1500*1	-300*1	-20*1		
	V/IIL2	VIL2 = V_{SS} (pull-up mode) *2	3.7	10	80	kΩ	
	IIH2Z	VIH2 = V_{DD} (High impedance mode)	-	-	1	μA	
	IIL2Z	VIL2 = V_{SS} (High impedance mode)	-1*1	-	-		
Input current3 (P01-P07) (P10-P17) (P20-P27) (P30-P33) (P40-P47) (P50-P57) (P60-P67) (P70,P76,P77) (P80-P87) (P90-P97) (PA0-PA7) (PB0-PB7)	IIL3	VIL1 = V_{SS} (pull-up mode) *2	-250*1	-30*1	-2*1	μA	
	V/IIL3	VIL1 = V_{SS} (pull-up mode) *2	22	100	800	kΩ	
	IIH3Z	VIH1 = V_{DD} (High impedance mode)	-	-	1	μA	
	IIL3Z	VIL1 = V_{SS} (High impedance mode)	-1*1	-	-		
Input current4 (PI00-PI01)	IIH4	VIH1 = V_{DD}	-	-	1		
	IIL4	VIL1 = V_{SS}	-1*1	-	-		
Input voltage1 (RESET_N) (P01-P07) (P10-P17) (P20-P27) (P30-P33) (P40-P47) (P50-P57) (P60-P67) (P70,P76,P77) (P80-P87) (P90-P97) (PA0-PA7) (PB0-PB7) (PI00-PI01)	VIH1	-	0.7 x V_{DD}	-	V_{DD}	V	5
	VIL1	-	0	-	0.3 x V_{DD}		
Input voltage2 (P00/TEST0)	VIH2	-	0.7 x V_{DD}	-	V_{DD}		
	VIL2	-	0	-	0.25 ×V_{DD}		
Pin capacitance (RESET_N) (P00/TEST0) (P01-P07) (P10-P17) (P20-P27) (P30-P33) (P40-P47) (P50-P57) (P60-P67) (P70,P76,P77) (P80-P87) (P90-P97) (PA0-PA7) (PB0-PB7) (PI00-PI01)	CPIN	f = 10kHz Ta = +25°C	-	-	10	pF	-

*1: The current flowing out the LSI through the pin is described in the negative number. The applicable maximum current is the absolute value. For example, -1mA means the maximum current 1mA flows out the LSI through the pin.

*2: Measurement conditions: Typ.: V_{DD} = 3.0V, Max.: V_{DD} = 1.6V, Min.: V_{DD} = 5.5V

chanhvinh.com


Synchronous Serial Port

Slave mode

(V_{DD} = 1.8 to 5.5V, V_{SS} = 0V, Ta = -40 to +105°C, unless otherwise specified)

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
SCK input cycle	t_{SCYC}	-	1 *2	-	-	µs
SCK input pulse width	t_{SW}	-	0.5 *3	-	-	
SOUT output delay time	t_{SD}	V_{DD} = 2.4 to 5.5V	-	-	100+ HSCLK*1×3	ns
		V_{DD} = 1.8 to 5.5V	-	-	200+ HSCLK*1×3	
SIN input setup time	t_{SS}	-	HSCLK*1 x1	-	-	
SIN input hold time	t_{SH}	-	80+ HSCLK*1×3	-	-	

*1: Cycle of high speed clock
*2: Need input cycles of HSCLK x8 or longer
*3: Need input cycles of HSCLK x4 or longer

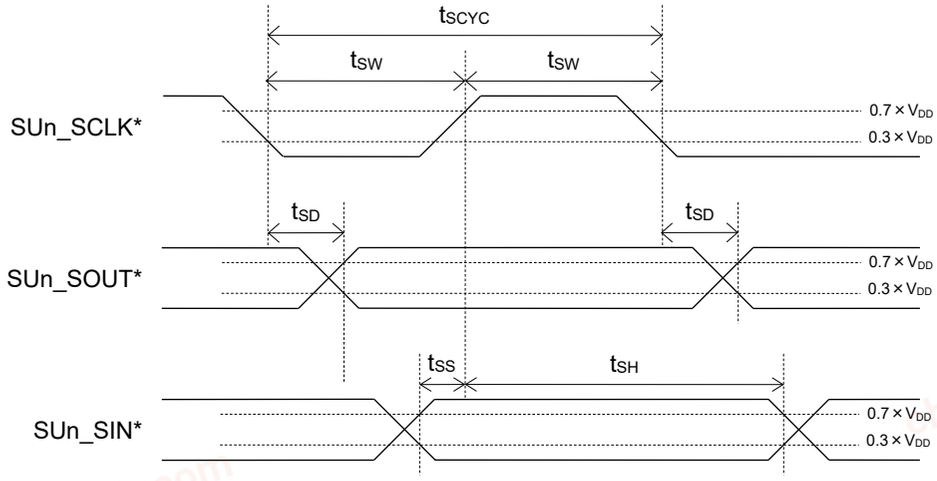

* 2nd to 8th function of port, n = 0~5


chanhvinh.com

Master mode

(V_{DD} = 1.8 to 5.5V, V_{SS} = 0V, Ta = -40 to +105°C, unless otherwise specified)

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
SCK output cycle	t_{SCYC}	-	-	SCLK*1	-	ns
SCK output pulse width	t_{SW}	-	SCLK*1 ×0.4	SCLK*1 ×0.5	SCLK*1 ×0.6	
SOUT output delay time	t_{SD}	V_{DD} = 2.4 to 5.5V	-	-	100	
		V_{DD} = 1.8 to 5.5V	-	-	160	
SIN input setup time	t_{SS}	V_{DD} = 2.4 to 5.5V	120	-	-	
		V_{DD} = 1.8 to 5.5V	180	-	-	
SIN input hold time	t_{SH}	V_{DD} = 2.4 to 5.5V	80	-	-	
		V_{DD} = 1.8 to 5.5V	100	-	-	

*1: Clock cycle selected by bit12~8(SnCK4~0) of the serial port n mode register (SIOnMOD)
V_{DD} ≥ 2.4V: min. 250ns , V_{DD} ≥ 1.8V: min. 500ns

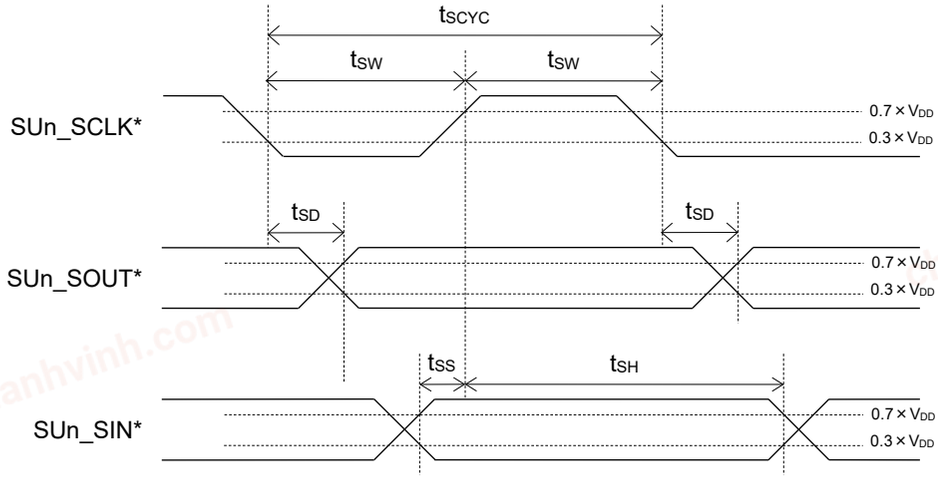

* 2nd to 8th function of port, n=0~5

chanhvinh.com


I²C Bus Interface

Standard Mode (100k bps)

(V_{DD} = 1.8 to 5.5V, V_{SS} = 0V, Ta = -40 to +105°C, unless otherwise specified)

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
SCL clock frequency	f_{SCL}	-	0	-	100	kHz
SCL hold time (start/restart condition)	$t_{HD:STA}$	-	4.0	-	-	μs
SCL "L" level time	t_{LOW}	-	4.7	-	-	
SCL "H" level time	t_{HIGH}	-	4.0	-	-	
SCL setup time (restart condition)	$t_{SU:STA}$	-	4.7	-	-	
SDA hold time	$t_{HD:DAT}$	-	0	-	-	
SDA setup time	$t_{SU:DAT}$	-	0.25	-	-	
SDA setup time (stop condition)	$t_{SU:STO}$	-	4.0	-	-	
Bus-free time	t_{BUF}	-	4.7	-	-	

When using the I²C as the master, configure the I²C master n mode register(I2MnMOD) and I²C bus 0 mode register (master side, I2UM0MOD) so that meet these specifications.

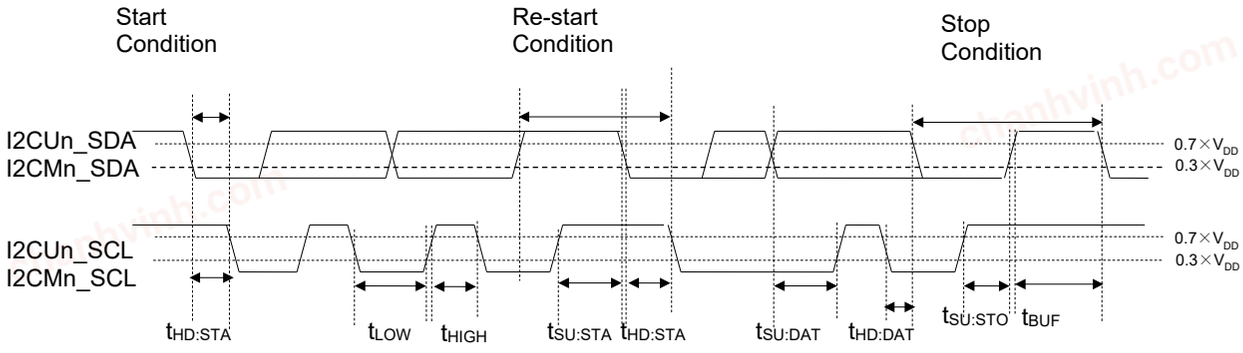

n : 0 to 1


chanhvinh.com

Fast Mode (400k bps)

(V_{DD} = 1.8 to 5.5V, V_{SS} = 0V, Ta = -40 to +105°C, unless otherwise specified)

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
SCL clock frequency	f_{SCL}	-	0	-	400	kHz
SCL hold time (start/restart condition)	$t_{HD:STA}$	-	0.6	-	-	μs
SCL "L" level time	t_{LOW}	-	1.3	-	-	
SCL "H" level time	t_{HIGH}	-	0.6	-	-	
SCL setup time (restart condition)	$t_{SU:STA}$	-	0.6	-	-	
SDA hold time	$t_{HD:DAT}$	-	0	-	-	
SDA setup time	$t_{SU:DAT}$	-	0.1	-	-	
SDA setup time (stop condition)	$t_{SU:STO}$	-	0.6	-	-	
Bus-free time	t_{BUF}	-	1.3	-	-	

When using the I²C as the master, configure the I²C master n mode register (I2MnMOD) and I²C bus 0 mode register (master side, I2UM0MOD) so that meet these specifications.

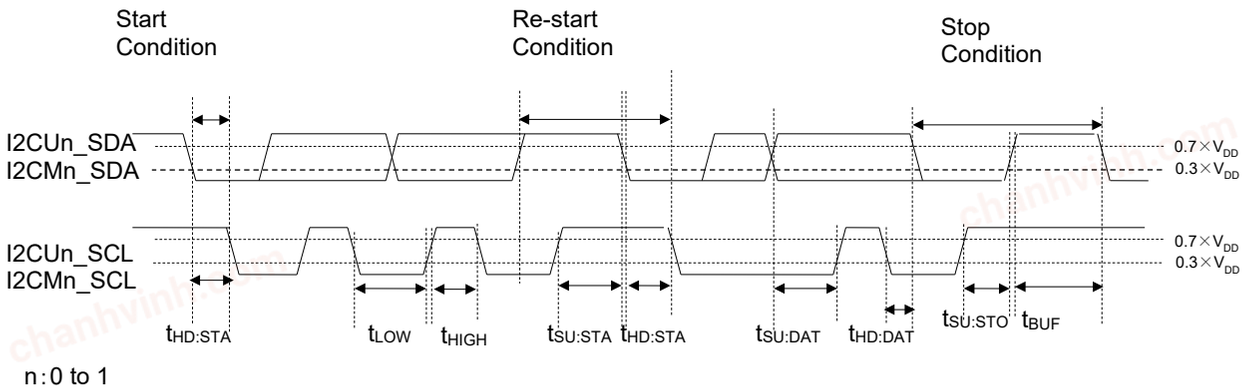

n : 0 to 1


chanhvinh.com

1Mbps Mode (1M bps)

(V_{DD} = 2.7 to 5.5V, V_{SS} = 0V, Ta = -40 to +105°C, unless otherwise specified)

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
SCL clock frequency	f_{SCL}	-	0	-	1000	kHz
SCL hold time (start/restart condition)	$t_{HD:STA}$	-	0.26	-	-	µs
SCL "L" level time	t_{LOW}	-	0.5	-	-	
SCL "H" level time	t_{HIGH}	-	0.26	-	-	
SCL setup time (restart condition)	$t_{SU:STA}$	-	0.26	-	-	
SDA hold time	$t_{HD:DAT}$	-	0	-	-	
SDA setup time	$t_{SU:DAT}$	-	0.1	-	-	
SDA setup time (stop condition)	$t_{SU:STO}$	-	0.26	-	-	
Bus-free time	t_{BUF}	-	0.5	-	-	

When using the I²C as the master, configure the I²C master n mode register (I2MnMOD) and I²C bus 0 mode register (master side, I2UM0MOD) so that meet these specifications.

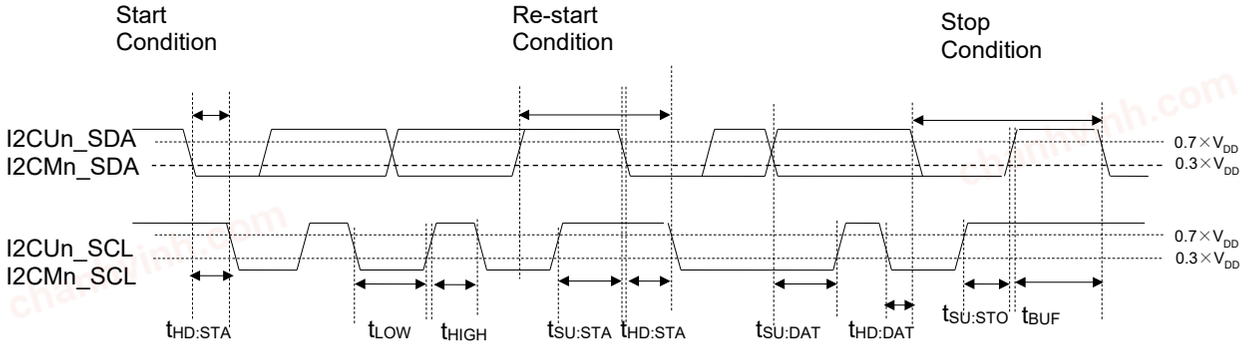

n : 0 to 1

chanhvinh.com


Reset

(V_{DD} = 1.6 to 5.5V, V_{SS} = 0V, Ta = -40 to +105°C, unless otherwise specified)

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit	Measuring circuit
Reset pulse width*2	P_{RST}	-	2	-	-	ms	1
P00 "H" level setup time*1	t_{SP00}	-	1	-	-		
P00 "H" level hold time*1	t_{HP00}*1	-	1	-	-		

*1: except ISP mode. Refer to the User's manual "25.4 In-System Programing Function" for the timing in ISP mode.

*2: V_{DD}=1.6V or over at power on.

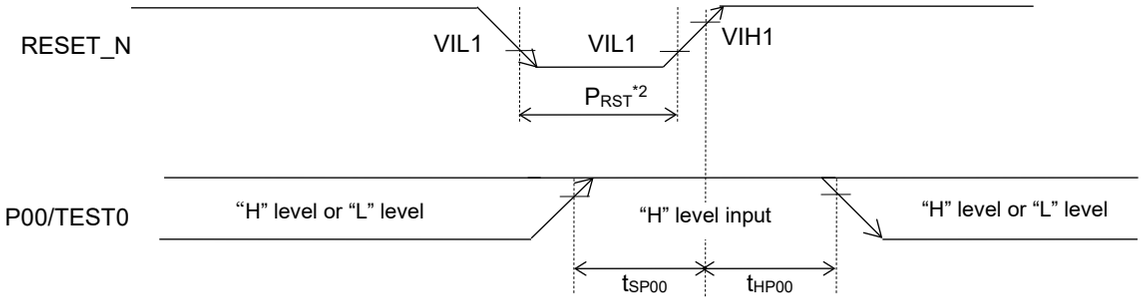


Note:
- RESET_N input shorter pulse than the Reset pulse width (P_{RST}) valid time should be avoided. The shorter pulse input may cause unexpected behavior.

chanhvinh.com

Slope of Power supply and Power On Reset

(V_{SS} = 0V, Ta = -40 to +105°C, unless otherwise specified)

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit	Measuring circuit
Power on rising slope	S_{VR}	-	-	-	60	V/ms	1
Power on falling slope	S_{VF}	-	-	-	2		
Power on reset detection voltage	V_{PORR}	At Power up (rising)	1.47	1.57	1.80	V	
	V_{PORF}	At Power down (falling)	1.33	1.49	1.58		
Power on reset minimum pulse width	P_{POR}	-	200	-	-	µs	
Power on voltage	V_{INIT}	At power on	1.8	-	-	V	
CPU operation start time (from the release of reset to the CPU starts to run)	t_{CPUI}	-	11	16	-	ms	-

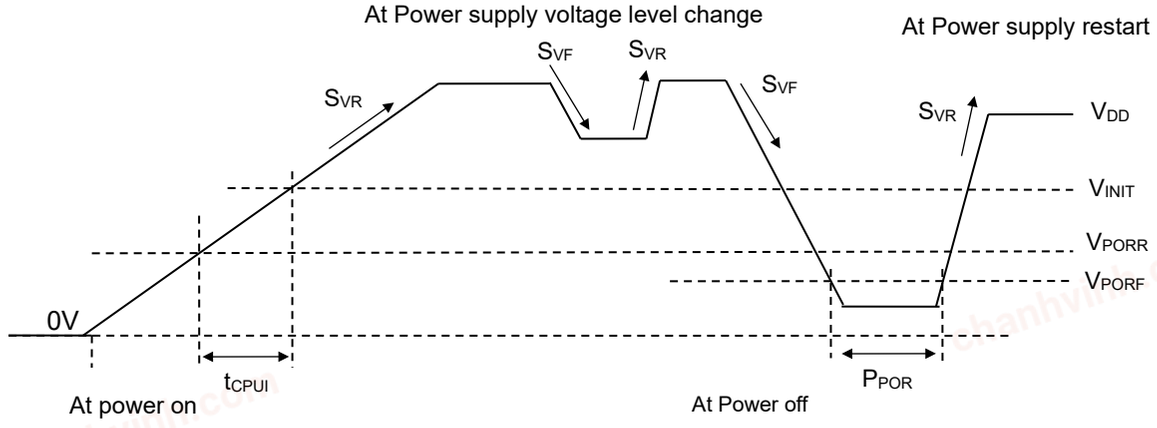

Note:
- If a pulse shorter than the Power on reset minimum pulse width is asserted to V_{DD}, it may cause the MCU malfunction.
  Apply prevent measurement such as bypass capacitors or external reset input, and so on.
- Start the high-speed clock when the V_{DD} is within the operating voltage.

chanhvinh.com

VLS

(V_{DD} = 1.6 to 5.5V, V_{SS} = 0V, Ta = -40 to +105°C, unless otherwise specified)

Parameter	Symbol	Condition VLS0LV *1		Min.	Typ.	Max.	Unit	Measuring circuit
VLS threshold voltage *2	V_{VLSR}	00H	Rising	3.86	4.06	4.26	V	1
	V_{VLSF}		Falling	3.84	4.00	4.16		
	V_{VLSR}	01H	Rising	3.57	3.76	3.95		
	V_{VLSF}		Falling	3.55	3.70	3.85		
	V_{VLSR}	02H	Rising	2.94	3.11	3.28		
	V_{VLSF}		Falling	2.92	3.05	3.18		
	V_{VLSR}	03H	Rising	2.85	3.01	3.17		
	V_{VLSF}		Falling	2.83	2.95	3.07		
	V_{VLSR}	04H	Rising	2.75	2.91	3.07		
	V_{VLSF}		Falling	2.73	2.85	2.97		
	V_{VLSR}	05H	Rising	2.66	2.81	2.96		
	V_{VLSF}		Falling	2.64	2.75	2.86		
	V_{VLSR}	06H	Rising	2.56	2.71	2.86		
	V_{VLSF}		Falling	2.54	2.65	2.76		
	V_{VLSR}	07H	Rising	2.46	2.61	2.76		
	V_{VLSF}		Falling	2.44	2.55	2.66		
	V_{VLSR}	08H	Rising	2.37	2.51	2.65		
	V_{VLSF}		Falling	2.35	2.45	2.55		
	V_{VLSR}	09H	Rising	1.98	2.11	2.24		
	V_{VLSF}		Falling	1.96	2.05	2.14		
	V_{VLSR}	0AH	Rising	1.89	2.01	2.13		
	V_{VLSF}		Falling	1.87	1.95	2.03		
	V_{VLSR}	0BH	Rising	1.79	1.91	2.03		
	V_{VLSF}		Falling	1.77	1.85	1.93		
VLS Current	I_{VLS}	-		-	50	-	nA	

*1: Bit3~Bit0 of voltage level detection circuit 0 level register (VLS0LV).

*2: The Data VSL0LV = 0CH~0FH is not available to use, if the data is specified it will the same spec as that 0BH is specified.

Analog Comparator

(V_{DD} = 1.8 to 5.5V, V_{SS} = 0V, Ta = -40 to +105°C, unless otherwise specified)

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit	Measuring circuit
Comparator same phase input voltage range	V_{CMR}	-	0.1	-	V_{DD} -1.5	V	1
Comparator0 input offset	V_{CMOF}	Ta = +25°C, V_{DD} = 5.0V	-	5	-	mV	
Comparator Reference Voltage	V_{CMREF}	-	0.75	0.8	0.85	V	

chanhvinh.com


Successive Approximation Type A/D Converter

(V_{DD} = 1.8 to 5.5V, V_{SS} = 0V, Ta = -40 to +105°C, unless otherwise specified)

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Resolution	n_{AD}	-	-	-	10	bit
Overall error	-	4.5V ≤ Reference voltage*1 ≤ 5.5V	-3.5	1.2	3.5	LSB
Integral non-linearity error	INL_{AD}	2.7V ≤ Reference voltage*1 ≤ 5.5V	-4	-	4	
		2.2V ≤ Reference voltage*1 < 2.7V	-6	-	6	
		1.8V ≤ Reference voltage*1 < 2.2V	-10	-	10	
		Reference voltage =Internal reference voltage	-15	-	15	
Differential non-linearity error	DNL_{AD}	2.7V ≤ Reference voltage*1 ≤ 5.5V	-3	-	3	
		2.2V ≤ Reference voltage*1 < 2.7V	-5	-	5	
		1.8V ≤ Reference voltage*1 < 2.2V	-9	-	9	
		Reference voltage = Internal reference voltage	-14	-	14	
Zero-scale error	ZSE	RI ≤ 1kΩ	-6	-	6	
Full-scale error	FSE	RI ≤1 kΩ	-6	-	6	
A/D reference voltage	V_{REF}	-	1.8	-	V_{DD}	V
Internal reference voltage	V_{REFI}	-	1.5	1.55	1.6	
Conversion time	t_{CONV}	4.5V ≤ V_{DD} ≤ 5.5V	2.25	-	427	µs
		2.2V ≤ V_{DD} ≤ 5.5V	4.5	-	427	
		1.8V ≤ V_{DD} ≤ 5.5V	18	-	427	

*1: V_{DD} or P23/V_{REF} is selected for the reference voltage of Successive Approximation Type A/D Converter by setting bit5 (VREFP1) and bit4 (VREFP0) of Reference voltage control register (VREFCON).

The current flows during the ADC sampling as it takes charging. Make the output impedance of the analog signal source 1kΩ or smaller. Also, putting 0.1µF capacitor on the ADC input pin is recommended to reduce the noise.

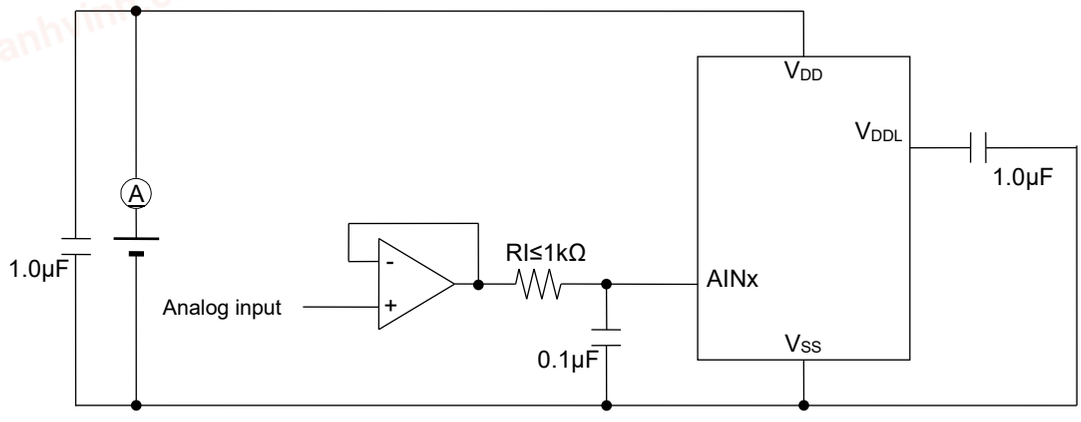

chanhvinh.com

D/A Converter

(V_{DD} = 1.8 to 5.5V, V_{SS} = 0V, Ta= -40 to +105°C, unless otherwise specified)

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Resolution	n_{DA}	-	-	-	8	bit
Conversion cycle	tc	-	10	-	-	μs
Integral non-linearity error	INL_{DA}	RL=4MΩ	-2	-	2	LSB
Differential non-linearity error	DNL_{DA}	RL=4MΩ	-1	-	1	
Output impedance	Ro	-	3	6	9	kΩ

Reference Voltage Output

(V_{DD} = 1.8 to 5.5V, V_{SS} = 0V, Ta = -40 to +105°C, unless otherwise specified)

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Output voltage	V_{REFO}	-	-	1.55	-	V
Output impedance	R_{VREFO}	-	-	-	500	kΩ

Flash Memory

(V_{SS}= 0V)

Parameter	Symbol	Condition		Range	Unit
Operating temperature	T_{OP}	Data flash memory, At write/erase		-40 to +85	°C
		Flash ROM, At write/erase		0 to +40	
Operating voltage	V_{DD}	At write/erase		+1.8 to +5.5	V
Maximum rewrite count	CEPD	Data Flash		10000	times
	CEPP	Program Flash		100	
Erase unit	-	Block erase	Program Flash	16K	B
			Data Flash	all area	
	-	Sector erase	Program Flash	1K	
			Data Flash	128	
Erase time (Max.)	-	Block erase / Sector erase		50	ms
Write unit	-	Program Flash		4	B
		Data Flash		1	
Write time (Max.)	-	Program Flash		80	μs
	-	Data Flash		40	
Data retention period	YDR	-		15	years

chanhvinh.com

LCD Driver

(V_{DD} = 1.8 to 5.5V, V_{SS} = 0V, Ta =-40 to +105°C, unless otherwise specified)


Parameter	Symbol	Condition	LCN[*1]	Range Min.	Range Typ.	Range Max.	Unit	Measuring circuit
V_{L1} Voltage	V_{L1}	Ta = +25°C $C_{L1, L2, L3}$ = 1.0µF	00H	Typ. -0.05	0.950	Typ. +0.05	V	6
			01H		0.975			
			02H		1.000			
			03H		1.025			
			04H		1.050			
			05H		1.075			
			06H		1.100			
			07H		1.125			
			08H		1.150			
			09H		1.175			
			0AH		1.200			
			0BH		1.225			
			0CH		1.250			
			0DH		1.275			
			0EH		1.300			
			0FH		1.325			
			10H		1.350			
			11H		1.375			
			12H		1.400			
			13H		1.425			
			14H		1.450			
			15H		1.475			
			16H		1.500			
			17H		1.525			
			18H		1.550			
			19H		1.575			
			1AH		1.600			
			1BH		1.625			
			1CH		1.650			
			1DH		1.675			
			1EH		1.700			
			1FH		1.725			
V_{L2} Voltage	V_{L2}	Ta = +25°C $C_{L1, CL2, CL3}$ = 1.0µF C_{12} = 1.0µF		V_{L1} x 1.8	V_{L1} x 2	-	V	
V_{L3} Voltage	V_{L3}			V_{L1} x 2.7	V_{L1} x 3	-		
Bias generation circuit start-up time	t_{BIAS}			-	-	200	ms	

[*1]: Value in LCN4~LCN0 bits of bias control register (BIASCON)


chanhvinh.com

Measuring circuit

Measuring circuit 1

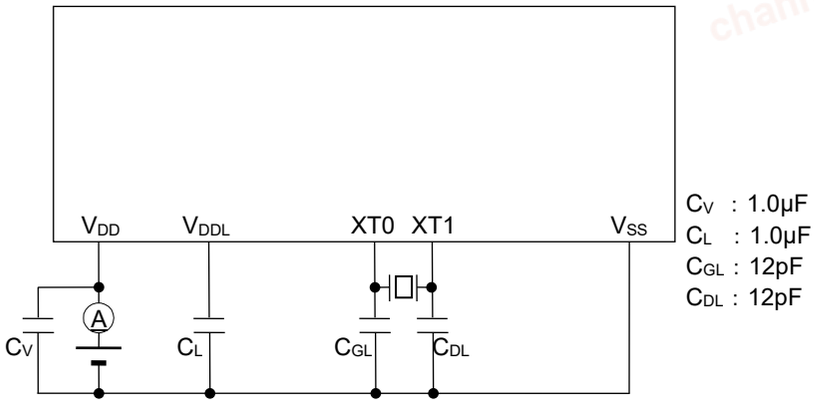


Measuring circuit 2

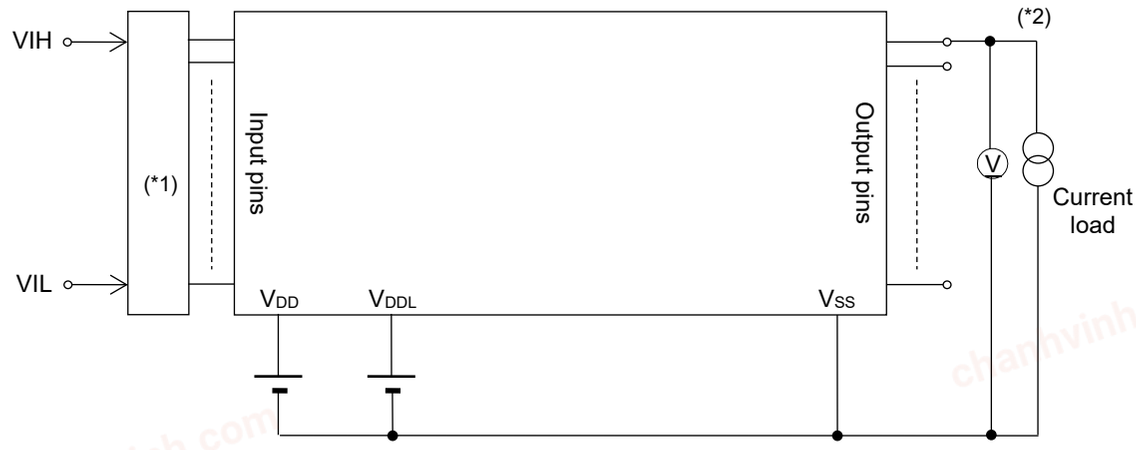

(*1) Input logic circuit to determine the specified measuring conditions
(*2) Measured connecting specified pins


Measuring circuit 3

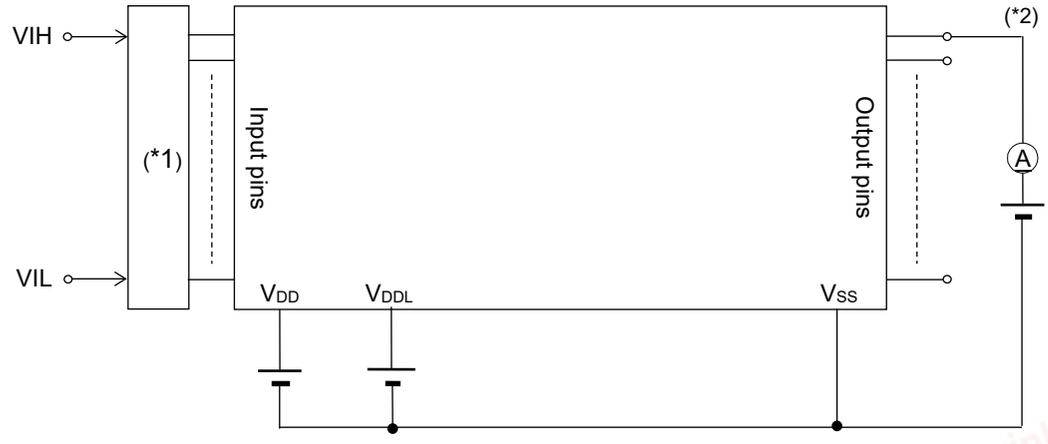

(*1) Input logic circuit to determine the specified measuring conditions
(*2) Measured connecting specified pins


chanhvinh.com

Measuring circuit 4

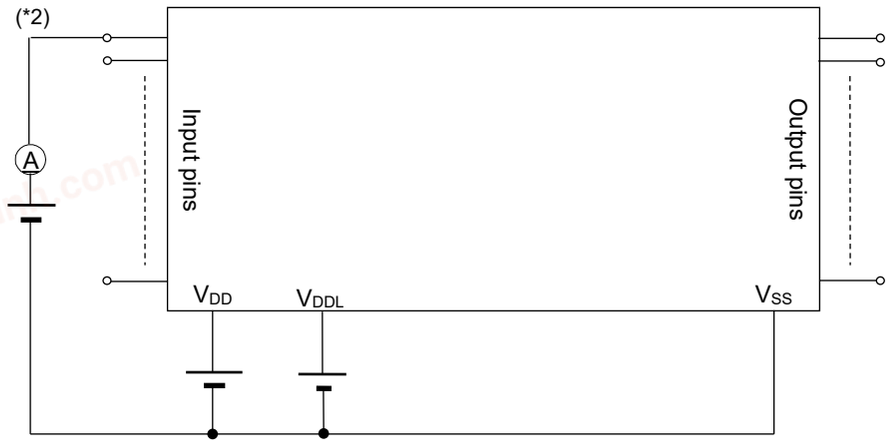


(*2) Measured connecting specified pins

Measuring circuit 5

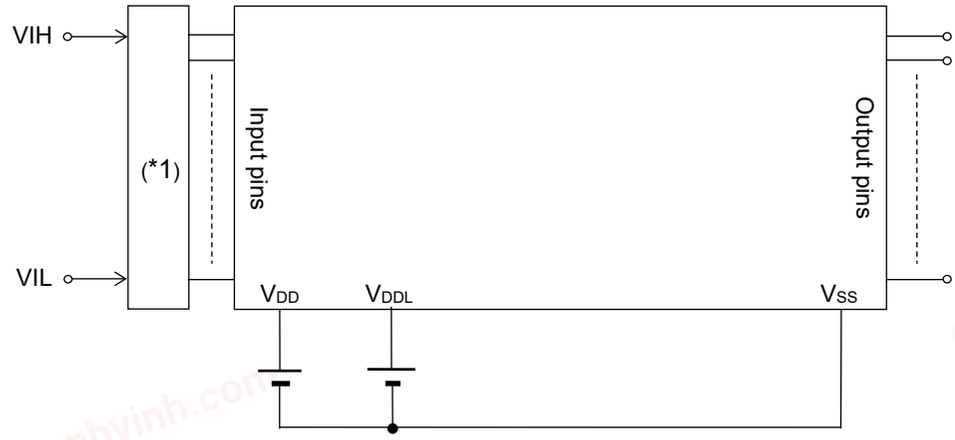

(*1) Input logic circuit to determine the specified measuring conditions

Measuring circuit 6

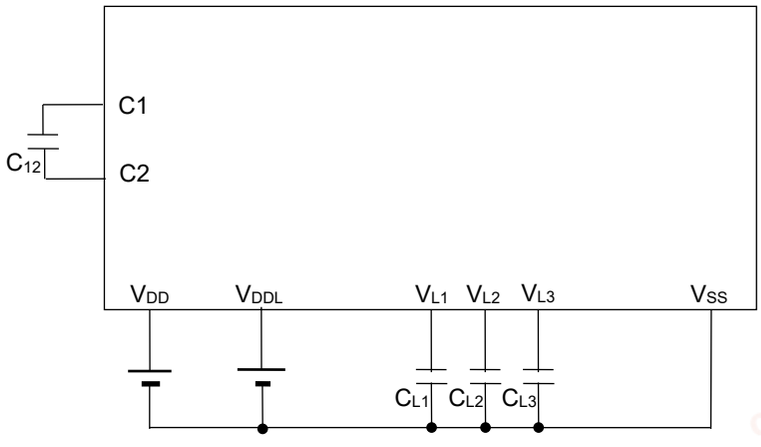

chanhvinh.com


Characteristics graphs

These Graphs on the following pages are references for designing an application.


chanhvinh.com
chanhvinh.com
chanhvinh.com
chanhvinh.com
chanhvinh.com
chanhvinh.com

chanhvinh.com

IOH vs. V_{DD}-VOH1 (V_{DD}=5V Typ.)

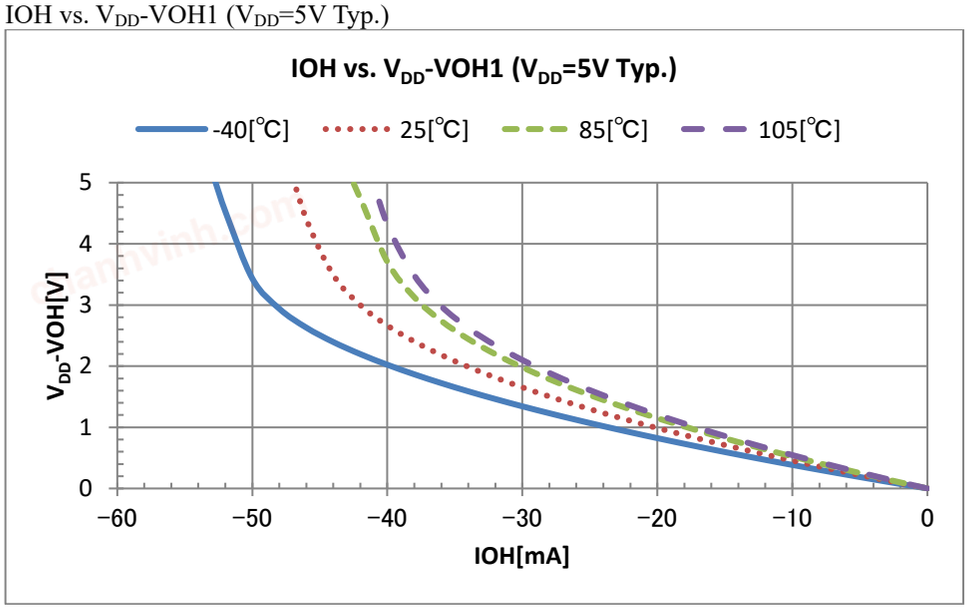


IOH vs. V_{DD}-VOH1 (V_{DD}=3V Typ.)

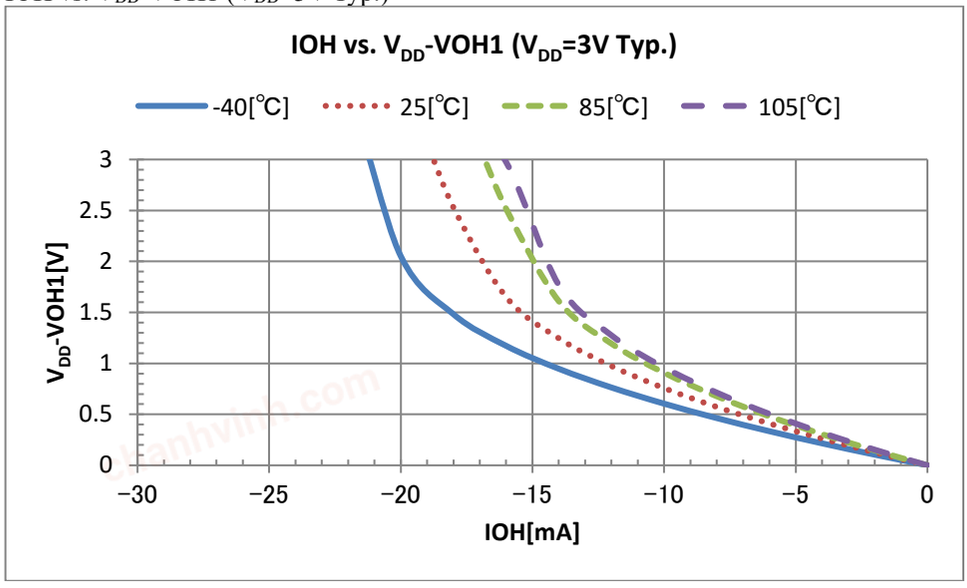


chanhvinh.com

IOL vs. VOL1 (V_{DD}=5V TYP.)

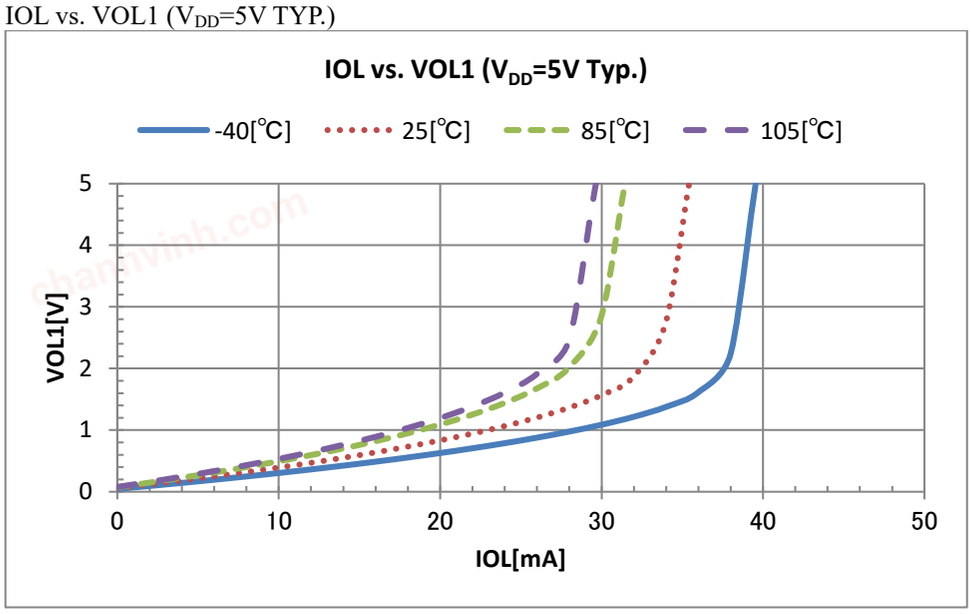


IOL vs. VOL1 (V_{DD}=3V TYP.)

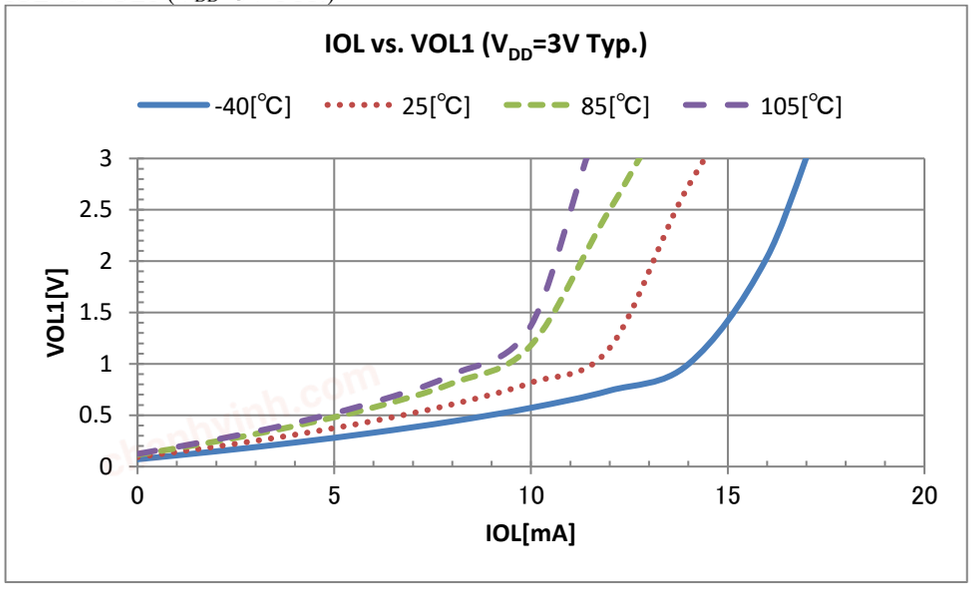


chanhvinh.com

IOL vs. VOL2 (V_{DD}=5V TYP.)

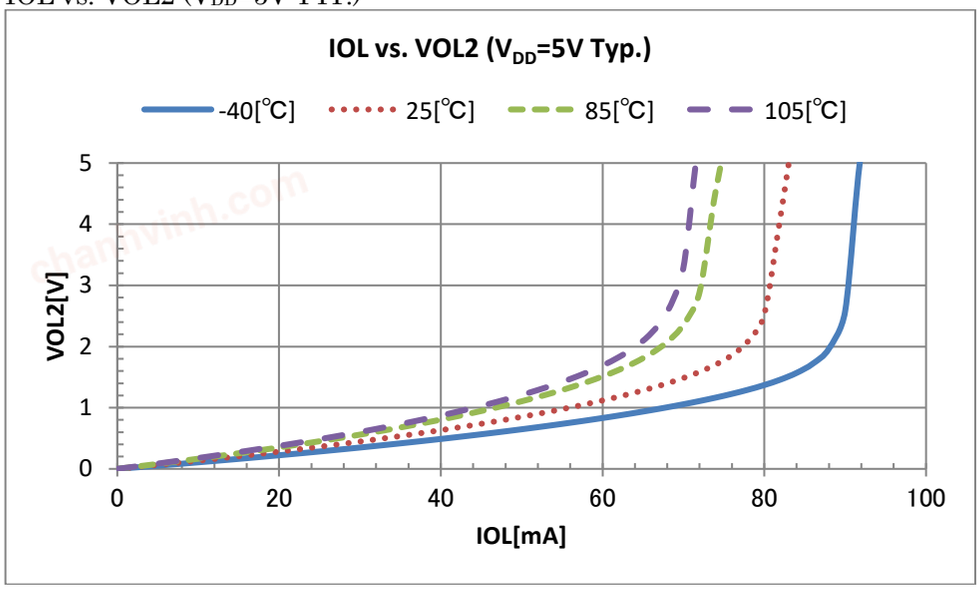


IOL vs. VOL2 (V_{DD}=3V TYP.).

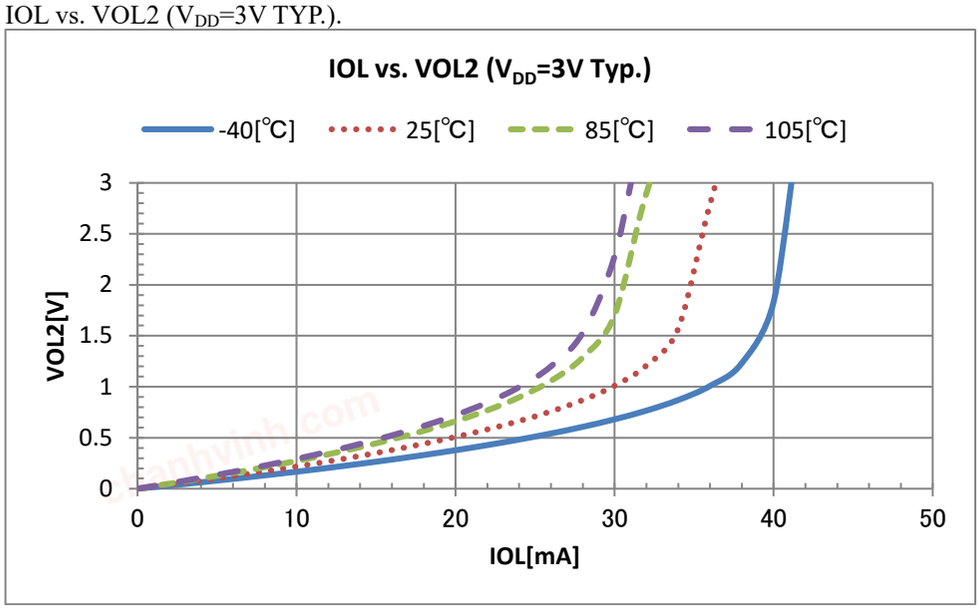


chanhvinh.com

V_{DD} vs. IIL2 (TYP. VIL2=V_{SS})

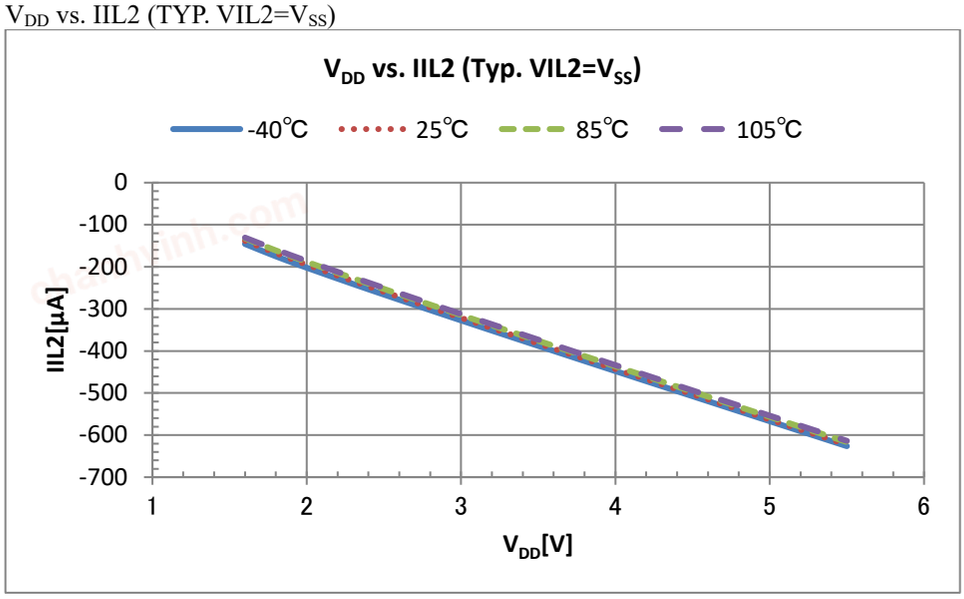


Pull-up resistor

V_{DD} vs. V_{DD}/IIL2 (Typ. VIL2=V_{SS})

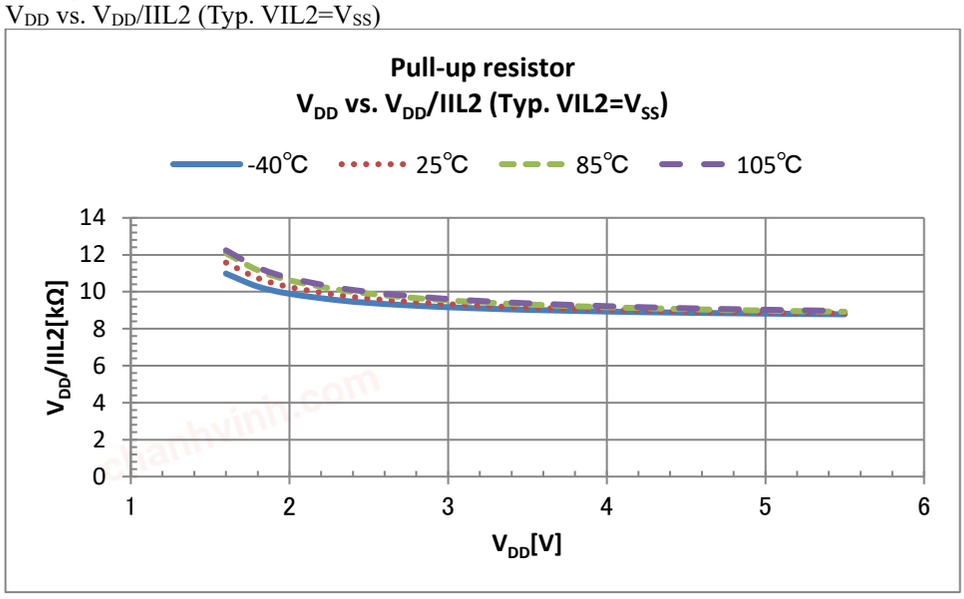


chanhvinh.com

V_{DD} vs. IIL3 (Typ. VIL3=V_{SS})

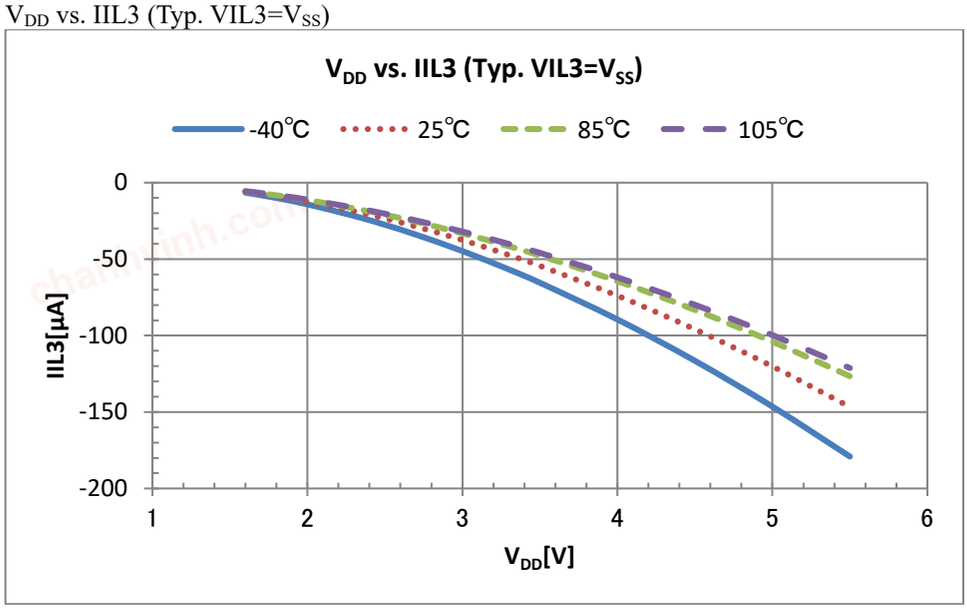

Pull-up resistor


V_{DD} vs. V_{DD}/IIL3 (Typ. VIL3=V_{SS})

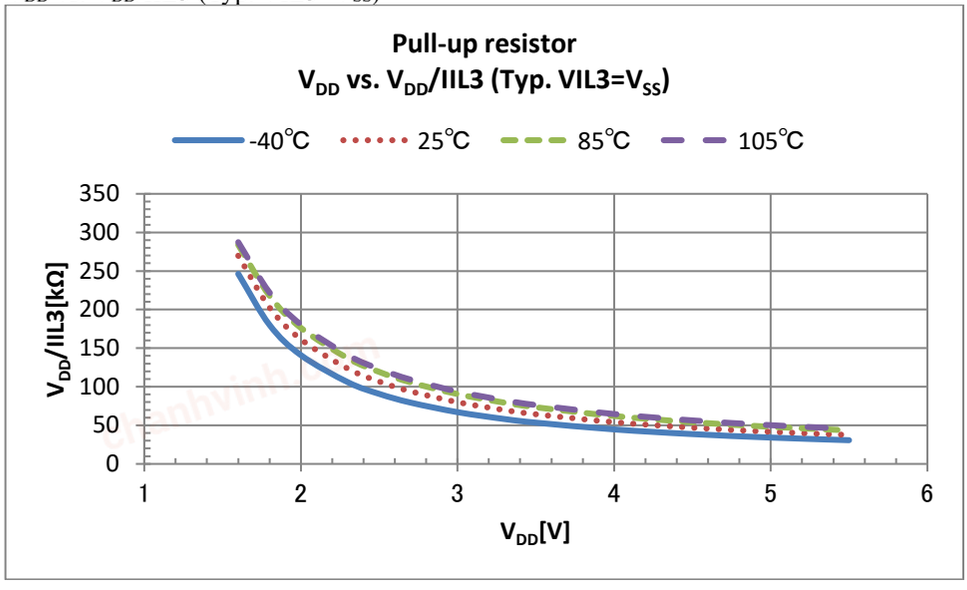


chanhvinh.com

Product: ML62Q1700, ML62Q1701, ML62Q1702, ML62Q1703, ML62Q1704, ML62Q1710, ML62Q1711, ML62Q1712, ML62Q1713, ML62Q1714, ML62Q1720, ML62Q1721, ML62Q1722, ML62Q1723, ML62Q1724

Current consumption vs. operating frequency of CPU
V_{DD}=3V, temp.=25°C PLL 16MHz Wait mode (TYP.)
Stop the clock supply to peripherals.

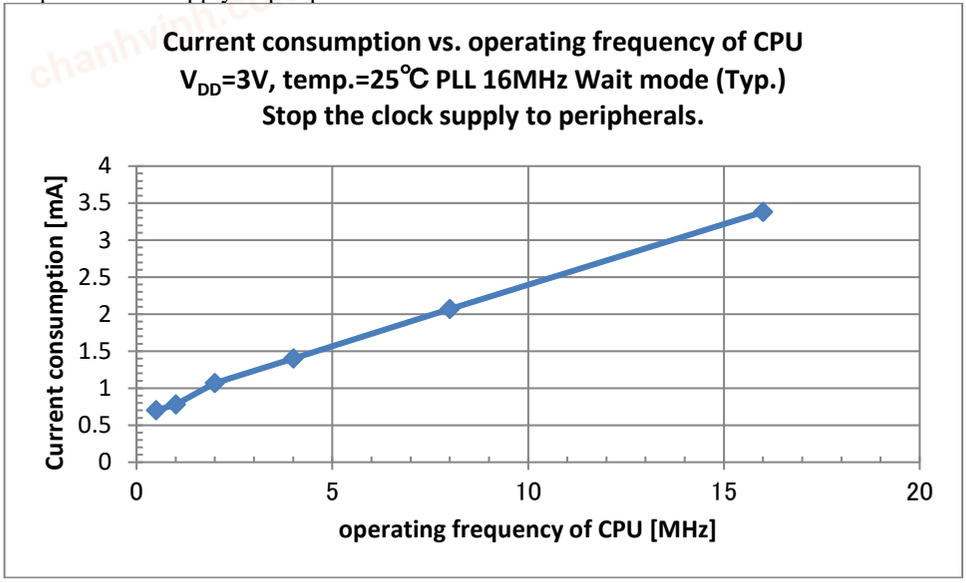


V_{DD}=3V, temp=25°C PLL 16MHz no Wait mode (TYP.)

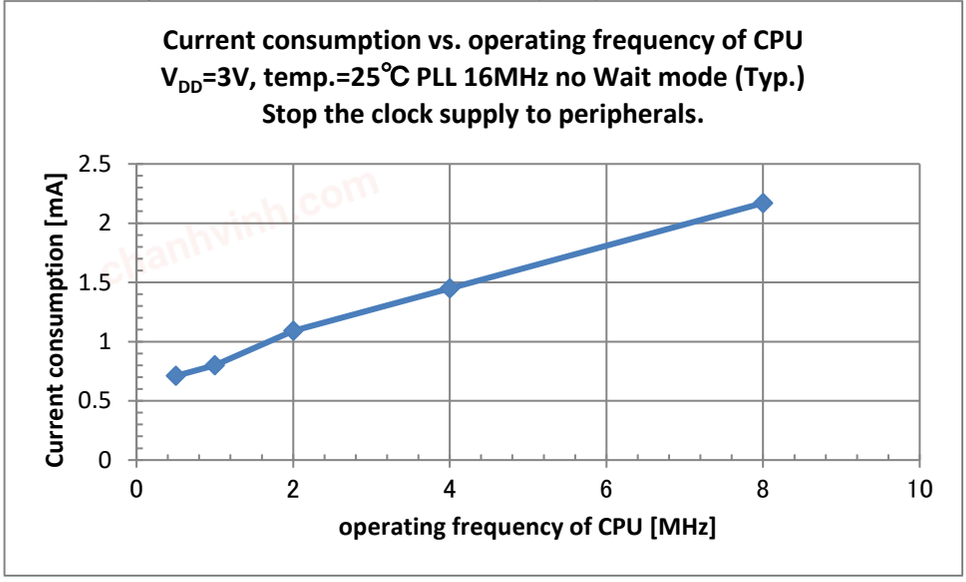


chanhvinh.com

Product: ML62Q1700, ML62Q1701, ML62Q1702, ML62Q1703, ML62Q1704, ML62Q1710, ML62Q1711, ML62Q1712, ML62Q1713, ML62Q1714, ML62Q1720, ML62Q1721, ML62Q1722, ML62Q1723, ML62Q1724

Current consumption vs. operating frequency of CPU
V_{DD}=3V, temp.=25°C PLL 24MHz Wait mode (Typ.)
Stop the clock supply to peripherals.

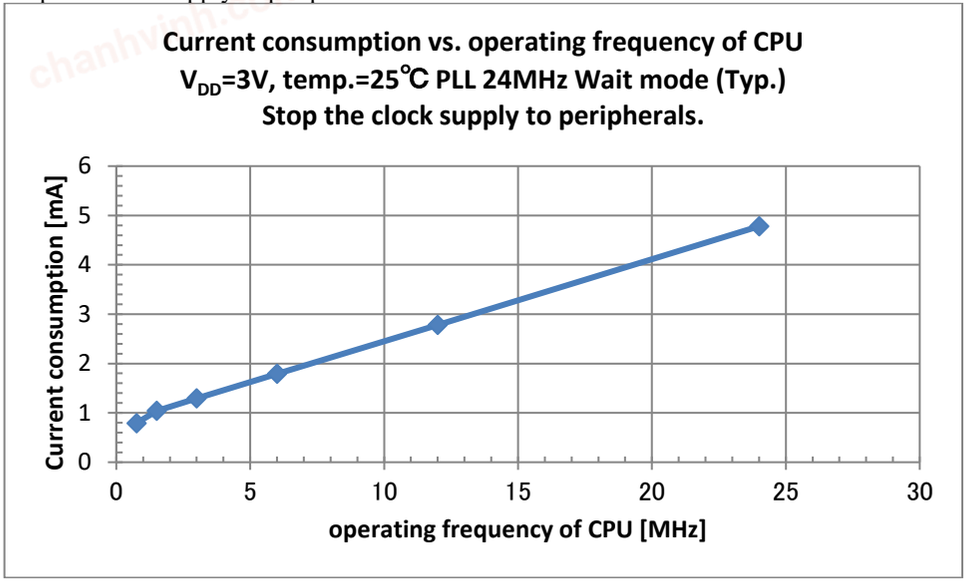


V_{DD}=3V, temp.=25°C PLL 24MHz no Wait mode (Typ.)

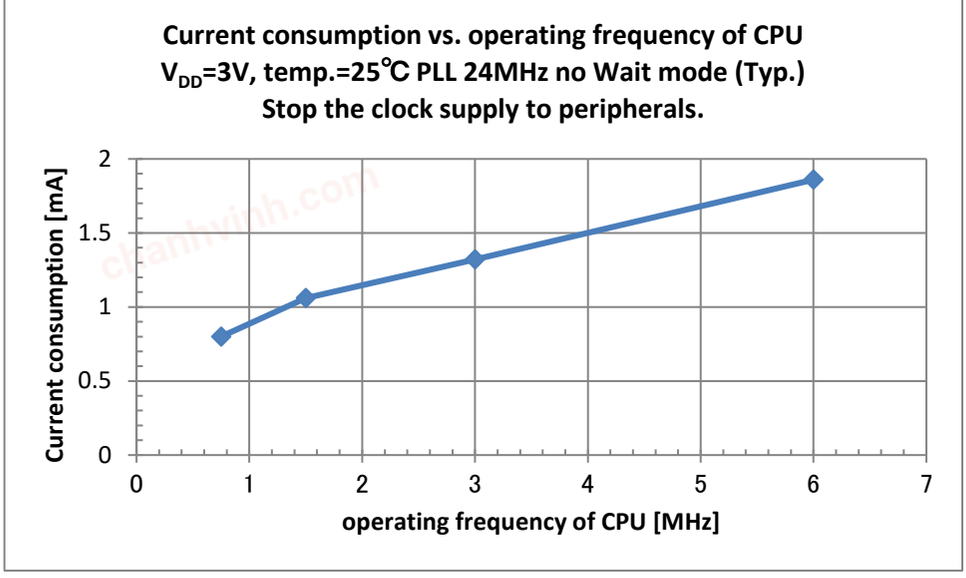


chanhvinh.com

Product: ML62Q1725, ML62Q1726, ML62Q1727,
ML62Q1733, ML62Q1734, ML62Q1735, ML62Q1736, ML62Q1737
ML62Q1743, ML62Q1744, ML62Q1745, ML62Q1746, ML62Q1747

Current consumption vs. operating frequency of CPU
V_{DD}=3V, temp.=25°C PLL 16MHz Wait mode (TYP.)
Stop the clock supply to peripherals.

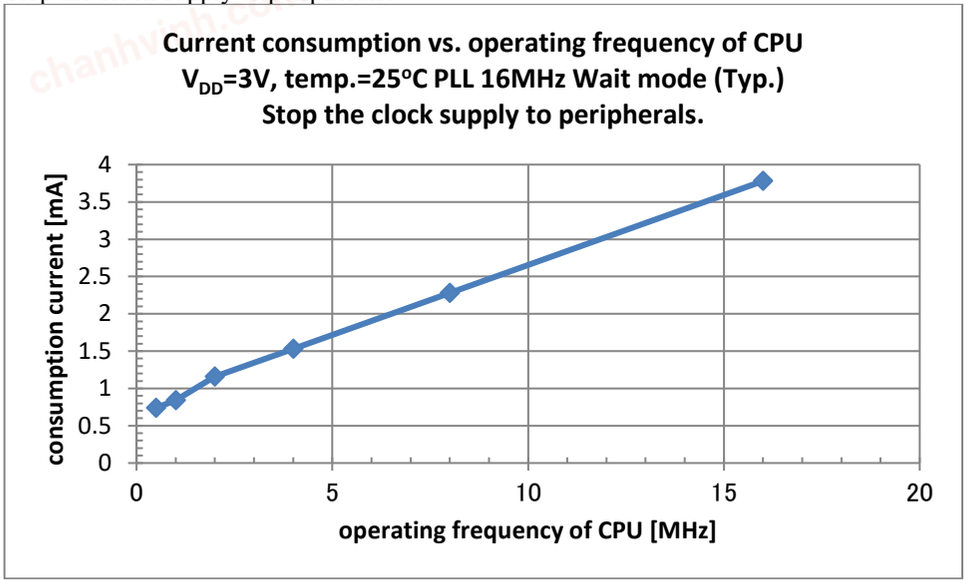


V_{DD}=3V, temp=25°C PLL 16MHz no Wait mode (TYP.)

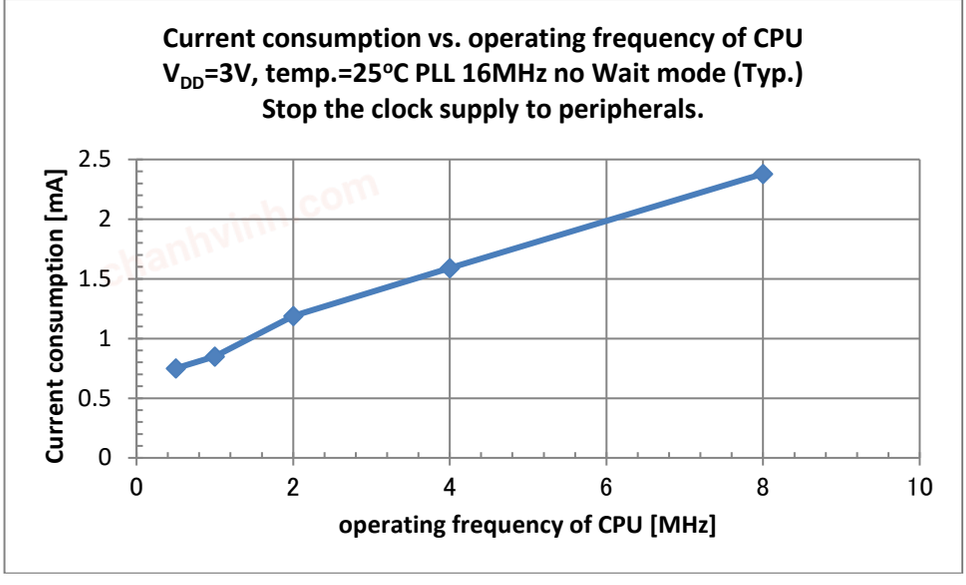


chanhvinh.com

Product: ML62Q1725, ML62Q1726, ML62Q1727,
ML62Q1733, ML62Q1734, ML62Q1735, ML62Q 1736, ML62Q1737
ML62Q1743, ML62Q1744, ML62Q1745, ML62Q 1746, ML62Q1747

Current consumption vs. operating frequency of CPU
V_{DD}=3V, temp.=25°C PLL 24MHz Wait mode (TYP.)
Stop the clock supply to peripherals.

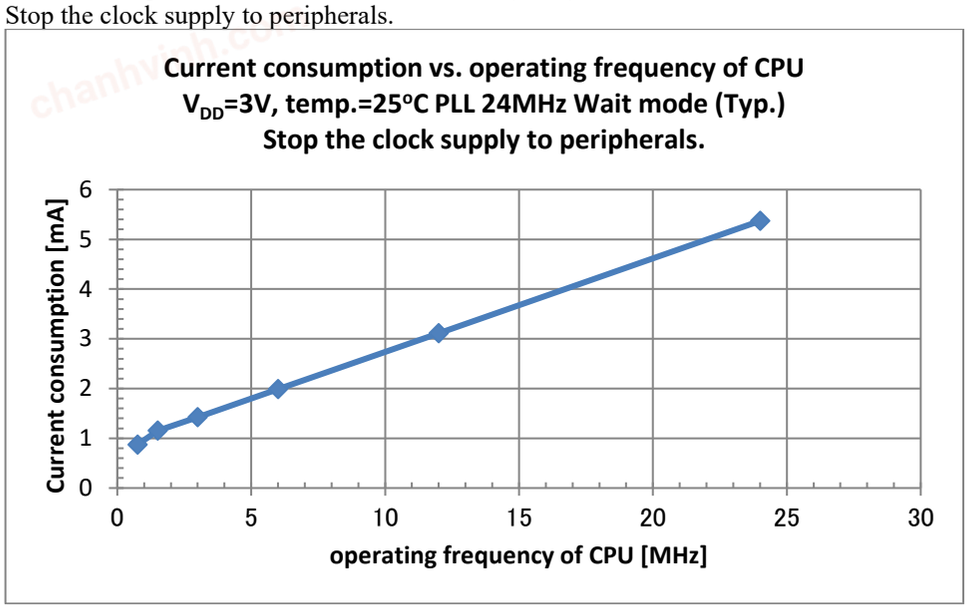


V_{DD}=3V, temp.=25°C PLL 24MHz no Wait mode (TYP.)

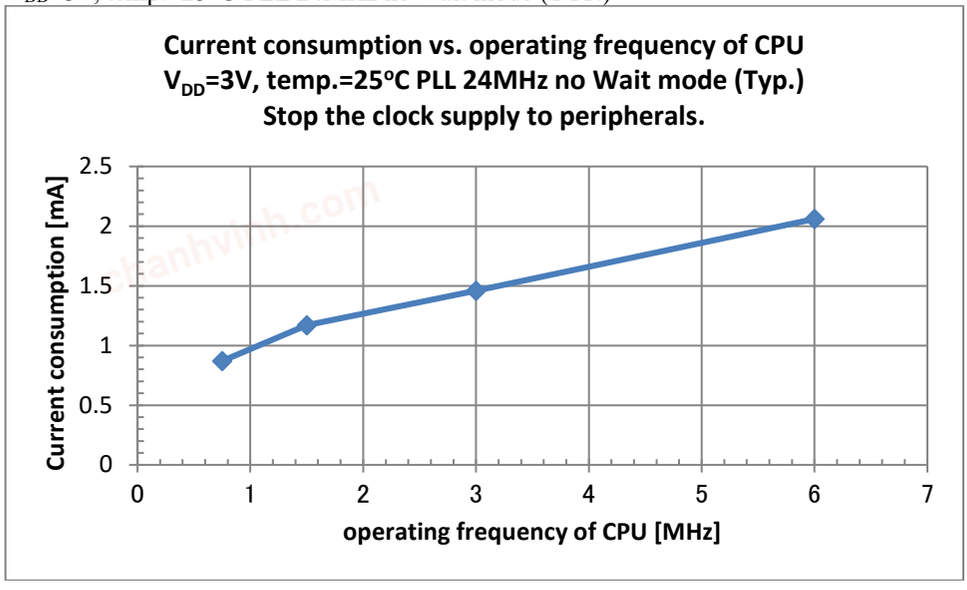


chanhvinh.com

Product: ML62Q1728, ML62Q1729, ML62Q1738, ML62Q1739, ML62Q1748, ML62Q1749

Current consumption vs. operating frequency of CPU
V_{DD}=3V, temp.=25°C PLL 16MHz Wait mode (TYP.)
Stop the clock supply to peripherals.

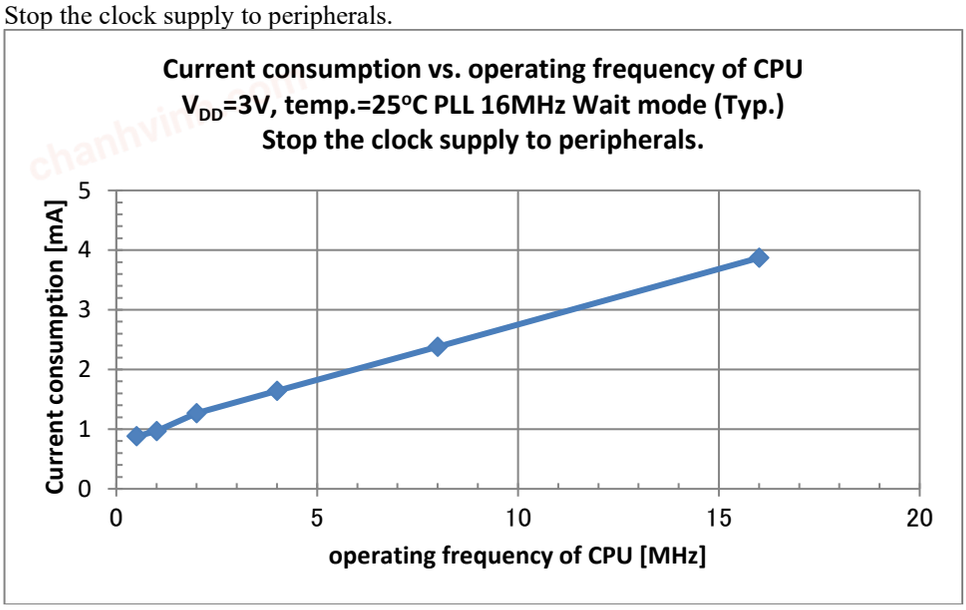


V_{DD}=3V, temp.=25°C PLL 16MHz no Wait mode (TYP.)

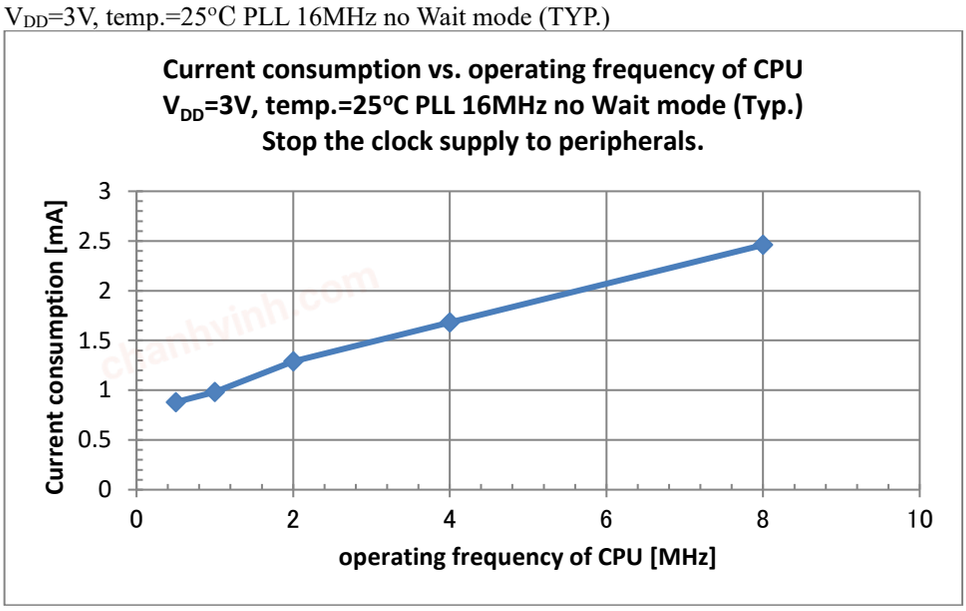


chanhvinh.com

Product: ML62Q1728, ML62Q1729, ML62Q1738, ML62Q1739, ML62Q1748, ML62Q1749

Current consumption vs. operating frequency of CPU
V_{DD}=3V, temp=25°C PLL 24MHz Wait mode (TYP.)
Stop the clock supply to peripherals.

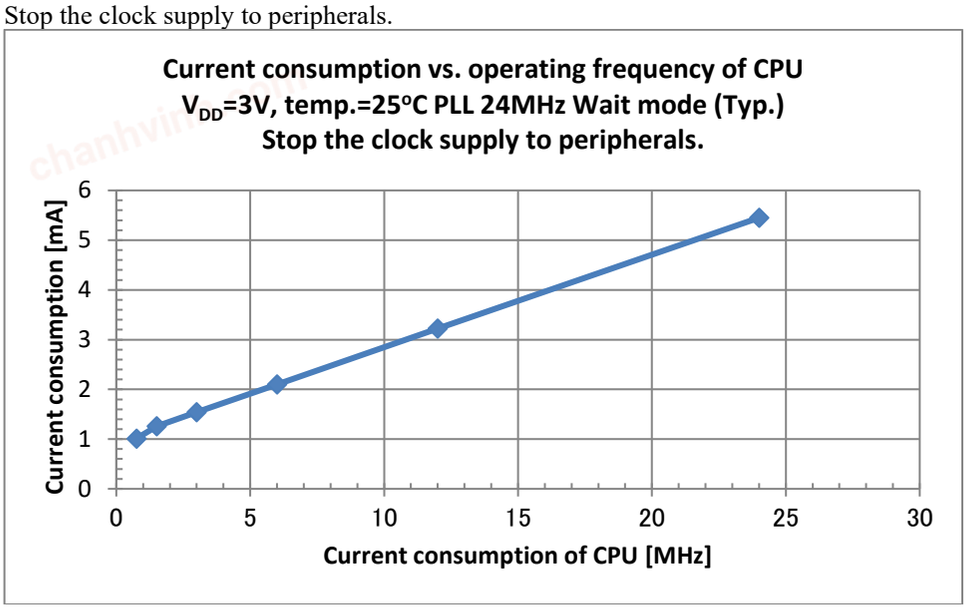


V_{DD}=3V, temp.=25°C PLL 24MHz no Wait mode (TYP.)

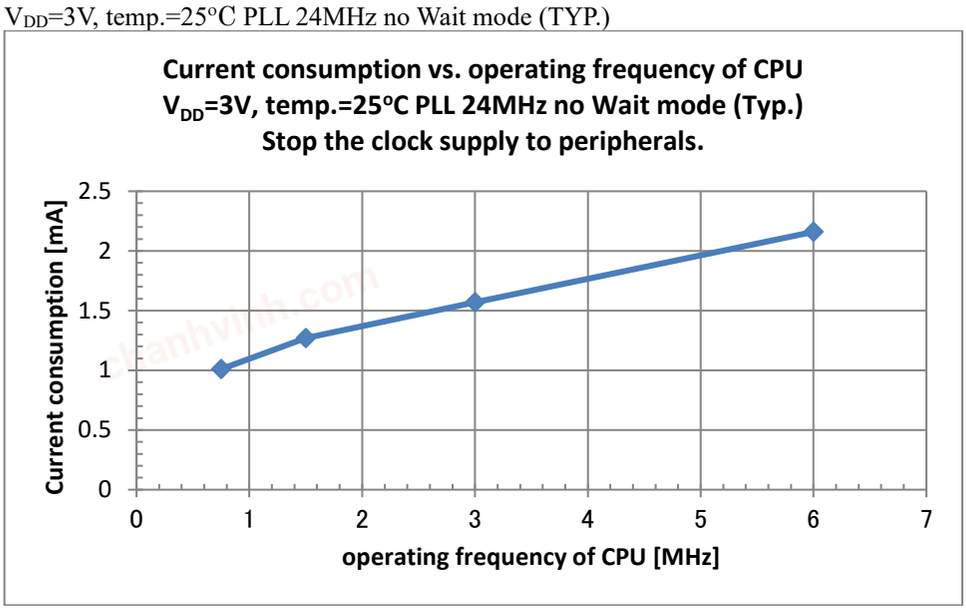


chanhvinh.com

Consumption current of ADC vs. operating voltage
PLL frequency=16MHz temp.=25°C ch0 V_{REF}=V_{DD}

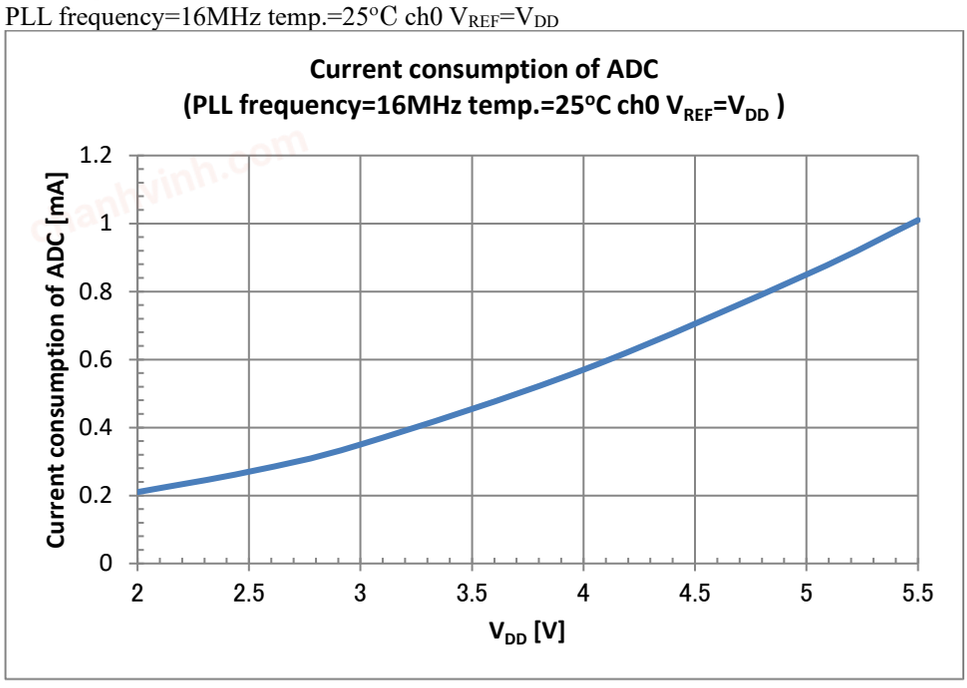


chanhvinh.com

Temp. vs. Low-speed RC oscillator frequency accuracy 1
without software adjustment (Typ.)

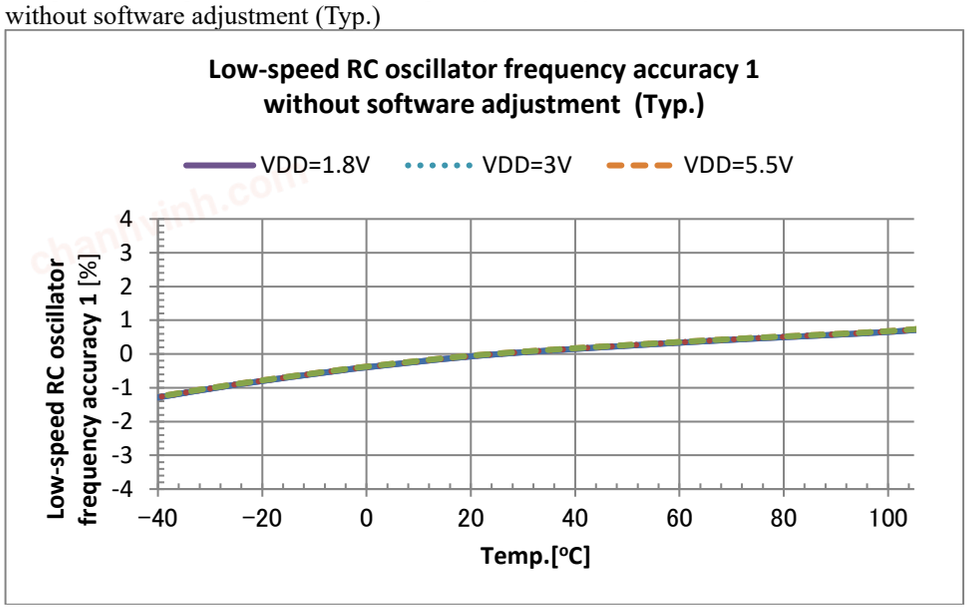


Temp. vs. PLL oscillator frequency accuracy 1
without software adjustment (24MHz Typ.)

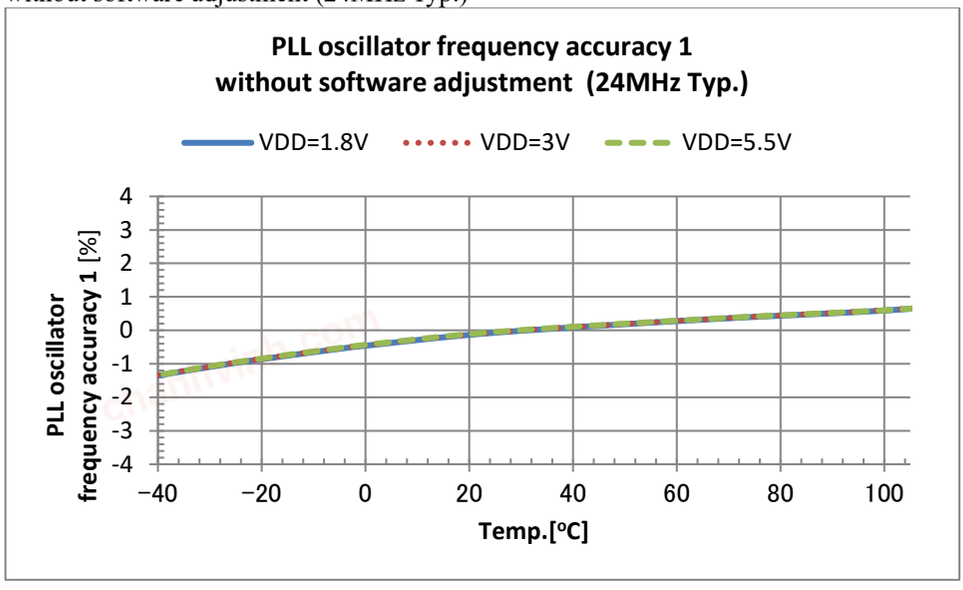

chanhvinh.com

PACKAGE DIMENSIONS

48pin TQFP Package

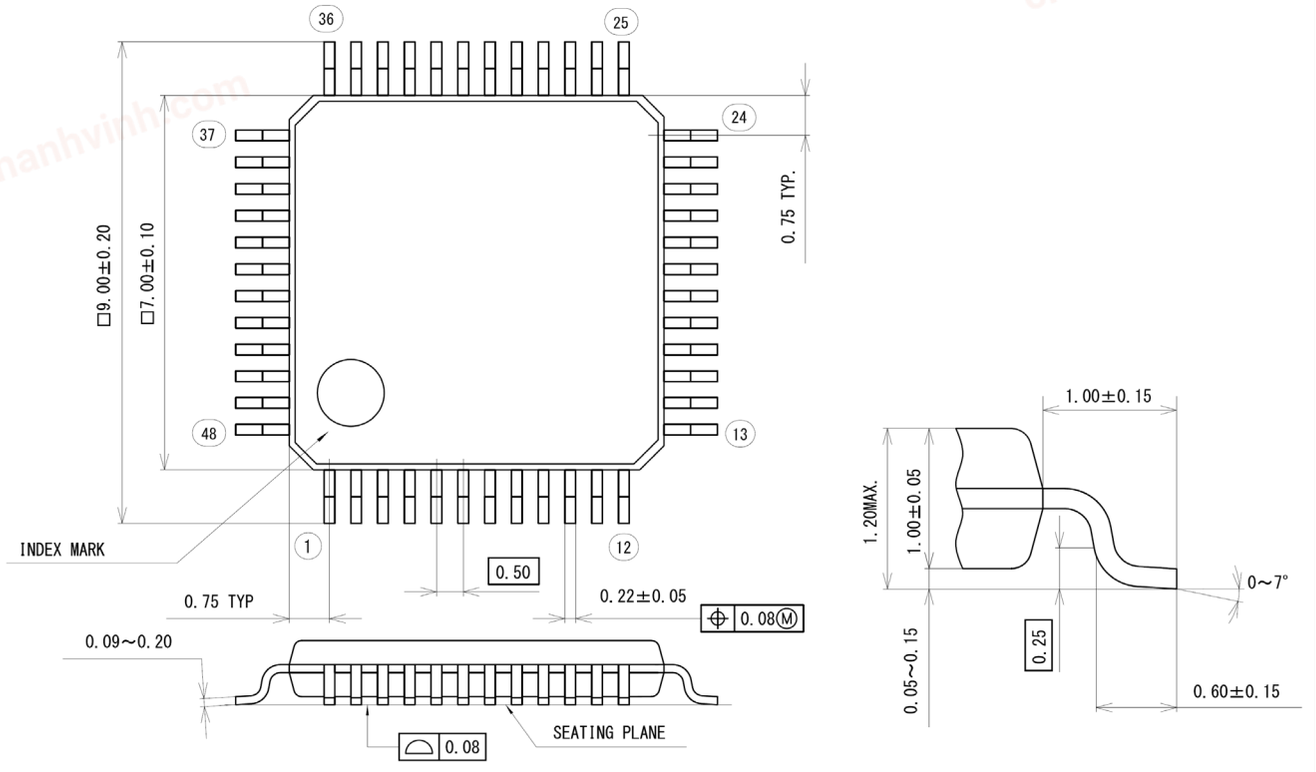

LAPIS Technology Co., Ltd.			
PACKAGE CODE	P-TQFP48-0707-0.50-ZK6		
PACKAGE MATERIAL	EPOXY RESIN	UNIT	mm
LEAD FLAME MATERIAL	Cu ALLOY	DWG No.	QSL-69142
LEAD FINISH	Sn 100%	REVISION	4
PLATING THICKNESS	MORE THAN 5μm	1st ISSUE	Jul/28/2014
PACKAGE MASS (g)	0.13TYP	REVISED	Oct/12/2020

1. LEAD WIDTH DOES NOT INCLUDE TRIM OFFSET.
2. PACKAGE WIDTH AND LENGTH DO NOT INCLUDE MOLD PROTRUSION, DIEPAD SUPPORT PROTRUSION AND CAVITY OFFSET BETWEEN TOP AND BOTTOM CAVITY.
3. THE SEATING PLANE IS THE SURFACE WHICH THE PACKAGE IS MOUNTED ON AND GETS IN CONTACT WITH.


(Unit: mm)

Notes for Mounting the Surface Mount Type Package

The surface mount type packages are very susceptible to heat in reflow mounting and humidity absorbed in storage. Therefore, before you perform reflow mounting, contact a ROHM sales office for the product name, package name, pin number, package code and desired mounting conditions (reflow method, temperature and times).

chanhvinh.com

52pin TQFP Package

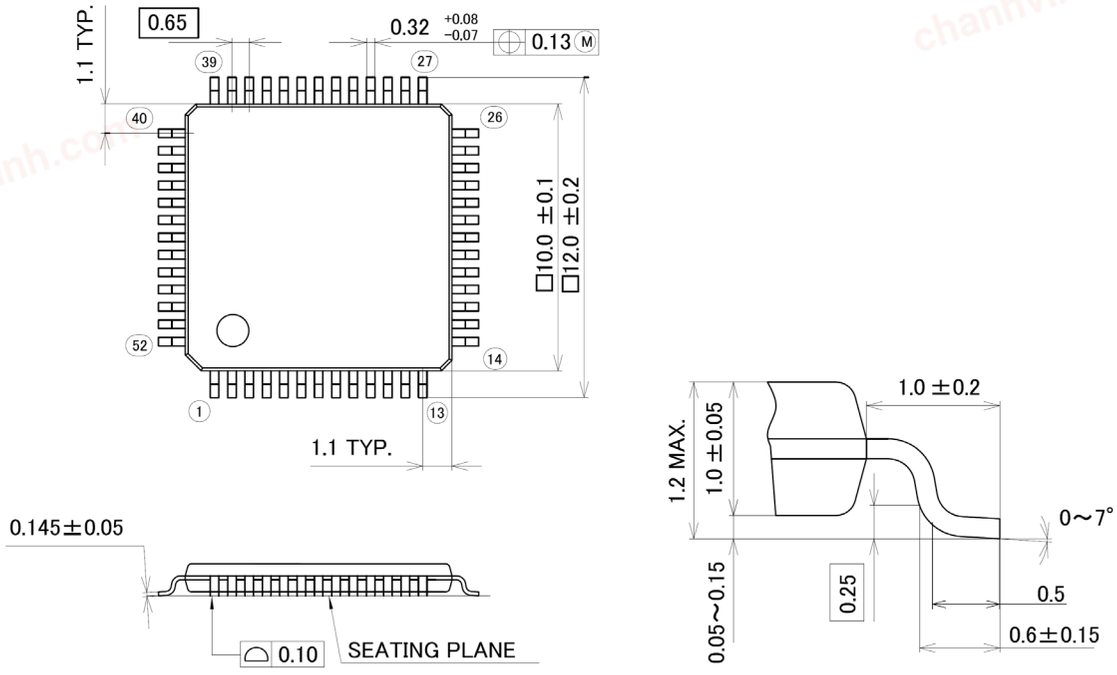

NOTES:
1. LEAD WIDTH DOES NOT INCLUDE TRIM OFFSET.
2. PACKAGE WIDTH AND LENGTH DO NOT INCLUDE MOLD PROTRUSION,DIEPAD SUPPORT PROTRUSION AND CAVITY OFFSET BETWEEN TOP AND BOTTOM CAVITY.
3. THE SEATING PLANE IS THE SURFACE WHICH THE PACKAGE IS MOUNTED ON AND GETS IN CONTACT WITH.

LAPIS Technology Co., Ltd.			
PACKAGE CODE	P-TQFP52-1010-0.65-ZK6		
PACKAGE MATERIAL	EPOXY RESIN	UNIT	mm
LEAD FLAME MATERIAL	Cu ALLOY	DWG No.	QSL-69380
LEAD FINISH	Sn	REVISION	2
PLATING THICKNESS	MORE THAN 5 μm	1st ISSUE	Dec/21/2016
PACKAGE MASS (g)	0.28TYP.	REVISED	Dec/22/2020


(Unit: mm)

Notes for Mounting the Surface Mount Type Package

The surface mount type packages are very susceptible to heat in reflow mounting and humidity absorbed in storage. Therefore, before you perform reflow mounting, contact a ROHM sales office for the product name, package name, pin number, package code and desired mounting conditions (reflow method, temperature and times).

chanhvinh.com

64pin TQFP Package

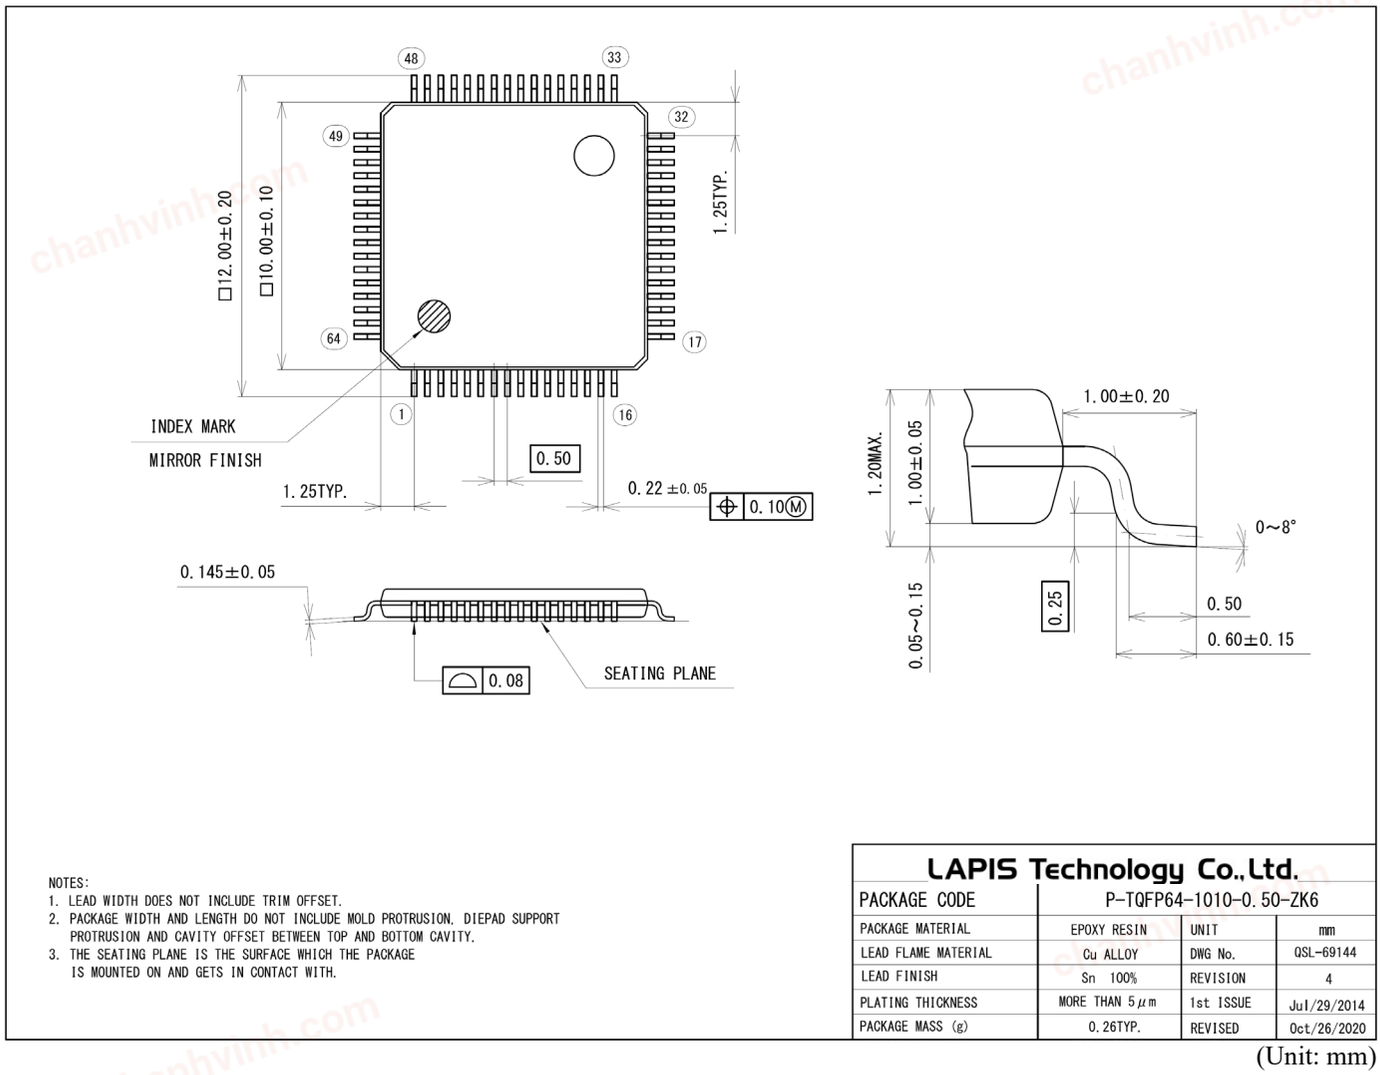

NOTES:
1. LEAD WIDTH DOES NOT INCLUDE TRIM OFFSET.
2. PACKAGE WIDTH AND LENGTH DO NOT INCLUDE MOLD PROTRUSION, DIEPAD SUPPORT PROTRUSION AND CAVITY OFFSET BETWEEN TOP AND BOTTOM CAVITY.
3. THE SEATING PLANE IS THE SURFACE WHICH THE PACKAGE IS MOUNTED ON AND GETS IN CONTACT WITH.

LAPIS Technology Co.,Ltd.			
PACKAGE CODE	P-TQFP64-1010-0.50-ZK6		
PACKAGE MATERIAL	EPOXY RESIN	UNIT	mm
LEAD FLAME MATERIAL	Cu ALLOY	DWG No.	QSL-69144
LEAD FINISH	Sn 100%	REVISION	4
PLATING THICKNESS	MORE THAN 5μm	1st ISSUE	Jul/29/2014
PACKAGE MASS (g)	0.26TYP.	REVISED	Oct/26/2020


(Unit: mm)

Notes for Mounting the Surface Mount Type Package

The surface mount type packages are very susceptible to heat in reflow mounting and humidity absorbed in storage. Therefore, before you perform reflow mounting, contact a ROHM sales office for the product name, package name, pin number, package code and desired mounting conditions (reflow method, temperature and times).

chanhvinh.com

64pin QFP Package

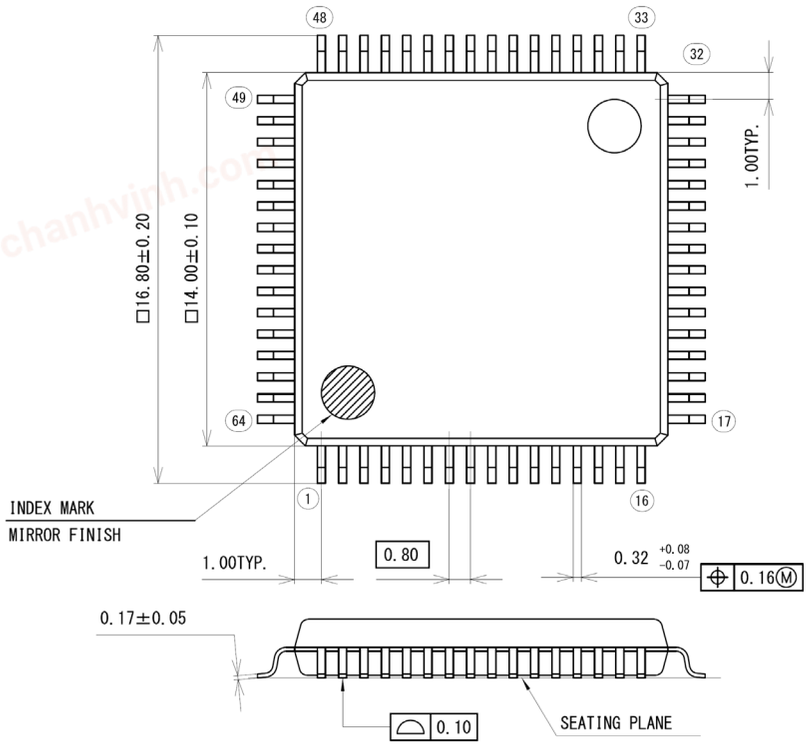

NOTES:
1. LEAD WIDTH DOES NOT INCLUDE TRIM OFFSET.
2. PACKAGE WIDTH AND LENGTH DO NOT INCLUDE MOLD PROTRUSION, DIEPAD SUPPORT PROTRUSION AND CAVITY OFFSET BETWEEN TOP AND BOTTOM CAVITY.
3. THE SEATING PLANE IS THE SURFACE WHICH THE PACKAGE IS MOUNTED ON AND GETS IN CONTACT WITH.

LAPIS Technology Co., Ltd.			
PACKAGE CODE	P-QFP64-1414-0.80-ZK6		
PACKAGE MATERIAL	EPOXY RESIN	UNIT	mm
LEAD FLAME MATERIAL	Cu ALLOY	DWG No.	QSL-69124
LEAD FINISH	Sn 100%	REVISION	2
PLATING THICKNESS	MORE THAN 5μm	1st ISSUE	Jul/28/2014
PACKAGE MASS (g)	0.87TYP.	REVISED	Dec/14/2020


(Unit: mm)

Notes for Mounting the Surface Mount Type Package

The surface mount type packages are very susceptible to heat in reflow mounting and humidity absorbed in storage. Therefore, before you perform reflow mounting, contact a ROHM sales office for the product name, package name, pin number, package code and desired mounting conditions (reflow method, temperature and times).

chanhvinh.com

80pin QFP Package

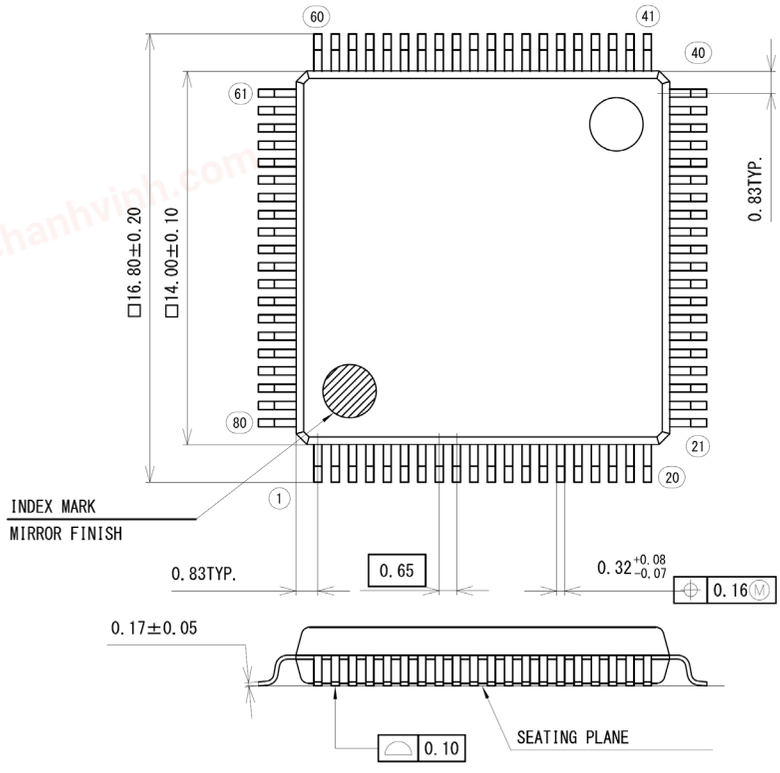

NOTES:
1. LEAD WIDTH DOES NOT INCLUDE TRIM OFFSET.
2. PACKAGE WIDTH AND LENGTH DO NOT INCLUDE MOLD PROTRUSION, DIEPAD SUPPORT PROTRUSION AND CAVITY OFFSET BETWEEN TOP AND BOTTOM CAVITY.
3. THE SEATING PLANE IS THE SURFACE WHICH THE PACKAGE IS MOUNTED ON AND GETS IN CONTACT WITH.

LAPIS Technology Co., Ltd.			
PACKAGE CODE	P-QFP80-1414-0.65-ZK6		
PACKAGE MATERIAL	EPOXY RESIN	UNIT	mm
LEAD FLAME MATERIAL	Cu ALLOY	DWG No.	QSL-69125
LEAD FINISH	Sn 100%	REVISION	2
PLATING THICKNESS	MORE THAN 5μm	1st ISSUE	Jul/28/2014
PACKAGE MASS (g)	0.85TYP	REVISED	Feb/02/2021


(Unit: mm)


Notes for Mounting the Surface Mount Type Package

The surface mount type packages are very susceptible to heat in reflow mounting and humidity absorbed in storage. Therefore, before you perform reflow mounting, contact a ROHM sales office for the product name, package name, pin number, package code and desired mounting conditions (reflow method, temperature and times).

chanhvinh.com

100pin TQFP Package

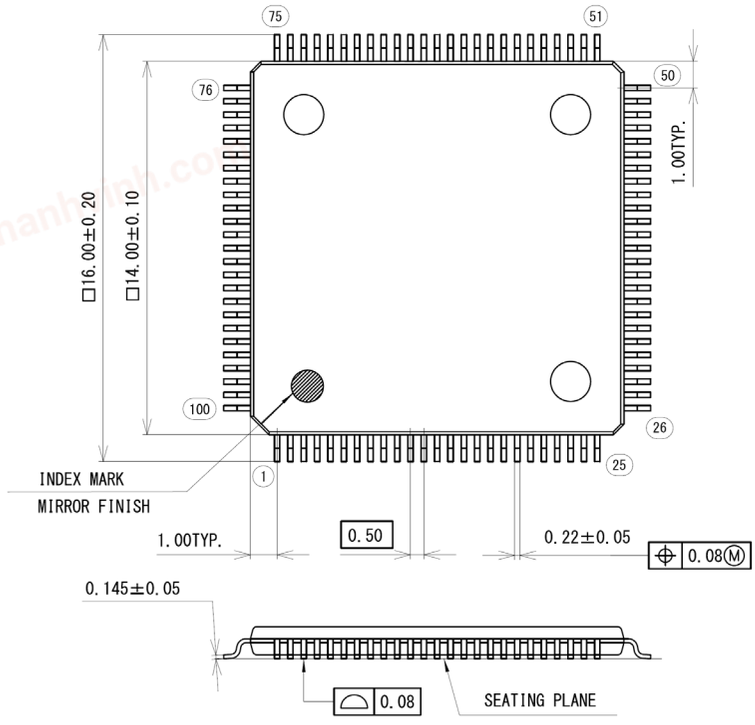

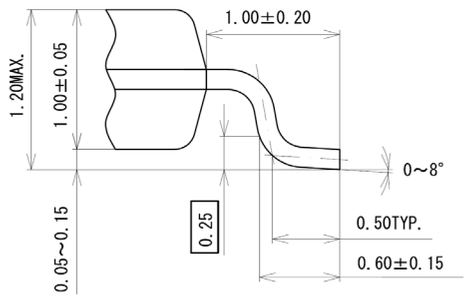

NOTES:
1. LEAD WIDTH DOES NOT INCLUDE TRIM OFFSET.
2. PACKAGE WIDTH AND LENGTH DO NOT INCLUDE MOLD PROTRUSION, DIEPAD SUPPORT PROTRUSION AND CAVITY OFFSET BETWEEN TOP AND BOTTOM CAVITY.
3. THE SEATING PLANE IS THE SURFACE WHICH THE PACKAGE IS MOUNTED ON AND GETS IN CONTACT WITH.

LAPIS Technology Co., Ltd.			
PACKAGE CODE	P-TQFP100-1414-0.50-ZK6		
PACKAGE MATERIAL	EPOXY RESIN	UNIT	mm
LEAD FLAME MATERIAL	Cu ALLOY	DWG No.	QSL-69147
LEAD FINISH	Sn 100%	REVISION	2
PLATING THICKNESS	MORE THAN 5μm	1st ISSUE	Jul/29/2014
PACKAGE MASS (g)	0.55TYP.	REVISED	Oct/26/2020


(Unit: mm)

Notes for Mounting the Surface Mount Type Package

The surface mount type packages are very susceptible to heat in reflow mounting and humidity absorbed in storage. Therefore, before you perform reflow mounting, contact a ROHM sales office for the product name, package name, pin number, package code and desired mounting conditions (reflow method, temperature and times).

chanhvinh.com

100pin QFP Package

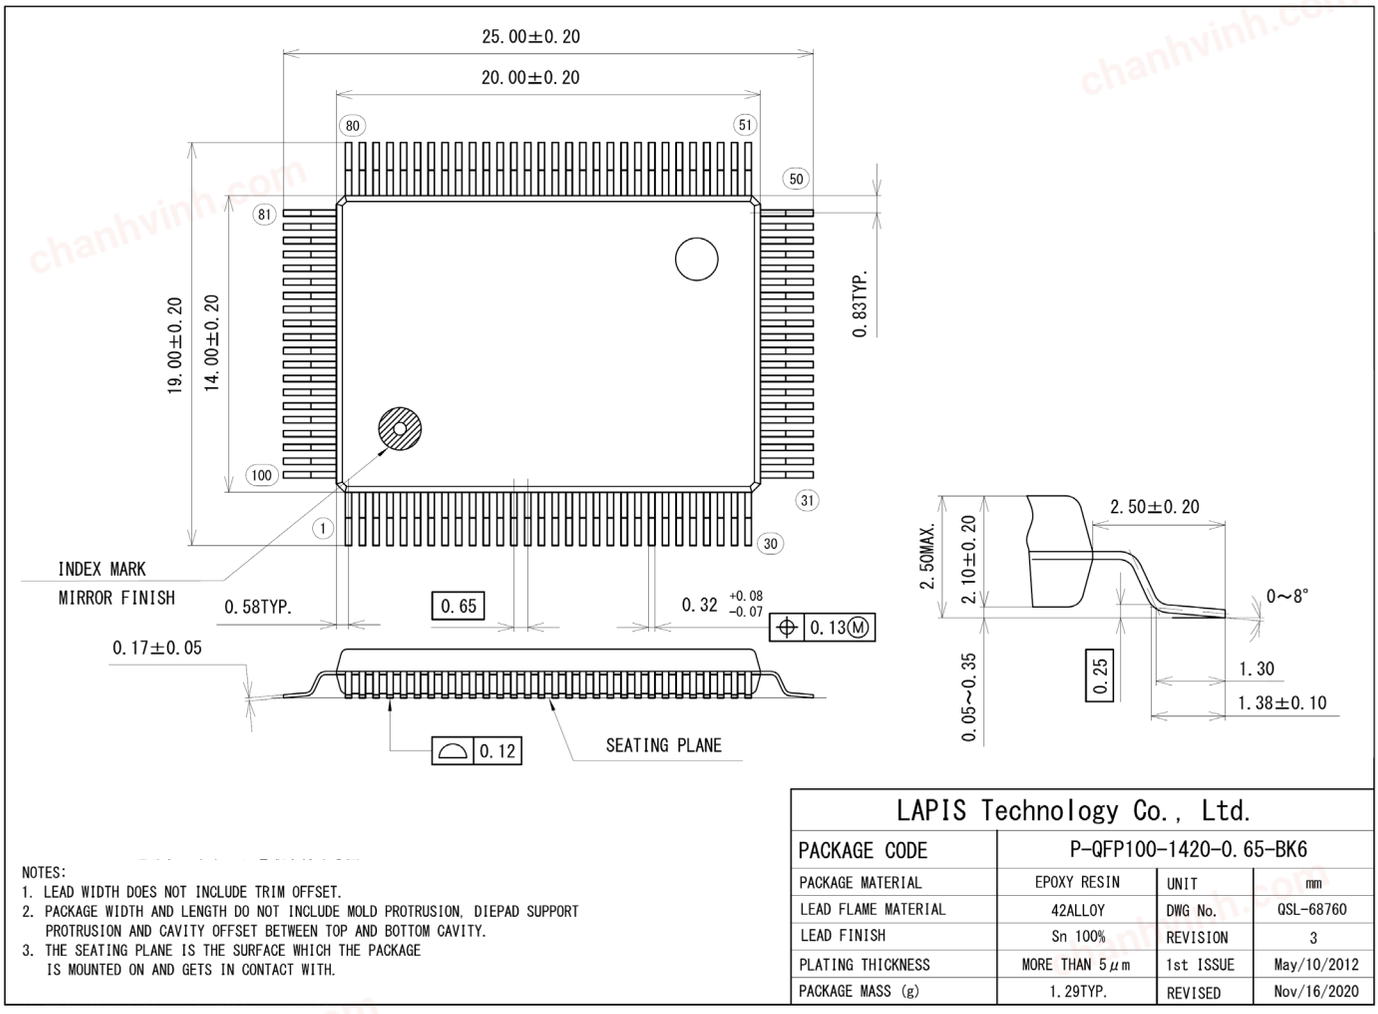

NOTES:
1. LEAD WIDTH DOES NOT INCLUDE TRIM OFFSET.
2. PACKAGE WIDTH AND LENGTH DO NOT INCLUDE MOLD PROTRUSION, DIEPAD SUPPORT PROTRUSION AND CAVITY OFFSET BETWEEN TOP AND BOTTOM CAVITY.
3. THE SEATING PLANE IS THE SURFACE WHICH THE PACKAGE IS MOUNTED ON AND GETS IN CONTACT WITH.

LAPIS Technology Co., Ltd.			
PACKAGE CODE	P-QFP100-1420-0.65-BK6		
PACKAGE MATERIAL	EPOXY RESIN	UNIT	mm
LEAD FLAME MATERIAL	42ALLOY	DWG No.	QSL-68760
LEAD FINISH	Sn 100%	REVISION	3
PLATING THICKNESS	MORE THAN 5μm	1st ISSUE	May/10/2012
PACKAGE MASS (g)	1.29TYP.	REVISED	Nov/16/2020

(Unit: mm)

Notes for Mounting the Surface Mount Type Package

The surface mount type packages are very susceptible to heat in reflow mounting and humidity absorbed in storage. Therefore, before you perform reflow mounting, contact a ROHM sales office for the product name, package name, pin number, package code and desired mounting conditions (reflow method, temperature and times).

chanhvinh.com

REVISION HISTORY

Document No.	Date	Page		Description
		Previous Edition	Current Edition	
FEDL62Q1700-01	May 24, 2019	-	-	1st Revision.
FEDL62Q1700-02	Mar 25, 2020	25	26	Changed termination of unused pins
		27	27	Added parameter “Operating temperature(Chip-Junction)” in Recommended Operating Conditions
		27	—	Removed the section “Operation Confirmed Crystal Unit(32.768kHz)”. This section is mentioned in Applications Note; “Operation-confirmed oscillator for ML62Q1000 series”.
		—	28	Added thermal characteristics section
		42	43	Added comments and notes to the reset characteristics
		42	44	Revised overall of “Power On Reset” section as “Slope of Power supply and Power On Reset” section. The major revisions are Added definitions of Power on rising/falling slope, Power on voltage, CPU operation start time, and added Note.
		*	*	Corrected typo
FEDL62Q1700-03	Jul 15, 2020	4,8,9	4,8,9	Changed comment for UART.
		23	23	Corrected description of SA-ADC in Table 4.
		27	27	Corrected comment in the parameter “Output voltage2”
FEDL62Q1700-04	May 19, 2022	1	1	Added Notes in general description section.
		—	73	Added Notes for product usage
		*	*	Corrected typo
FEDL62Q1700-05	Mar 26, 2024	1	1	Added application information
		6	7	Changed the format of the shipping package information
		7	8	Updated “how to read the part number”
		26	26	Added comment in Table 5
		65-71	66-73	Revised package dimension
		74	75	Revised the Note

chanhvinh.com

Notes for product usage

Notes on this page are applicable to the all microcontroller products.
For individual notes on each LAPIS Technology microcontroller product, refer to [Note] in the chapters of each user's manual.
The individual notes of each user's manual take priority over those contents in this page if they are different.

1. HANDLING OF UNUSED INPUT PINS
   Fix the unused input pins to the power pin or GND to prevent to cause the device performing wrong operation or increasing the current consumption due to noise, etc. If the handlings for the unused pins are described in the chapters, follow the instruction.

2. STATE AT POWER ON
   At the power on, the data in the internal registers and output of the ports are undefined until the power supply voltage reaches to the recommended operating condition and "L" level is input to the reset pin.
   On LAPIS Technology microcontroller products that have the power on reset function, the data in the internal registers and output of the ports are undefined until the power on reset is generated.
   Be careful to design the application system does not work incorrectly due to the undefined data of internal registers and output of the ports.

3. ACCESS TO UNUSED MEMORY
   If reading from unused address area or writing to unused address area of the memory, the operations are not guaranteed.

4. CHARACTERISTICS DIFFERENCE BETWEEN THE PRODUCTS
   Electrical characteristics, noise tolerance, noise radiation amount, and the other characteristics are different from each microcontroller product.
   When replacing from other product to LAPIS Technology microcontroller products, please evaluate enough the apparatus/system which implemented LAPIS Technology microcontroller products.

5. USE ENVIRONMENT
   When using this product in a high humidity environment and an environment where dew condensation, take moisture-proof measures.

chanhvinh.com

Notes

1) When using LAPIS Technology Products, refer to the latest product information and ensure that usage conditions (absolute maximum ratings*1, recommended operating conditions, etc.) are within the ranges specified. LAPIS Technology disclaims any and all liability for any malfunctions, failure or accident arising out of or in connection with the use of LAPIS Technology Products outside of such usage conditions specified ranges, or without observing precautions. Even if it is used within such usage conditions specified ranges, semiconductors can break down and malfunction due to various factors. Therefore, in order to prevent personal injury, fire or the other damage from break down or malfunction of LAPIS Technology Products, please take safety at your own risk measures such as complying with the derating characteristics, implementing redundant and fire prevention designs, and utilizing backups and fail-safe procedures.
*1: Absolute maximum ratings: a limit value that must not be exceeded even momentarily.

2) The Products specified in this document are not designed to be radiation tolerant.

3) Descriptions of circuits, software and other related information in this document are provided only to illustrate the standard operation of semiconductor products and application examples. You are fully responsible for the incorporation or any other use of the circuits, software, and information in the design of your product or system. And the peripheral conditions must be taken into account when designing circuits for mass production. LAPIS Technology disclaims any and all liability for any losses and damages incurred by you or third parties arising from the use of these circuits, software, and other related information.

4) No license, expressly or implied, is granted hereby under any intellectual property rights or other rights of LAPIS Technology or any third party with respect to LAPIS Technology Products or the information contained in this document (including but not limited to, the Product data, drawings, charts, programs, algorithms, and application examples, etc.). Therefore, LAPIS Technology shall have no responsibility whatsoever for any dispute, concerning such rights owned by third parties, arising out of the use of such technical information.

5) LAPIS Technology intends our Products to be used in a way indicated in this document. Please be sure to contact a ROHM sales office if you consider the use of our Products in different way from original use indicated in this document. For use of our Products in medical systems, please be sure to contact a LAPIS Technology representative and must obtain written agreement. Do not use our Products in applications which may directly cause injuries to human life, and which require extremely high reliability, such as aerospace equipment, nuclear power control systems, and submarine repeaters, etc. LAPIS Technology disclaims any and all liability for any losses and damages incurred by you or third parties arising by using the Product for purposes not intended by us without our prior written consent.

6) All information contained in this document is subject to change for the purpose of improvement, etc. without any prior notice. Before purchasing or using LAPIS Technology Products, please confirm the latest information with a ROHM sales office. LAPIS Technology has used reasonable care to ensure the accuracy of the information contained in this document, however, LAPIS Technology shall have no responsibility for any damages, expenses or losses arising from inaccuracy or errors of such information.

7) Please use the Products in accordance with any applicable environmental laws and regulations, such as the RoHS Directive. LAPIS Technology shall have no responsibility for any damages or losses resulting non-compliance with any applicable laws or regulations.

8) When providing our Products and technologies contained in this document to other countries, you must abide by the procedures and provisions stipulated in all applicable export laws and regulations, including without limitation the US Export Administration Regulations and the Foreign Exchange and Foreign Trade Act.

9) Please contact a ROHM sales office if you have any questions regarding the information contained in this document or LAPIS Technology's Products.

10) This document, in part or in whole, may not be reprinted or reproduced without prior consent of LAPIS Technology.

(Note) “LAPIS Technology” as used in this document means LAPIS Technology Co., Ltd.

Copyright 2018-2024 LAPIS Technology Co., Ltd.

LAPIS Technology Co.,Ltd.
2-4-8 Shinyokohama, Kouhoku-ku,Yokohama 222-8575, Japan
https://www.lapis-tech.com/en/