
chanhvinh.com

Product data sheet

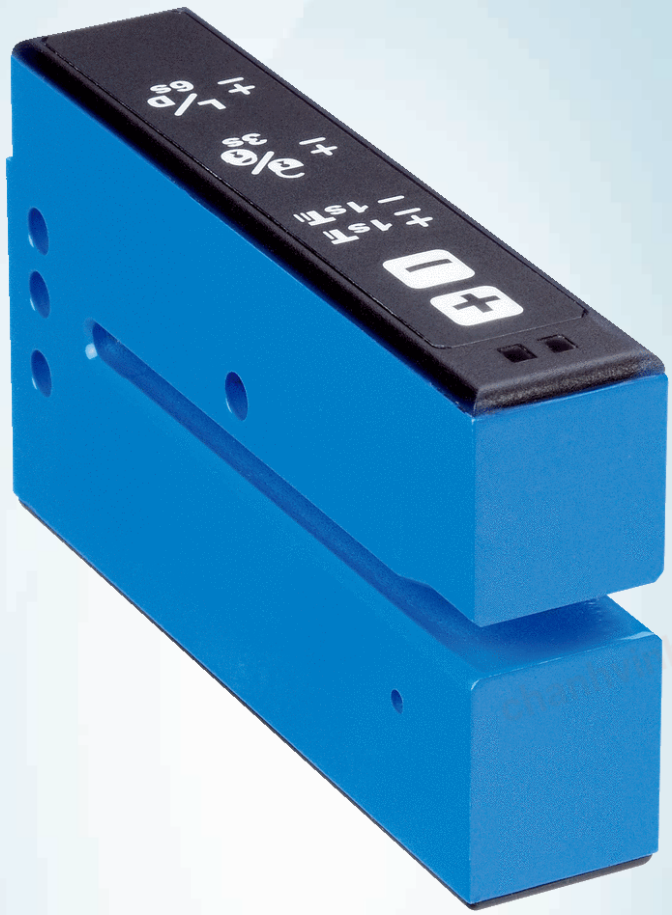

UFN3-70N415

UF

FORK SENSORS

SICK
Sensor Intelligence.

chanhvinh.com

UFN3-70N415 | UF

FORK SENSORS



Illustration may differ

Ordering information

Type	Part no.
UFN3-70N415	6049680

Other models and accessories ➜ www.sick.com/UF

Detailed technical data

Features

Functional principle	Ultrasonic detection principle
Dimensions (W x H x D)	18 mm x 47.5 mm x 92.5 mm
Housing design	Fork shaped
Fork width	3 mm
Fork depth	69 mm
Minimum detectable object (MDO)	Gap between Labels / Size of labels: 2 mm [1]
Label detection	✓
Adjustment	Plus/minus button (Teach-in, sensitivity, light/dark switching) Cable (Teach-in dynamic)
Teach-in mode	2-point teach-in Teach-in dynamic

[1] Depends on the label thickness.

Mechanics/electronics

Supply voltage	10 V DC ... 30 V DC [1]
Ripple	< 10 % [2]
Current consumption	40 mA [3]
Switching frequency	1.5 kHz [4]
Response time	250 µs [5]
Switching output	NPN
Switching output (voltage)	NPN: HIGH = approx. U_V / LOW ≤ 2 V

[1] Limit values, reverse-polarity protected, operation in short-circuit protected network: max. 8 A.
[2] May not exceed or fall below U_V tolerances.
[3] Without load.
[4] With light/dark ratio 1:1, typical, depending on material and speed.
[5] Signal transit time with resistive load.
[6] Output current minimal 0.03 mA.
[7] Reference voltage DC 50 V.

chanhvinh.com

Switching mode	Light/dark switching
Output current $I_{max.}$	100 mA [6]
Input, teach-in (ET)	Teach: U > 7 V ... < U_V Run: U < 2 V
Initialization time	100 ms
Connection type	Male connector M8, 4-pin
Protection class	III [7]
Circuit protection	Output Q short-circuit protected Interference pulse suppression
Enclosure rating	IP65
Weight	95 g
Housing material	Metal, Aluminum

[1] Limit values, reverse-polarity protected, operation in short-circuit protected network: max. 8 A.
[2] May not exceed or fall below U_V tolerances.
[3] Without load.
[4] With light/dark ratio 1:1, typical, depending on material and speed.
[5] Signal transit time with resistive load.
[6] Output current minimal 0.03 mA.
[7] Reference voltage DC 50 V.

Ambient data

Ambient operating temperature	+5 °C ... +55 °C [1]
Ambient temperature, storage	–20 °C ... +70 °C
Shock load	According to EN 60068-2-27
EMC	EN 60947-5-2 [2]
UL File No.	NRKH.E191603 & NRKH7.E191603

[1] Do not bend below 0 °C.
[2] The UFN complies with the Radio Safety Requirements (EMC) for the industrial sector (Radio Safety Class A). It may cause radio interference if used in residential areas.

Classifications

eCl@ss 5.0	27270909
eCl@ss 5.1.4	27270909
eCl@ss 6.0	27270909
eCl@ss 6.2	27270909
eCl@ss 7.0	27270909
eCl@ss 8.0	27270909
eCl@ss 8.1	27270909
eCl@ss 9.0	27270909
eCl@ss 10.0	27270909
eCl@ss 11.0	27270909
eCl@ss 12.0	27270909
ETIM 5.0	EC002720
ETIM 6.0	EC002720
ETIM 7.0	EC002720

chanhvinh.com


UFN3-70N415 | UF

FORK SENSORS

ETIM 8.0	EC002720
UNSPSC 16.0901	39121528

Dimensional drawing (Dimensions in mm (inch))


UFnext - Plus/minus buttons

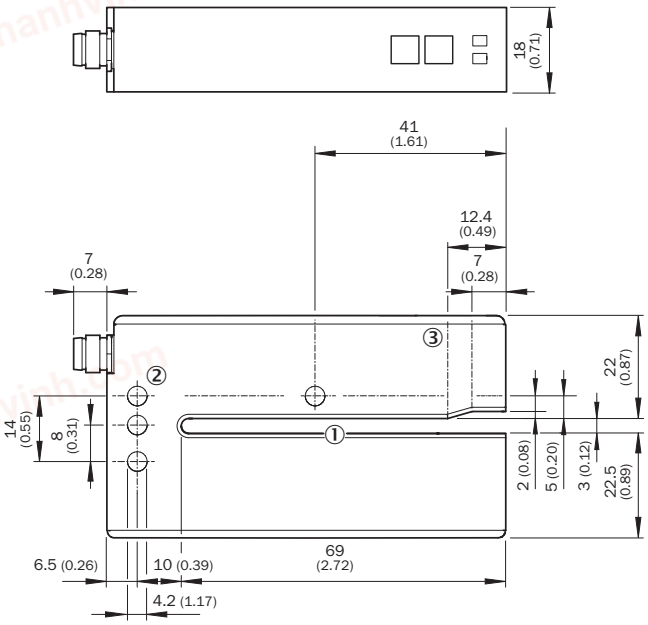

① Fork opening: fork width 3 mm, forks depth 69 mm
② Mounting hole, Ø 4.2 mm
③ Detection axis

Adjustments

Adjustment: teach-in via plus/minus buttons (WFxx-B416)

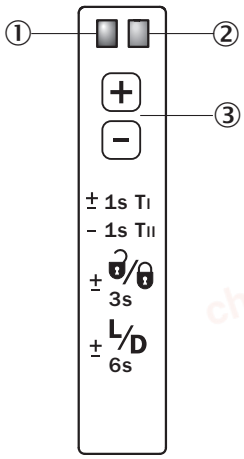


① Function signal indicator (yellow), switching output
② Function indicator (red)
③ “+”/“–” buttons and function button

chanhvinh.com

Connection diagram


Cd-092



Concept of operation


Teach-in dynamic via plus/minus buttons

1. Position label or substrate in the active area of the fork sensor

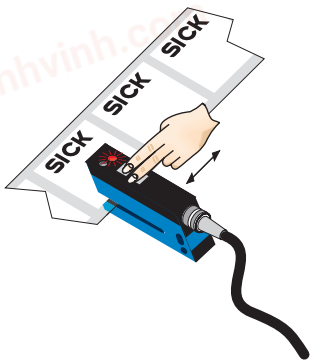

Press both the “+” and “–” buttons together, hold > 1 s and than release the teach-in buttons. The red LED flashes.

2. Move multiple labels through the fork sensor

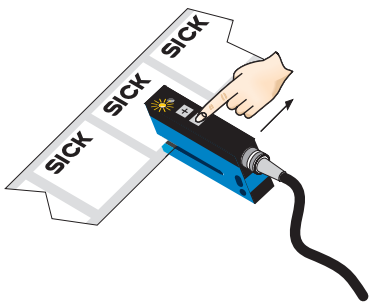

Press “–” button, teach-in process is finished.

Notes

Switching threshold adaptation:
Only, the first teach-in procedure after switching on is permanently stored. Teach-in can be repeated cyclically. Switching output also during teach-in active.

+ / – Once teach-in process is complete, the switching threshold can be adjusted at any time using the “+” or “–” button. To make minor adjustments, press the “+” or “–” button once. To configure settings quickly, keep the “+” or “–” button pressed for longer.

± 3s Press both the “+” and “–” buttons together (3 seconds) to lock the device and prevent unintentional actuation.

± L/D 6s Press both the “+” and “–” buttons together (6 seconds) to define the switching function (light/dark switching). Standard setting: Q = light switching.

Teach-in (static): Setting the switching threshold without movements of label, cf. operating instruction.

chanhvinh.com

Recommended accessories

Other models and accessories ➜ www.sick.com/UF

	Brief description	Type	Part no.
Plug connectors and cables			
	Head A: female connector, M8, 4-pin, straight, A-coded Head B: Flying leads Cable: Sensor/actuator cable, PVC, unshielded, 5 m	YF8U14-050VA3XLEAX	2095889
	Head A: male connector, M8, 4-pin, straight Cable: unshielded	STE-0804-G	6037323

chanhvinh.com

SICK AT A GLANCE

SICK is one of the leading manufacturers of intelligent sensors and sensor solutions for industrial applications. A unique range of products and services creates the perfect basis for controlling processes securely and efficiently, protecting individuals from accidents and preventing damage to the environment.

We have extensive experience in a wide range of industries and understand their processes and requirements. With intelligent sensors, we can deliver exactly what our customers need. In application centers in Europe, Asia and North America, system solutions are tested and optimized in accordance with customer specifications. All this makes us a reliable supplier and development partner.

Comprehensive services complete our offering: SICK LifeTime Services provide support throughout the machine life cycle and ensure safety and productivity.

For us, that is "Sensor Intelligence."

WORLDWIDE PRESENCE:

Contacts and other locations –www.sick.com