
chanhvinh.com


MC34063AB, MC34063AC, MC34063EB, MC34063EC

DC-DC converter control circuits

Datasheet - production data



DIP-8



SO-8

Features

- Output switch current in excess of 1.5 A
- 2 % reference accuracy
- Low quiescent current: 2.5 mA (typ.)
- Operating from 3 V to 40 V
- Frequency operation to 100 kHz
- Active current limiting

Description

The MC34063A/E series is a monolithic control circuit which delivers the main functions for DC-DC voltage converting.

The device contains an internal temperature compensated reference, comparator, duty cycle controlled oscillator with an active current limit circuit, driver and high current output switch. Output voltage is adjustable through two external resistors with a 2% reference accuracy.

Employing a minimum number of external components, the MC34063A/E device series is designed for step-down, step-up and voltage-inverting applications.

Table 1. Device summary

Order codes	
DIP-8	**SO-8**
MC34063ABN	MC34063ABD-TR
MC34063ACN	MC34063ACD-TR
MC34063EBN	MC34063EBD-TR
MC34063ECN	MC34063ECD-TR

This is information on a product in full production. www.st.com

chanhvinh.com

Contents

1 Diagram 3

2 Pin configuration 4

3 Maximum ratings 5

4 Electrical characteristics 6

5 Typical performance characteristics 8

6 Typical application circuit 10


7 Package mechanical data 18

8 Revision history 22

chanhvinh.com

1 Diagram

Figure 1. Block diagram

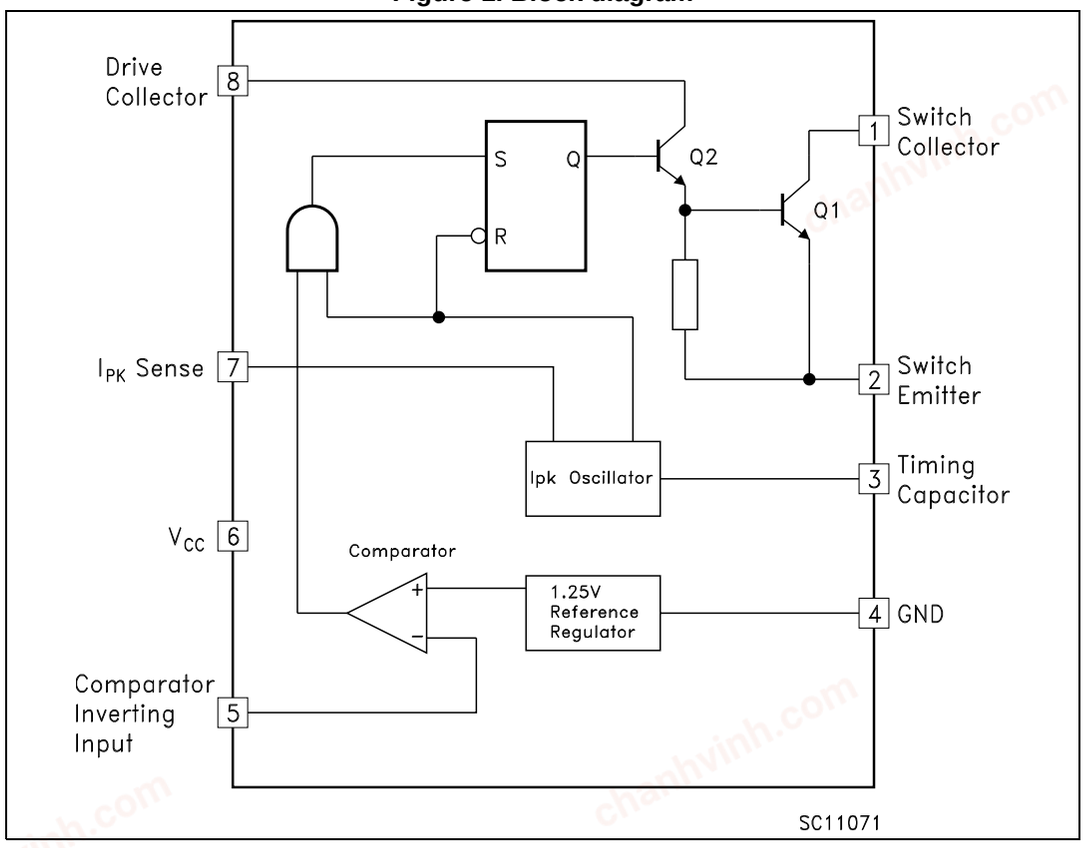

chanhvinh.com

2 Pin configuration

Figure 2. Pin connections

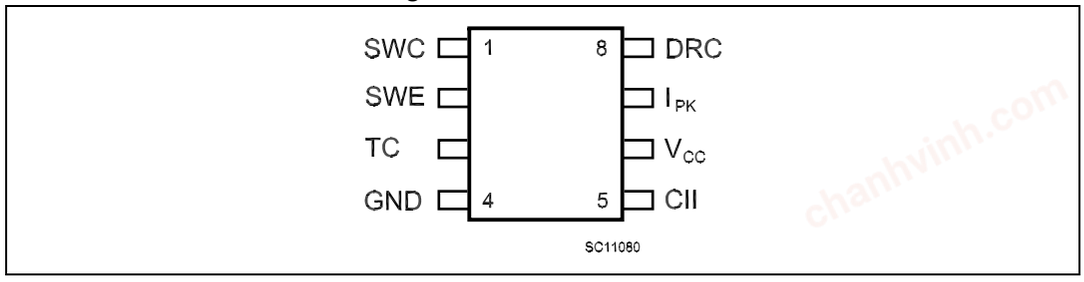


Table 2. Pin description

Pin n°	Symbol	Name and function
1	SWC	Switch collector
2	SWE	Switch emitter
3	TC	Timing capacitor
4	GND	Ground
5	CII	Comparator inverting input
6	V_{CC}	Voltage supply
7	I_{PK}	I_{PK} sense
8	DRC	Voltage driver collector

chanhvinh.com

3 Maximum ratings

Table 3. Absolute maximum ratings

Symbol	Parameter		Value	Unit
V_{CC}	Power supply voltage		50	V
V_{IR}	Comparator input voltage range		-0.3 to 40	V
V_{SWC}	Switch collector voltage		40	V
V_{SWE}	Switch emitter voltage (V_{SWC} = 40V)		40	V
V_{CE}	Switch collector to emitter voltage		40	V
V_{DC}	Driver collector voltage		40	V
I_{DC}	Driver collector current		100	mA
I_{SW}	Switch current		1.5	A
P_{TOT}	Power dissipation at T_A = 25°C	for DIP-8	1.25	W
		for SO-8	0.625	
T_J	Operating junction temperature		150	°C
T_{STG}	Storage temperature range		-40 to 150	°C
T_{OP}	Operating ambient temperature range	for AC and EC series	0 to 70	°C
		for AB series	-40 to 85	
		for EB series	-40 to 125	

Note: Absolute maximum ratings are those values beyond which damage to the device may occur. Functional operation under these condition is not implied.

Table 4. Thermal data

Symbol	Parameter	DIP-8	SO-8	Unit
R_{thJA}	Thermal resistance junction-ambient (1)	100	160	°C/W
R_{thJC}	Thermal resistance junction-case	42	20	°C/W

1. This value depends from thermal design of PCB on which the device is mounted.

chanhvinh.com

4 Electrical characteristics

Refer to the test circuits, V_{CC} = 5 V, T_A = T_{LOW} to T_{HIGH}, unless otherwise specified. [a]

Table 5. Oscillator

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
f_{OSC}	Frequency	V_{PIN5} = 0V, C_T = 1 nF, T_A = 25°C	24	33	42	kHz
I_{CHG}	Charge current	V_{CC} = 5 to 40V, T_A = 25°C	24	33	42	µA
I_{DISCHG}	Discharge current	V_{CC} = 5 to 40V, T_A = 25°C	140	200	260	µA
I_{DISCHG}/I_{CHG}	Discharge to charge current ratio	PIN 7 = V_{CC}, T_A = 25°C	5.2	6.2	7.5	µA
$V_{IPK(sense)}$	Current limit sense voltage	I_{CHG} = I_{DISCHG}, T_A = 25°C	250	300	350	mV

Table 6. Output switch

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
$V_{CE(sat)}$	Saturation voltage, Darlington connection	I_{SW} = 1 A, PIN 1, 8 connected		1	1.3	V
$V_{CE(sat)}$	Saturation voltage	I_{SW} = 1 A, R_{PIN8} = 82 Ω to V_{CC} Forced β ~ 20		0.45	0.7	V
h_{FE}	DC current gain	I_{SW} = 1 A,V_{CE} = 5 V, T_A = 25°C	50	120		
$I_{C(off)}$	Collector off-state current	V_{CE} = 40 V		0.01	100	µA

Table 7. Comparator

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
V_{TH}	Threshold voltage	T_A = 25°C	1.225	1.25	1.275	V
		T_A = T_{LOW} to T_{HIGH}	1.21		1.29	
Reg_{line}	Threshold voltage line regulation	V_{CC} = 3 to 40 V		1	5	mV
I_{IB}	Input bias current	V_{IN} = 0 V		-5	-400	nA

a. T_{LOW} = 0 °C, T_{HIGH} = 70 °C (AC and EC series); T_{LOW} = -40 °C, T_{HIGH} = 85 °C (AB series); T_{LOW} = -40 °C, T_{HIGH} = 125 °C (EB series)

chanhvinh.com

Table 8. Total device

Symbol	Parameter	Test conditions		Min.	Typ.	Max.	Unit
I_{CC}	Supply current	V_{CC} = 5 to 40 V C_T = 1 nF PIN 7 = V_{CC} V_{PIN5} >V_{TH} PIN 2 = GND Remaining pins open	for MC34063A		2.5	4	mA
			for MC34063E		1.5	4	
$V_{START-UP}$	Start-up voltage (1)	T_A = 25°C C_T = 1 µF, PIN 5 = 0	for MC34063A		2.1		V
			for MC34063E		1.5		

1. Start-up voltage is the minimum power supply voltage at which the internal oscillator begins to work.

Note: Maximum package power dissipation limit must be observed.

If Darlington configuration is not used, care must be taken to avoid deep saturation of output switch. The resulting switch-off time may be adversely affected. In a Darlington configuration the following output driver condition is suggested:
Forced β of output current switch = $I_{COUTPUT}/(I_{CDRIVER}$ - 1 mA) ≥ 10

chanhvinh.com

5 Typical performance characteristics

Figure 3. Emitter follower configuration output saturation voltage vs. emitter current

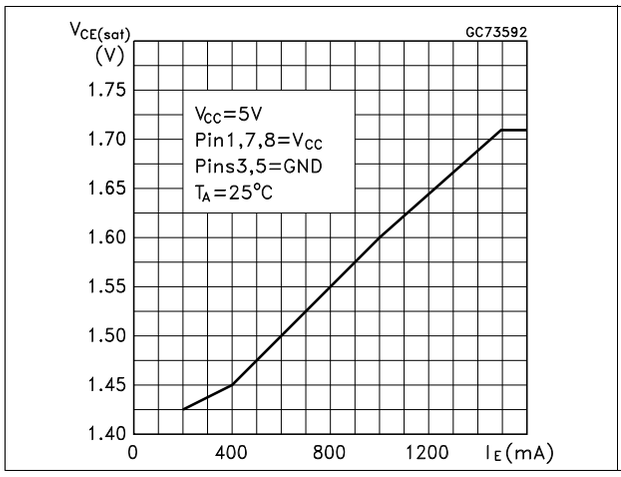


Figure 4. Output switch ON-OFF time vs. oscillator timing capacitor

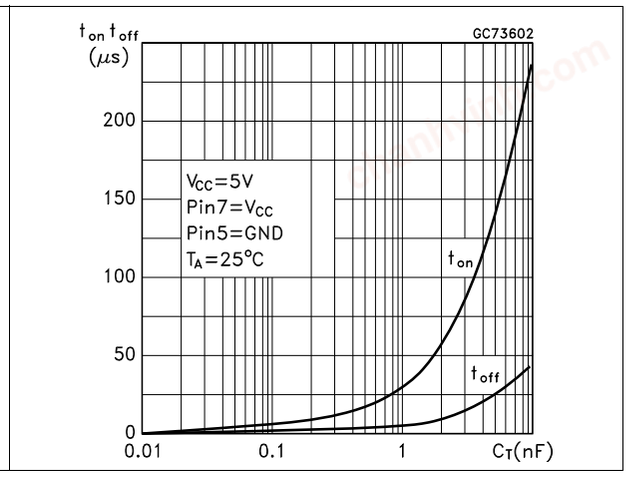


Figure 5. Common emitter configuration output switch saturation voltage vs. collector current


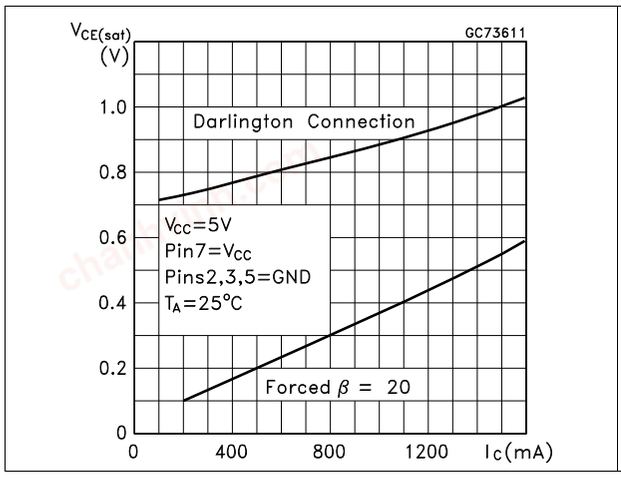


Figure 6. Darlington configuration collector emitter saturation voltage (V_{CEsat}) vs. temperature

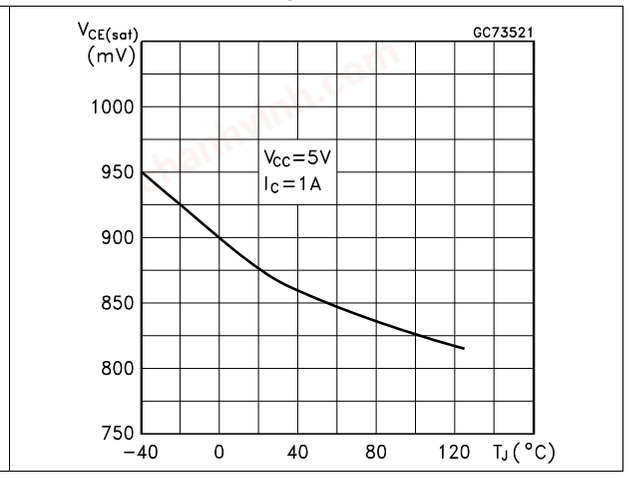

chanhvinh.com

Figure 7. Power collector emitter saturation voltage (V_{CEsat}) vs. temperature

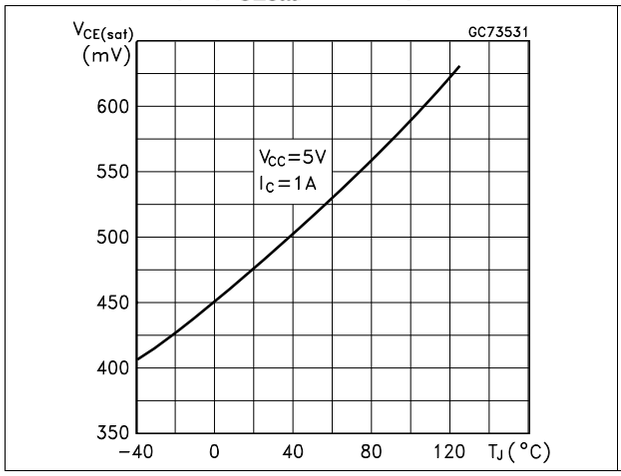


Figure 8. Current limit sense voltage (V_{IPK}) vs. temperature

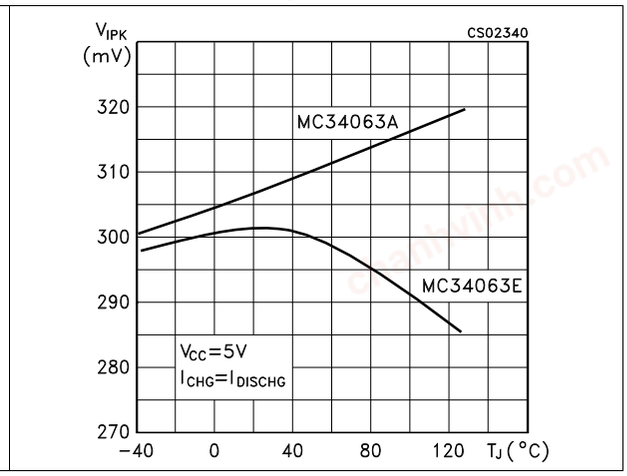


Figure 9. Reference voltage vs. temperature

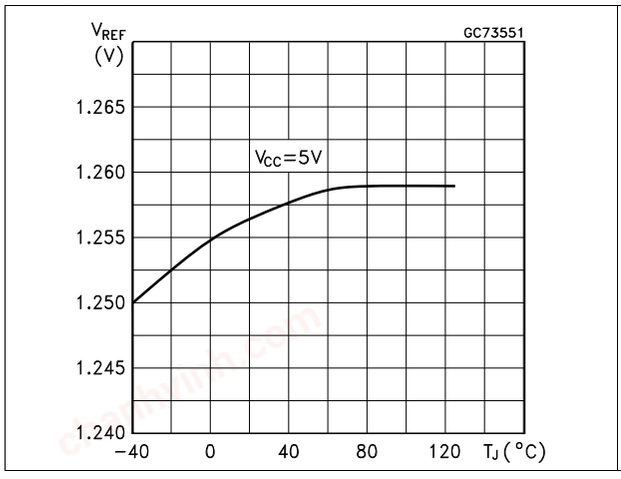


Figure 10. Bias current vs. temperature

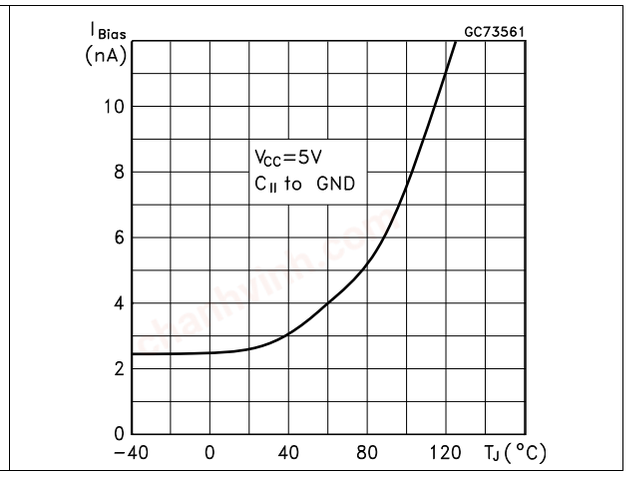


Figure 11. Supply current vs. temperature


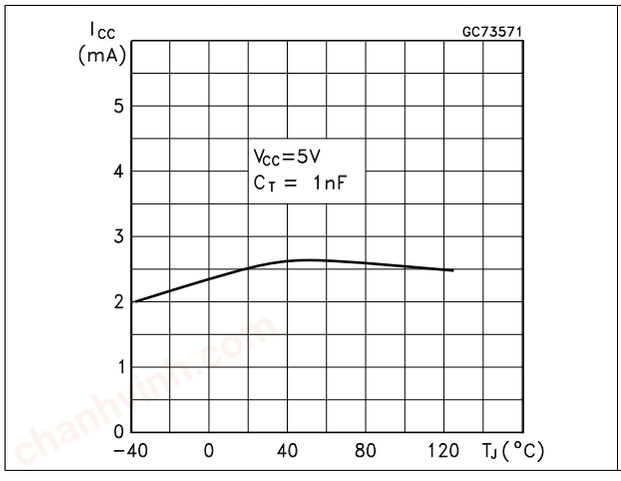


Figure 12. Supply current vs. input voltage

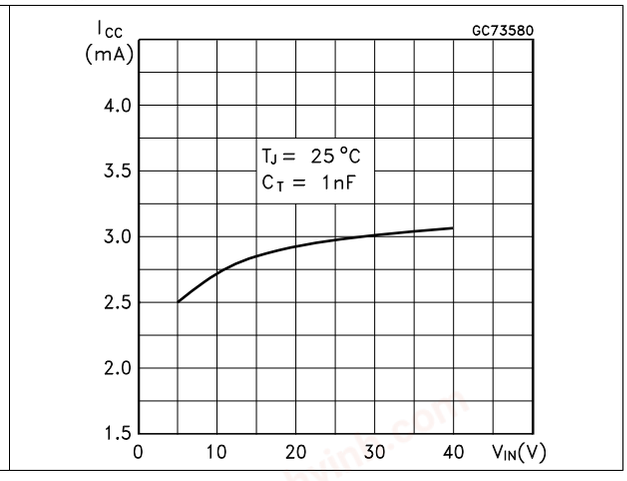

chanhvinh.com

6 Typical application circuit

Figure 13. Step-up converter

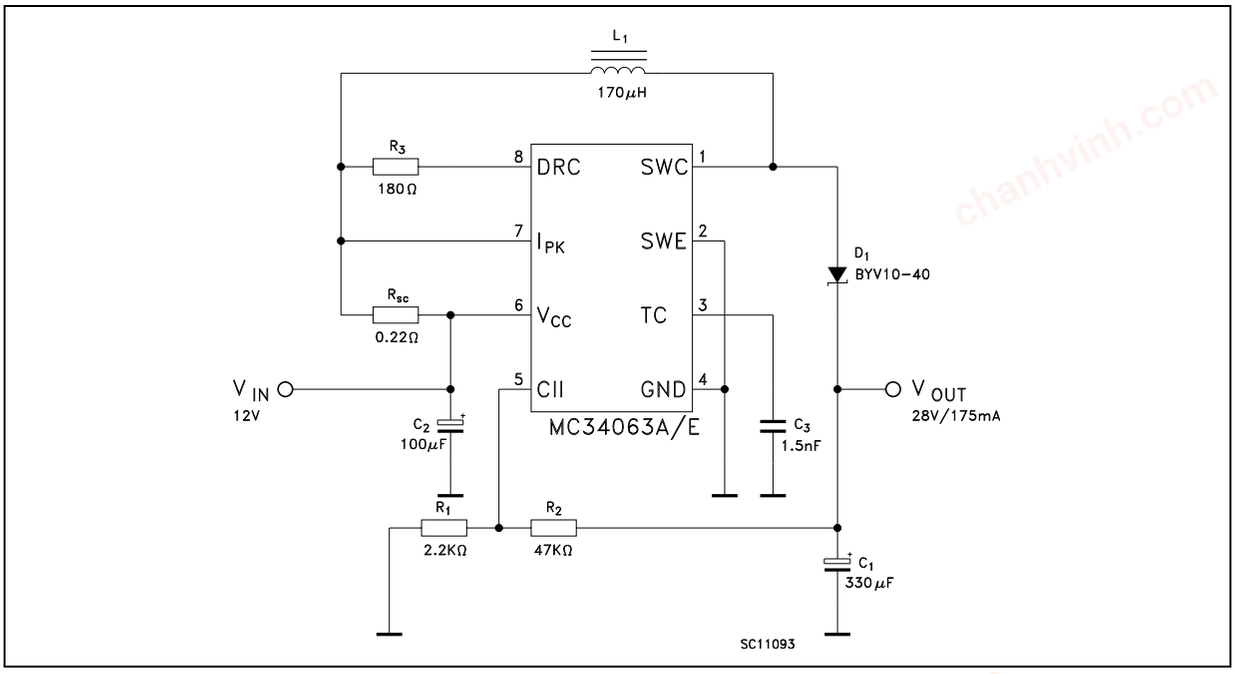


Figure 14. Printed evaluation board

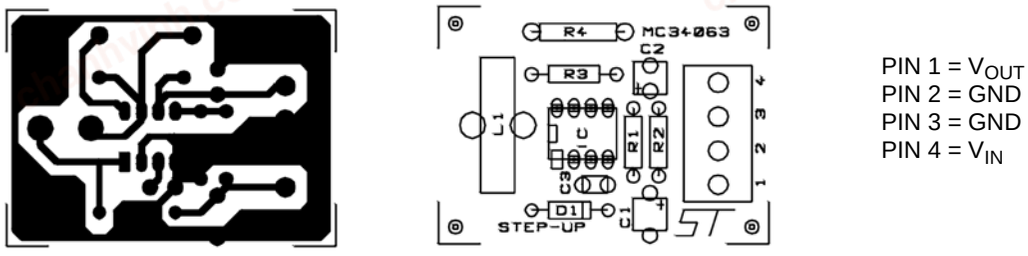


Table 9. Test condition (V_{OUT} = 28 V)

Test	Conditions	Value (Typ.)	Unit
Line Regulation	V_{IN} = 8 to 16 V, I_O = 175 mA	30	mV
Load Regulation	V_{IN} = 12 V, I_O = 75 to 175 mA	10	mV
Output Ripple	V_{IN} = 12 V, I_O = 175 mA	300	mV
Efficiency	V_{IN} = 12 V, I_O = 175 mA	89	%

chanhvinh.com

Figure 15. Step-down converter



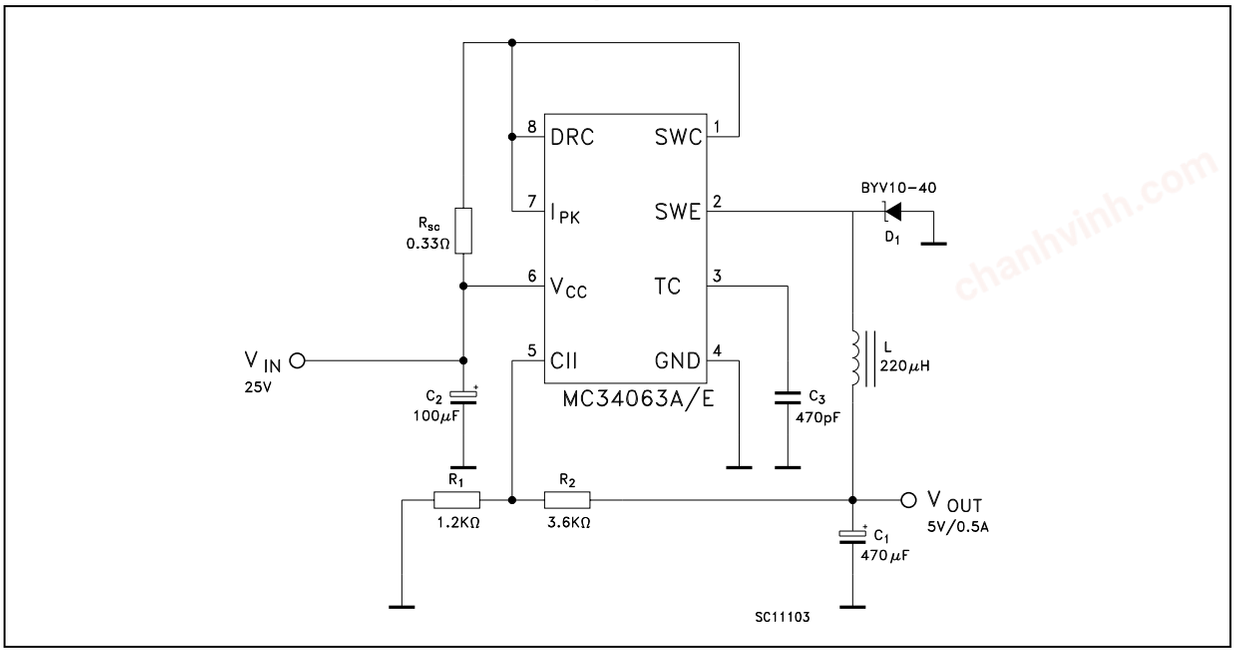


Figure 16. Printed evaluation board





PIN 1 = V_{OUT}
PIN 2 = GND
PIN 3 = GND
PIN 4 = V_{IN}

Table 10. Test condition (V_{OUT} = 5 V)

Test	Conditions	Value (typ.)	Unit
Line regulation	V_{IN} = 15 to 25 V, I_O = 500 mA	5	mV
Load regulation	V_{IN} = 25 V, I_O = 50 to 500 mA	30	mV
Output ripple	V_{IN} = 25 V, I_O = 500 mA	100	mV
Efficiency	V_{IN} = 25 V, I_O = 500 mA	80	%
I_{SC}	V_{IN} = 25 V, R_{LOAD} = 0.1 Ω	1.2	A

chanhvinh.com

Figure 17. Voltage inverting converter

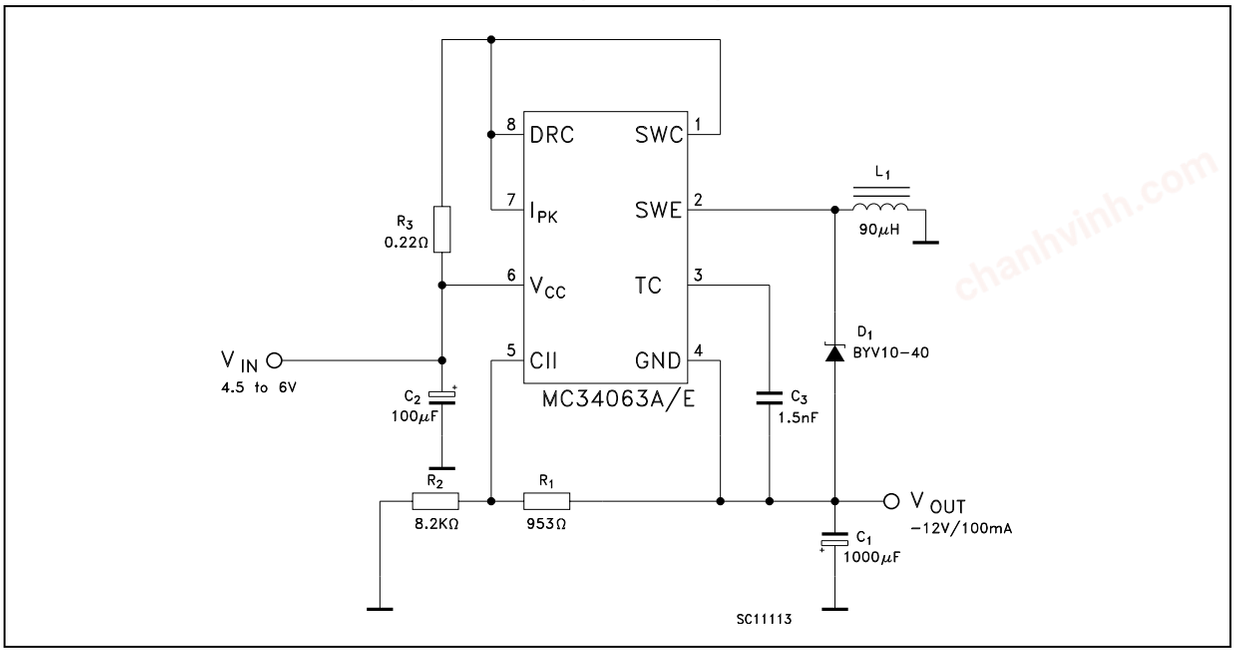


Figure 18. Printed evaluation board

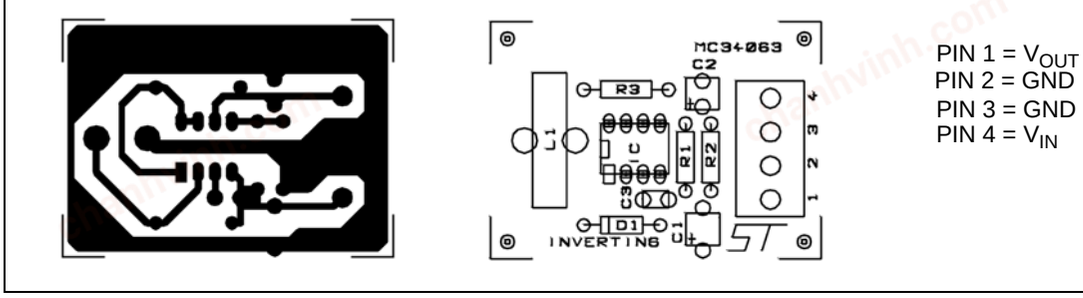


Table 11. Test condition (V_{OUT} = 12 V)

Test	Conditions	Value (typ.)	Unit
Line regulation	V_{IN} = 4.5 to 6 V, I_O = 100 mA	15	mV
Load regulation	V_{IN} = 5 V, I_O = 10 to 100 mA	20	mV
Output ripple	V_{IN} = 5 V, I_O = 100 mA	230	mV
Efficiency	V_{IN} = 5 V, I_O = 100 mA	58	%
I_{SC}	V_{IN} = 5 V, R_{LOAD} = 0.1 Ω	0.9	A

chanhvinh.com

Table 12. Calculation

Parameter	Step-Up (Discontinuous mode)	Step-Down (Continuous mode)	Voltage Inverting (Discontinuous mode)
t_{on}/t_{off}	$\frac{V_{OUT} + V_F - V_{IN(min)}}{V_{IN(min)} - V_{sat}}$	$\frac{V_{OUT} + V_F}{V_{IN(min)} - V_{sat} - V_{OUT}}$	$\frac{\lvert V_{OUT}\rvert + V_F}{V_{IN} - V_{sat}}$
$(t_{on} + t_{off})$ max	$1/f_{min}$	$1/f_{min}$	$1/f_{min}$
C_T	$4.5x10^{-5}t_{on}$	$4.5x10^{-5}t_{on}$	$4.5x10^{-5}t_{on}$
$I_{PK(switch)}$	$2I_{out(max)}[(t_{on}/t_{off})+1]$	$2I_{out(max)}$	$2I_{out(max)}[(t_{on}/t_{off})+1]$
R_{SC}	$0.3/I_{PK(switch)}$	$0.3/I_{PK(switch)}$	$0.3/I_{PK(switch)}$
C_O	$\frac{I_{out}t_{on}}{V_{ripple(p-p)}}$	$\frac{I_{PK(switch)}(t_{on} + t_{off})}{8V_{ripple(p-p)}}$	$\frac{I_{out}t_{on}}{V_{ripple(p-p)}}$
$L_{(min)}$	$\frac{V_{IN(min)} - V_{sat}}{I_{PK(switch)}} \times t_{on(min)}$	$\frac{/_{IN(min)} - V_{sat} - V_{out}}{I_{PK(switch)}} \times t_{on(min}$	$\frac{V_{IN(min)} - V_{sat}}{I_{PK(switch)}} \times t_{on(min)}$

Note: *V_{SAT} = Saturation voltage of the output switch*

V_F = Forward voltage drop of the output rectifier

The following power supply characteristics must be chosen:

V_{IN} = Nominal input voltage

V_{OUT} = Desired output voltage, $|V_{OUT}| = 1.25\ (1 + R_2/R_1)$

I_{OUT} = Desired output current

f_{MIN} = Minimum desired output switching frequency at the selected values of V_{IN} and I_O

V_{RIPPLE} = Desired peak to peak output ripple voltage. In practice, the calculated capacitor value will and to be increased due to its equivalent series resistance and board layout. The ripple voltage should be kept to a low value since it will directly affect the line and load regulation.

chanhvinh.com

Figure 19. Step-up with external NPN switch


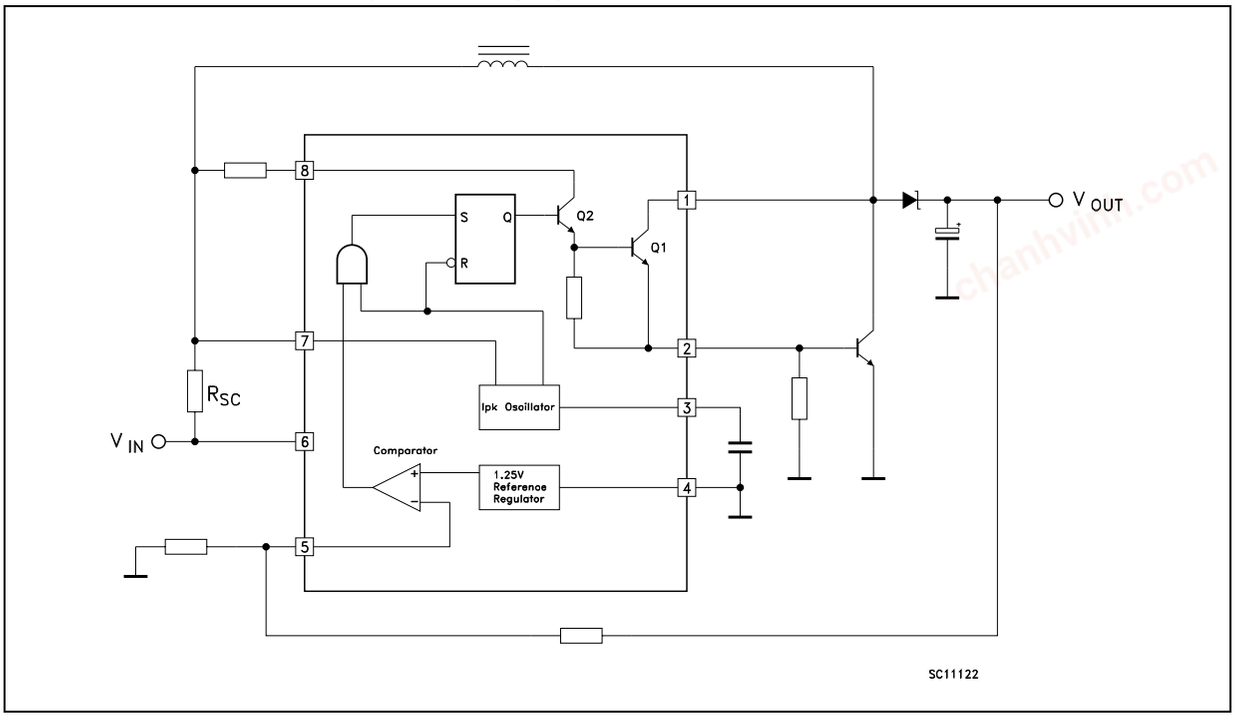


Figure 20. Step-down with external NPN switch

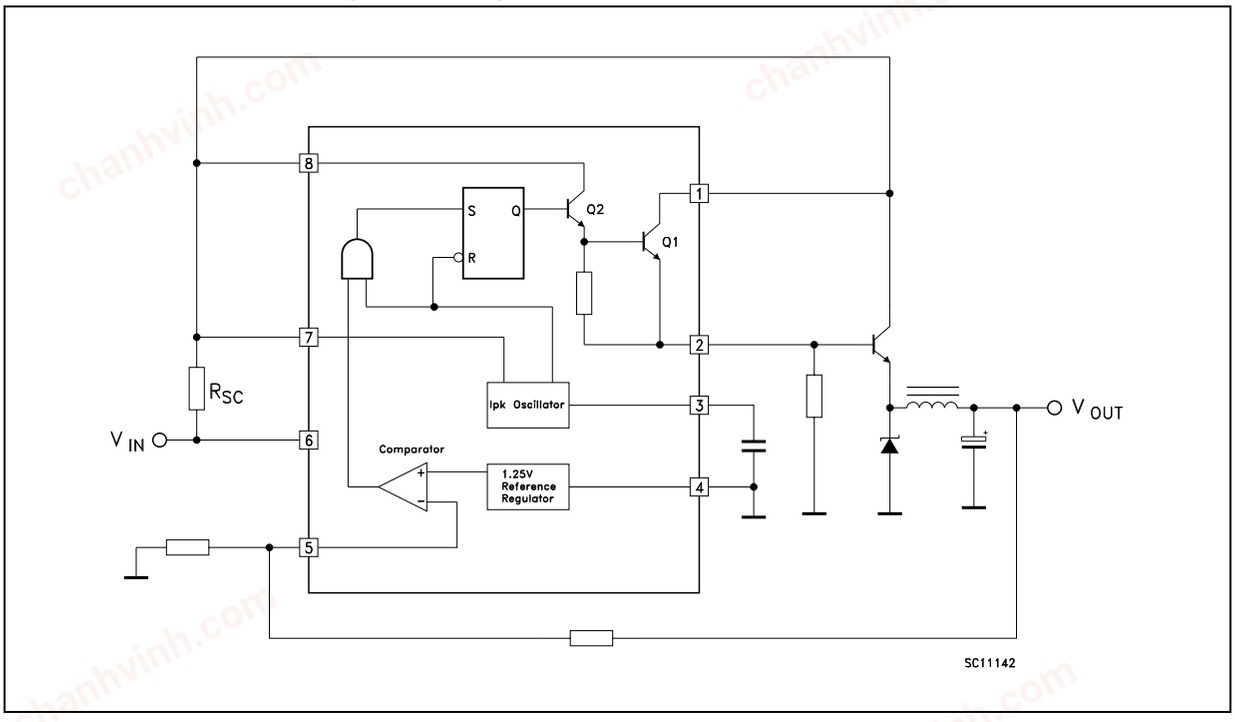

chanhvinh.com

Figure 21. Step-down with external PNP switch


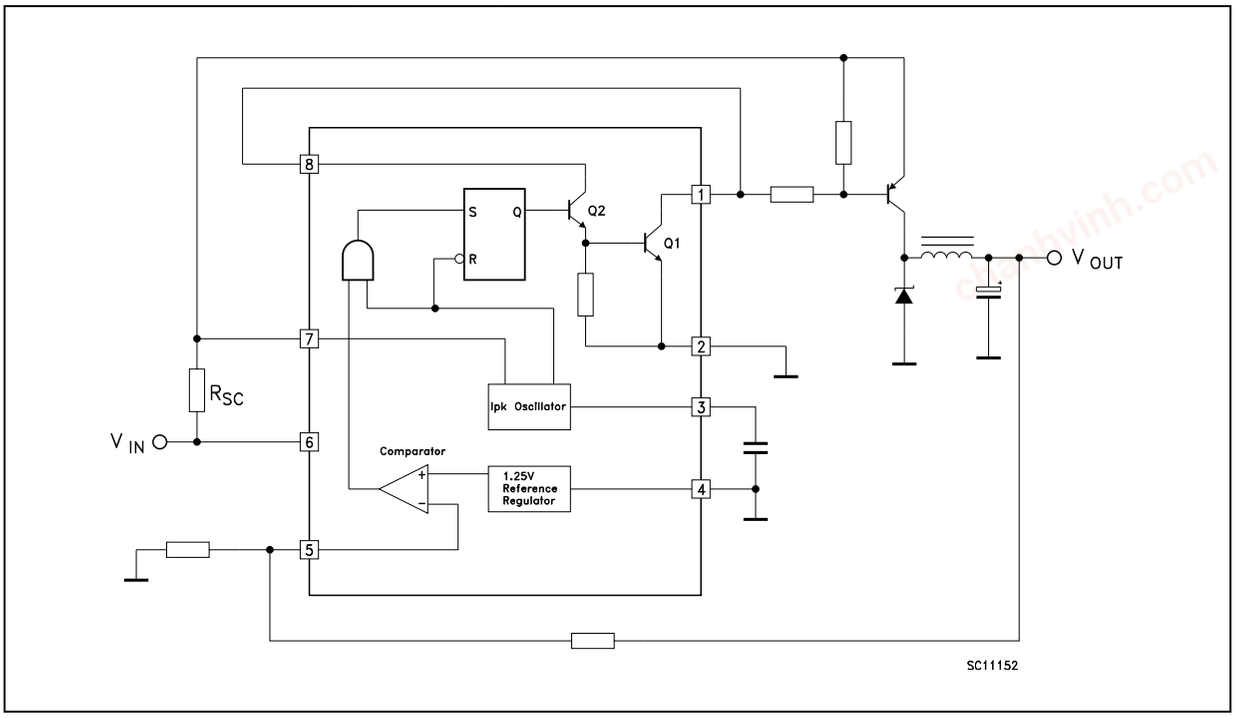


Figure 22. Voltage inverting with external NPN switch

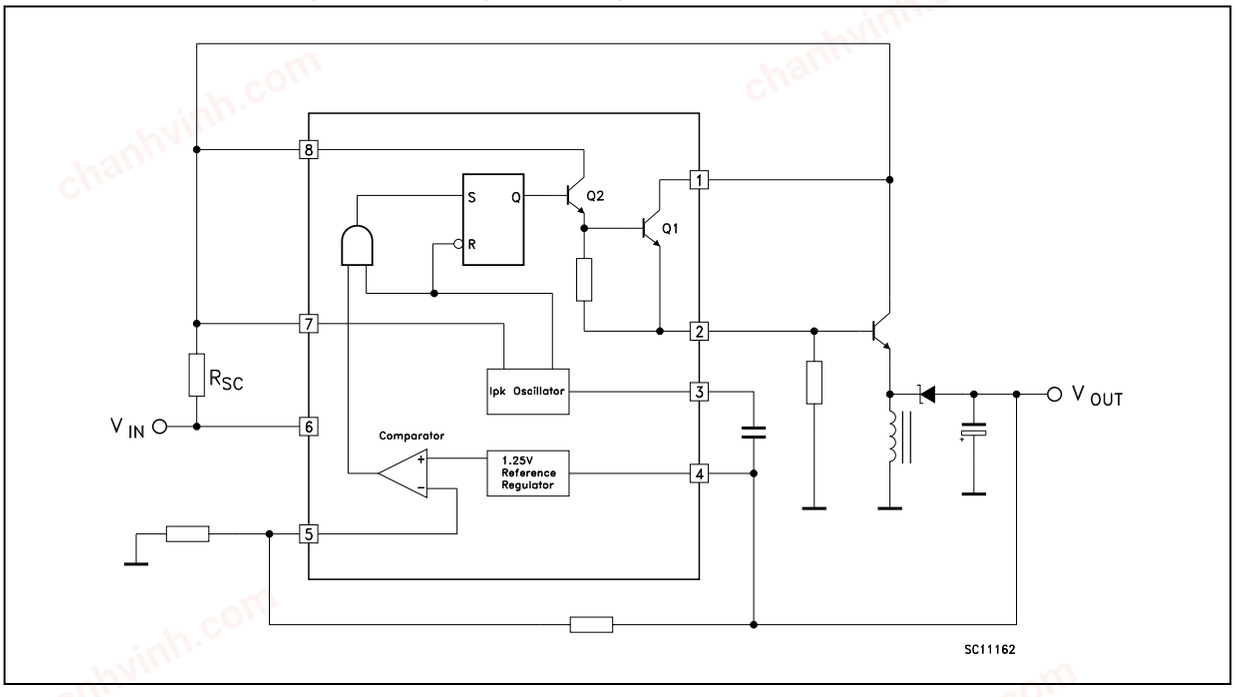

chanhvinh.com

Figure 23. Voltage inverting with external PNP saturated switch



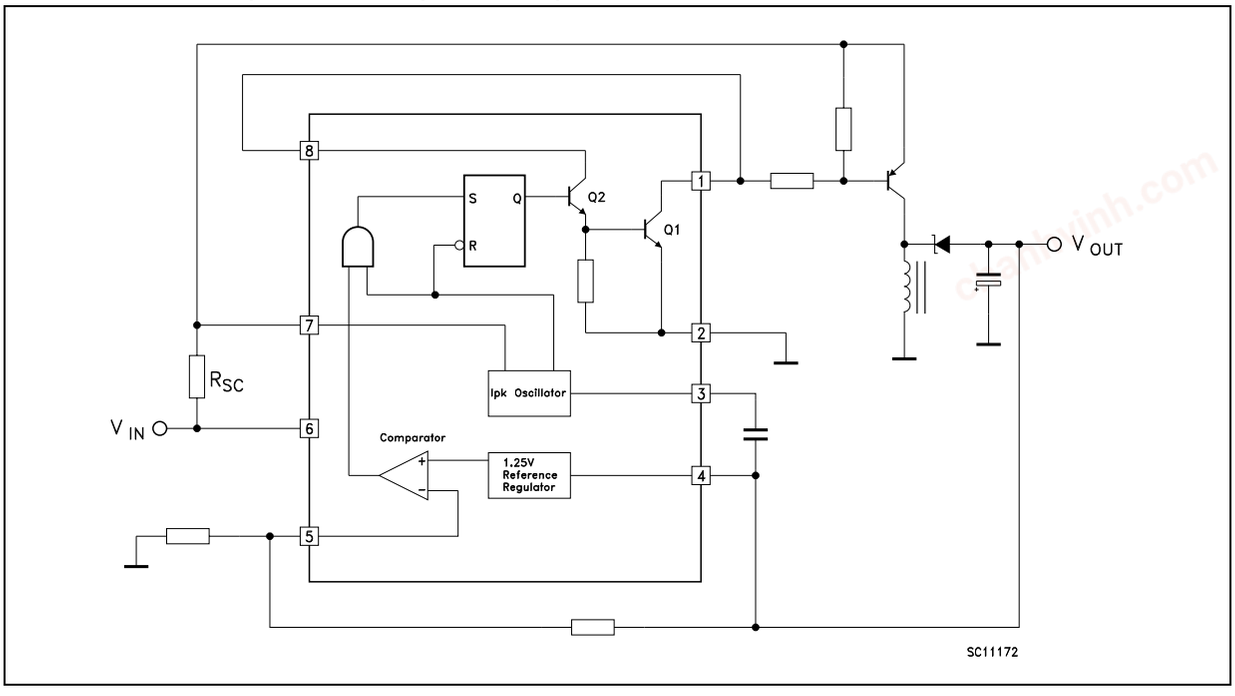


Figure 24. Dual output voltage

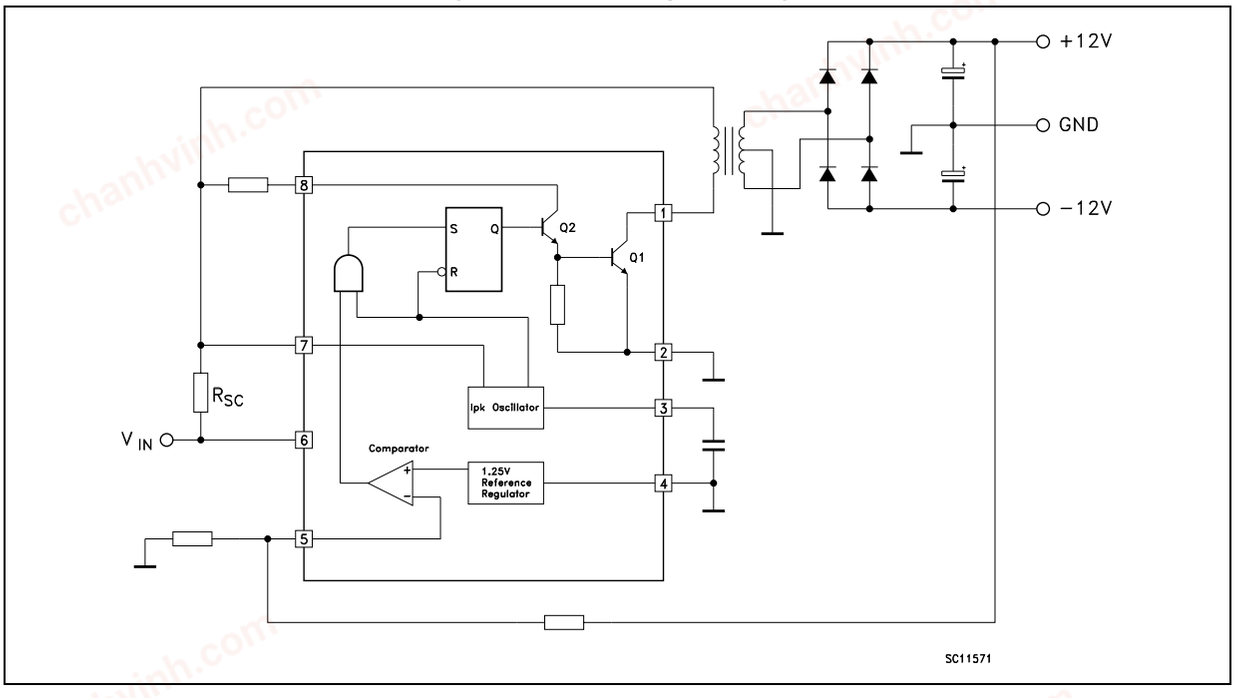

chanhvinh.com

Figure 25. Higher output power, higher input voltage

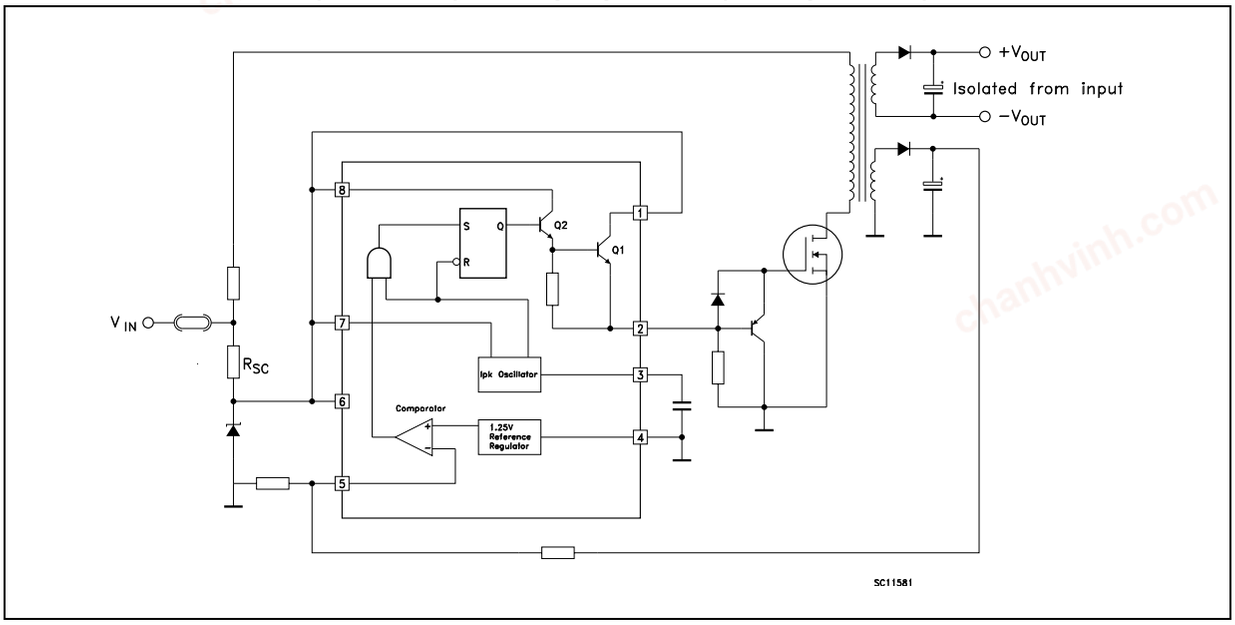

chanhvinh.com

7 Package mechanical data


In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK® packages, depending on their level of environmental compliance. ECOPACK® specifications, grade definitions and product status are available at: *www.st.com*. ECOPACK® is an ST trademark.

chanhvinh.com

chanhvinh.com

Plastic DIP-8 mechanical data

Dim.	mm.			inch.		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A		3.3			0.130	
a1	0.7			0.028		
B	1.39		1.65	0.055		0.065
B1	0.91		1.04	0.036		0.041
b		0.5			0.020	
b1	0.38		0.5	0.015		0.020
D			9.8			0.386
E		8.8			0.346	
e		2.54			0.100	
e3		7.62			0.300	
e4		7.62			0.300	
F			7.1			0.280
I			4.8			0.189
L		3.3			0.130	
Z	0.44		1.6	0.017		0.063

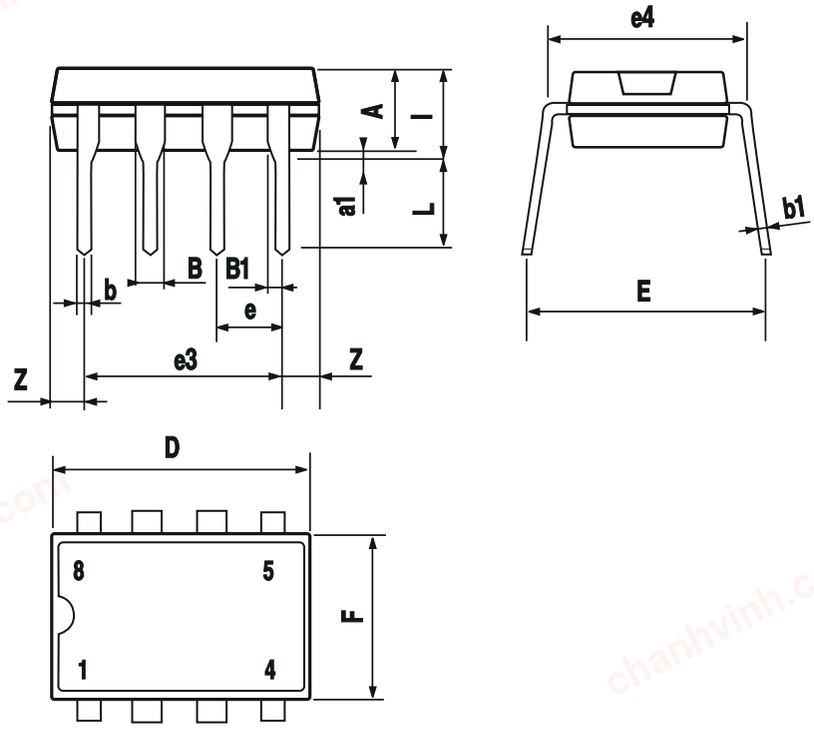


P001F

chanhvinh.com

SO-8 mechanical data


Dim.	mm.			inch.		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	1.35		1.75	0.053		0.069
A1	0.10		0.25	0.04		0.010
A2	1.10		1.65	0.043		0.065
B	0.33		0.51	0.013		0.020
C	0.19		0.25	0.007		0.010
D	4.80		5.00	0.189		0.197
E	3.80		4.00	0.150		0.157
e		1.27			0.050	
H	5.80		6.20	0.228		0.244
h	0.25		0.50	0.010		0.020
L	0.40		1.27	0.016		0.050
k	8° (max.)					
ddd			0.1			0.04

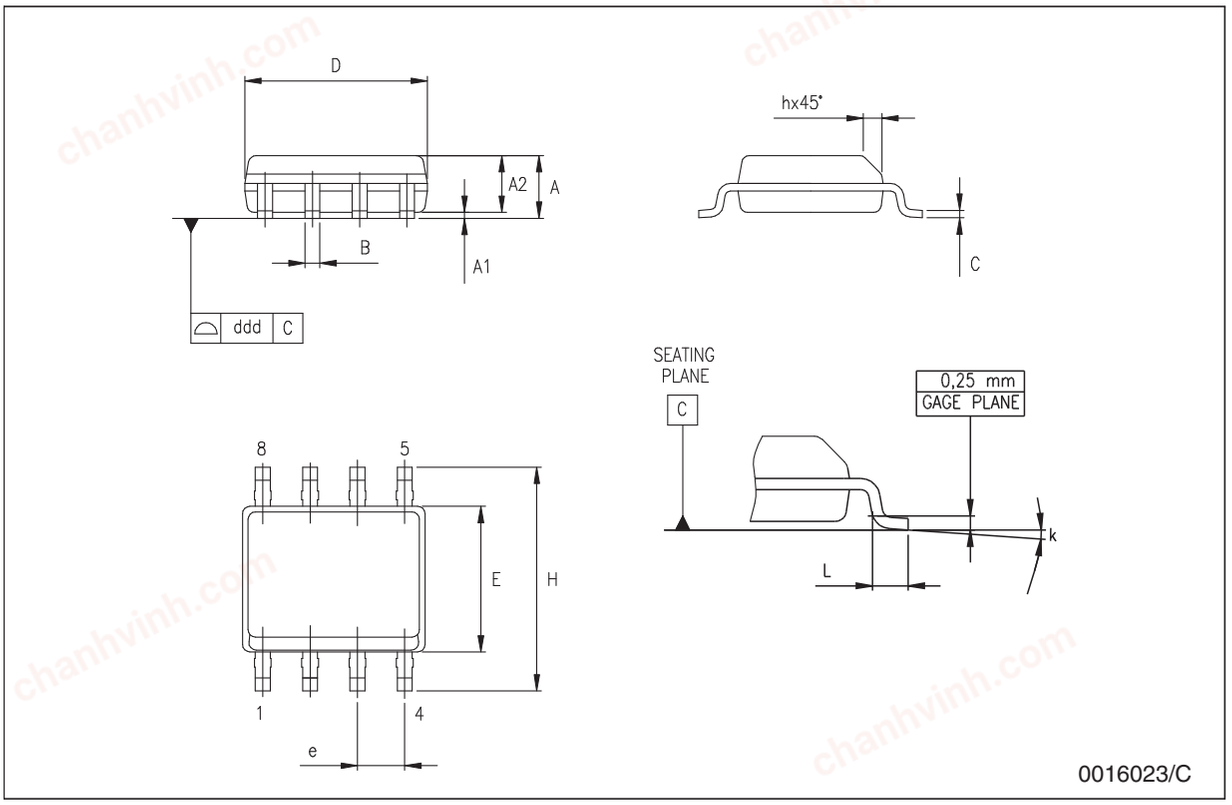

chanhvinh.com

Tape & reel SO-8 mechanical data

Dim.	mm.			inch.		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A			330			12.992
C	12.8		13.2	0.504		0.519
D	20.2			0.795		
N	60			2.362		
T			22.4			0.882
Ao	8.1		8.5	0.319		0.335
Bo	5.5		5.9	0.216		0.232
Ko	2.1		2.3	0.082		0.090
Po	3.9		4.1	0.153		0.161
P	7.9		8.1	0.311		0.319

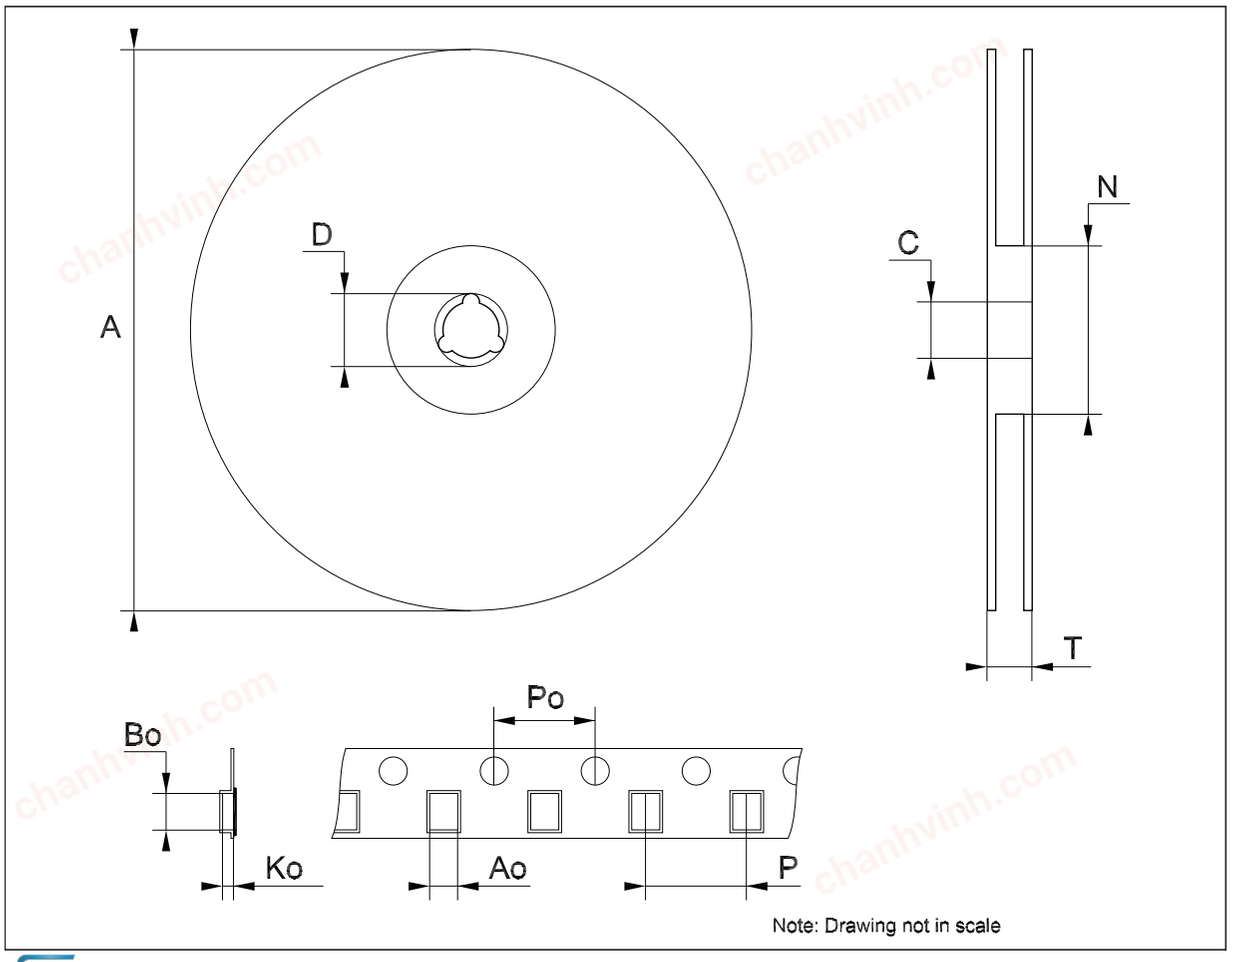

Note: Drawing not in scale

chanhvinh.com

8 Revision history

Table 13. Document revision history

Date	Revision	Changes
20-Nov-2007	10	Added *Table 1*.
24-Apr-2013	11	Removed note *Table 1 on page 1*.

chanhvinh.com

Please Read Carefully:

Information in this document is provided solely in connection with ST products. STMicroelectronics NV and its subsidiaries (“ST”) reserve the right to make changes, corrections, modifications or improvements, to this document, and the products and services described herein at any time, without notice.

All ST products are sold pursuant to ST’s terms and conditions of sale.

Purchasers are solely responsible for the choice, selection and use of the ST products and services described herein, and ST assumes no liability whatsoever relating to the choice, selection or use of the ST products and services described herein.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted under this document. If any part of this document refers to any third party products or services it shall not be deemed a license grant by ST for the use of such third party products or services, or any intellectual property contained therein or considered as a warranty covering the use in any manner whatsoever of such third party products or services or any intellectual property contained therein.

UNLESS OTHERWISE SET FORTH IN ST’S TERMS AND CONDITIONS OF SALE ST DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY WITH RESPECT TO THE USE AND/OR SALE OF ST PRODUCTS INCLUDING WITHOUT LIMITATION IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION), OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.

ST PRODUCTS ARE NOT AUTHORIZED FOR USE IN WEAPONS. NOR ARE ST PRODUCTS DESIGNED OR AUTHORIZED FOR USE IN: (A) SAFETY CRITICAL APPLICATIONS SUCH AS LIFE SUPPORTING, ACTIVE IMPLANTED DEVICES OR SYSTEMS WITH PRODUCT FUNCTIONAL SAFETY REQUIREMENTS; (B) AERONAUTIC APPLICATIONS; (C) AUTOMOTIVE APPLICATIONS OR ENVIRONMENTS, AND/OR (D) AEROSPACE APPLICATIONS OR ENVIRONMENTS. WHERE ST PRODUCTS ARE NOT DESIGNED FOR SUCH USE, THE PURCHASER SHALL USE PRODUCTS AT PURCHASER’S SOLE RISK, EVEN IF ST HAS BEEN INFORMED IN WRITING OF SUCH USAGE, UNLESS A PRODUCT IS EXPRESSLY DESIGNATED BY ST AS BEING INTENDED FOR “AUTOMOTIVE, AUTOMOTIVE SAFETY OR MEDICAL” INDUSTRY DOMAINS ACCORDING TO ST PRODUCT DESIGN SPECIFICATIONS. PRODUCTS FORMALLY ESCC, QML OR JAN QUALIFIED ARE DEEMED SUITABLE FOR USE IN AEROSPACE BY THE CORRESPONDING GOVERNMENTAL AGENCY.

Resale of ST products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by ST for the ST product or service described herein and shall not create or extend in any manner whatsoever, any liability of ST.

ST and the ST logo are trademarks or registered trademarks of ST in various countries.
Information in this document supersedes and replaces all information previously supplied.
The ST logo is a registered trademark of STMicroelectronics. All other names are the property of their respective owners.

© 2013 STMicroelectronics - All rights reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Philippines - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

www.st.com