chanhvinh.com

VNI2140

Datasheet

Dual high-side smart power solid state relay



PowerSSO-12™

Product status link

VNI2140J

Product label

SUSTAINABLE TECHNOLOGY

Features

- Nominal current: 0.75 A per channel
- Shorted-load protections
- Junction overtemperature protection
- Case overtemperature protection for thermal independence of the channels
- Thermal case shutdown restart not simultaneous for the various channels
- Protection against loss of ground
- Current limitation 1 A per channel
- Undervoltage shutdown
- Open-load in OFF-state and short to VCC detection
- Open-drain diagnostic outputs
- 3.3 V CMOS/TTL compatible inputs
- Fast demagnetization of inductive loads
- Conforms to IEC 61131-2

Applications

- Programmable logic control
- Industrial PC peripheral input/output
- Numerical control machines

Description

The VNI2140J is a monolithic device designed using STMicroelectronics' VIPower technology.


The device drives two independent resistive or inductive loads with one side connected to ground. Active current limitation prevents a drop in system power supply in cases of shorted-load, and built-in thermal shutdown protects the chip from damage due to overtemperature and short-circuit.

In overload conditions, channel turns OFF and ON automatically to maintain the junction temperature between T_{TSD} and T_R. If the case temperature reaches T_{CSD}, the overloaded channel is turned OFF and restarts only when case temperature decreases down to T_{CR}. In order to avoid high-peak current from the supply, when more than one channel is overloaded the T_{CSD} restart is not simultaneous. Non overloaded channels continue to operate normally. The open-drain diagnostics output indicates overtemperature conditions and open-load in OFF-state.

chanhvinh.com

1 Block diagram

Figure 1. **Block diagram**

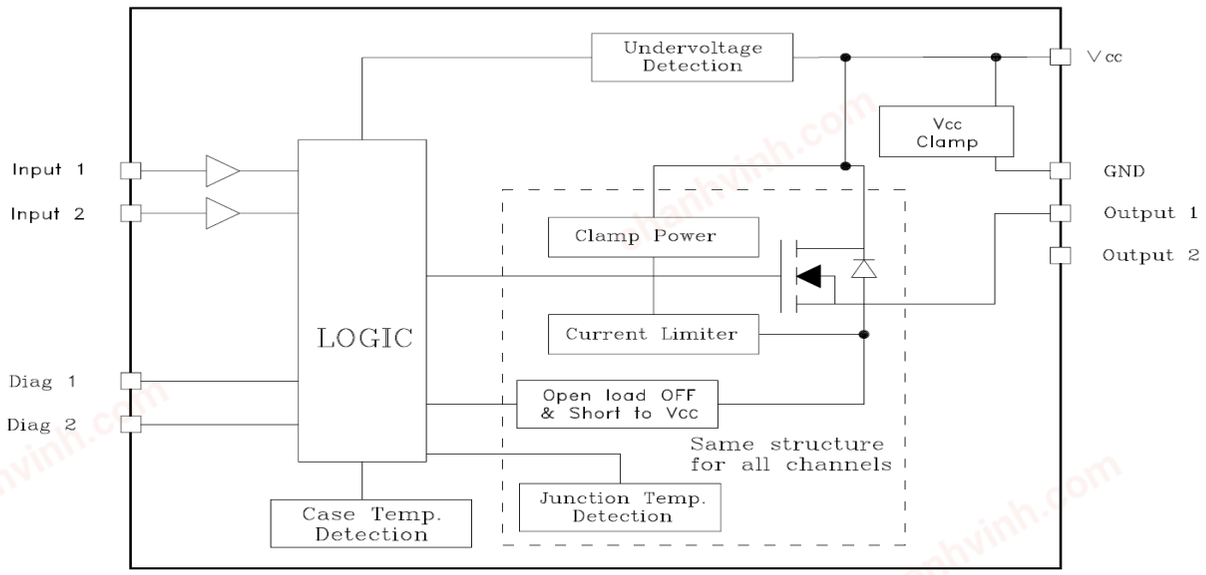

chanhvinh.com

2 Pin connections

Figure 2. **Pin connections (top view)**

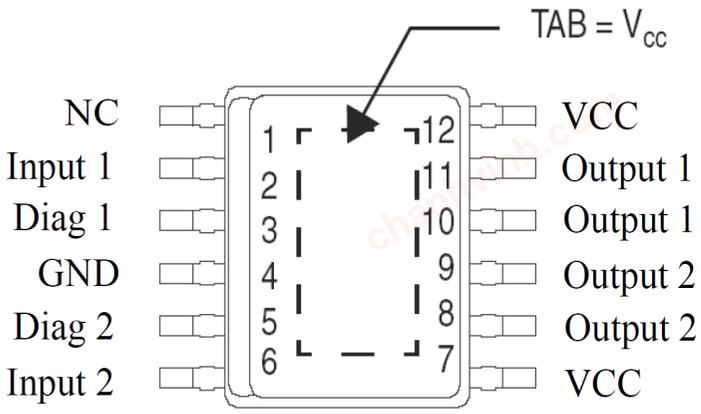


Table 1. **Pin description**

Pin	Name	Type	Description
1	NC	-	Not connected
2	Input 1	Logic input	Channel 1 input, 3.3 V CMOS/TTL compatible
3	Diag 1	Output/Open-drain	Channel 1 diagnostic in open-drain configuration
4	GND	Ground	Device ground connection
5	Diag 2	Output/Open-drain	Channel 2 diagnostic in open-drain configuration
6	Input 2	Logic input	Channel 2 input, 3.3 V CMOS/TTL compatible
7	VCC	Supply	Supply voltage
8	Output 2	Output	Channel 2 power stage output, internally protected
9	Output 2	Output	Channel 2 power stage output, internally protected
10	Output 1	Output	Channel 1 power stage output, internally protected
11	Output 1	Output	Channel 2 power stage output, internally protected
12	VCC	Supply	Supply voltage
TAB	TAB	Supply	Supply voltage

chanhvinh.com

3 Maximum ratings

Table 2. Absolute maximum ratings

Symbol	Parameter	Value	Unit
V_{CC}	Power supply voltage	45	V
$-V_{CC}$	Reverse supply voltage	-0.3	V
I_{GND}	DC ground reverse current	-250	mA
I_{OUT}	DC output current	Internally limited (1)	A
I_R	DC reverse output current (per channel)	-5	A
I_{IN}	Input pin current (per channel)	+/-10	mA
V_{IN}	Input pin voltage	$+V_{CC}$	V
V_{DIAG}	Diag pin voltage	$+V_{CC}$	V
I_{DIAG}	Diag pin current	+/-10	mA
V_{ESD}	Electrostatic discharge (R = 1.5k Ω; C = 100 pF)	2000	V
E_{AS}	Single pulse avalanche energy per channel, all channels driven simultaneously at T_{AMB} = 125 °C, I_{OUT} = 1 A	300	mJ
P_{TOT}	Power dissipation at T_C = 25 °C	Internally limited (1)	W
T_J	Junction operating temperature	Internally limited (1)	°C
T_{STG}	Storage temperature	-55 to 150	°C

1. *Protection functions are intended to avoid IC damage in fault conditions and are not intended for continuous operation. Continuous and repetitive operation of protection functions may reduce the IC lifetime.*

chanhvinh.com

4 Thermal data

Table 3. **Thermal data**

Symbol	Parameter	Value	Unit
$R_{th(JC)}$	Thermal resistance junction-case (1)	1	°C/W
$R_{th(JA)}$	Thermal resistance junction-ambient (2)	See Figure 11	°C/W

1. *Per channel*
2. *When mounted using minimum recommended pad size on FR-4 board.*

chanhvinh.com

5 Electrical characteristics

9 V < V_{CC} < 36 V; -40 °C < T_J < 125 °C; unless otherwise specified

Table 4. Power section

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
V_{CC}	Supply voltage		9	-	45	V
$R_{DS(ON)}$	ON-state resistance	I_{OUT} = 0.5 A at T_J = 25 °C	-	0.080	-	Ω
		I_{OUT} = 0.5 A at T_J = 125 °C	-	-	0.150	Ω
I_S	V_{CC} supply current	All channels in OFF-state	-	300	-	µA
		ON-state with V_{IN} = 5 V, T_J = 125 °C	-	1.9	4	mA
V_{CLAMP}	V_{CC} clamp voltage	I_S = 20 mA	45	-	52	V
$V_{OUT(OFF)}$	OFF-state output voltage	V_{IN} = 0 V, I_{OUT} = 0 A	-	-	3	V
$I_{OUT(OFF)}$	OFF-state output current	V_{IN} = V_{OUT} = 0 V	0	-	5	µA
$I_{OUT(OFF1)}$		V_{IN} = 0 , V_{OUT} = 4 V	-35	-	0	µA
I_{LGND}	Output current at GND disconnection	V_{CC} = V_{IN1} or V_{IN2} = V_{DIAG} = V_{GND} = 24 V; V_{OUT} = 0 V	-	-	0.5	mA

Table 5. Switching

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
$t_{d(ON)}$	Output current turn-on delay time	V_{CC} = 24 V, R_L = 48 Ω, Input rise time < 0.1 µs, T_J = 25 °C, see Figure 6	-	8	-	µs
t_r	Output current rise time		-	15	-	µs
$t_{d(ON)}$ + t_r	Turn-on response		-	-	35	µs
$t_{d(OFF)}$	Output current turn-off delay time		-	10	-	µs
t_f	Output current fall time		-	7	-	µs
$t_{d(OFF)}$ + t_f	Turn-off response		-	-	40	µs
t_{DOL}	Delay time for open-load detection		-	500	-	µs
$dV/dt_{(ON)}$	Turn-on voltage slope		-	3	-	V/µs
$dV/dt_{m(OFF)}$	Turn-off voltage slope		-	4	-	V/µs

Table 6. Logic inputs

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
V_{IL}	Input low level voltage		-	-	0.8	V
V_{IH}	Input high level voltage		2.20	-	-	V
$V_{I(HYST)}$	Input hysteresis voltage		-	0.15	-	V
I_{IN}	Input current	V_{IN} = 15 V	-	-	10	µA
		V_{IN} = 36 V	-	-	210	


chanhvinh.com

Table 7. Protection and diagnostic

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
V_{DIAG} (1)	Diag voltage output low	I_{DIAG} = 1.5 mA (fault condition)	-	-	0.6	V
V_{USD}	Undervoltage protection		7	-	9	V
V_{USDHYS}	Undervoltage hysteresis		0.4	0.5	-	V
I_{LIM}	DC short-circuit current	V_{CC} = 24 V, R_{LOAD} ≤ 10 mΩ	1	-	2	A
I_{LDIAG}	Diag leakage current	V_{CC} = 32 V	-	30	-	µA
V_{OL}	Open-load OFF-state voltage detection threshold	V_{IN} = 0 V	2	3	4	V
T_{TSD}	Junction shutdown temperature		150	170	-	°C
T_R	Junction reset temperature		135	155	200	°C
T_{HYST}	Junction thermal hysteresis		7	15	-	°C
T_{CSD}	Case shutdown temperature		125	139	146	°C
T_{CR}	Case reset temperature		110	-	-	°C
T_{CHYST}	Case thermal hysteresis		7	15	-	°C
V_{DEMAG}	Output voltage at turn-OFF	I_{OUT} = 0.5 A; L_{LOAD} ≥ 1 mH	V_{CC} - 45	V_{CC} - 50	V_{CC} - 52	V

1. *Diag determination > 100 ms after the switching edge.*

Figure 3. Current and voltage conventions

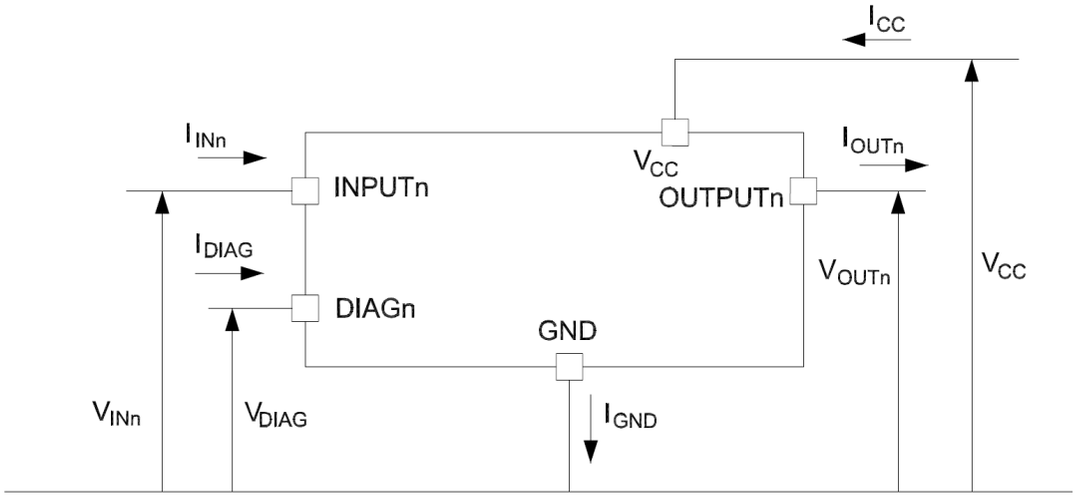

chanhvinh.com

6 Truth table

Table 8. **Truth table**

Condition	$Input_n$	$Output_n$	$Diag_n$
Normal operation	L	L	H
	H	H	H
Overtemperature	L	L	H
	H	L	L
Undervoltage	L	L	X
	H	L	X
Shorted-load (current limitation)	L	L	H
	H	X	H
Output voltage > V_{OL}	L	Z(1)	L
	H	H	H
Short to V_{CC}	L	H	L
	H	H	H


1. *Depending on the external circuit.*

Note: X = don't care.

chanhvinh.com


7 Switching waveforms

Figure 4. **Switching waveforms**

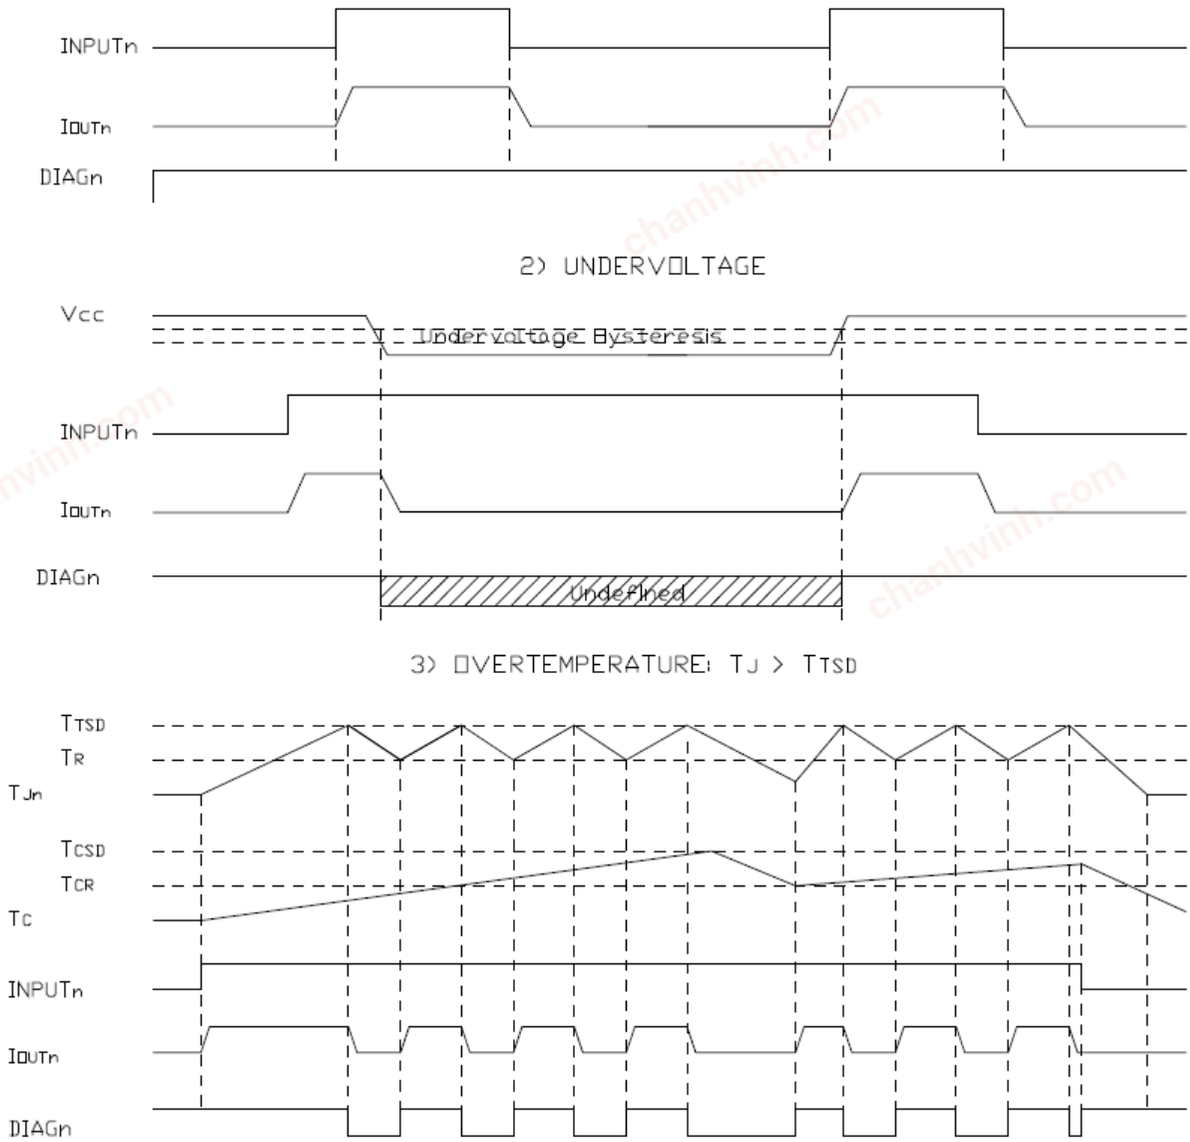

chanhvinh.com

Figure 5. **Switching waveforms (continued)**

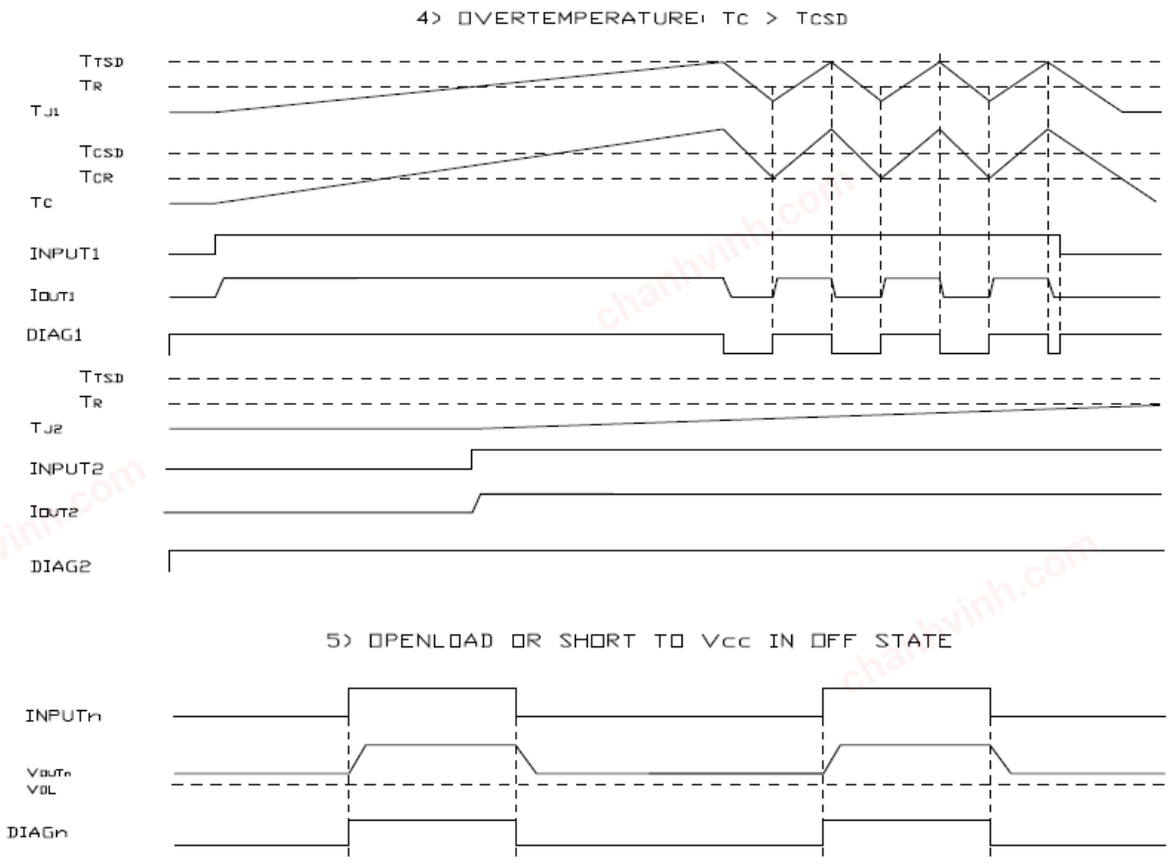

chanhvinh.com

Figure 6. **Switching parameter test conditions**


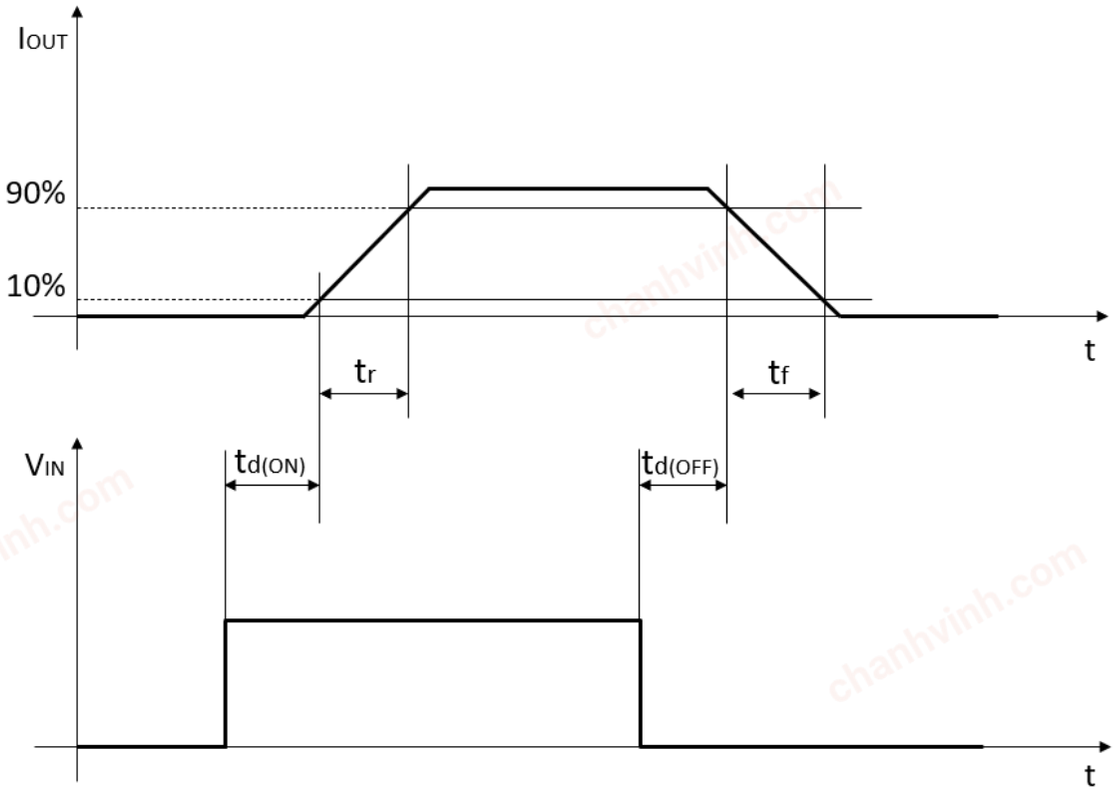


Figure 7. **Typical application circuit**

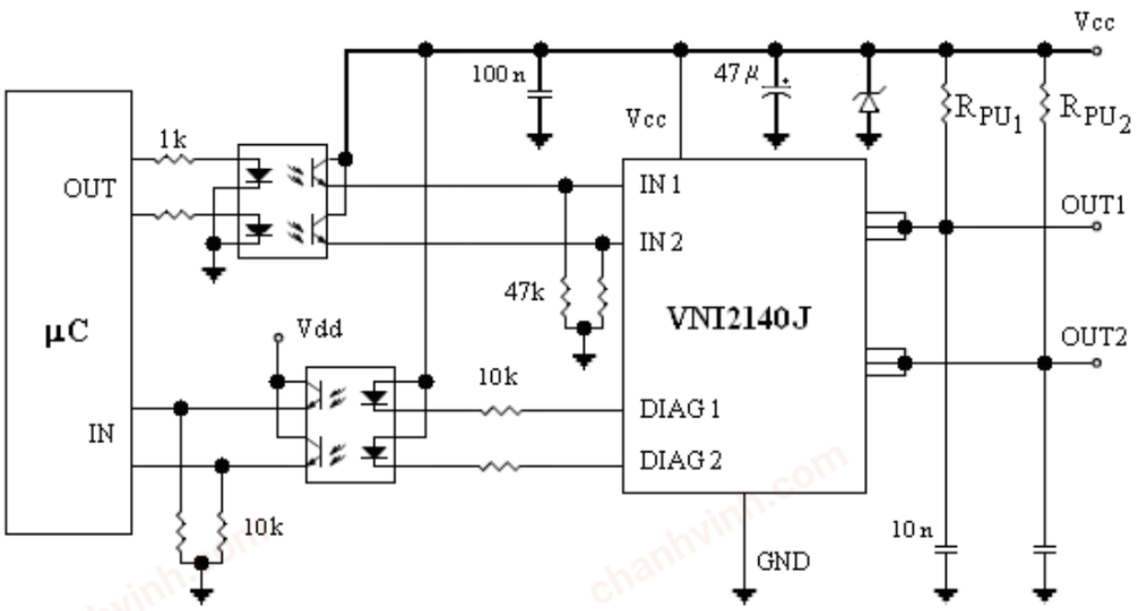

chanhvinh.com

8 Open-load

In order to detect the open-load fault, a pull-up resistor must be connected between the V_{CC} line and the output pin.

In a normal condition, a current flows through the network made up of a pull-up resistor and a load. The voltage across the load is less than V_{OLMIN} and the DIAG pin is kept high.

This is the result in the condition:

Equation 1:

V_{CC} [R_{LOAD} / (R_{LOAD} + R_{PU})] < V_{OLMIN}

or

Equation 2:

[(V_{CC} / V_{OLMIN}) - 1] R_{LOAD} < R_{PU}


When an open-load event occurs the voltage on the output pin rises to a value higher than V_{OLMAX} (depending on the pull-up resistor) and the diag pin goes down.

This is the result in the condition:

Equation 3:


R_{PU} < (V_{CC} - V_{OLMAX}) / |$I_{OUT(OFF1)MIN}$|

Figure 8. Open-load detection

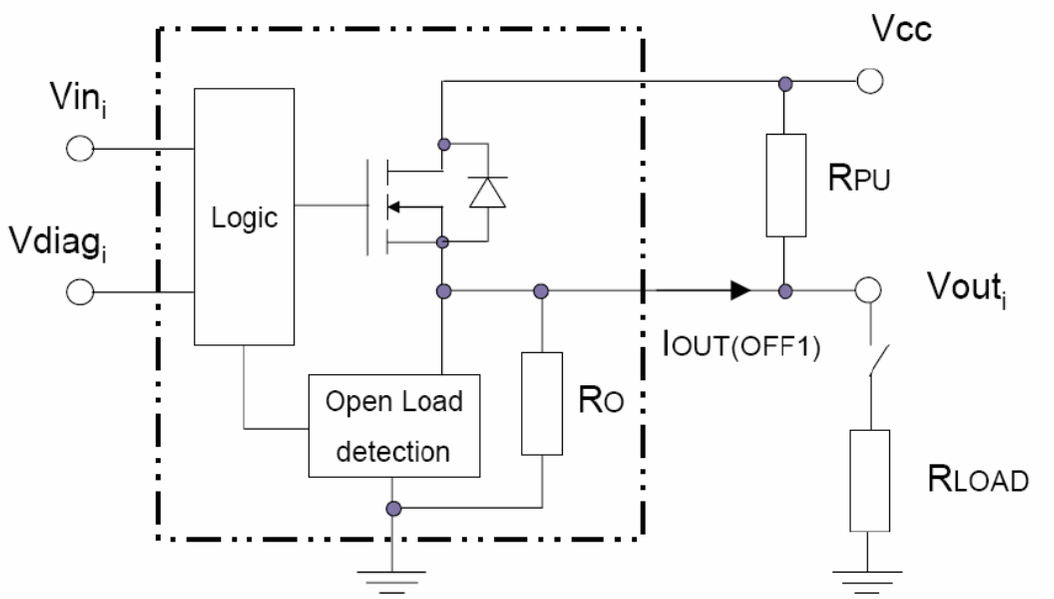

chanhvinh.com


Figure 9. **Turn-on/off to open-load**

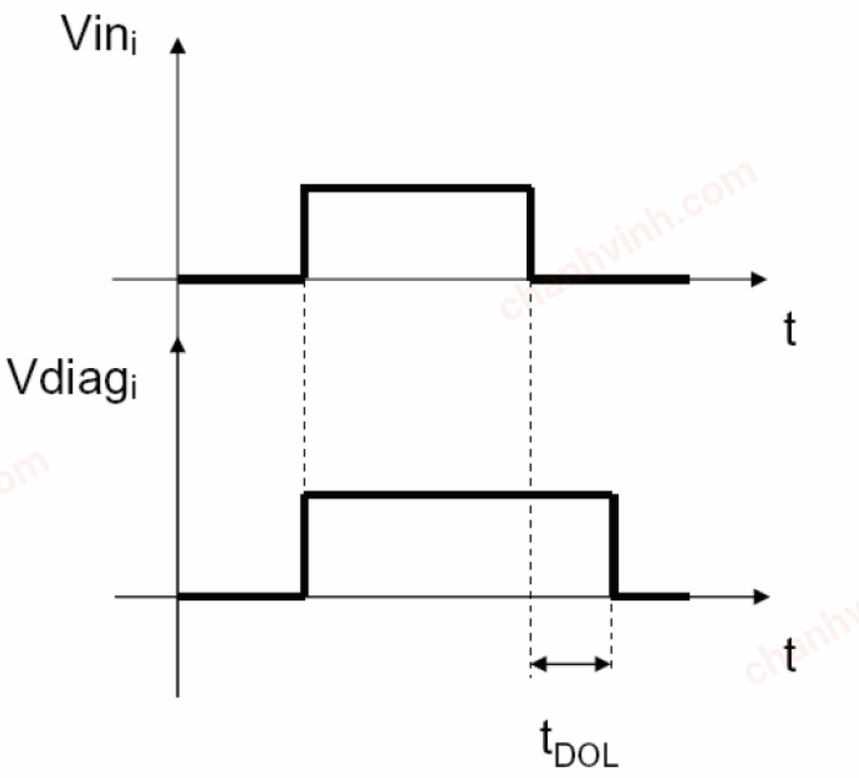

chanhvinh.com


9 Package and PCB thermal data

Figure 10. **PowerSSO-12 PC board**

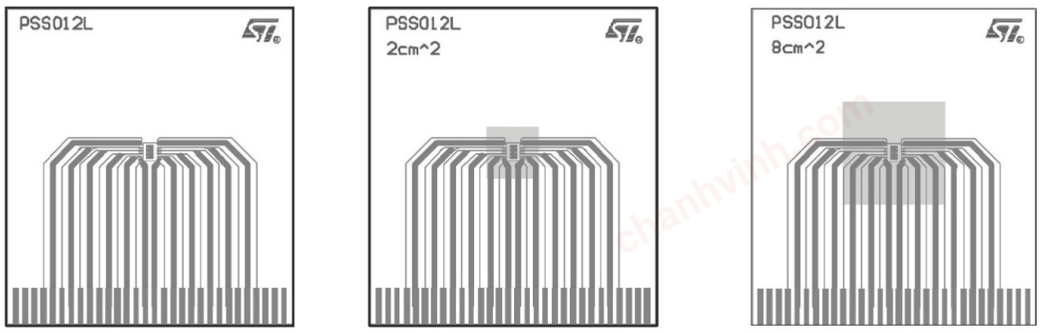


Layout condition of R_{th} and Z_{th} measurements (PCB: Double layer, Thermal Vias, FR4 area= 77mm x 86mm, PCB thickness=1.6mm, Cu thickness=70µm (front and back side), Copper areas: from minimum pad lay-out to 8cm^2).

Figure 11. **R_{thJA} vs. PCB copper area in open box free-air condition**

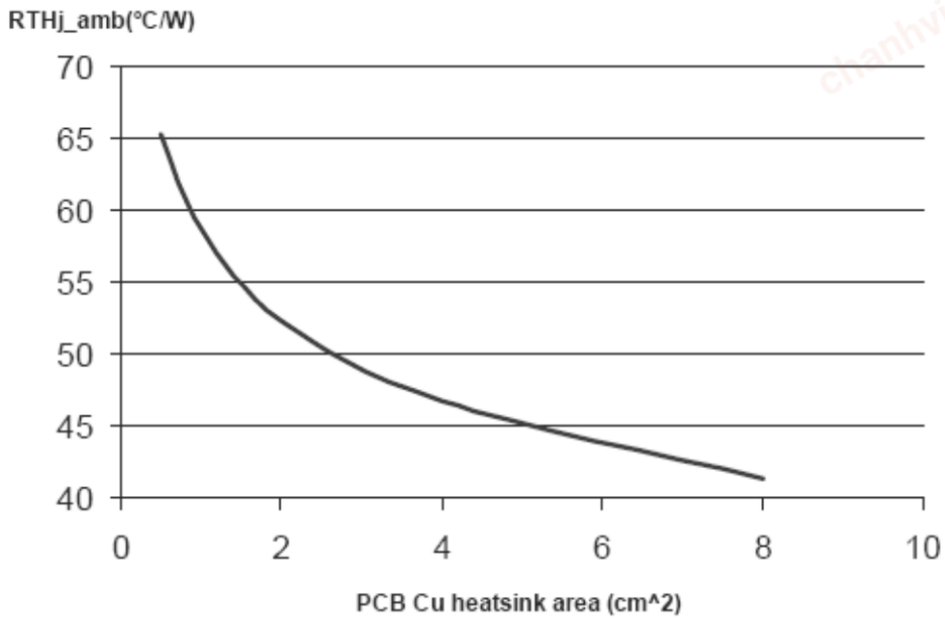

chanhvinh.com

Figure 12. **PowerSSO-12 thermal impedance junction ambient single pulse**

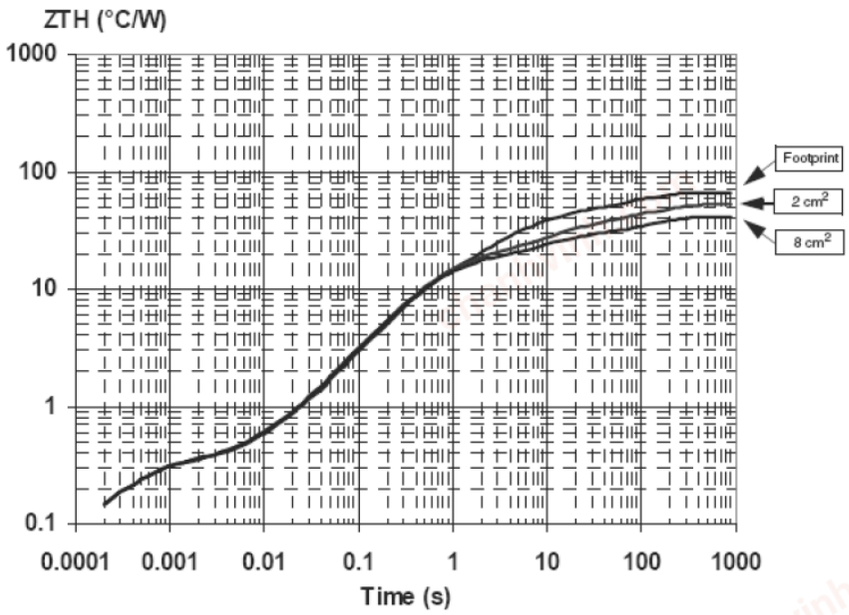


Pulse calculation formula:

$Z_{THδ} = R_{TH} \times δ + Z_{THtp} (1 - δ)$

where $δ = t_p / T$

Figure 13. **Thermal fitting model of a double channel HSD in PowerSSO-12**

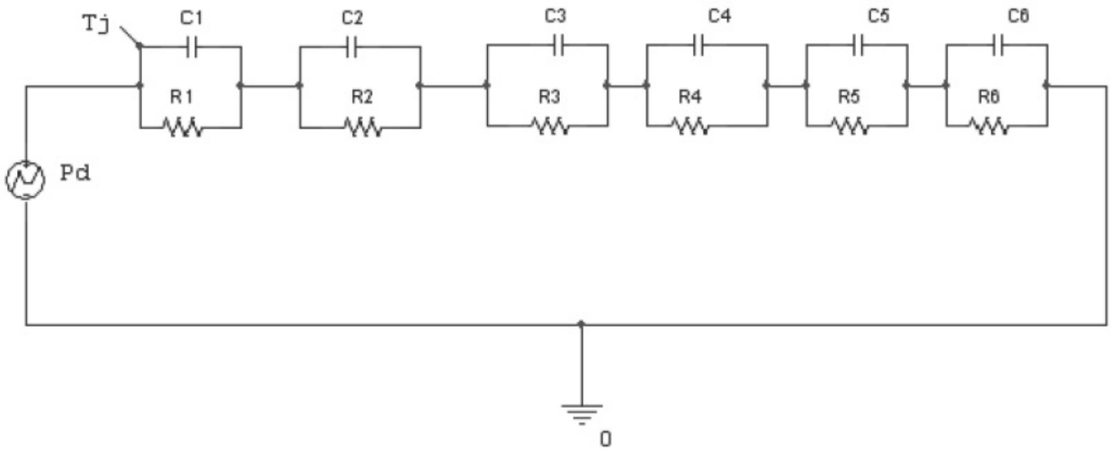

chanhvinh.com

Table 9. **Thermal parameter**

Area/island (cm^2)	Footprint	2	8
R1 (°C/W)	0.1	-	-
R2 (°C/W)	0.2	-	-
R3 (°C/W)	7	-	-
R4 (°C/W)	10	10	9
R5 (°C/W)	22	15	10
R6 (°C/W)	26	20	15
C1 (W.s/°C)	0.0001	-	-
C2 (W.s/°C)	0.002	-	-
C3 (W.s/°C)	0.05	-	-
C4 (W.s/°C)	0.2	0.1	0.1
C5 (W.s/°C)	0.27	0.8	1
C6 (W.s/°C)	3	6	9

chanhvinh.com

10 Reverse polarity protection

Reverse polarity protection can be implemented on-board using two different solutions:

1. Placing a resistor (R_{GND}) between IC GND pin and load GND
2. Placing a diode between IC GND pin and load GND

If option 1 is selected, the minimum resistance value has to be selected according to the following equation:

$R_{GND} \geq V_{CC} / I_{GND}$

where I_{GND} is the DC reverse ground pin current and can be found in Section 3 of this datasheet.

Power dissipated by R_{GND} (when $V_{CC} < 0$: during reverse polarity situations) is:


$P_D = (V_{CC})^2 / R_{GND}$

If option 2 is selected, the diode has to be chosen by taking into account VRRM >$|V_{CC}|$ and its power dissipation capability:

$P_D \geq I_S \times V_F$

Note: In normal conditions (no reverse polarity), due to the diode, there is a voltage drop between GND of the device and GND of the system.

Figure 14. Reverse polarity protection

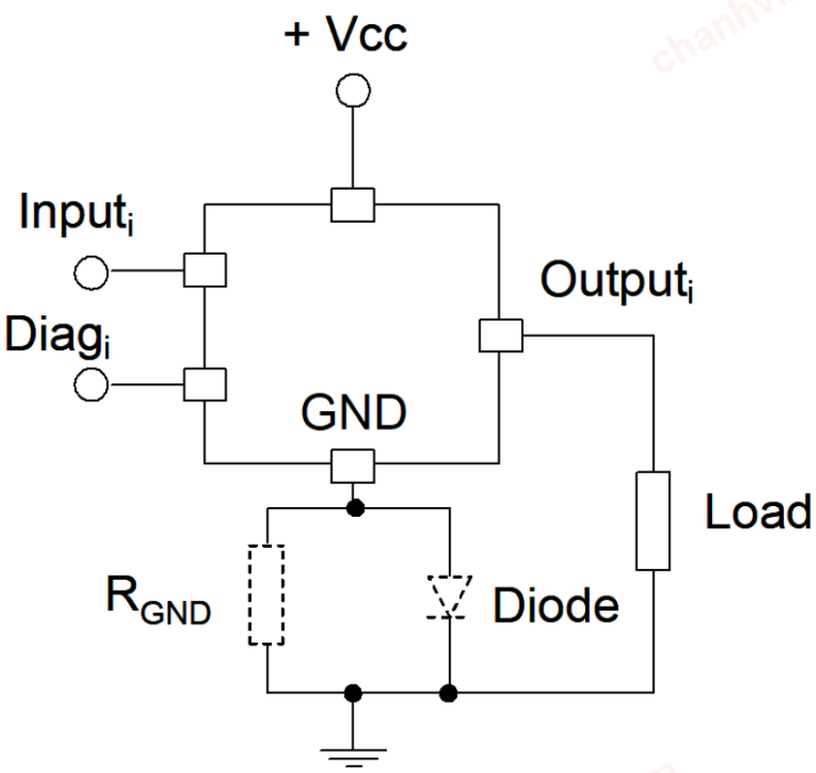

This schematic can be used with any type of load.


chanhvinh.com

11 Package information

In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK packages, depending on their level of environmental compliance. ECOPACK specifications, grade definitions and product status are available at: www.st.com. ECOPACK is an ST trademark.

11.1 PowerSSO-12™ package information

Figure 15. **PowerSSO-12™ package outline**

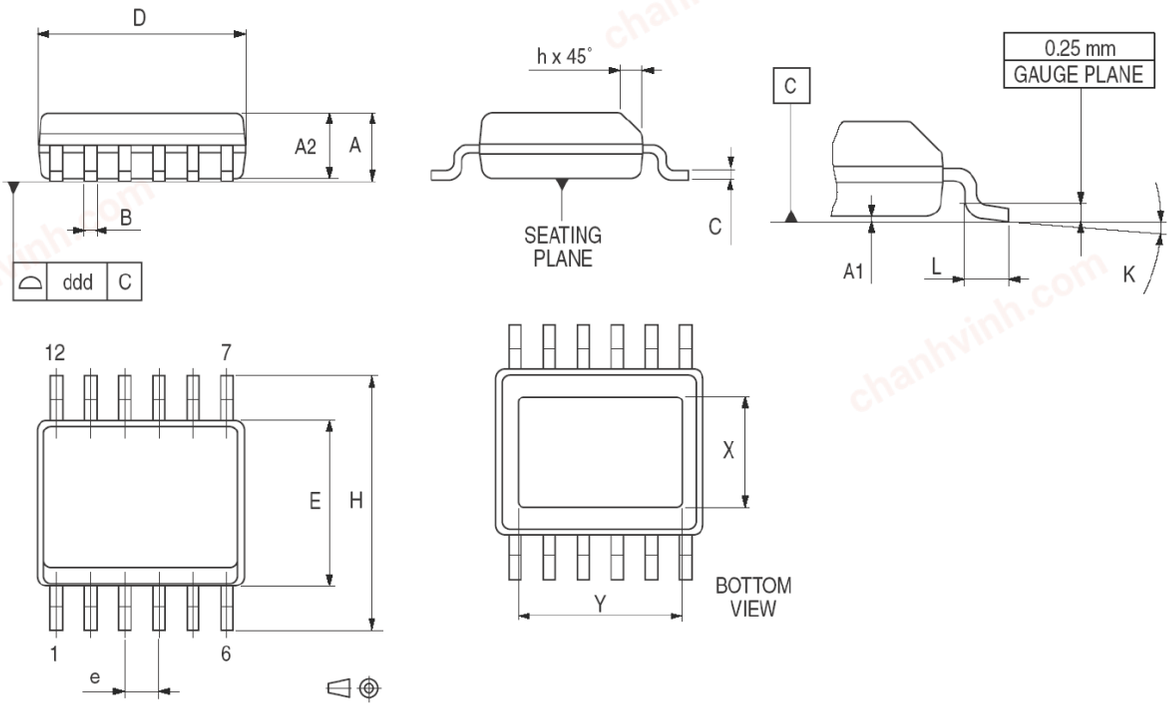


chanhvinh.com

Table 10. **PowerSSO 12, mechanical data**

Symbol	Dimensions [mm]		
	Min.	Typ.	Max.
A	1.250	-	1.620
A1	0.000	-	0.100
A2	1.100	-	1.650
B	0.230	-	0.410
C	0.190	-	0.250
D	4.800	-	5.000
E	3.800	-	4.000
e	-	0.800	-
H	5.800	-	6.200
h	0.250	-	0.500
L	0.400	-	1.270
k	0°	-	8°
X	1.900	-	2.500
Y	3.600	-	4.200
ddd	-	-	0.100

Figure 16. **Suggested footprint**

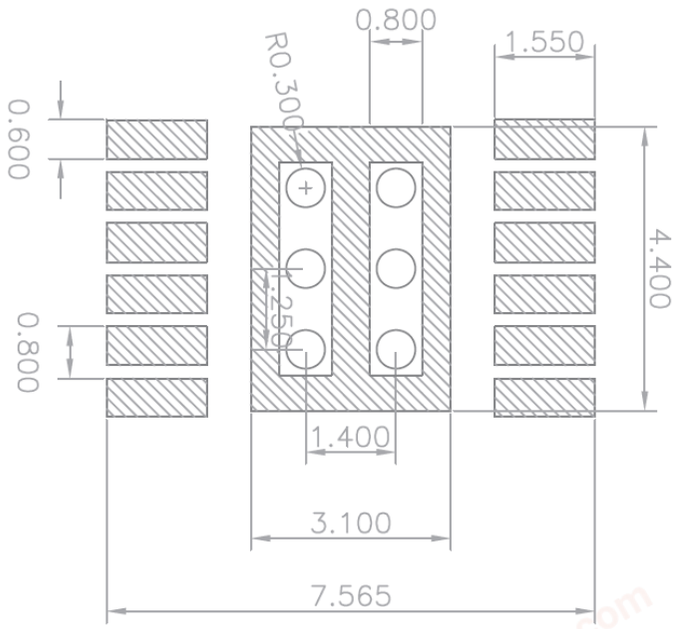


STMicroelectronics is not responsible for any PCB related issues. The footprint shown in the above figure is a suggestion, which might not be in line with the customer PCB supplier design rules.

chanhvinh.com

12 PowerSSO-12™ packing information


Figure 17. **PowerSSO-12™ tube shipment (no suffix)**

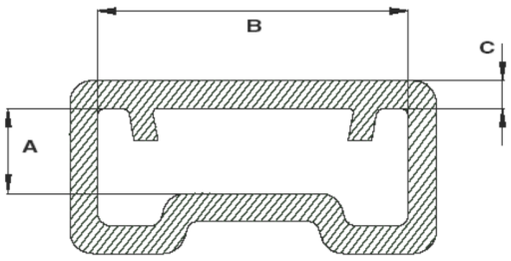

Base Q.ty	100
Bulk Q.ty	2000
Tube length (± 0.5)	532
A	1.85
B	6.75
C (± 0.1)	0.6

All dimensions are in mm.

Figure 18. **PowerSSO-12™ tape and reel shipment (suffix "TR")**

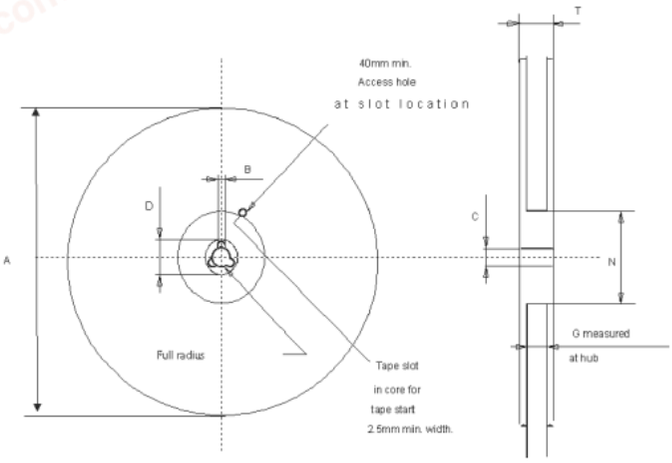

REEL DIMENSIONS


Base Q.ty	2500
Bulk Q.ty	2500
A (max)	330
B (min)	1.5
C (± 0.2)	13
F	20.2
G (+ 2 / -0)	12.4
N (min)	60
T (max)	18.4


TAPE DIMENSIONS


According to Electronic Industries Association (EIA) Standard 481 rev. A, Feb. 1986

Tape width	W	12
Tape Hole Spacing	P0 (± 0.1)	4
Component Spacing	P	8
Hole Diameter	D (± 0.05)	1.5
Hole Diameter	D1 (min)	1.5
Hole Position	F (± 0.1)	5.5
Compartment Depth	K (max)	4.5
Hole Spacing	P1 (± 0.1)	2

All dimensions are in mm.

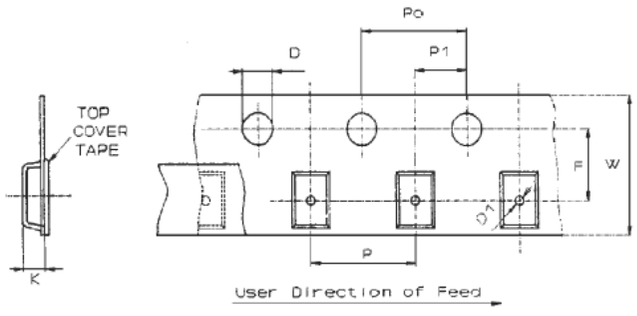

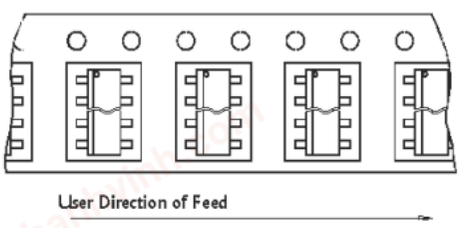

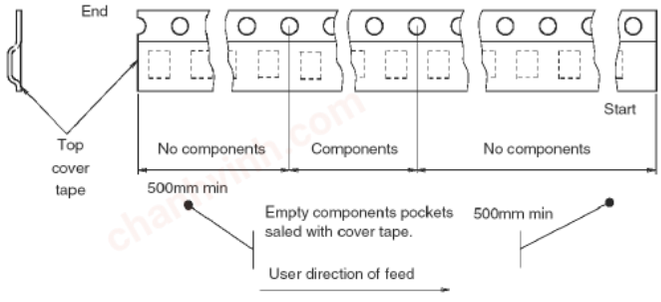

chanhvinh.com

13 Ordering information

Table 11. **Ordering information**

Part number	Package	Packaging
VNI2140J	PowerSSO-12	Tube
VNI2140JTR		Tape and reel

chanhvinh.com

chanhvinh.com

Revision history

Table 12. **Document revision history**

Date	Version	Changes
16-Dec-2008	1	Initial release.
29-Apr-2009	2	Updated Table 5 on page 6
03-Jul-2009	3	Updated features in cover page and Table 5 on page 6
27-Aug-2009	4	Updated Section 9: Reverse polarity protection
25-Mar-2010	5	Updated Cover page and Table 4 on page 5
26-Apr-2010	6	Updated Table 5 on page 6
21-Jul-2010	7	Updated Table 8 on page 7
15-Nov-2011	8	Updated Figure 18 on page 21
09-Nov-2017	9	Updated Table 4 on page 5 and Table 7 on page 6. Minor modifications throughout document.
10-Dec-2019	10	Updated Section 9: Reverse polarity protection
13-Sep-2022	11	DS format changed; table 9: T_{CSD} values (Typ. and Max.) changed. Reduced the maximum value of I_{LGND}. Other minor text changes.

chanhvinh.com

Contents

1 Block diagram 2
2 Pin connections 3
3 Maximum ratings 4
4 Thermal data 5
5 Electrical characteristics 6
6 Truth table 8
7 Switching waveforms 9
8 Open-load 12
9 Package and PCB thermal data 14
10 Reverse polarity protection 17
11 Package information 18
11.1 PowerSSO-12™ package information 18
12 PowerSSO-12™ packing information 20
13 Ordering information 21
Revision history 22
List of tables 24
List of figures 25

chanhvinh.com

List of tables

Table 1. Pin description . . . 3
Table 2. Absolute maximum ratings . . . 4
Table 3. Thermal data . . . 5
Table 4. Power section . . . 6
Table 5. Switching . . . 6
Table 6. Logic inputs . . . 6
Table 7. Protection and diagnostic . . . 7
Table 8. Truth table . . . 8
Table 9. Thermal parameter . . . 16
Table 10. PowerSSO 12, mechanical data . . . 19
Table 11. Ordering information . . . 21
Table 12. Document revision history . . . 22

chanhvinh.com

List of figures

Figure 1. Block diagram . . . 2
Figure 2. Pin connections (top view) . . . 3
Figure 3. Current and voltage conventions . . . 7
Figure 4. Switching waveforms . . . 9
Figure 5. Switching waveforms (continued) . . . 10
Figure 6. Switching parameter test conditions . . . 11
Figure 7. Typical application circuit . . . 11
Figure 8. Open-load detection . . . 12
Figure 9. Turn-on/off to open-load . . . 13
Figure 10. PowerSSO-12 PC board . . . 14
Figure 11. R_{thJA} vs. PCB copper area in open box free-air condition . . . 14
Figure 12. PowerSSO-12 thermal impedance junction ambient single pulse . . . 15
Figure 13. Thermal fitting model of a double channel HSD in PowerSSO-12 . . . 15
Figure 14. Reverse polarity protection . . . 17
Figure 15. PowerSSO-12™ package outline . . . 18
Figure 16. Suggested footprint . . . 19
Figure 17. PowerSSO-12™ tube shipment (no suffix) . . . 20
Figure 18. PowerSSO-12™ tape and reel shipment (suffix “TR”) . . . 20

chanhvinh.com

IMPORTANT NOTICE – READ CAREFULLY

STMicroelectronics NV and its subsidiaries (“ST”) reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST’s terms and conditions of sale in place at the time of order acknowledgment.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of purchasers’ products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. For additional information about ST trademarks, refer to www.st.com/trademarks. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2022 STMicroelectronics – All rights reserved