chanhvinh.com

TAOGLAS



Datasheet

Raptor X Series

Part No:
MA8007.A.001

Description

7in1 Screwmount 2m RG-174 TGC-302 GNSS L1-L5 SMA(M) 5G/4G(1-4) SMA(M) Wi-Fi(1-2) RP-SMA(M)

Features:

1*GNSS L1/L5 Bands
4* 5G/4G LTE Cellular 600-6000MHz
2* Wi-Fi 2.4/5.8/7.125GHz
Dimensions: 350mm x 70mm x 39mm
M22 Thread
IP69K Rated Enclosure
Cable: GNSS- 2m of RG-174, Wi-Fi & 5G/4G –2m of TGC-302
IK10 Rated Enclosure
Connector: GNSS – SMA(M), 5G/4G – SMA(M), Wi-Fi – RP-SMA(M)
Custom Cables and Connectors Available
RoHS & Reach Compliant

chanhvinh.com

1.	Introduction	3
2.	Specification	4
3.	Mechanical Drawing	8
4.	Installation Guide	9
5.	Packaging	10
6.	Antenna Characteristics	11
7.	LNA Characteristics	18
8.	Radiation Patterns	20
	Changelog	79

Taoglas makes no warranties based on the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. Taoglas reserves all rights to this document and the information contained herein. Reproduction, use or disclosure to third parties without express permission is strictly prohibited.

chanhvinh.com

1. Introduction



Introducing the Taoglas Raptor X MA8007, a low-profile, sleek, 7-in-1 combination antenna engineered for the next generation of routers and gateways. The advanced combination antenna offers dual-band GNSS L1/L5 for exceptional navigational positional accuracy and high-efficiency 5G/4G wideband cellular MIMO connectivity spanning 600-6000MHz for superior mobile connectivity. Applications can be future-proofed with the tri-band Wi-Fi 6 antennas covering 2.4/5.8/7.125GHz.

The Raptor X boasts a compact form factor of just 350 x 70 x 39mm, setting a new market standard for products containing up to 10 antennas. With a height of only 39mm, it is ideal for vehicle roof installations where height constraints are common, typically below 80mm. Its sleek, 70mm design allows it to fit seamlessly on various NEMA cabinets and between the ribs on many vehicle roofs. The MA8007 has an extremely robust IP69K rated enclosure allowing for the most demanding of use cases and applications.

Typical applications include:
- Emergency and First Responder Vehicles
- EV Charger Stations
- Smart Industry and Warehouse Applications
- Private LTE Networks

The MA8007, part of the Raptor X series, offers customization with up to ten connections, one GNSS, four cellular, and five Wi-Fi antennas tailored for specific routers and customer configurations. All cables and connectors can be fully customized to meet your unique requirements.


For further information on how to integrate the Raptor X or for orders, please contact your regional Taoglas customer support team

chanhvinh.com

TAOGLAS

2. Specification

GNSS Frequency Bands					
GPS	L1 1575.42 MHz	L2 1227.6 MHz	L5 1176.45 MHz		
	■	□	■		
GLONASS	G1 1602 MHz	G2 1248 MHz	G3 1207 MHz		
	■	□	□		
Galileo	E1 1575.24 MHz	E5a 1176.45 MHz	E5b 1201.5 MHz	E6 1278.75 MHz	
	■	■	□	□	
BeiDou	B1C 1575.42 MHz	B1I 1561 MHz	B2a 1176.45 MHz	B2b 1207.14 MHz	B3 1268.52 MHz
	■	■	■	□	□
L-Band	L-Band 1542 MHz				
	□				
QZSS (Regional)	L1 1575.42 MHz	L2C 1227.6 MHz	L5 1176.45 MHz	L6 1278.75e6	
	■	□	■	□	
IRNSS (Regional)	L5 1176.45 MHz				
	■				
SBAS	L1/E1/B1 1575.42 MHz	L5/B2a/E5a 1176.45 MHz	G1 1602 MHz	G2 1248 MHz	G3 1207 MHz
	■	■	■	□	□

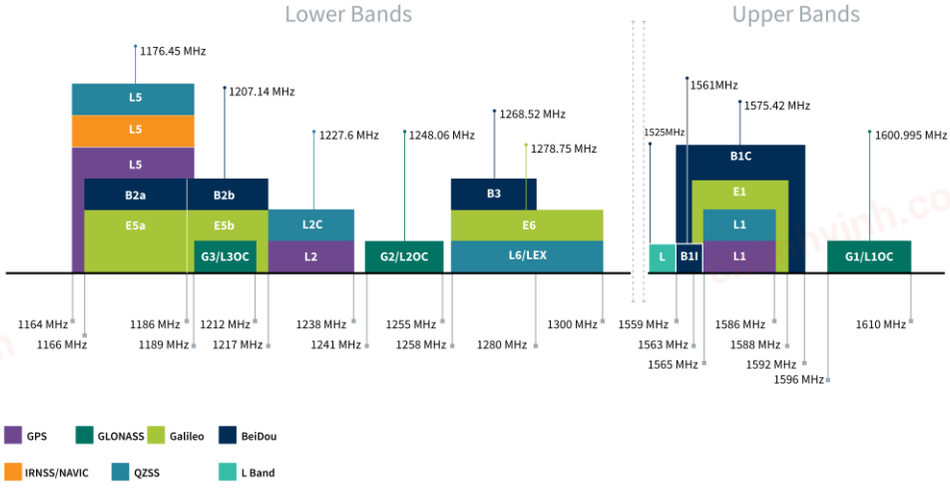

Bands and Constellations Table

chanhvinh.com

GNSS Electrical				
Frequency (MHz)	GPS_L5	BeiDou_B1	GPS_L1	GLONASS_G1
	1164-1189	1559-1592	1565-1586	1596-1610
Average Gain (dB)	-2.95	-2.00	-1.77	-2.62
Efficiency (%)	50.7	63.0	66.5	54.7
Peak Gain (dBi)	2.49	3.93	3.93	3.38
Axial Ratio at Zenith	5	4.8	11.7	13.1
Impedance	50 Ω			
Polarization	RHCP			

LNA and Filter Electrical Properties (3.3V Typ.)			
Frequency (MHz)		High-Band	Low-Band
LNA Gain (dB)		32.3	26.3
Current Consumption (mA)		16.8	
Outer Band Attenuation (dB)	At 500 ~ 1000 MHz	60 dB	
	At 2000 ~ 2690MHz	60 dB	
	At 3300~ 6000MHz	60 dB	
Output Impedance		50 ohm	
Input Voltage(V)		+1.8 to 5.5	

chanhvinh.com

LTE Electrical									
Band	Frequency (MHz)	Measurement	Efficiency (%)	Average Gain (dB)	Peak Gain (dBi)	Impedance	Polarization	Radiation Pattern	Max. input power
5GNR/4G Band71	617-698	5G/4G-1	49.8	-3.03	0.87	50 Ω	Linear	Omni	2W
		5G/4G-2	36.6	-4.37	0.91				
		5G/4G-3	36.4	-4.38	1.03				
		5G/4G-4	44.5	-3.52	2.25				
4G/3G Band 12,13,14,17,28,29	698-824	5G/4G-1	49.7	-3.04	2.94				
		5G/4G-2	39.5	-4.03	2.11				
		5G/4G-3	35.4	-4.51	1.97				
		5G/4G-4	50.3	-2.99	2.25				
4G/3G/NB-IoT/Cat M Band 5,8,18,19,20,26,27	824-960	5G/4G-1	50.8	-2.94	2.64				
		5G/4G-2	43.7	-3.60	2.18				
		5G/4G-3	37.5	-4.26	2.17				
		5G/4G-4	48.0	-3.19	2.25				
5GNR/4G Band 21,32,74,75,76	1427-1518	5G/4G-1	27.9	-5.54	1.01				
		5G/4G-2	27.8	-5.56	1.21				
		5G/4G-3	24.5	-6.10	1.11				
		5G/4G-4	26.7	-5.74	0.99				
4G/3G Band 1,2,3,4,9,23,25,35,39, 66	1710-2200	5G/4G-1	47.7	-3.21	5.15				
		5G/4G-2	53.7	-2.70	5.44				
		5G/4G-3	51.2	-2.91	5.63				
		5G/4G-4	42.5	-3.72	4.65				
4G/3G Band 7,30,38,40,41	2300-2690	5G/4G-1	45.2	-3.45	6.16				
		5G/4G-2	56.8	-2.45	6.97				
		5G/4G-3	52.6	-2.79	6.72				
		5G/4G-4	47.0	-3.28	6.15				
5GNR/4G Band 22,42,48,77,78,79	3300-5000	5G/4G-1	58.9	-2.30	6.23				
		5G/4G-2	58.9	-2.30	6.78				
		5G/4G-3	57.3	-2.42	7.74				
		5G/4G-4	55.6	-2.55	5.97				
LTE5200/Wi-Fi5800	5150-5925	5G/4G-1	48.9	-3.11	5.76				
		5G/4G-2	41.2	-3.86	4.93				
		5G/4G-3	43.5	-3.62	6.48				
		5G/4G-4	40.1	-3.97	4.44				


chanhvinh.com

Wi-Fi Electrical									
Band	Frequency (MHz)	Measurement	Efficiency (%)	Average Gain (dB)	Peak Gain (dBi)	Impedance	Polarization	Radiation Pattern	Max. input power
Wi-Fi - 2GHz	2400-2500	Wi-Fi-1	53.7	-2.70	6.71	50 Ω	Linear	Omni	2W
		Wi-Fi-2	50.0	-3.01	6.09				
Wi-Fi - 5GHz	5150-5850	Wi-Fi-1	44.3	-3.54	6.82				
		Wi-Fi-2	46.8	-3.30	5.42				
***Tested with 0.3m of Cable on a 30x30cm Ground Plane**									


Mechanical	
Dimensions	350mm * 70mm * 39 mm
Weight	0.84kg
Material	PC
Connector	GNSS: SMA(M), 5G/4G(1-4): SMA(M), Wi-Fi(1-2): RP-SMA
Cable	GNSS:2m of RG-174, 5G/4G(1-4) Wi-Fi(1-2):2m of TGC-302
Enclosure Impact Rating	IK10

Environmental	
Waterproof Rating	IP69K
Temperature Range	-40°C to + 85°C
Humidity	Non-condensing 65°C 95% RH

3. Mechanical Drawing

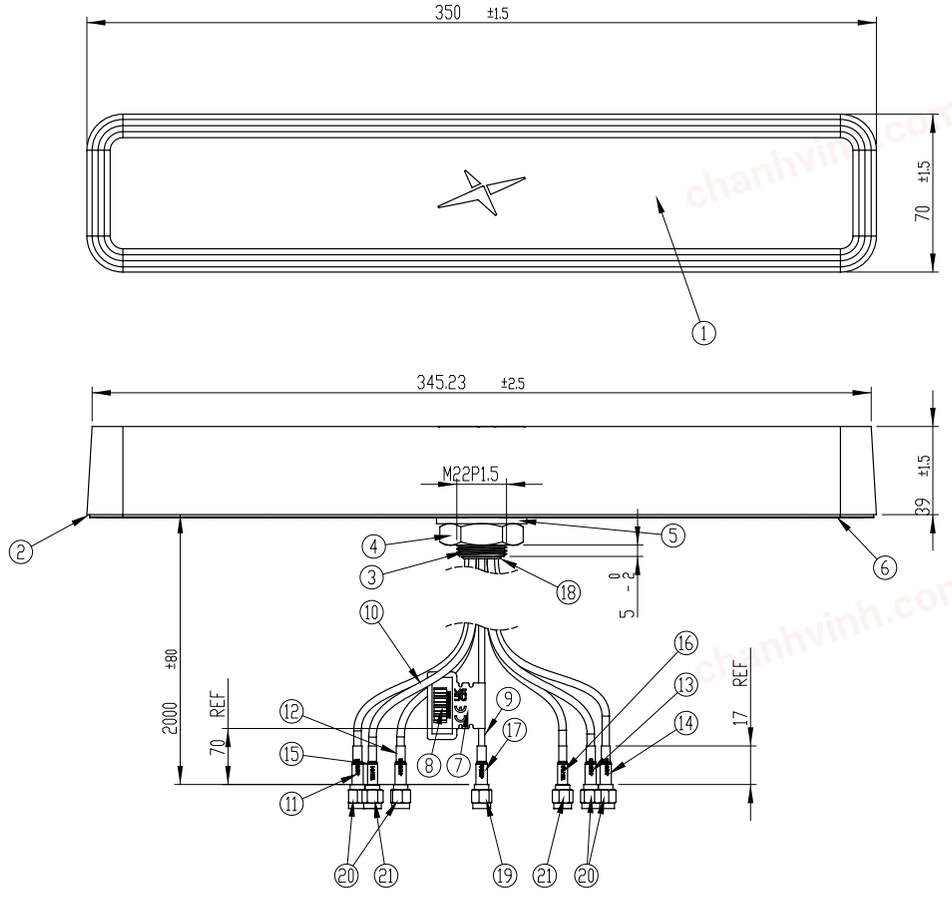


	Name	Material	Finish	Qty
1	Top Housing	PC	Black	1
2	Bottom Housing	PC	Black	1
3	Metal Sten	Zinc Alloy	Ni Plated	1
4	Nut_M22x1.5P	Steel	Ni-Zn Plated	1
5	Washer_M22	Steel	Ni-Zn Plated	1
6	Double Side Adhesive	3M 9448HK + CR4305 2t	Black	1
7	CE,WEEE and UKCA mark Label	PEPA	White	1
8	Barcode Label	PET	White	1
9	RG174 Coaxial Cable	PVC	Black	1
10	TGC-302 Cable	PVC	Black	6
11	Heat Shrink Tube(4G/5G-1)	PE	Red Tube/White Text	1
12	Heat Shrink Tube(4G/5G-2)	PE	Red Tube/White Text	1
13	Heat Shrink Tube(4G/5G-3)	PE	Red Tube/White Text	1
14	Heat Shrink Tube(4G/5G-4)	PE	Red Tube/White Text	1
15	Heat Shrink Tube (WIFI1)	PE	Yellow tube/ Black text	1
16	Heat Shink Tube (WIFI2)	PE	Yellow Tube/Black Text	1
17	Heat Shrink Tube(GNSS)	PE	Blue Tube/White Text	1
18	Grommet_MA8957/MA8955_ TGC302*8_RG174*1	DJSilicon, NE-7150, HS=50A +/- 5A	Black	1
19	SMA(M) ST_RG174	Brass	Au Plated	1
20	SMA(M) ST_TGC302	Brass	Au Plated	4
21	RP-SMA(M)_TGC302	Brass	Au Plated	2

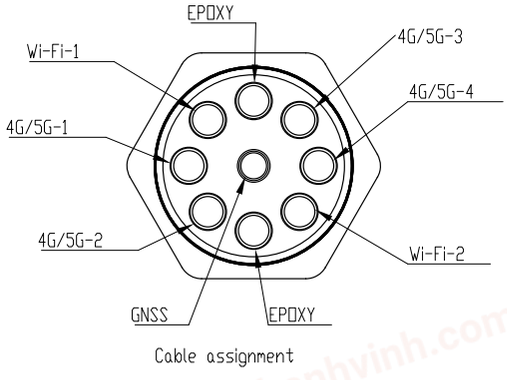


Cable assignment

chanhvinh.com

4. Installation Guide

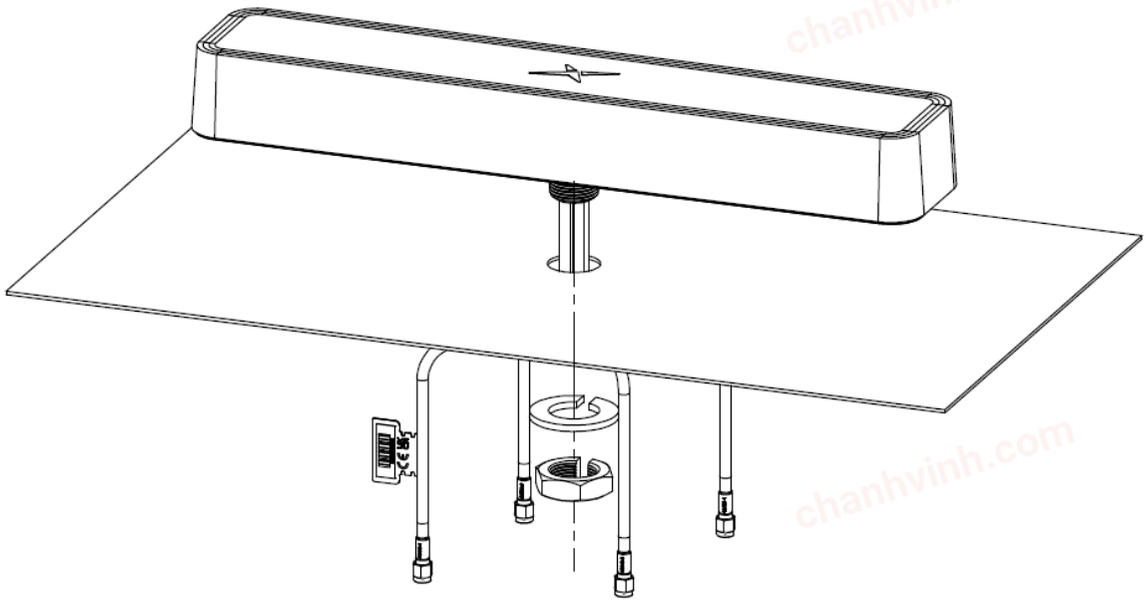

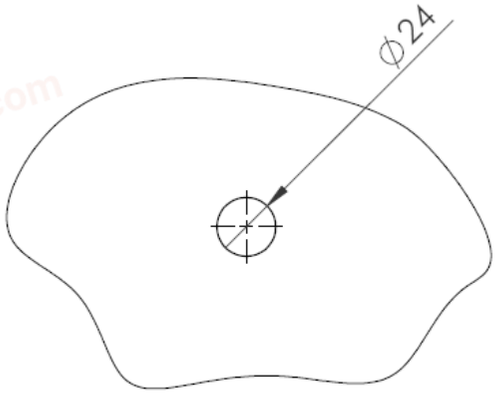

RECCOMMENDED HOLE SIZE FOR MOUNTING

MAX PANEL THICKNESS = 6MM

chanhvinh.com

5. Packaging

1pc MA8007.A.001 per PE Bag
Weight: 0.84Kg



10pcs MA8007.A.001 per carton
Dimensions 370 x 370 x 300mm
Weight: 9.6Kg



chanhvinh.com

6. Antenna Characteristics

6.1 Test Setup







VNA Test Set up

chanhvinh.com

6.2 5G/4G - Return Loss

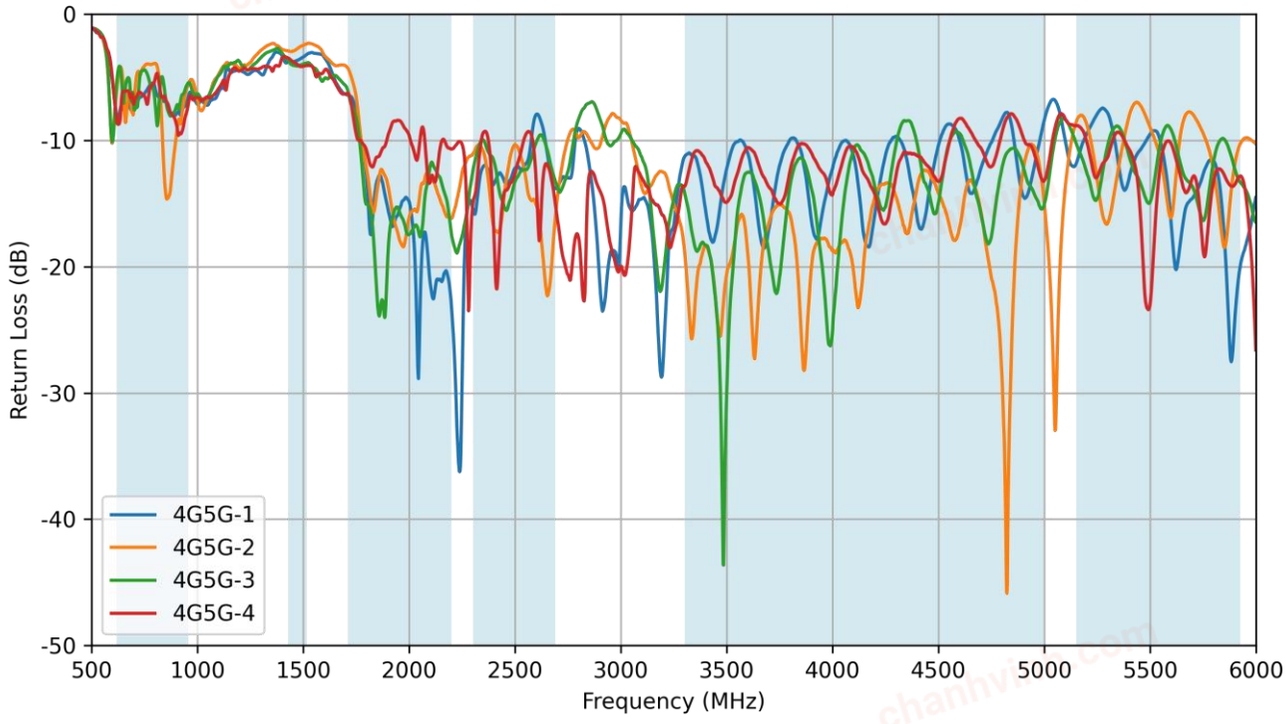


6.3 5G/4G - VSWR

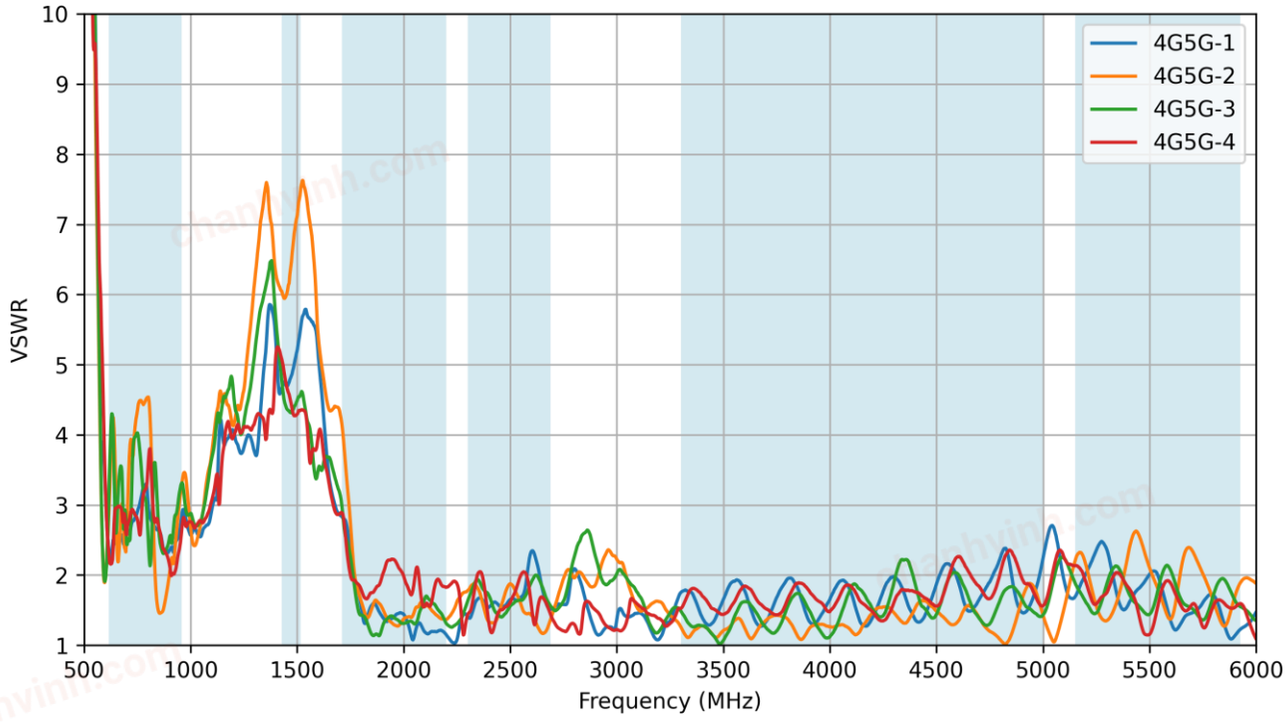


chanhvinh.com

6.4 5G/4G - Isolation

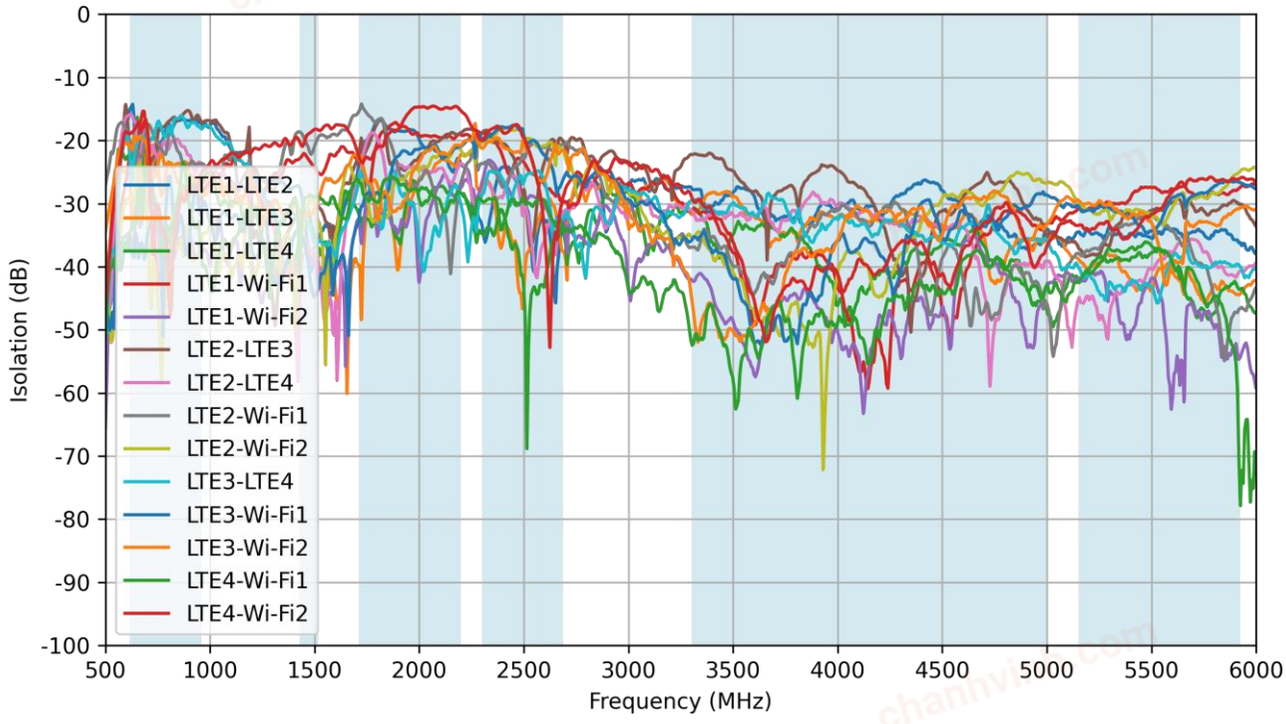


6.5 5G/4G - Efficiency

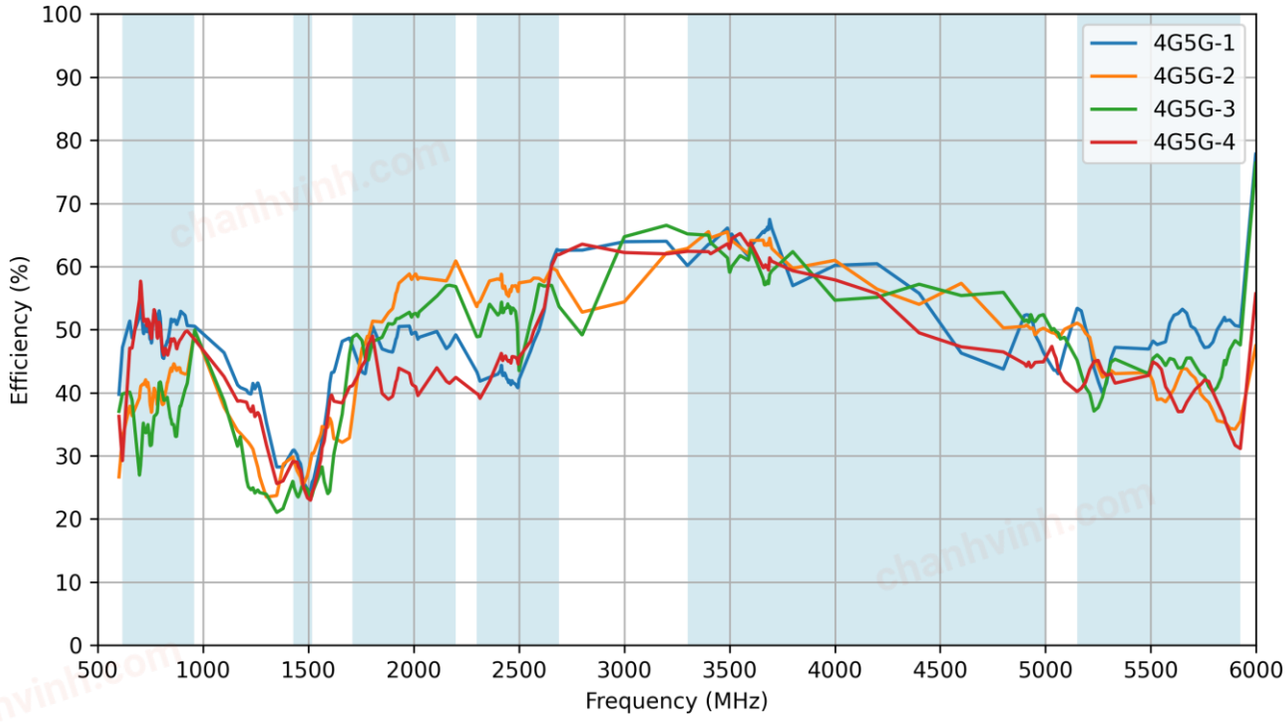


chanhvinh.com

6.6 5G/4G - Average Gain

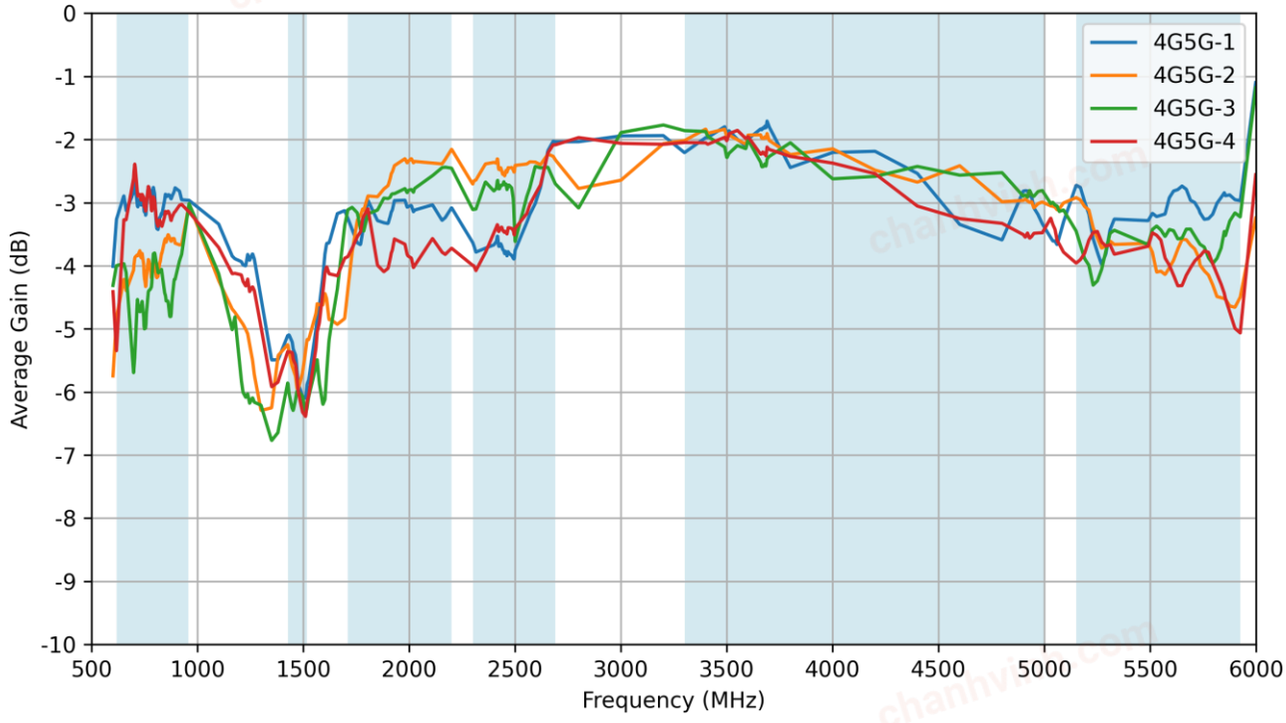


6.7 5G/4G - Peak Gain

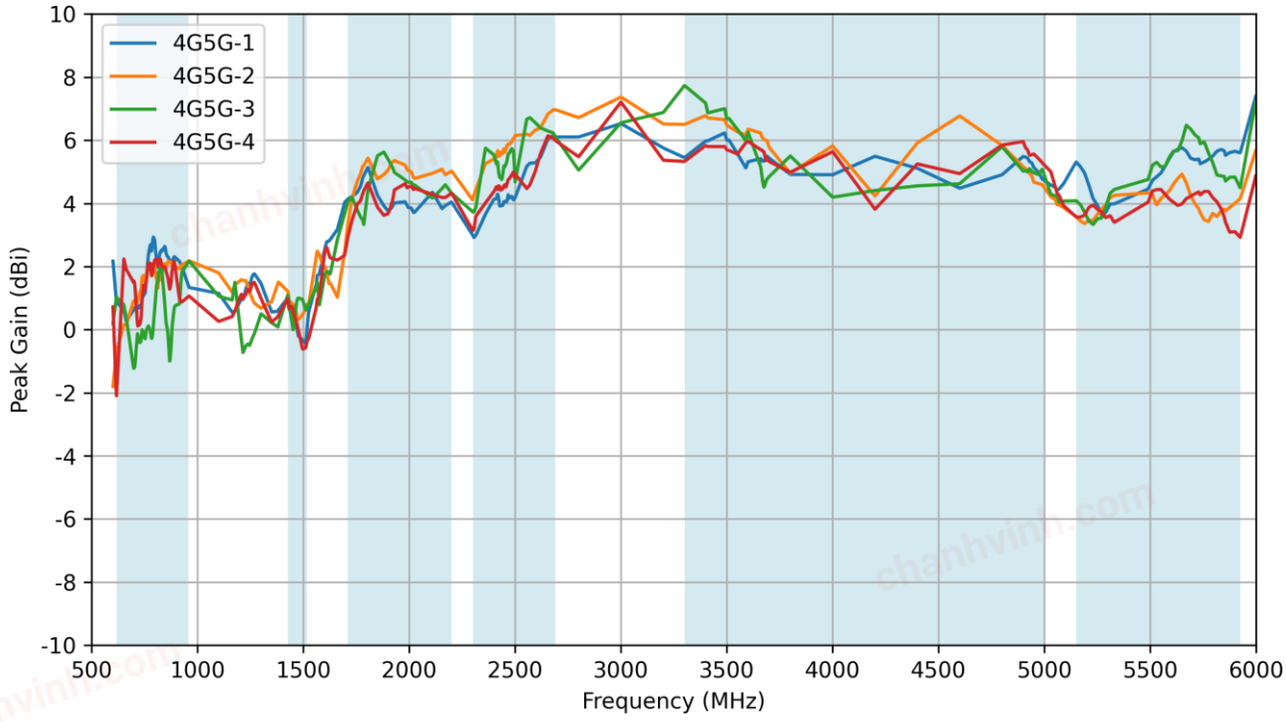


chanhvinh.com


6.8 Wi-Fi - Return Loss

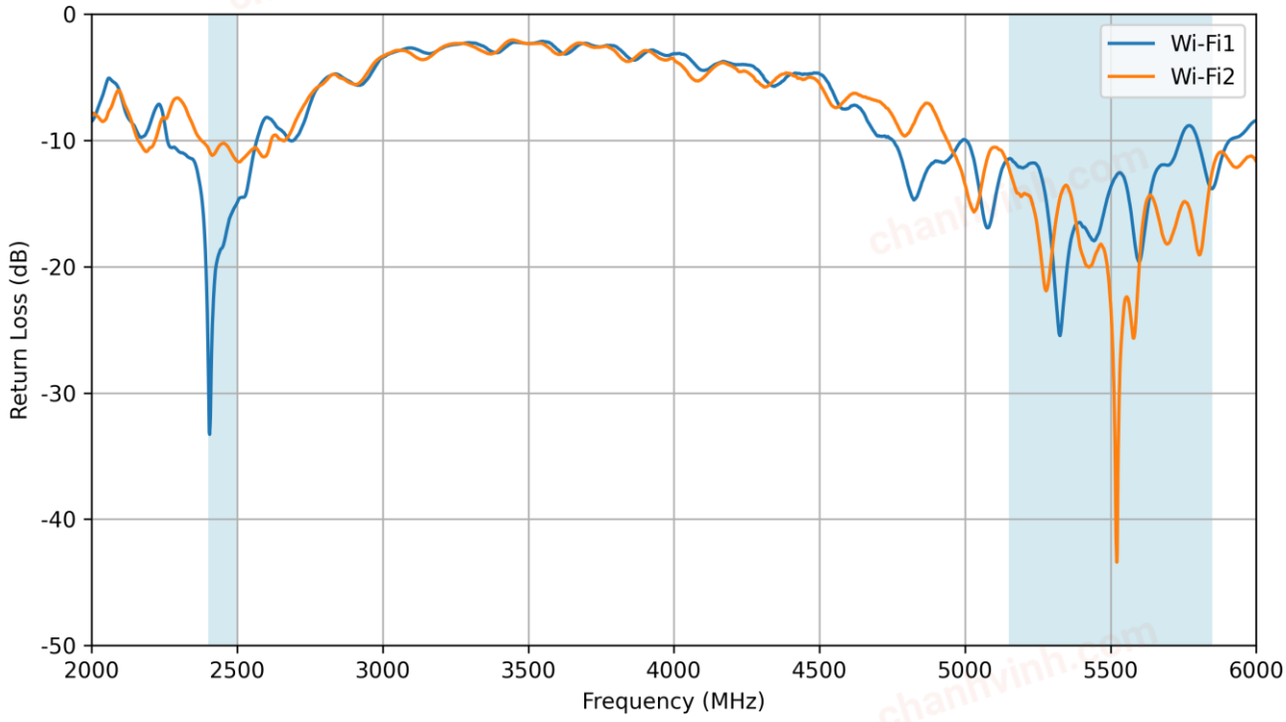


6.9 Wi-Fi - VSWR

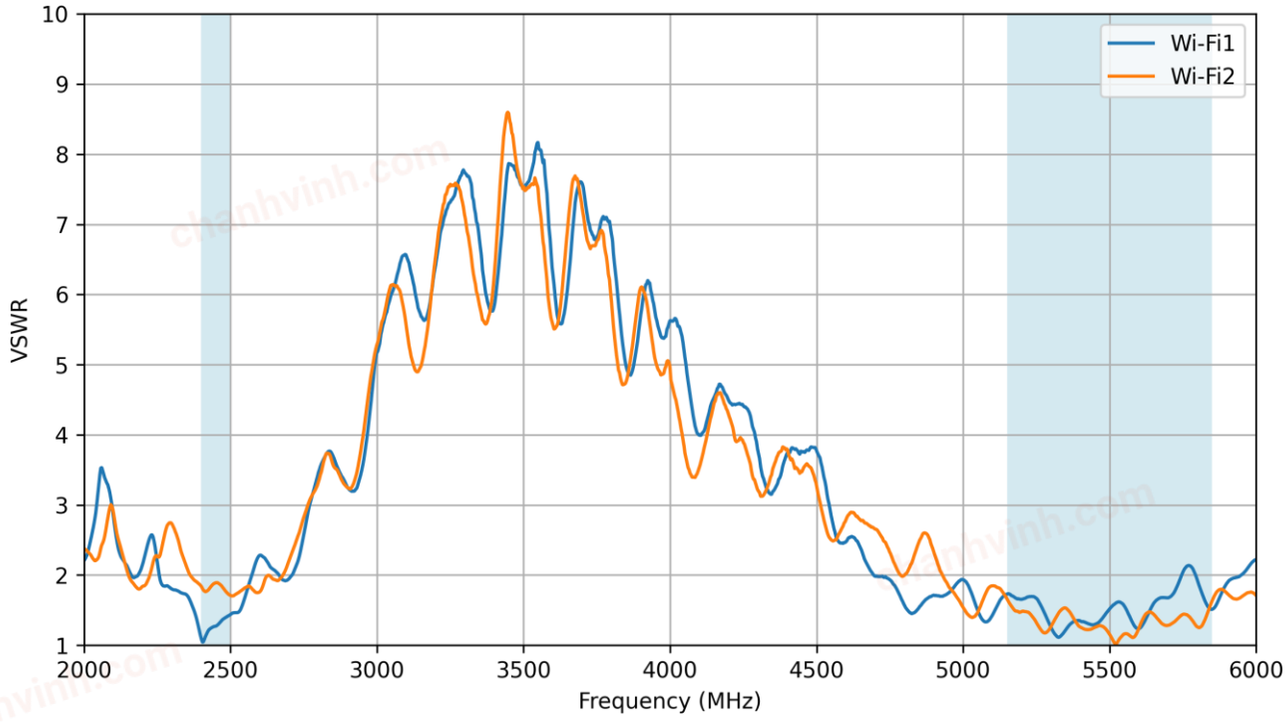

6.10 Wi-Fi - Isolation

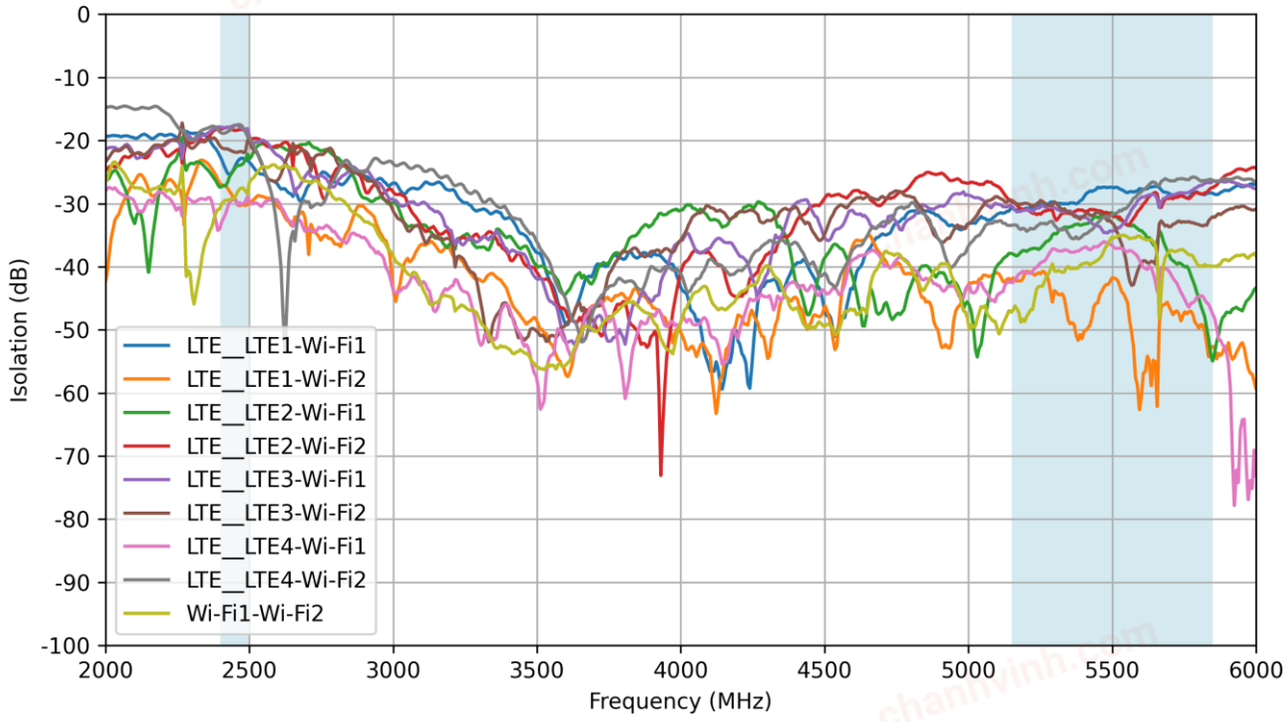


6.11 Wi-Fi - Efficiency

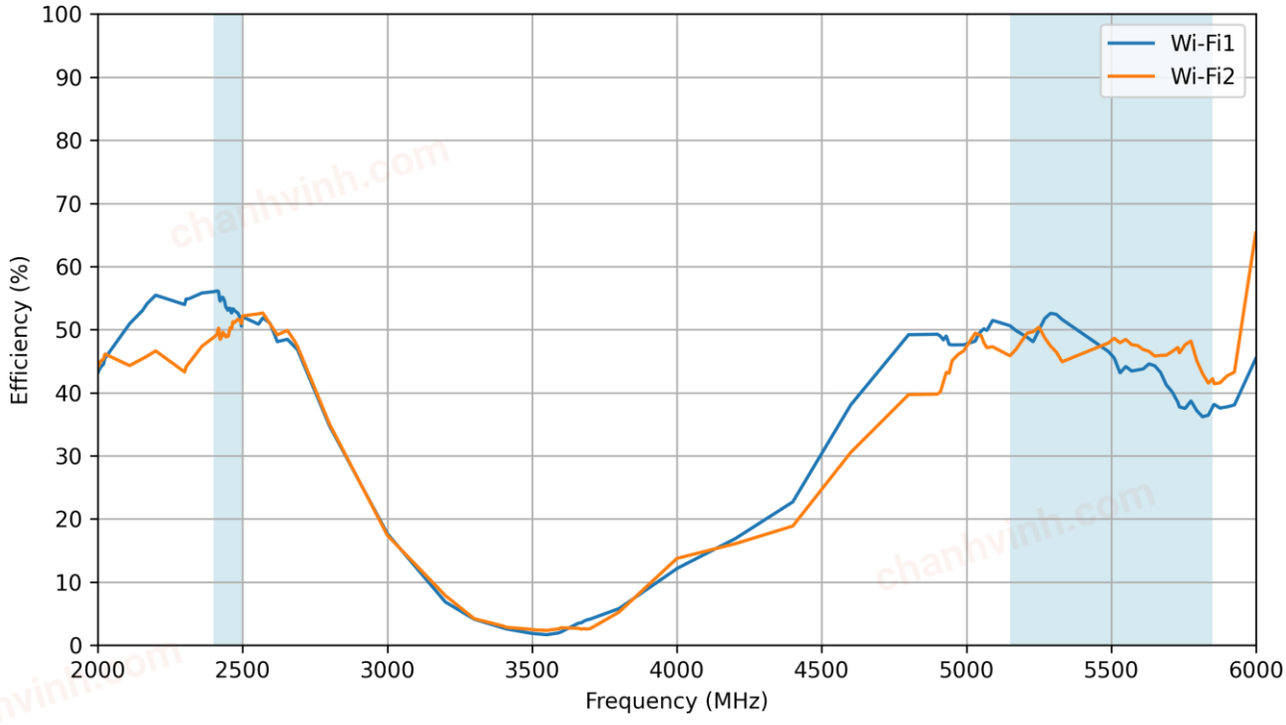


chanhvinh.com

6.12 Wi-Fi - Average Gain

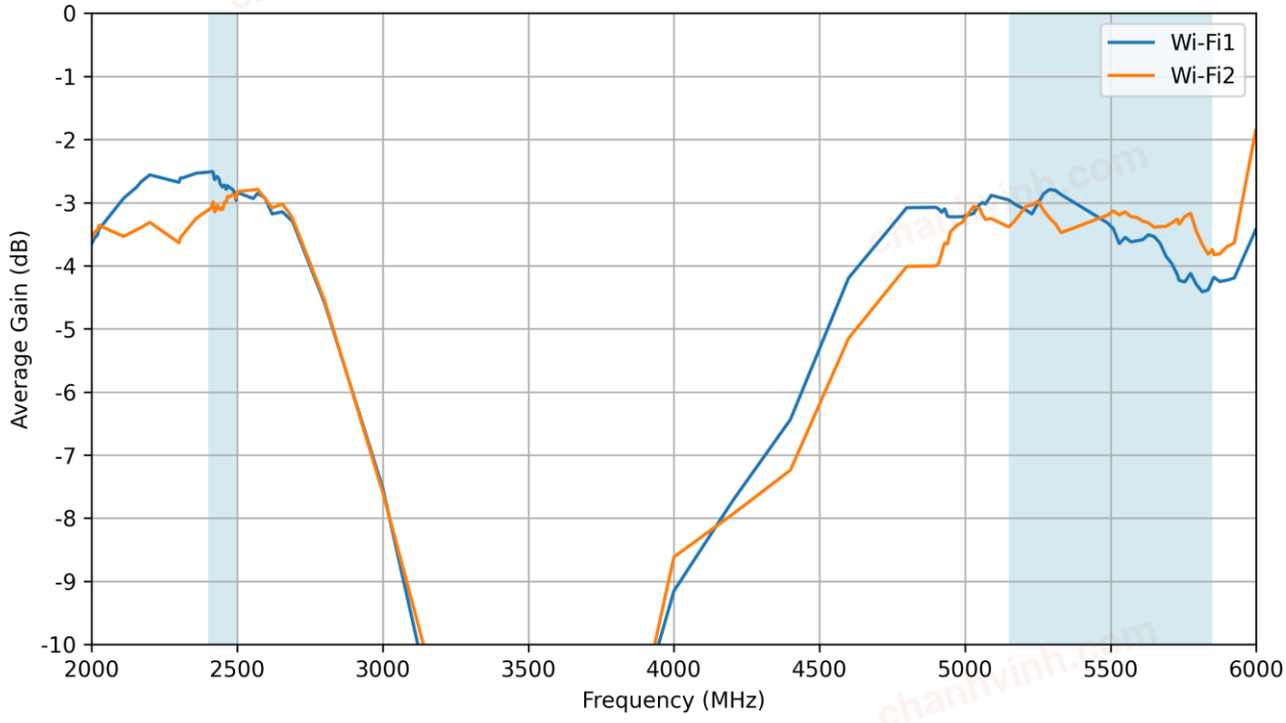


6.13 Wi-Fi - Peak Gain

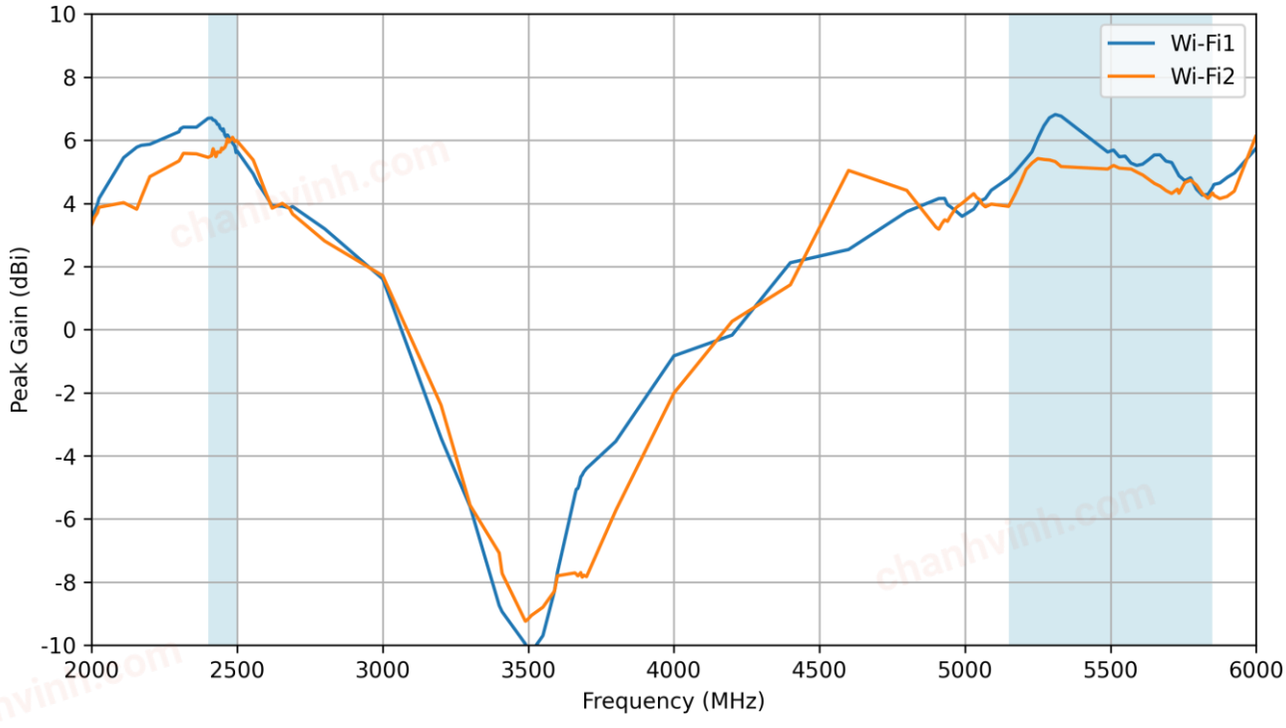


chanhvinh.com

7. LNA Characteristics

7.1 Block Diagram

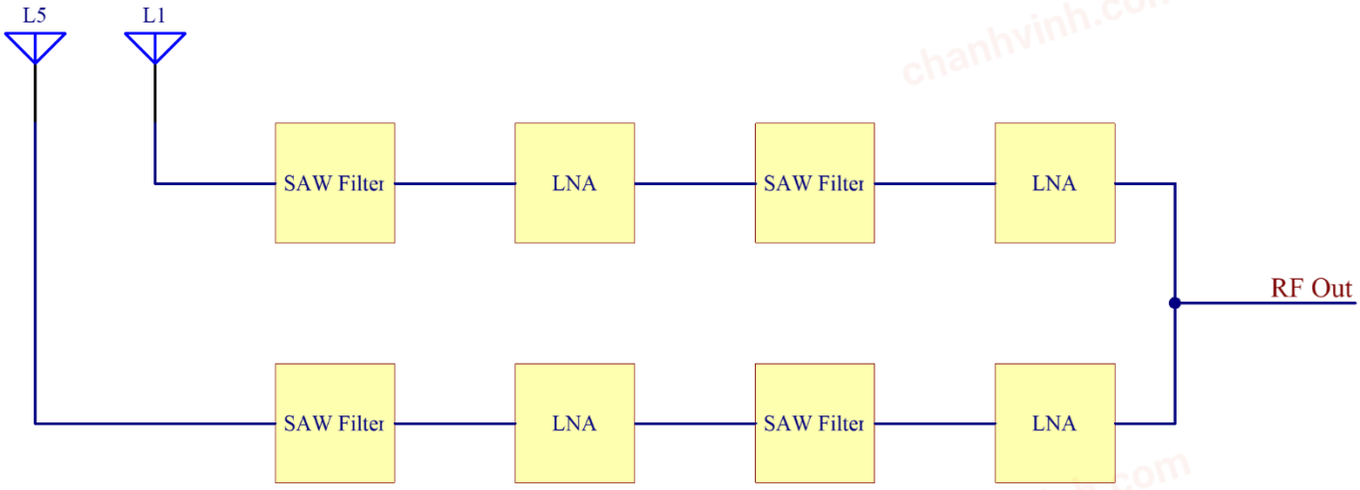


7.2 Gain – Low-Band

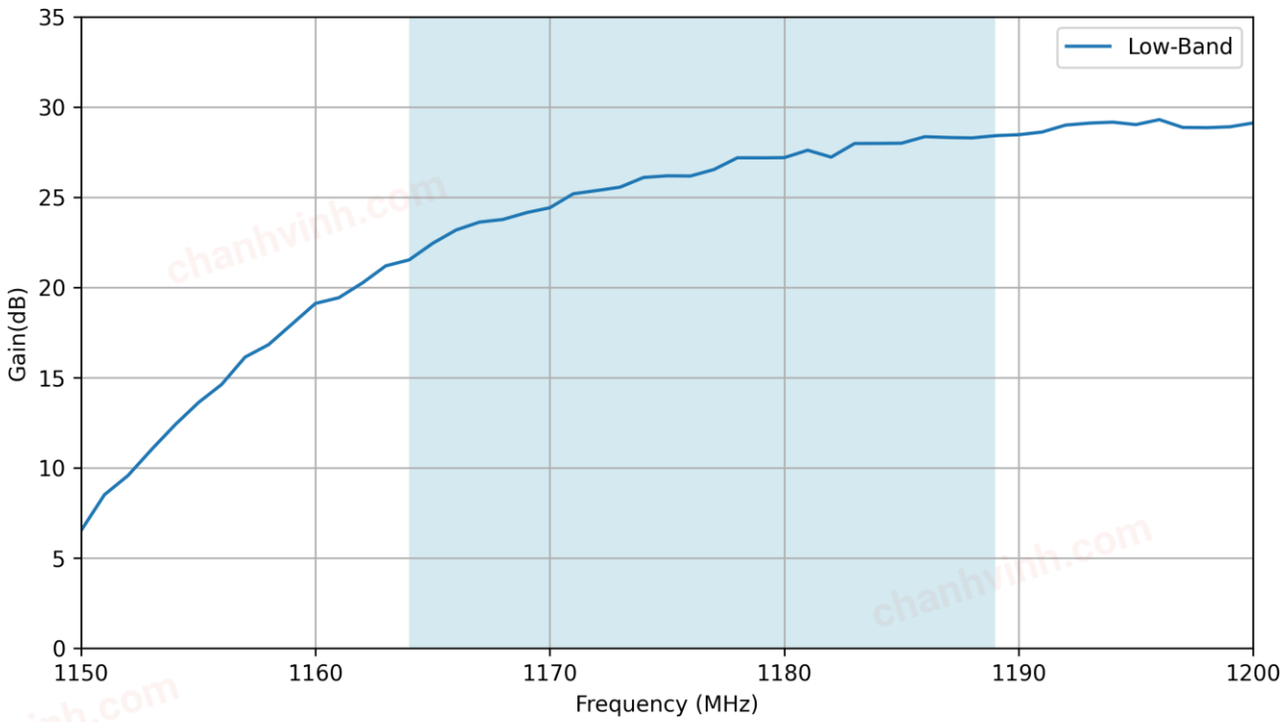


chanhvinh.com

7.3 Gain – High-Band

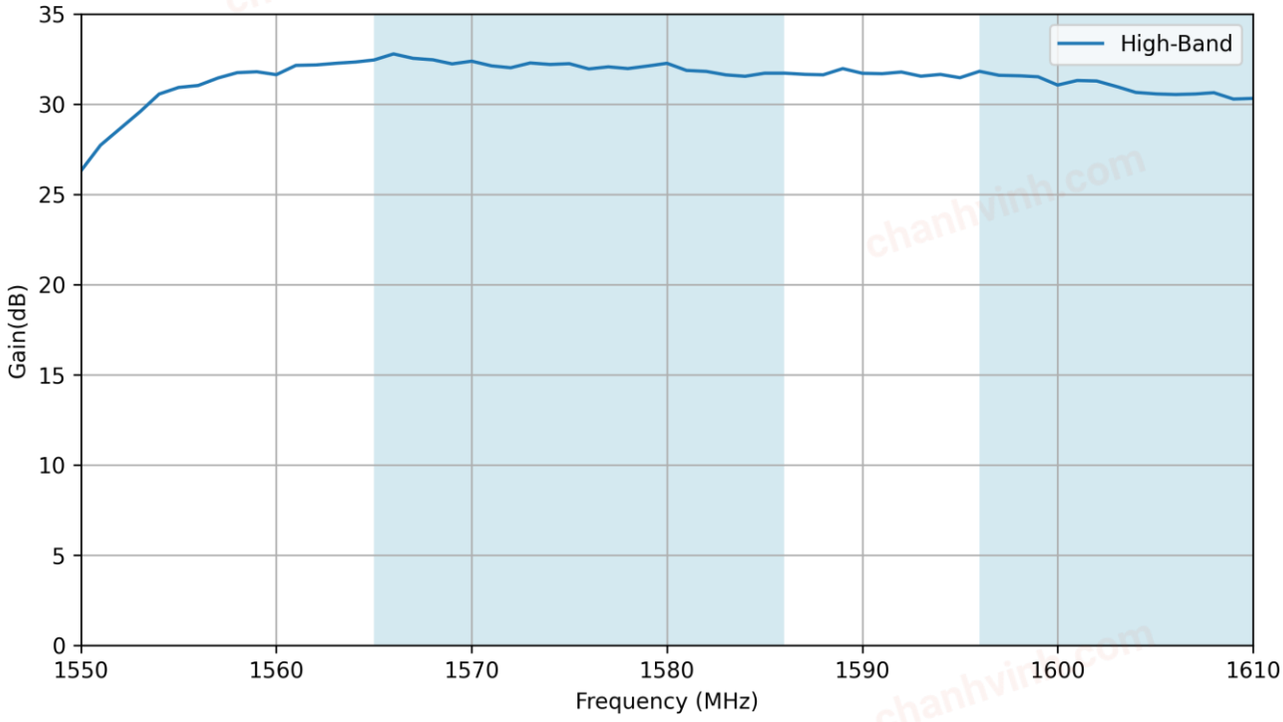



7.4 Out Of Band Attenuation

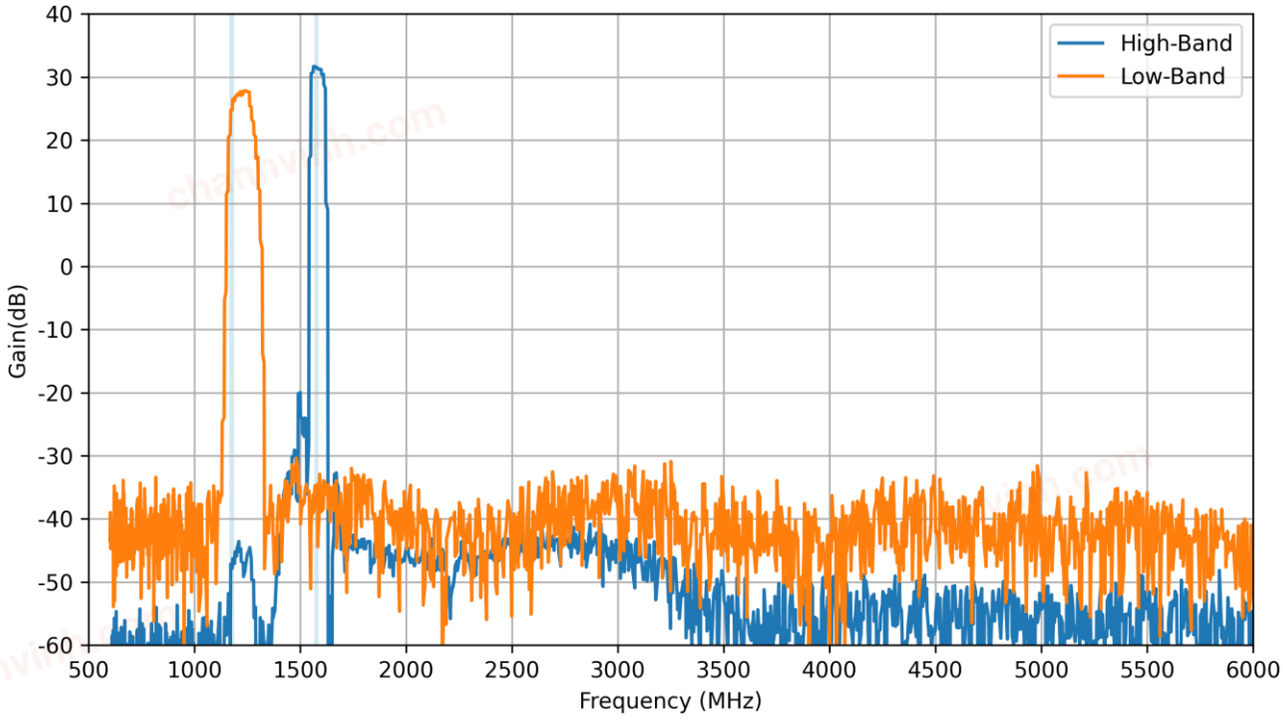

8. Radiation Patterns

8.1 Test Setup

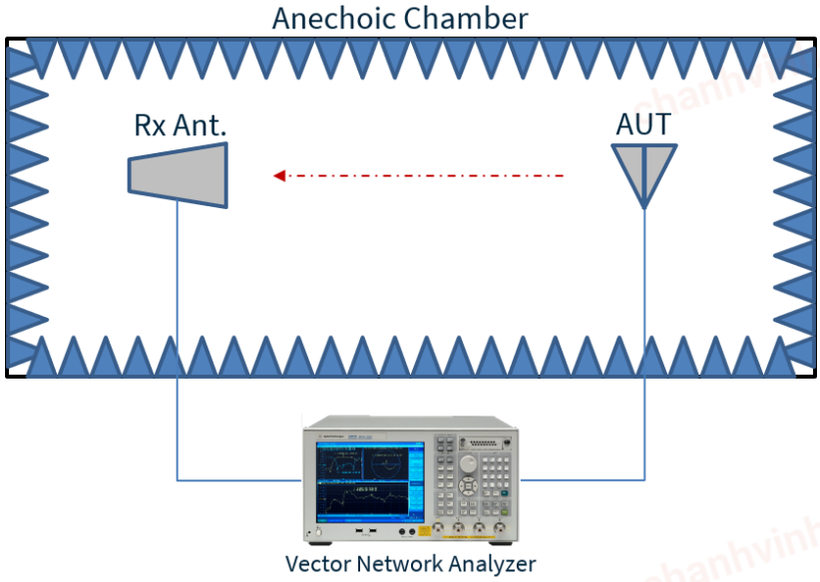




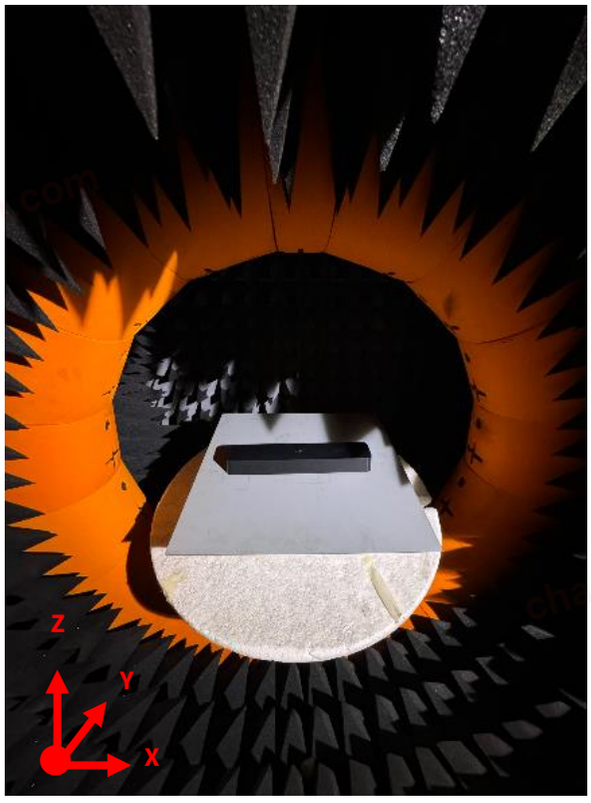


Chamber Test Set up

chanhvinh.com


8.2 GNSS - Patterns at 1176 MHz



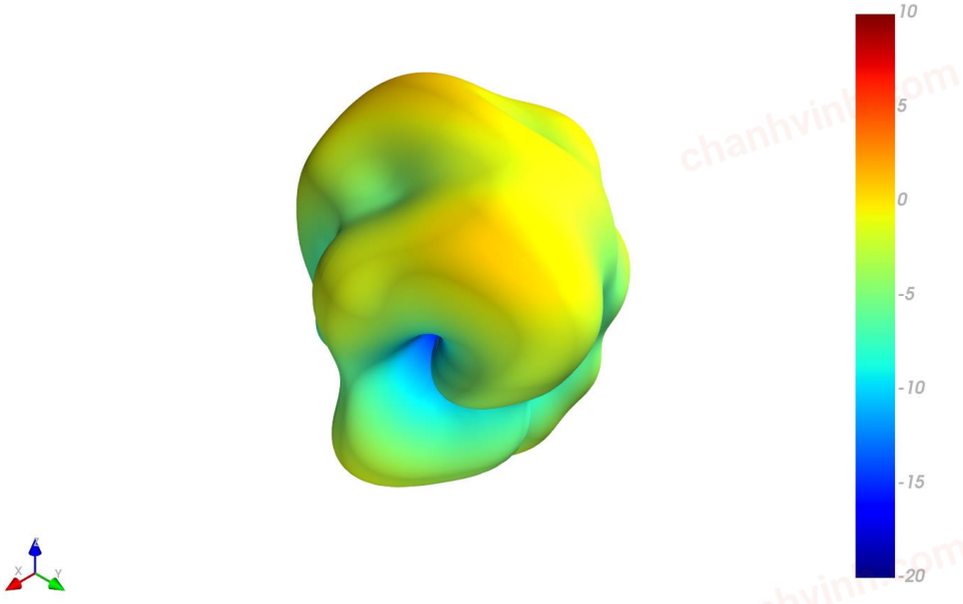


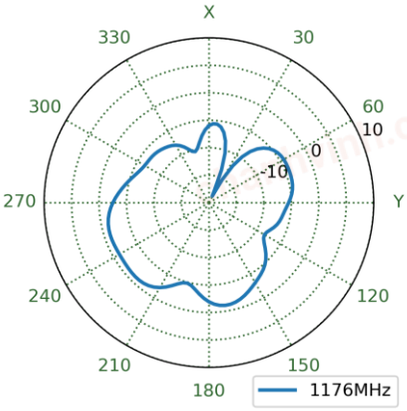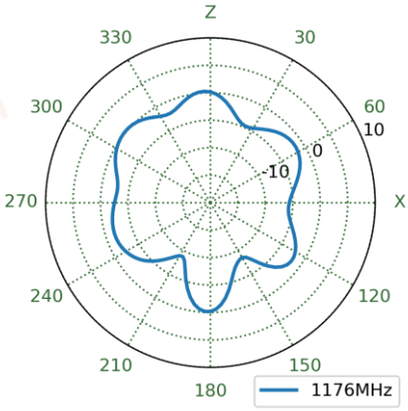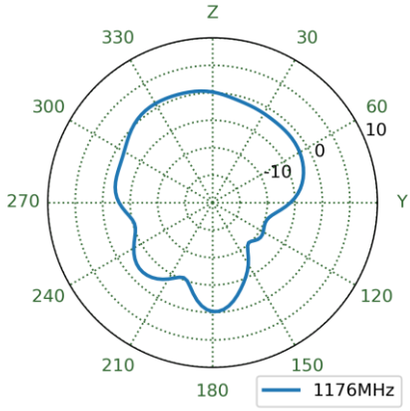XY Plane	XZ Plane	YZ Plane
		

chanhvinh.com


8.3 GNSS - Patterns at 1575 MHz



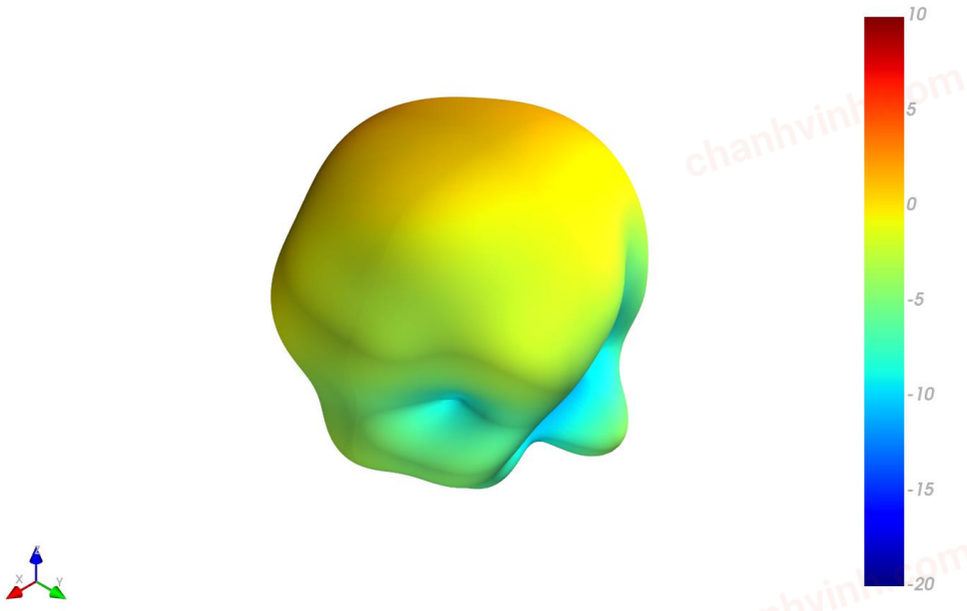


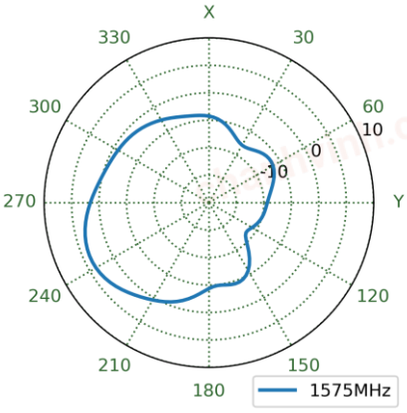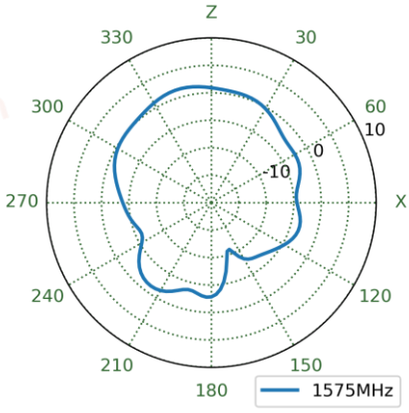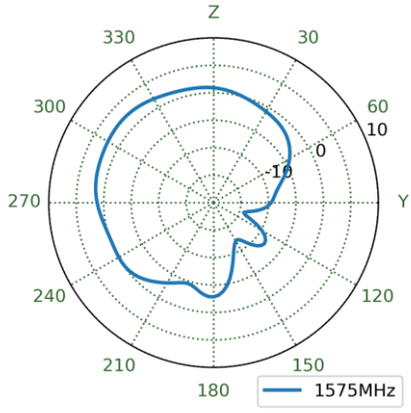XY Plane	XZ Plane	YZ Plane
		

chanhvinh.com


8.4 5G/4G-1 Patterns at 650 MHz

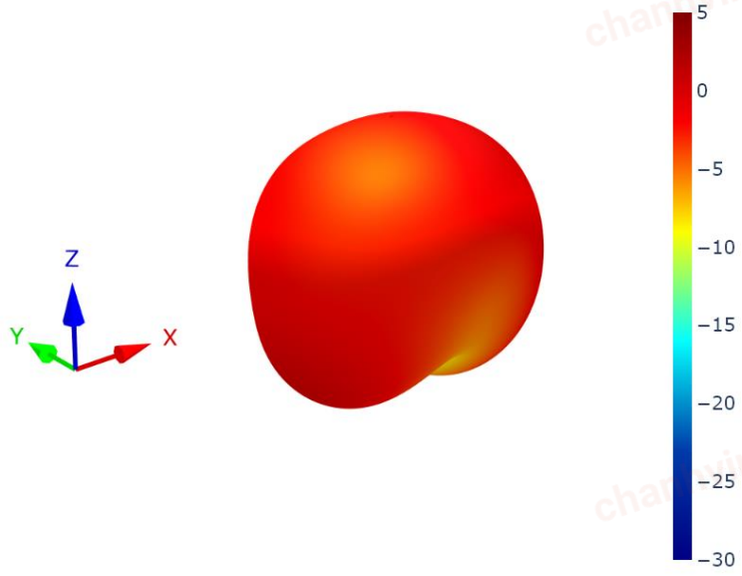

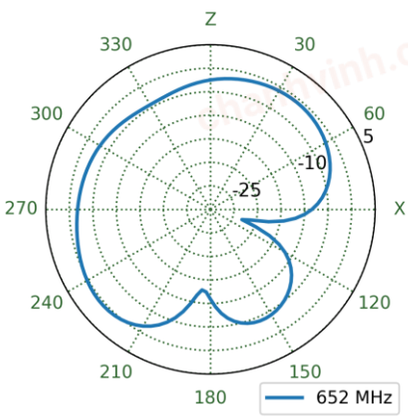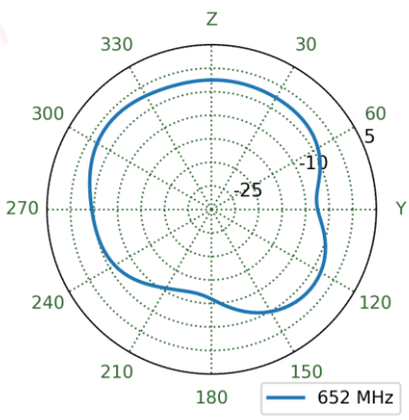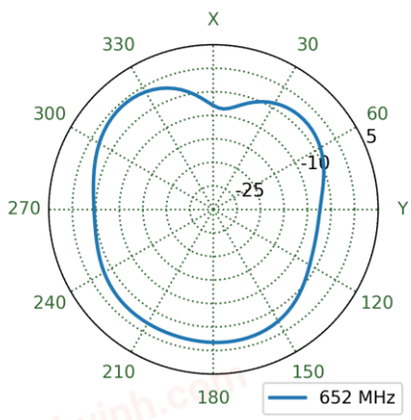
XZ Plane	YZ Plane	XY Plane
		


chanhvinh.com


8.5 5G/4G-2 Patterns at 650 MHz

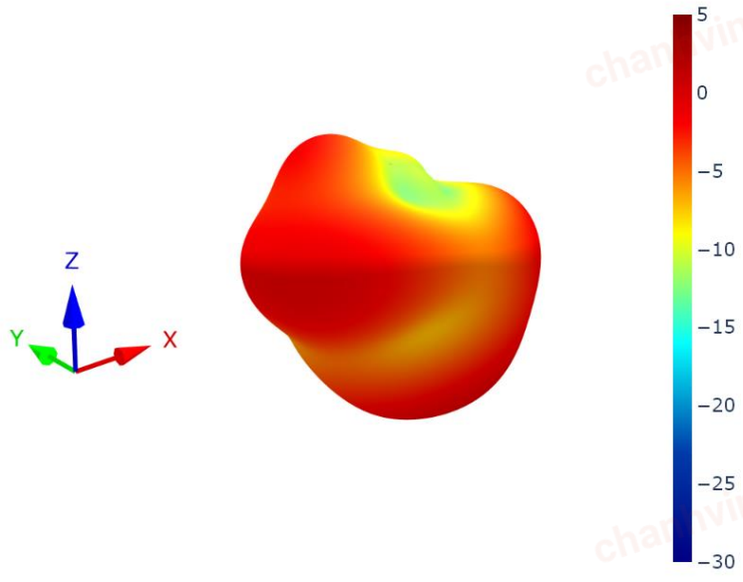


XZ Plane	YZ Plane	XY Plane

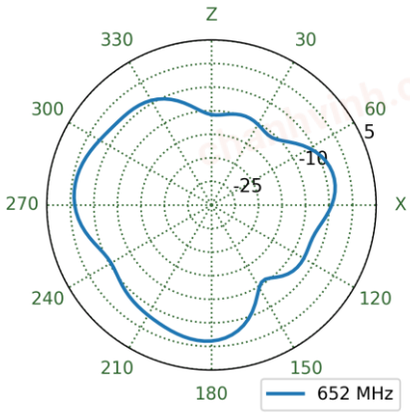

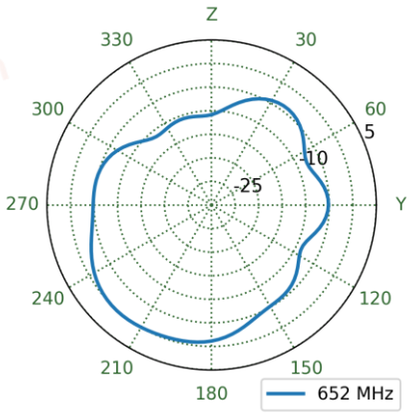


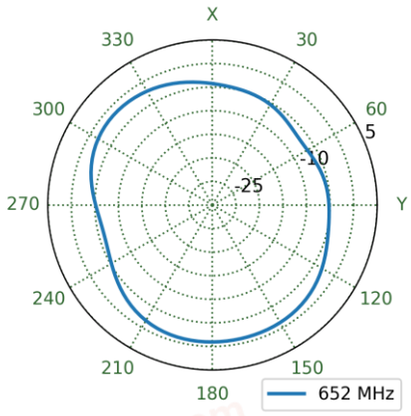



8.6 5G/4G-3 Patterns at 650 MHz

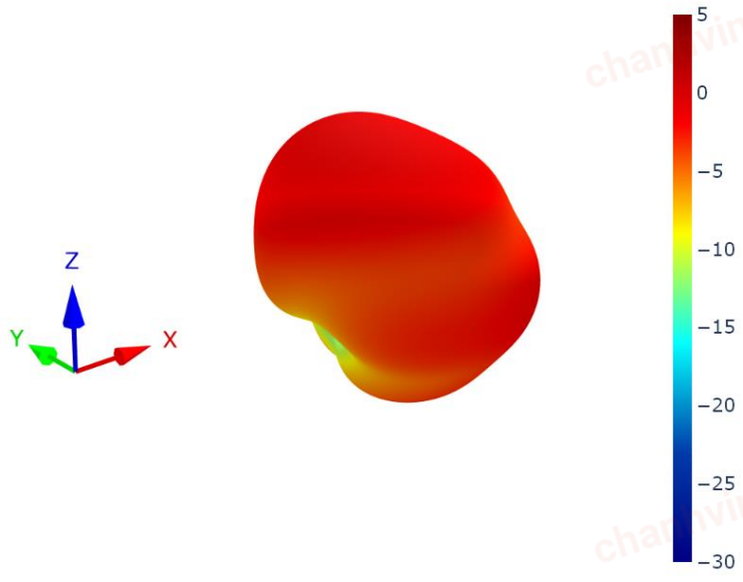

XZ Plane	YZ Plane	XY Plane

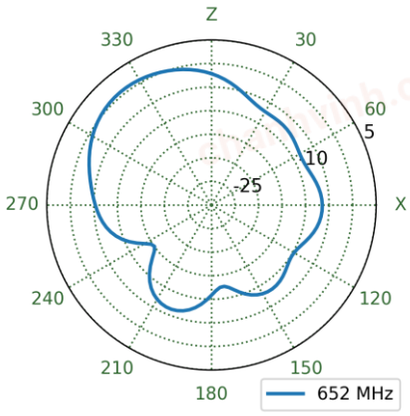


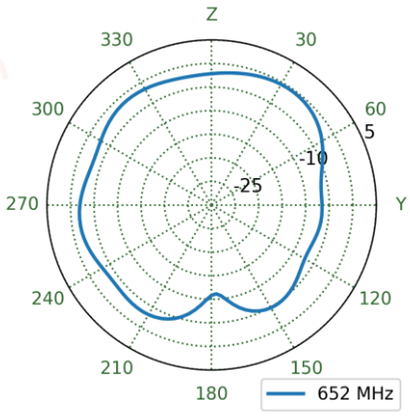

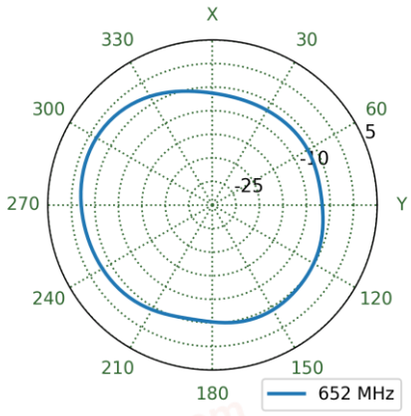



chanhvinh.com


8.7 5G/4G-4 Patterns at 650 MHz

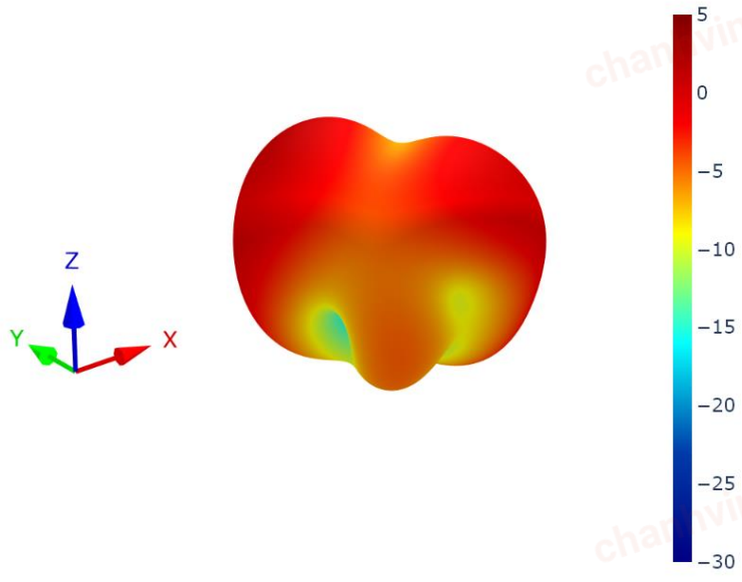

XZ Plane	YZ Plane	XY Plane

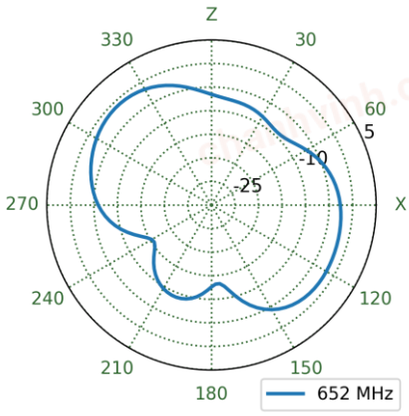


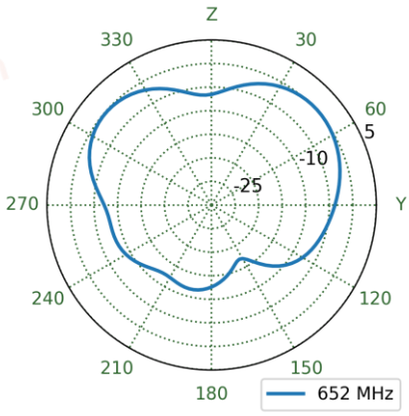

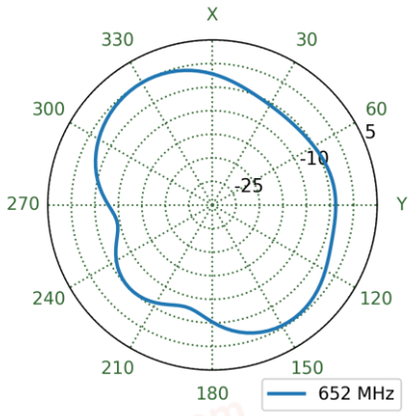



chanhvinh.com


8.8 5G/4G-1 Patterns at 750 MHz

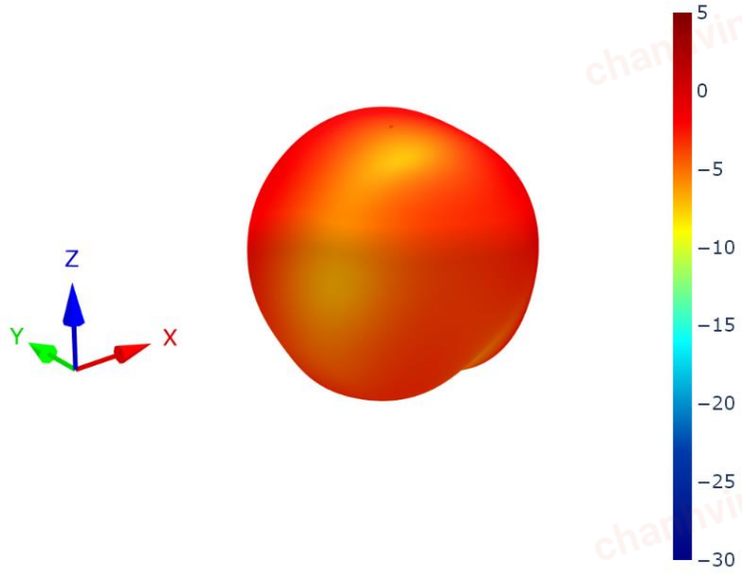

XZ Plane	YZ Plane	XY Plane

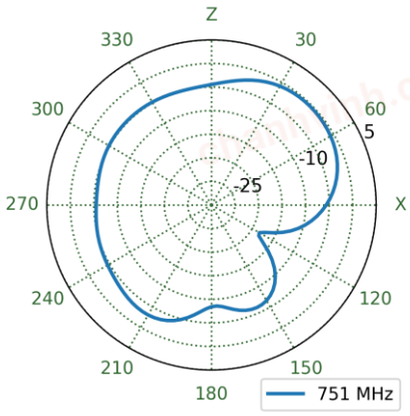


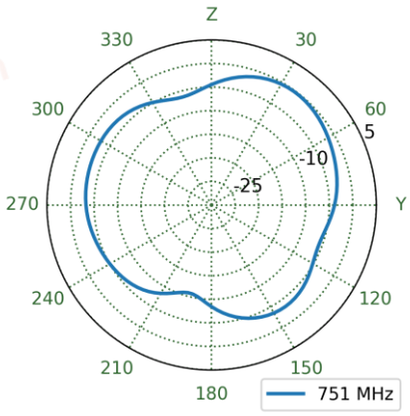

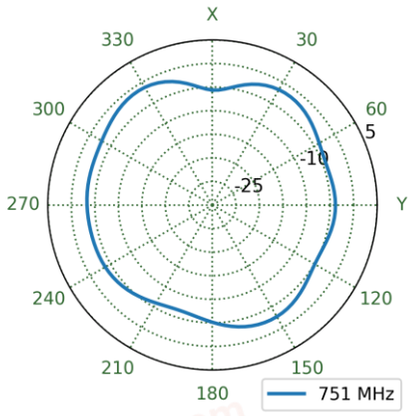



chanhvinh.com


8.9 5G/4G-2 Patterns at 750 MHz

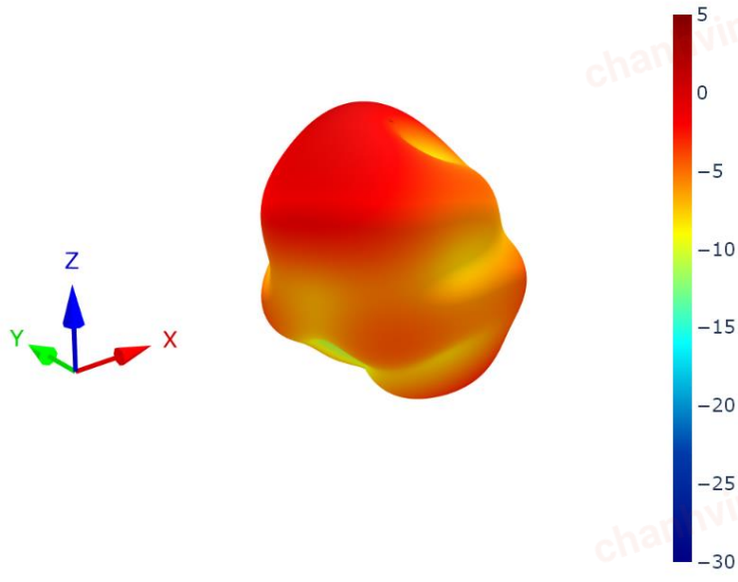

XZ Plane	YZ Plane	XY Plane

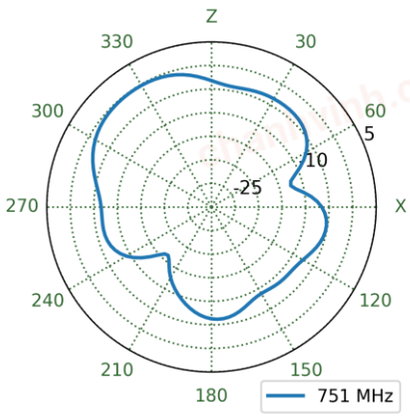


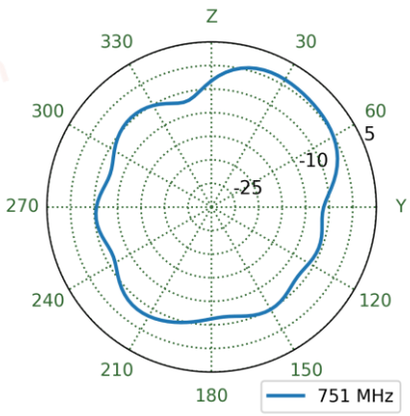

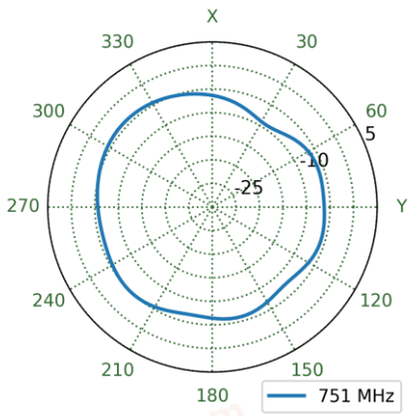



chanhvinh.com


8.10 5G/4G-3 Patterns at 750 MHz

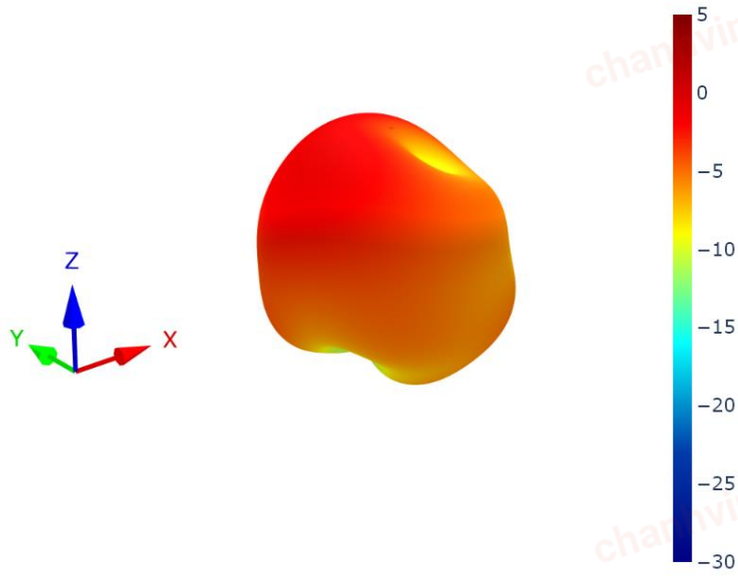

XZ Plane	YZ Plane	XY Plane

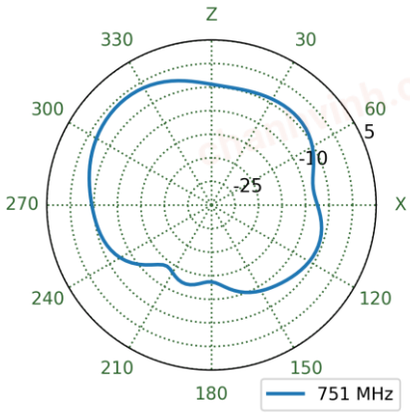


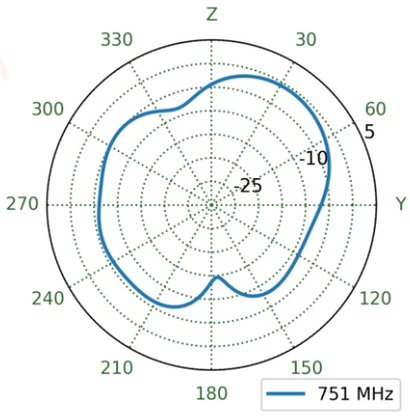

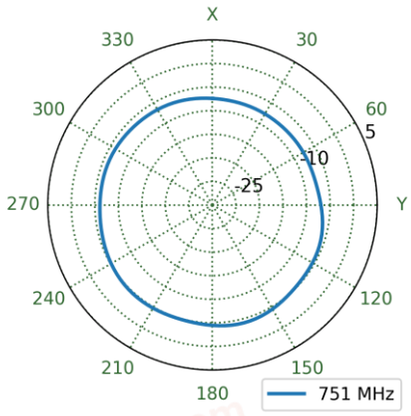



chanhvinh.com


8.11 5G/4G-4 Patterns at 750 MHz

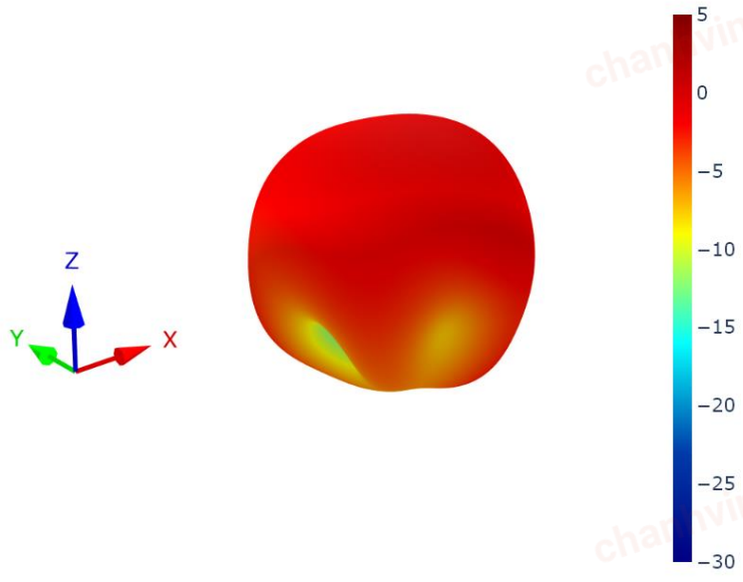

XZ Plane	YZ Plane	XY Plane

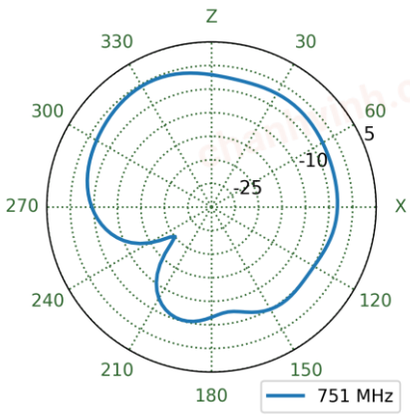


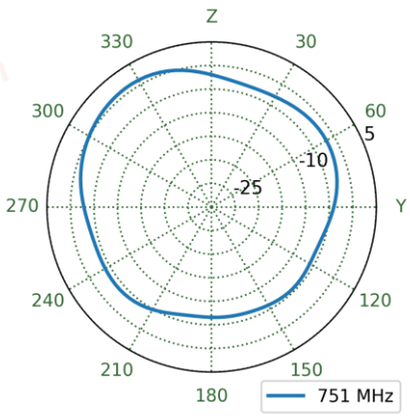

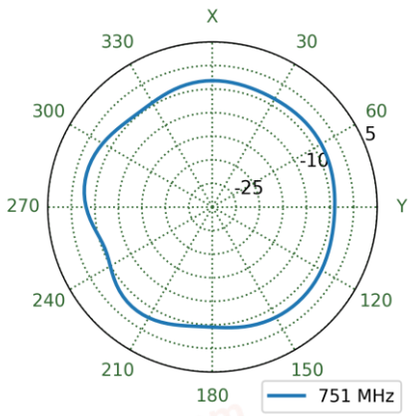



chanhvinh.com


8.12 5G/4G-1 Patterns at 890 MHz

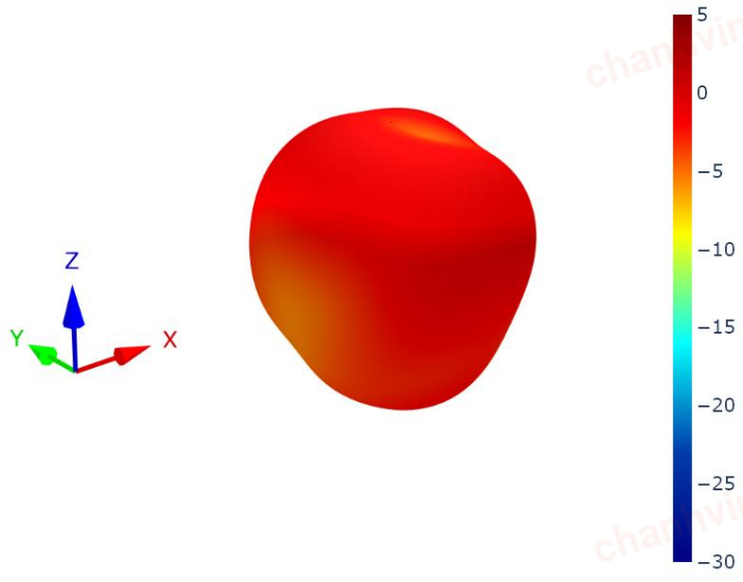

XZ Plane	YZ Plane	XY Plane

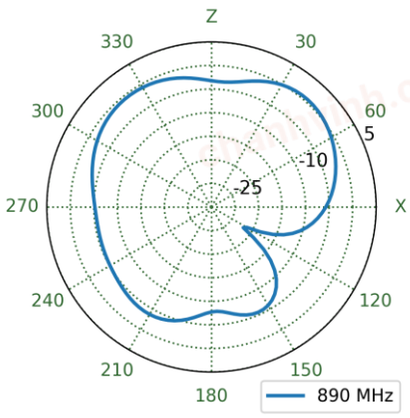


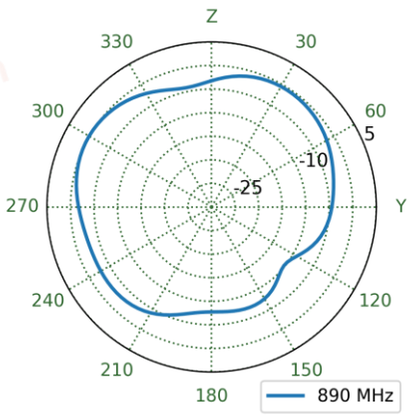

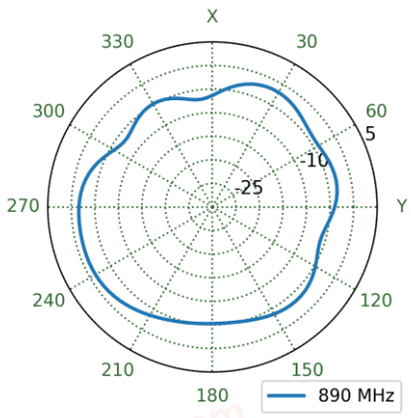



chanhvinh.com


8.13 5G/4G-2 Patterns at 890 MHz

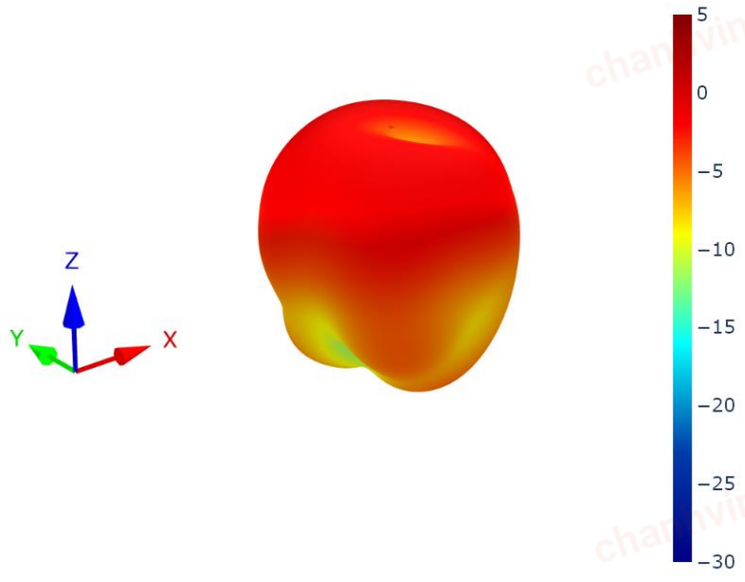

XZ Plane	YZ Plane	XY Plane

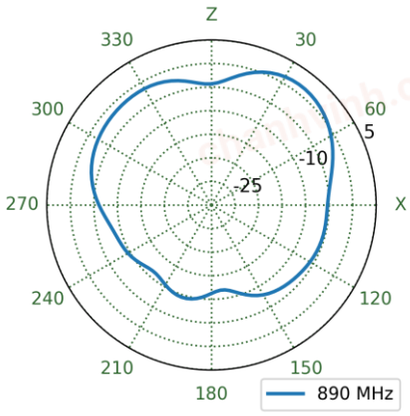


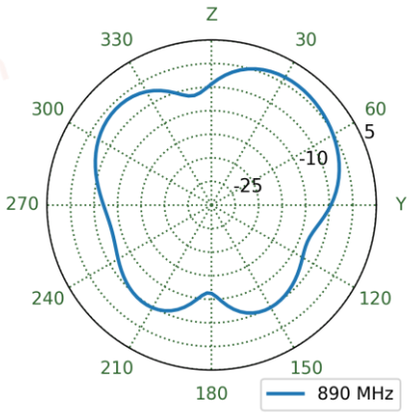

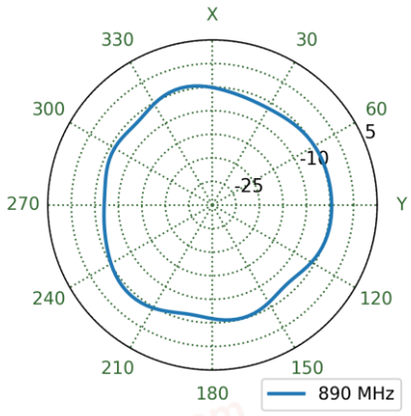



chanhvinh.com


8.14 5G/4G-3 Patterns at 890 MHz

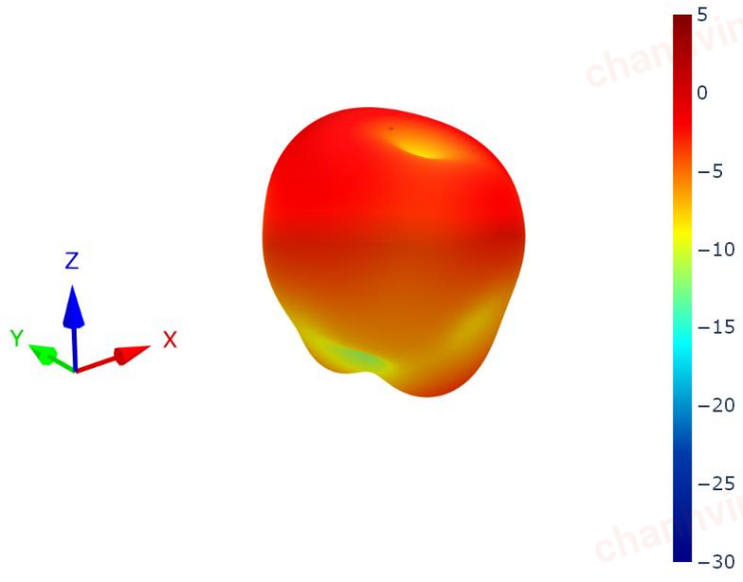

XZ Plane	YZ Plane	XY Plane

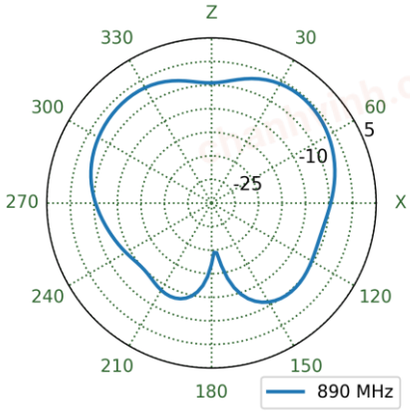


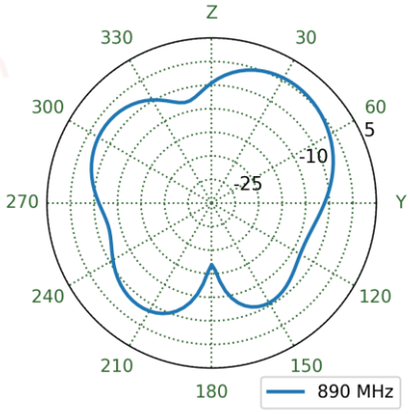

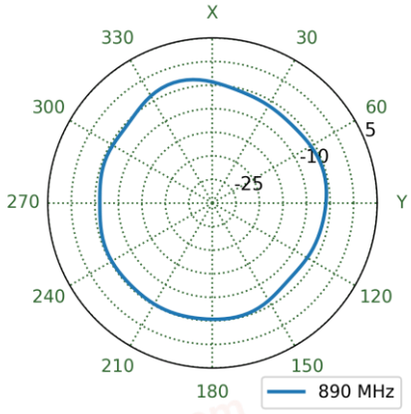



chanhvinh.com


8.15 5G/4G-4 Patterns at 890 MHz

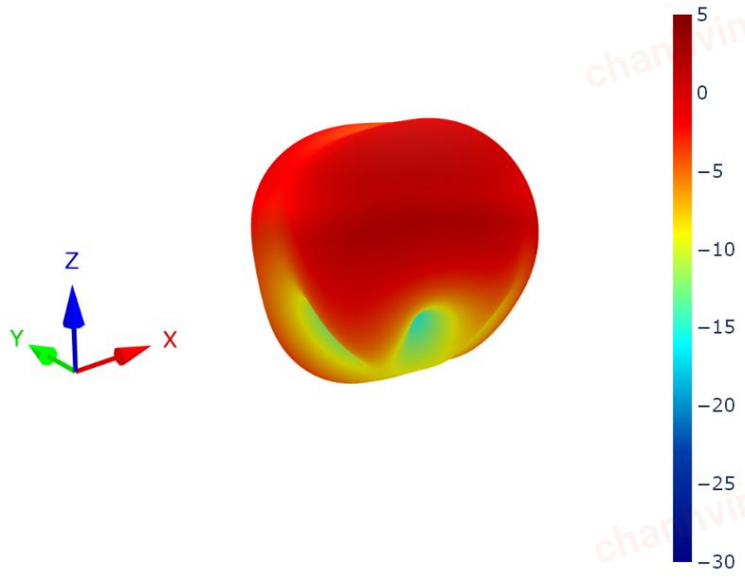


XZ Plane	YZ Plane	XY Plane

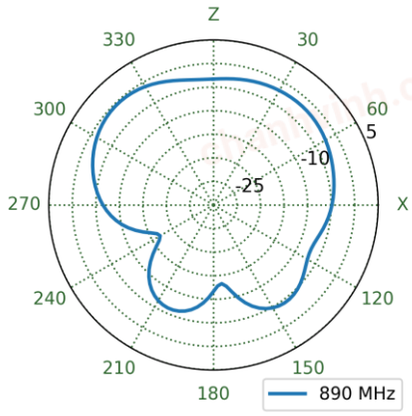

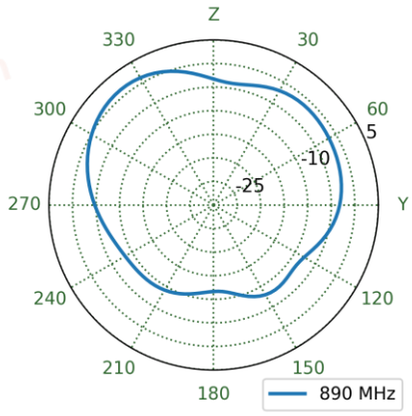


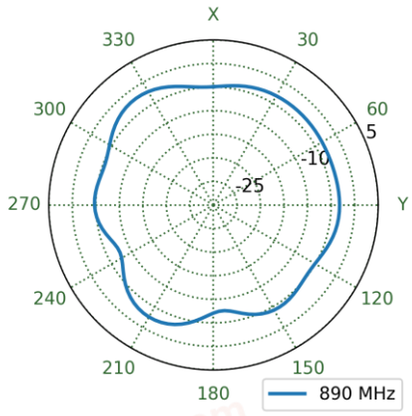



8.16 5G/4G-1 Patterns at 1470 MHz

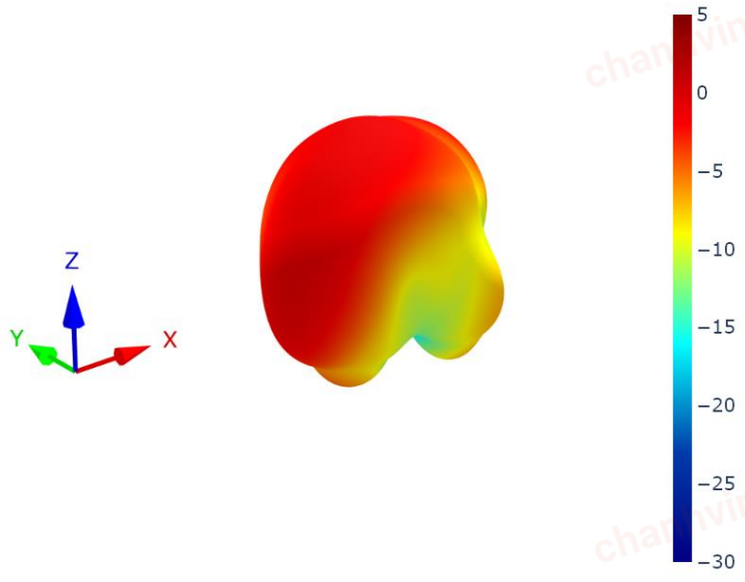

XZ Plane	YZ Plane	XY Plane

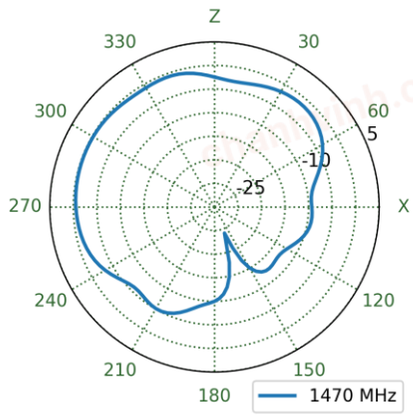


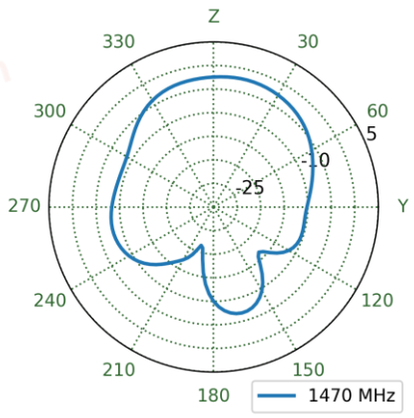

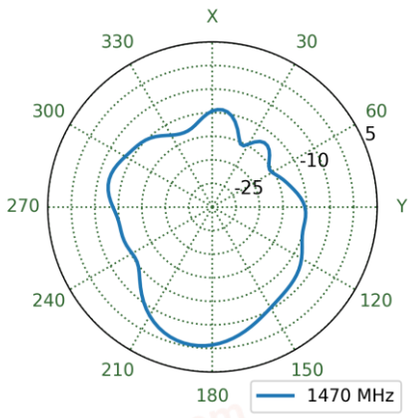



chanhvinh.com


8.17 5G/4G-2 Patterns at 1470 MHz

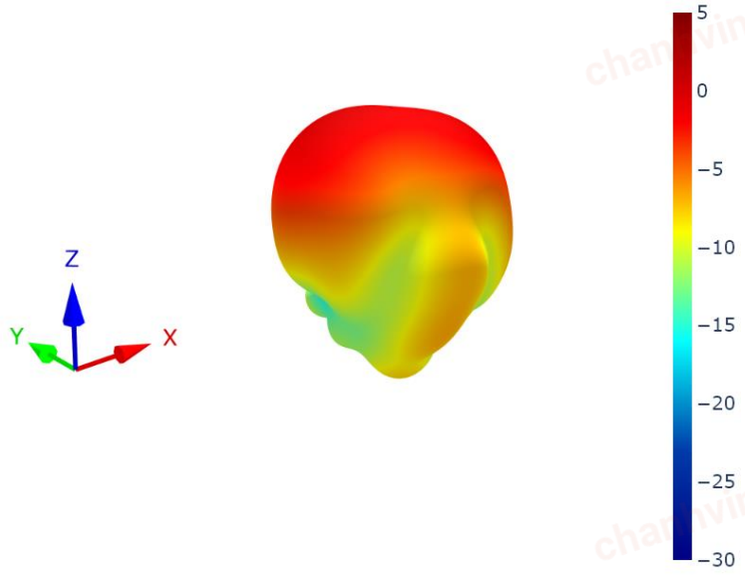

XZ Plane	YZ Plane	XY Plane

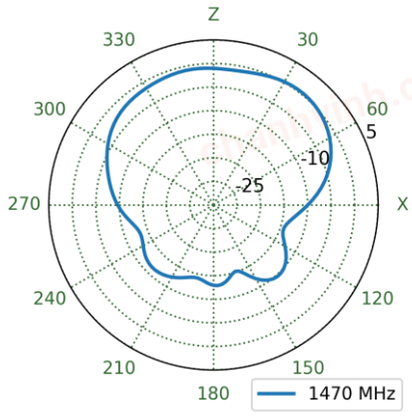


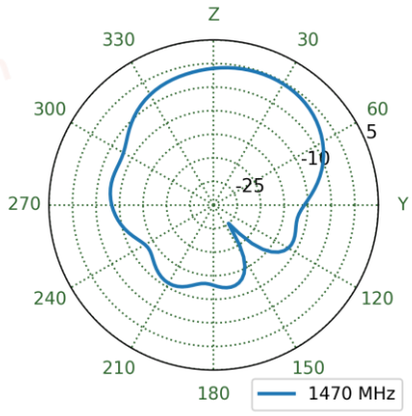

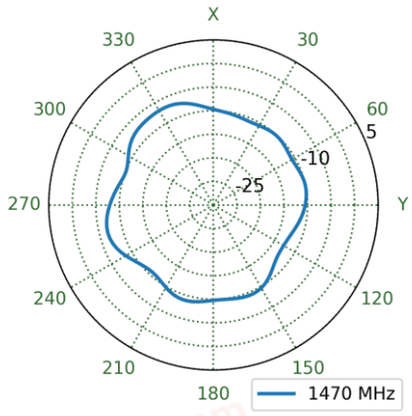



chanhvinh.com


8.18 5G/4G-3 Patterns at 1470 MHz

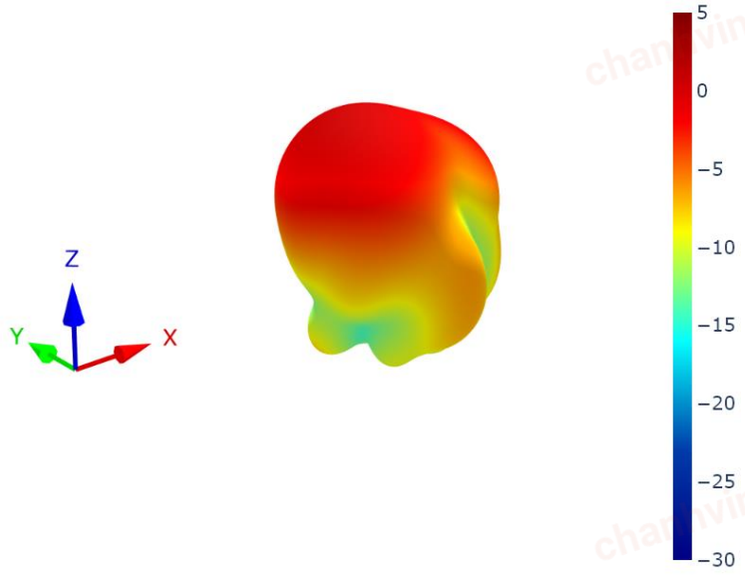


XZ Plane	YZ Plane	XY Plane

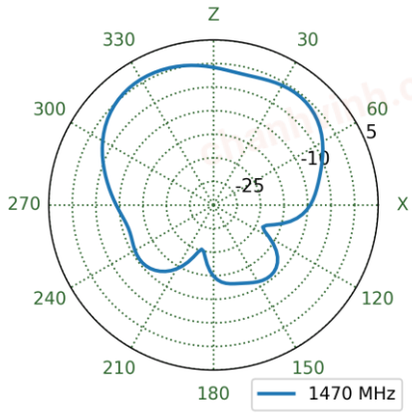

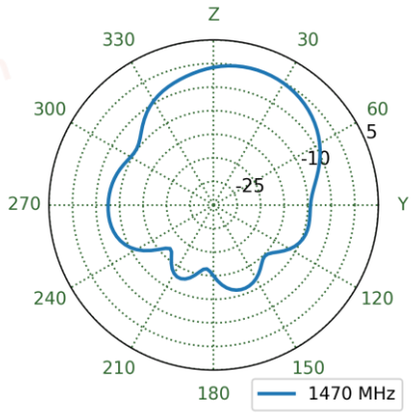


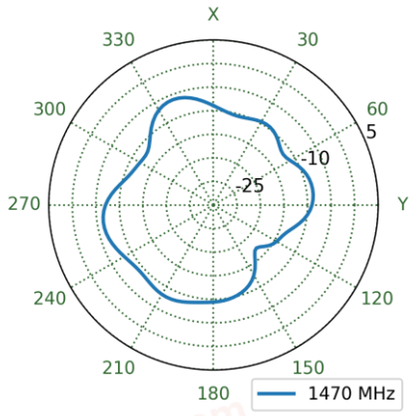



8.19 5G/4G-4 Patterns at 1470 MHz

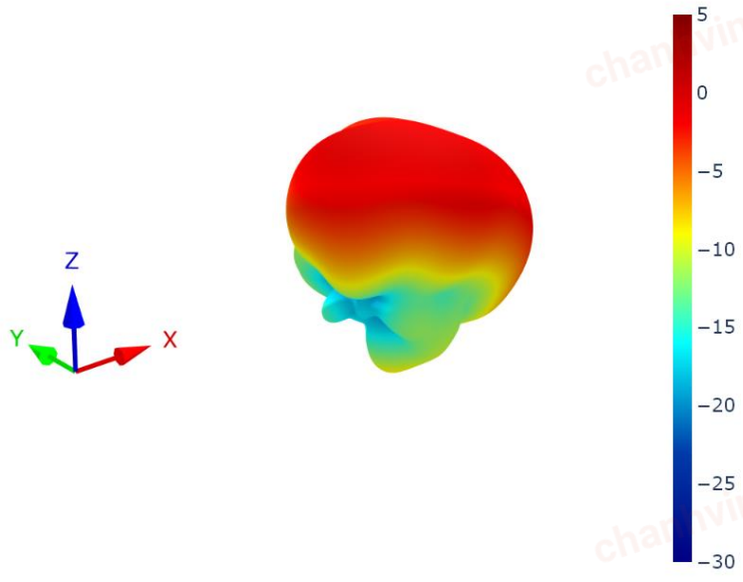

XZ Plane	YZ Plane	XY Plane

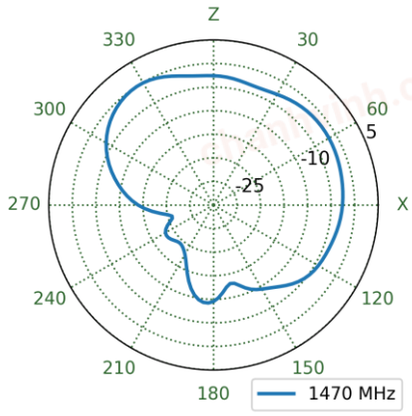


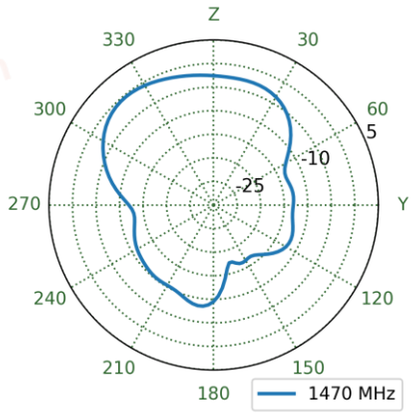

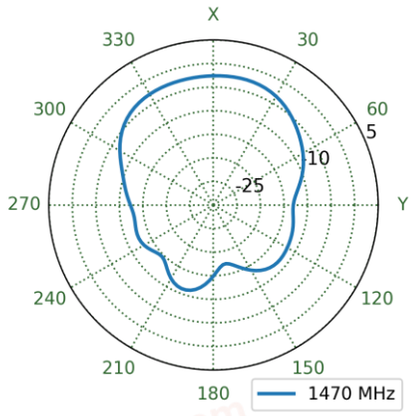



chanhvinh.com


8.20 5G/4G-1 Patterns at 1805 MHz

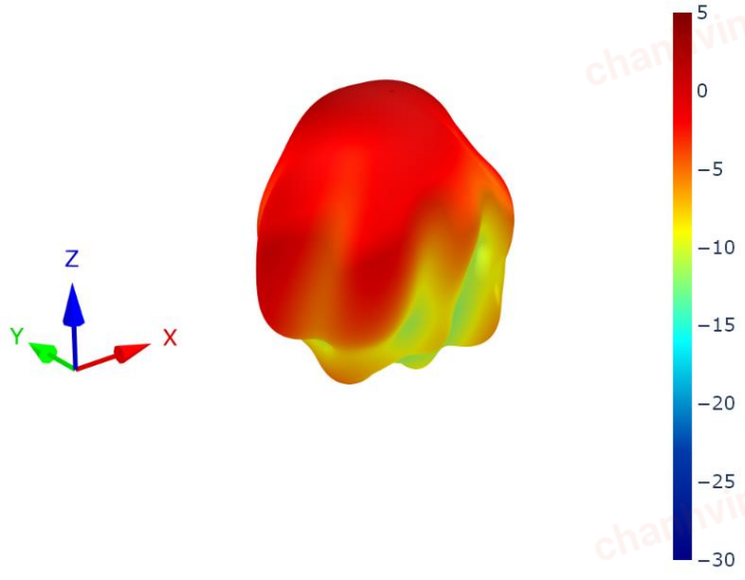

XZ Plane	YZ Plane	XY Plane

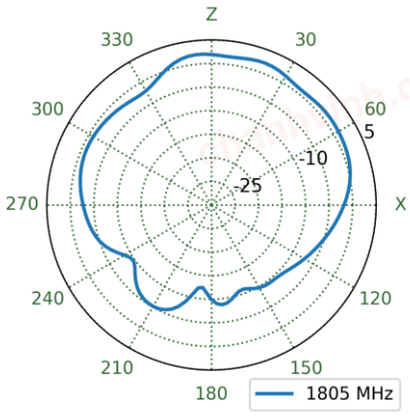


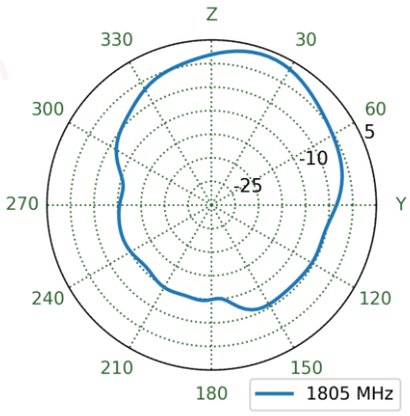

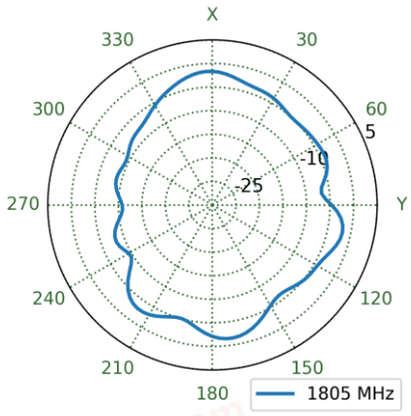



chanhvinh.com


8.21 5G/4G-2 Patterns at 1805 MHz

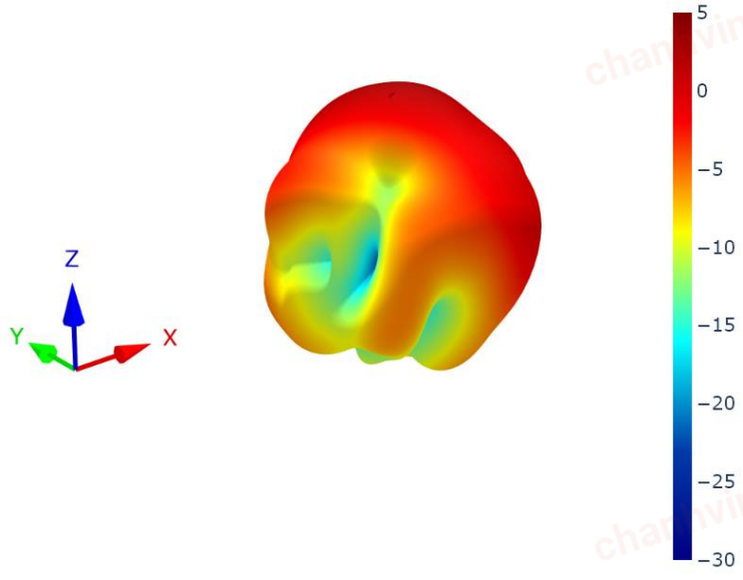


XZ Plane	YZ Plane	XY Plane

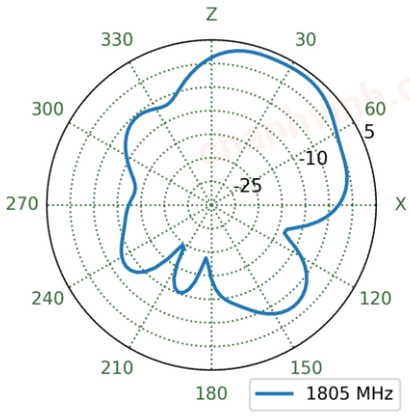

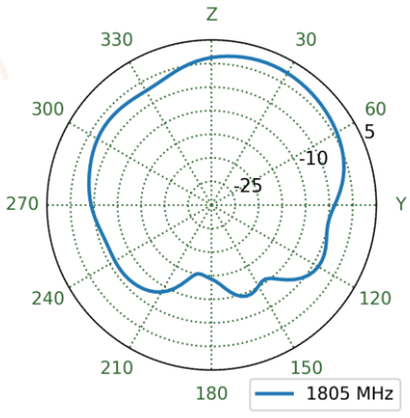


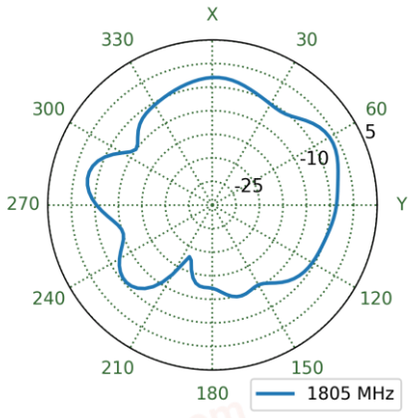



8.22 5G/4G-3 Patterns at 1805 MHz

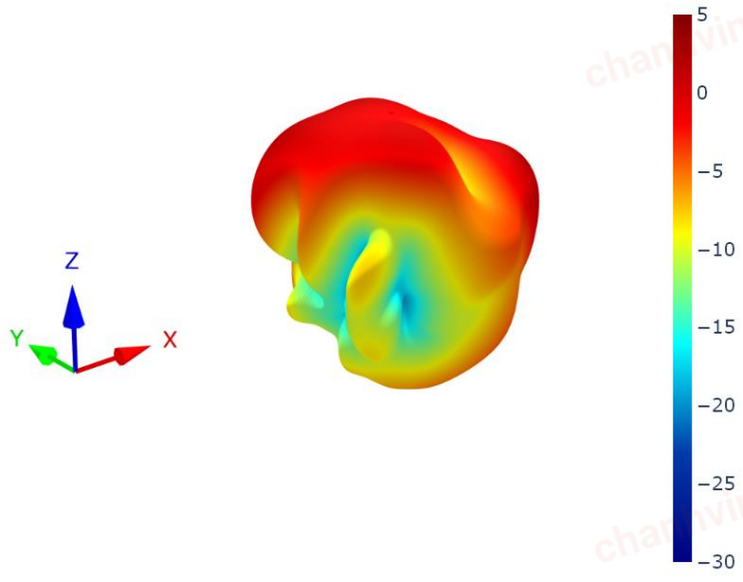

XZ Plane	YZ Plane	XY Plane

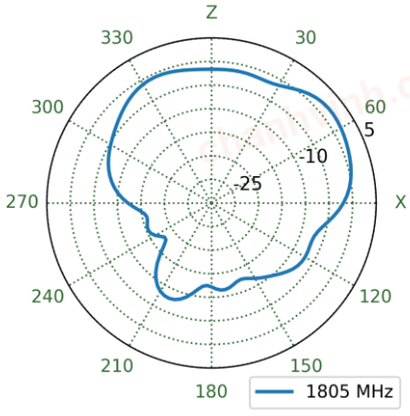


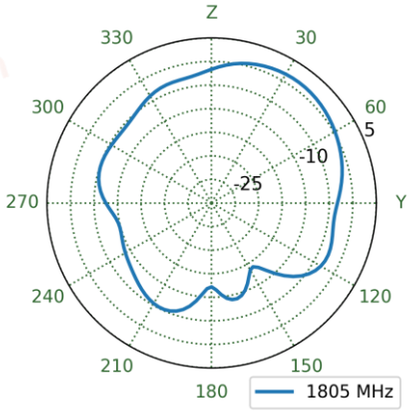

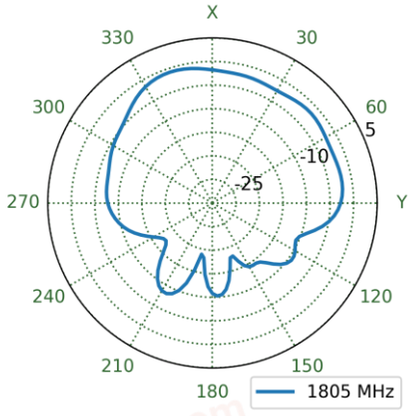



chanhvinh.com


8.23 5G/4G-4 Patterns at 1805 MHz

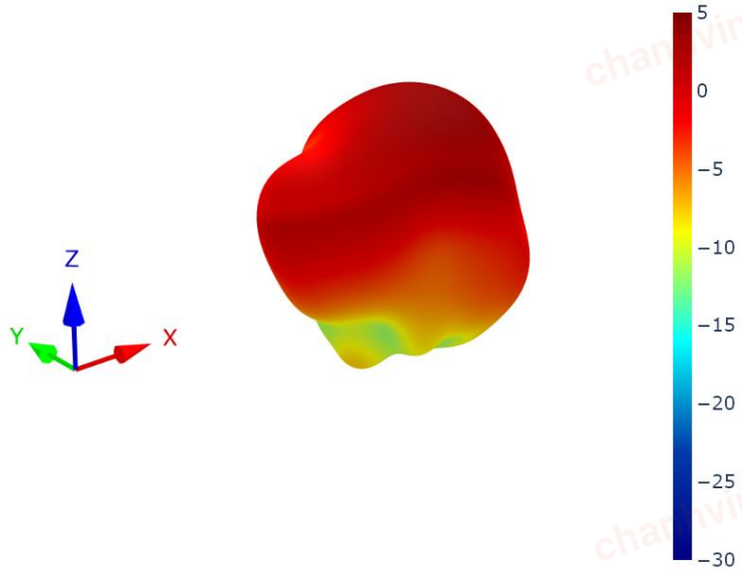

XZ Plane	YZ Plane	XY Plane

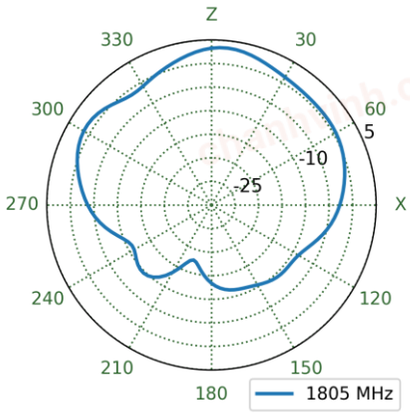


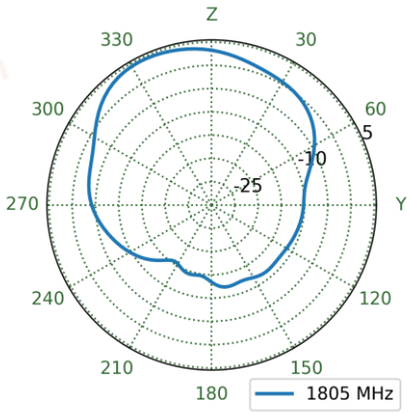

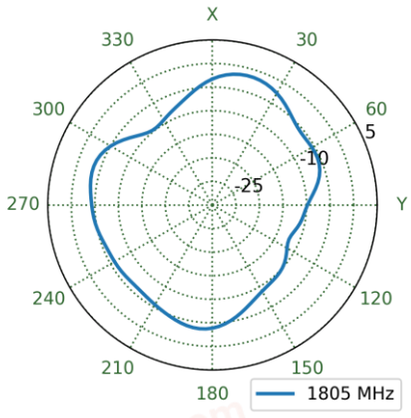



chanhvinh.com


8.24 5G/4G-1 Patterns at 1920 MHz

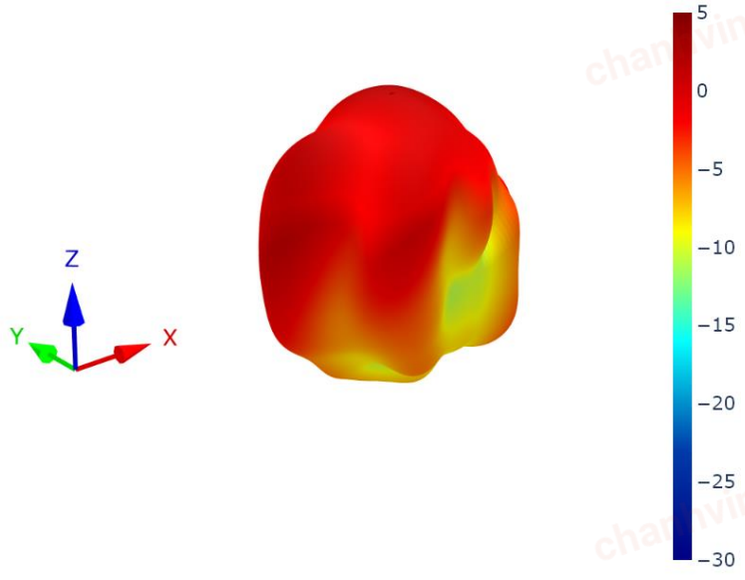

XZ Plane	YZ Plane	XY Plane

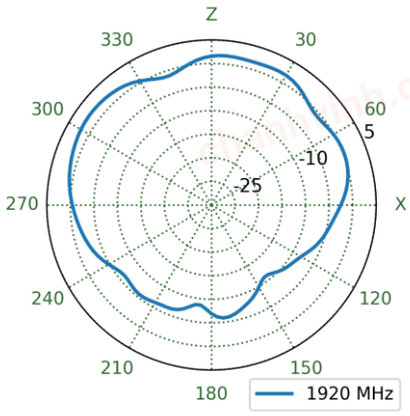


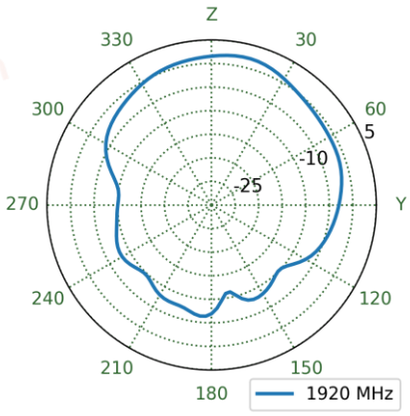

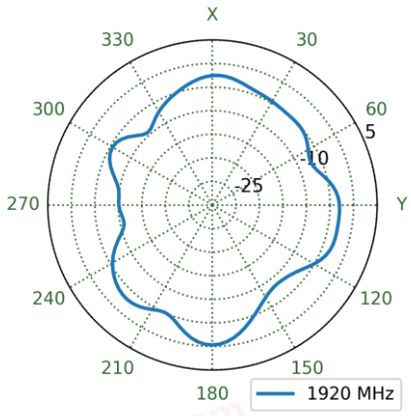



chanhvinh.com


8.25 5G/4G-2 Patterns at 1920 MHz

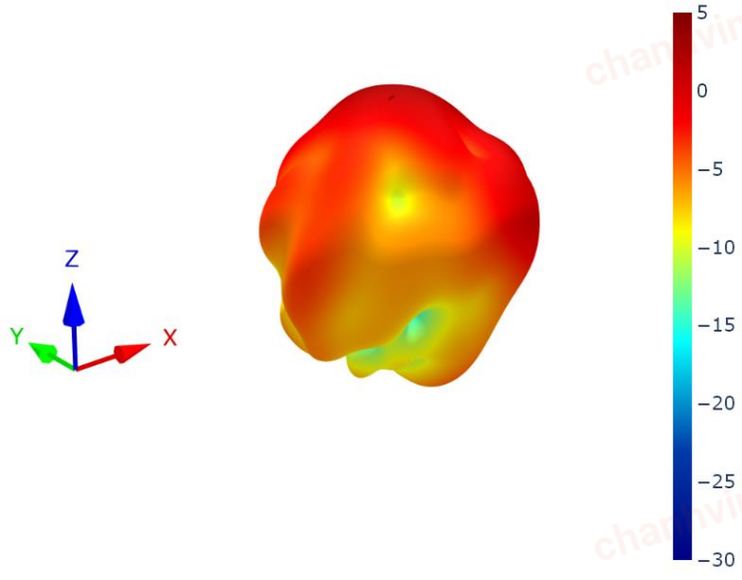

XZ Plane	YZ Plane	XY Plane

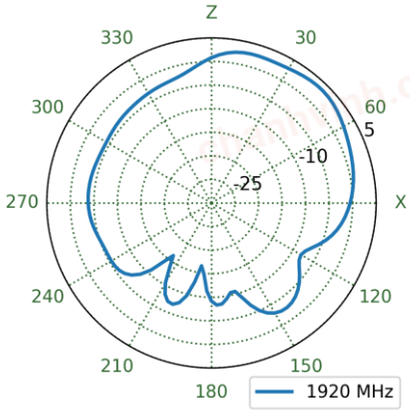


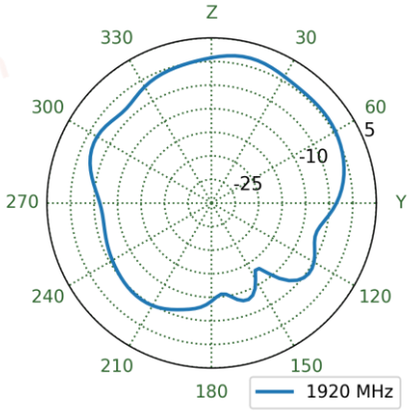

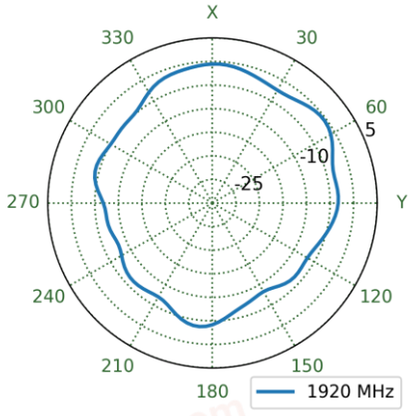



chanhvinh.com


8.26 5G/4G-3 Patterns at 1920 MHz

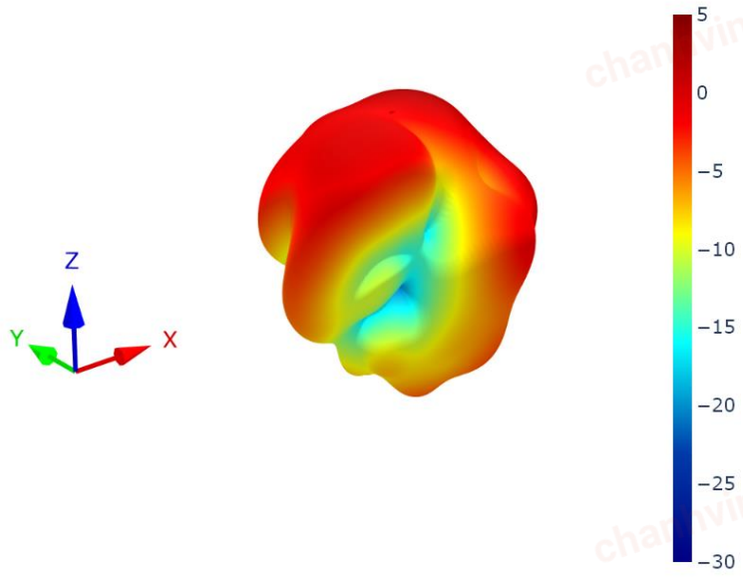


XZ Plane	YZ Plane	XY Plane

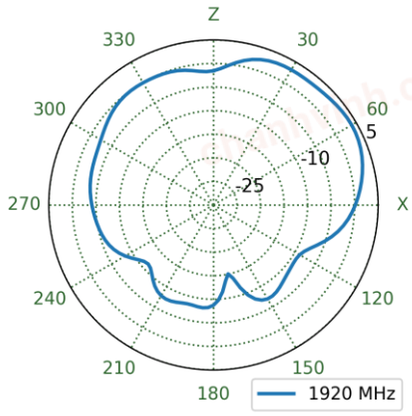

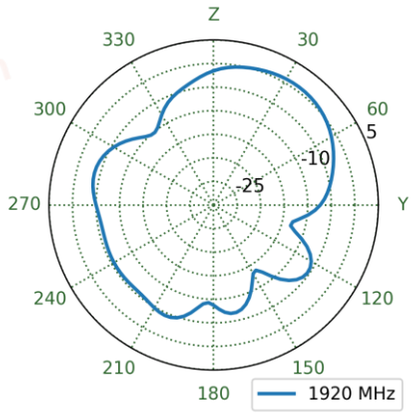


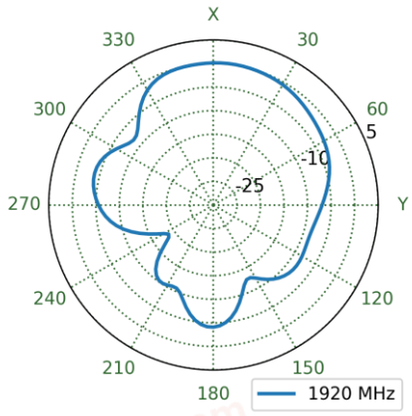



8.27 5G/4G-4 Patterns at 1920 MHz

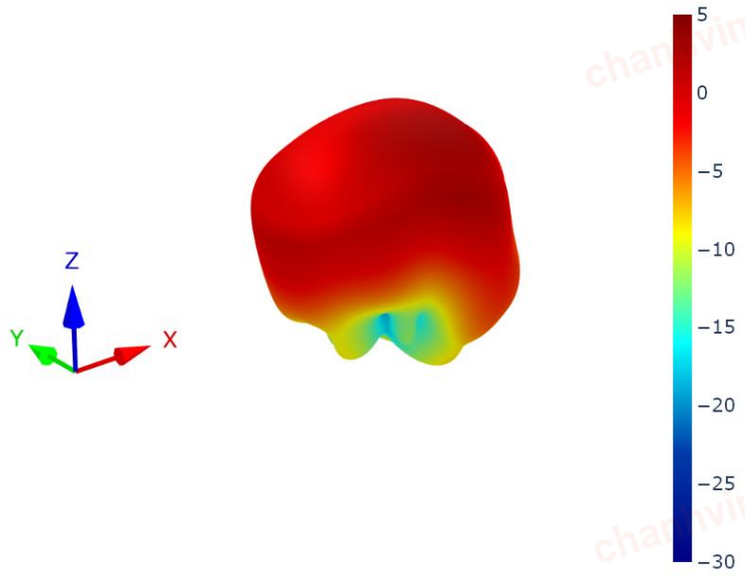

XZ Plane	YZ Plane	XY Plane

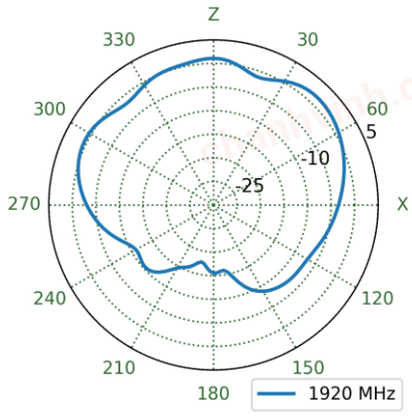


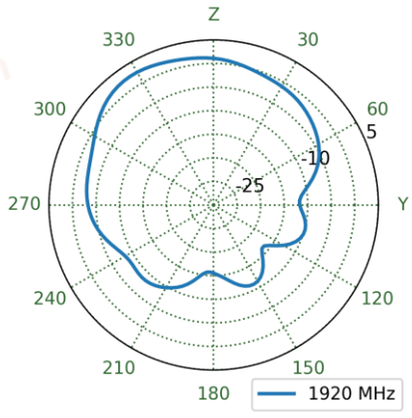

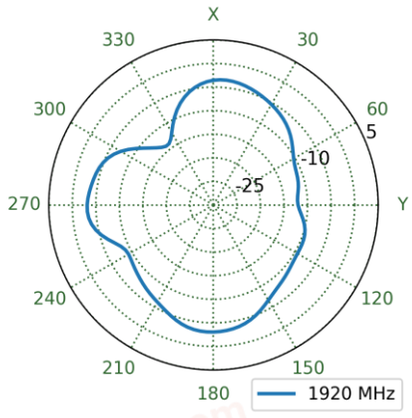



chanhvinh.com


8.28 5G/4G-1 Patterns at 1990 MHz

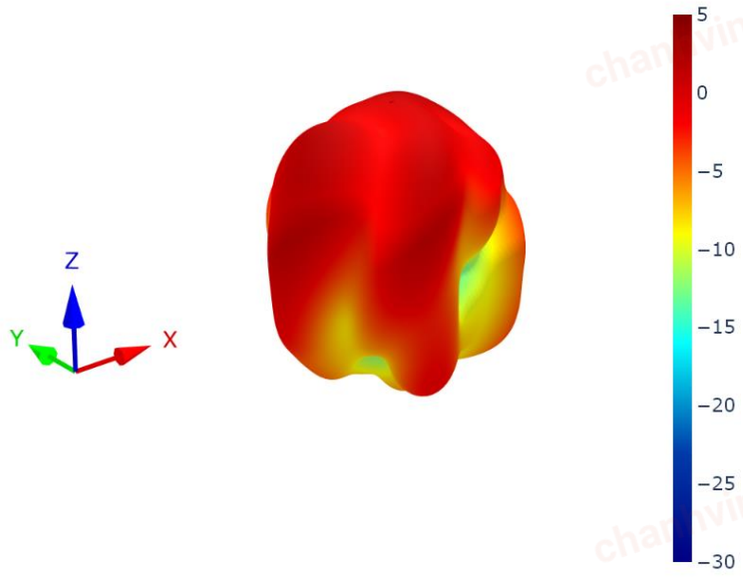

XZ Plane	YZ Plane	XY Plane

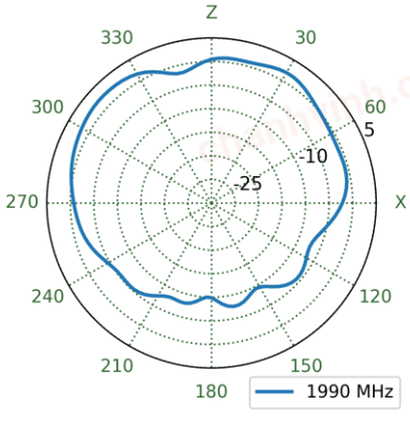


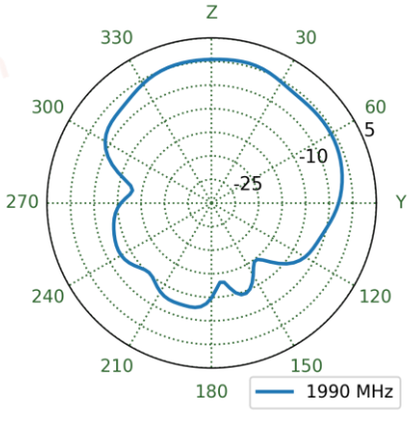

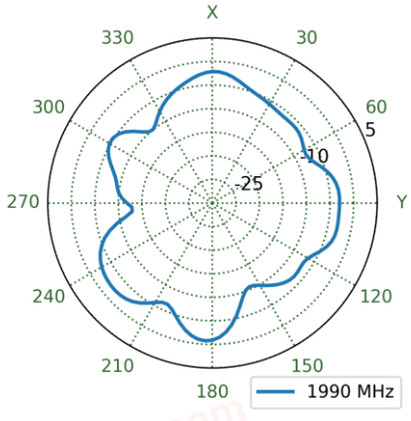



chanhvinh.com


8.29 5G/4G-2 Patterns at 1990 MHz

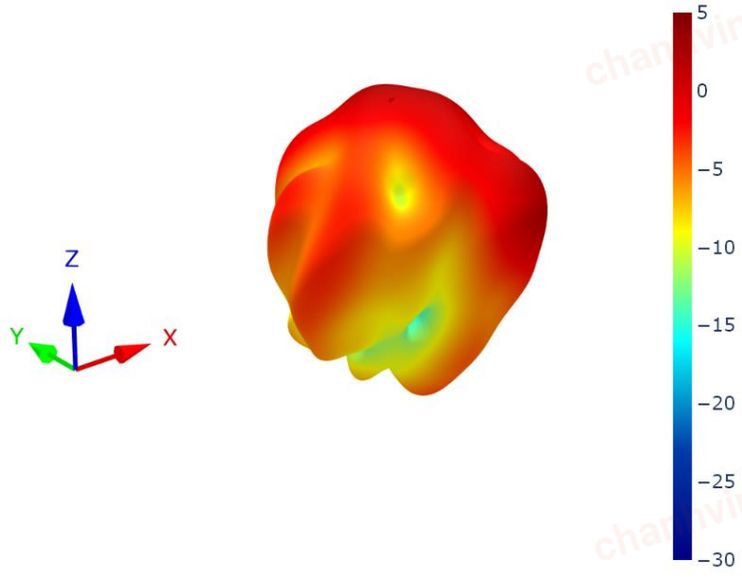

XZ Plane	YZ Plane	XY Plane

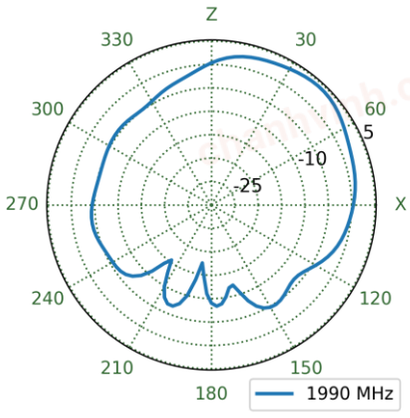


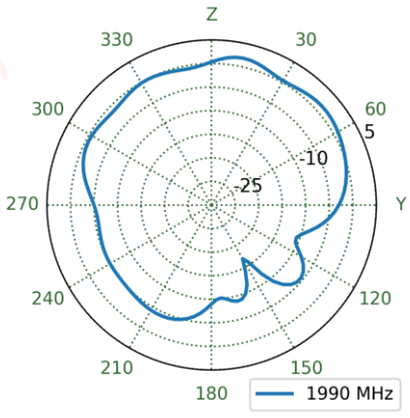

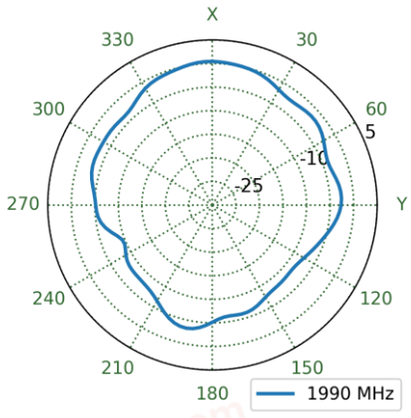



chanhvinh.com


8.30 5G/4G-3 Patterns at 1990 MHz

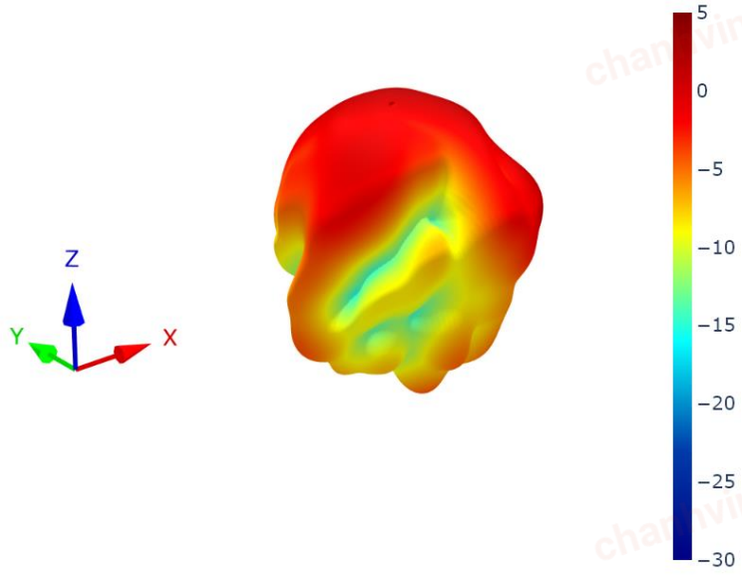


XZ Plane	YZ Plane	XY Plane

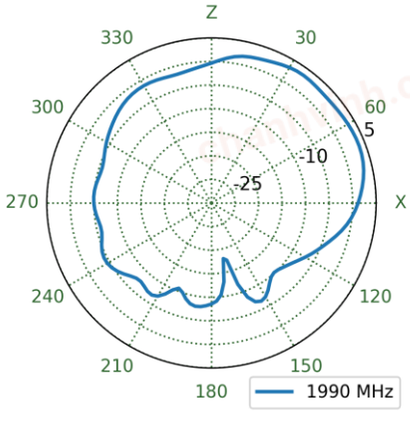

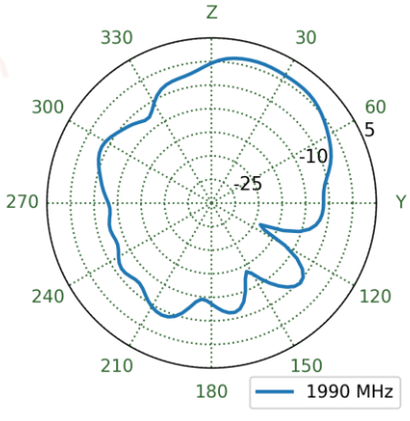


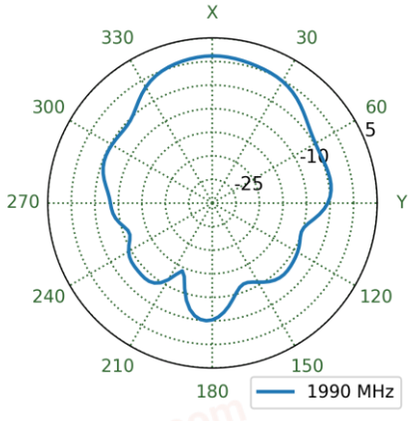



8.31 5G/4G-4 Patterns at 1990 MHz

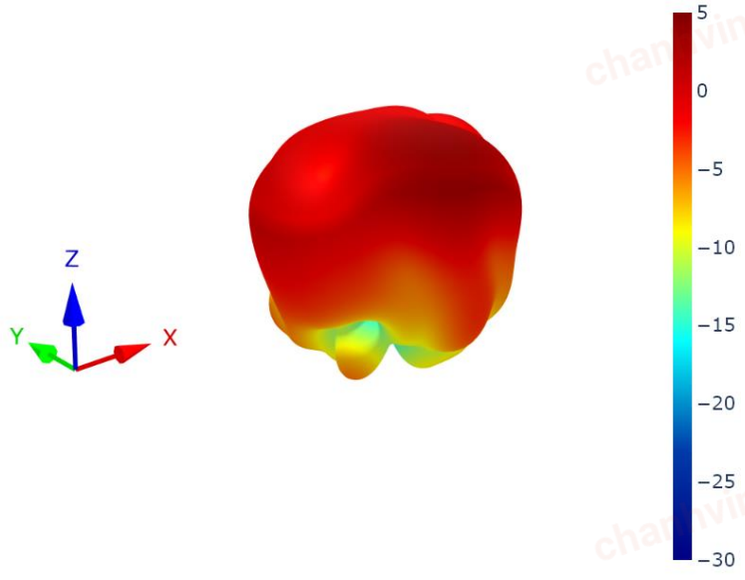

XZ Plane	YZ Plane	XY Plane

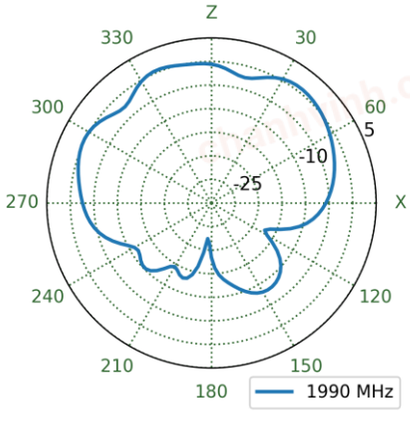


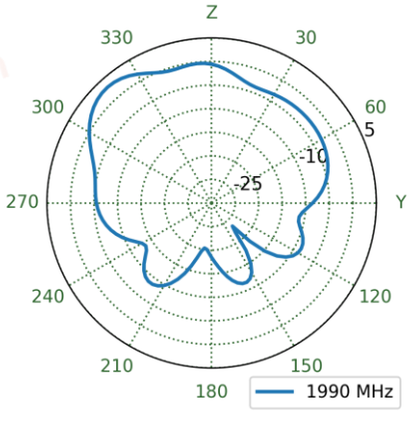

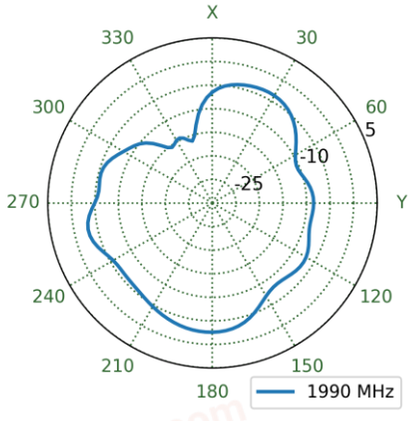



chanhvinh.com


8.32 5G/4G-1 Patterns at 2360 MHz

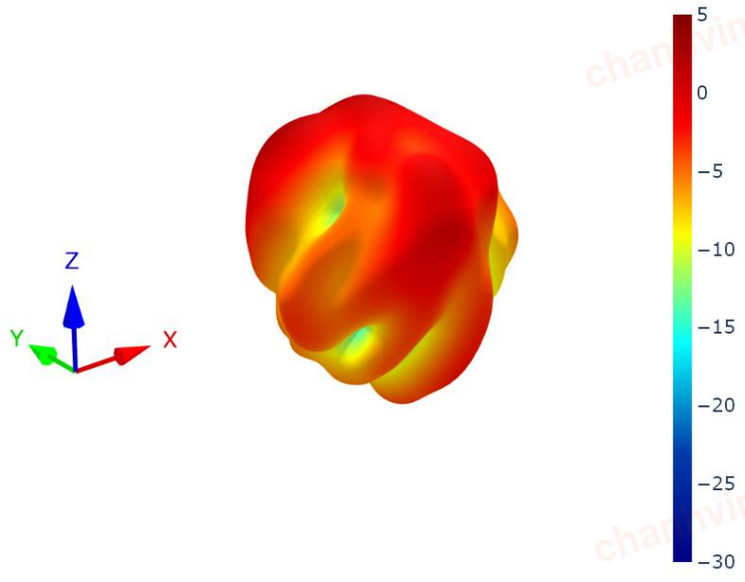

XZ Plane	YZ Plane	XY Plane

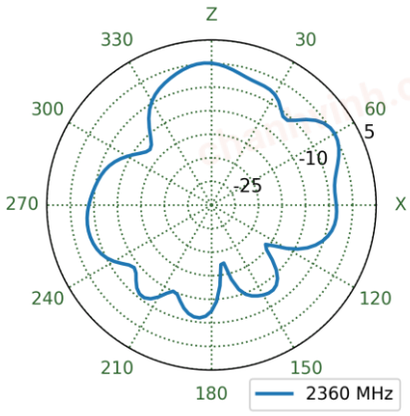


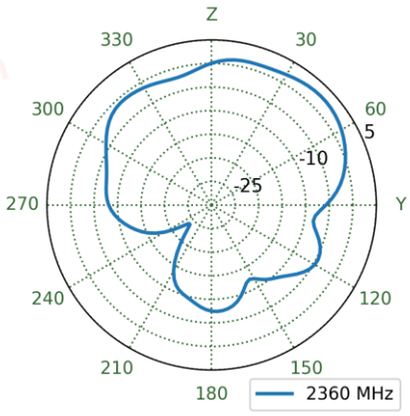

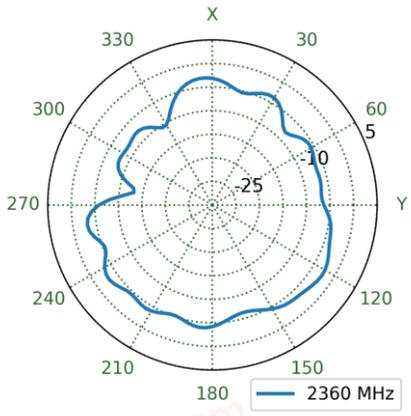



chanhvinh.com


8.33 5G/4G-2 Patterns at 2360 MHz

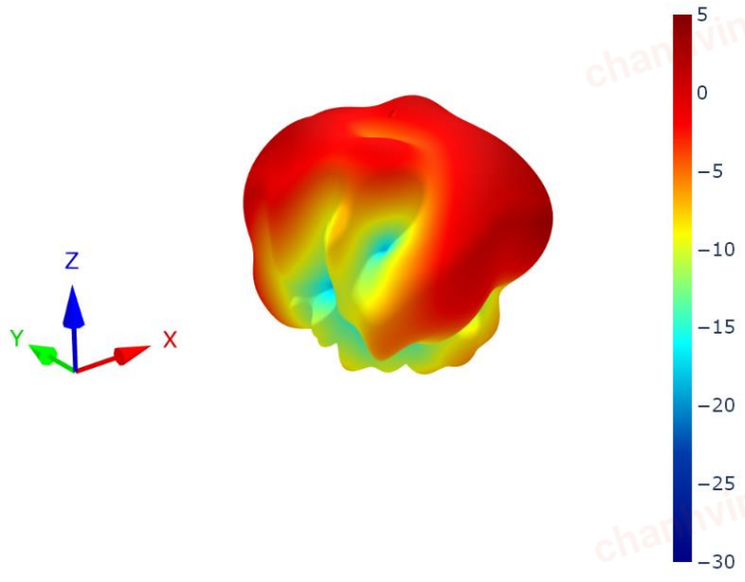

XZ Plane	YZ Plane	XY Plane

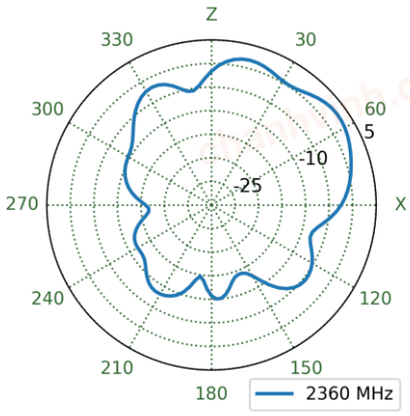


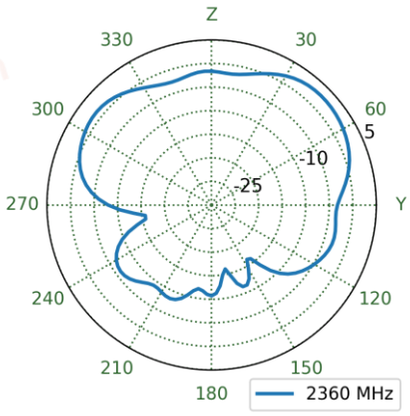

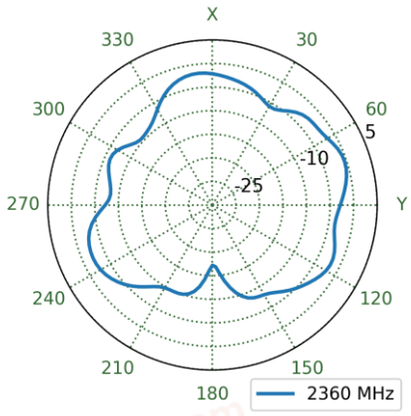



chanhvinh.com


8.34 5G/4G-3 Patterns at 2360 MHz

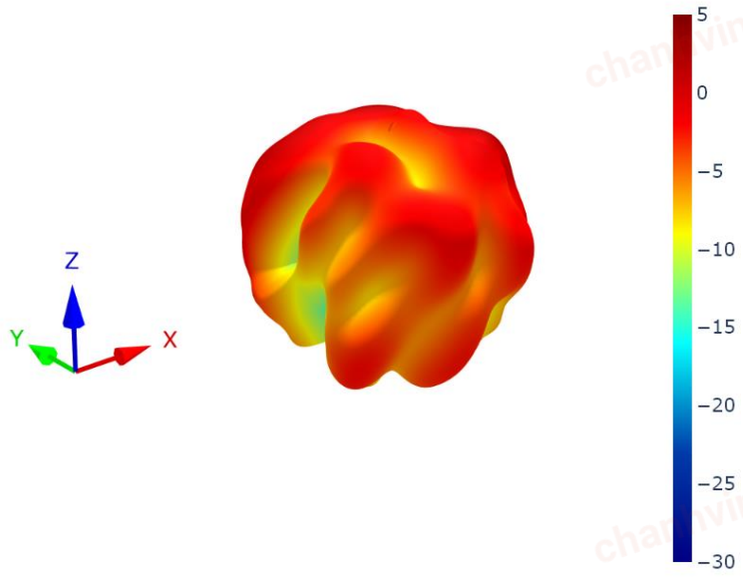

XZ Plane	YZ Plane	XY Plane

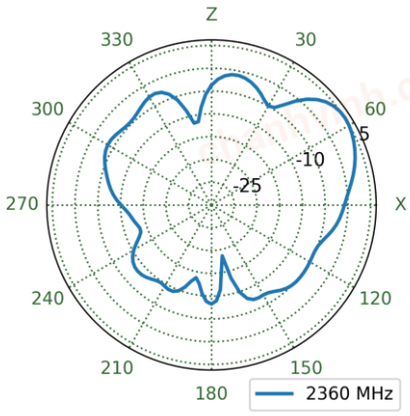


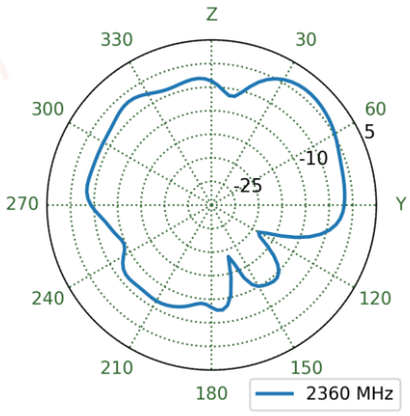

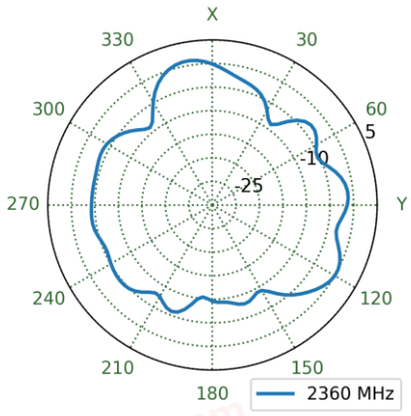



chanhvinh.com


8.35 5G/4G-4 Patterns at 2360 MHz

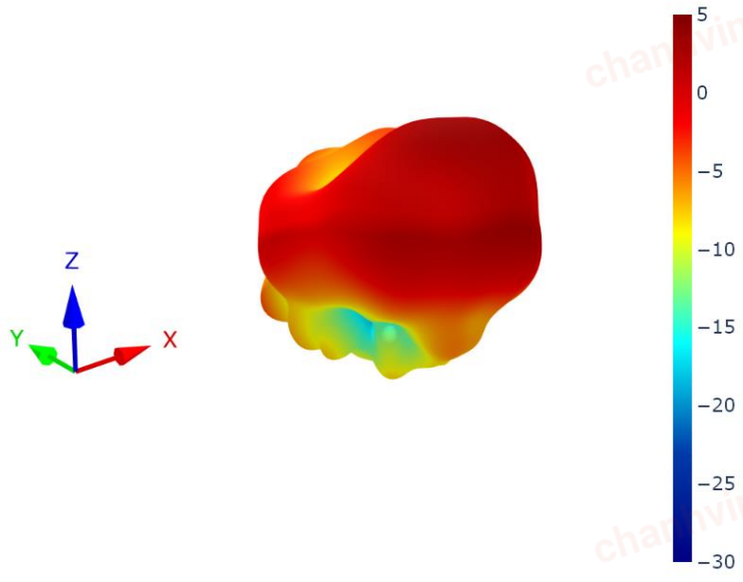

XZ Plane	YZ Plane	XY Plane

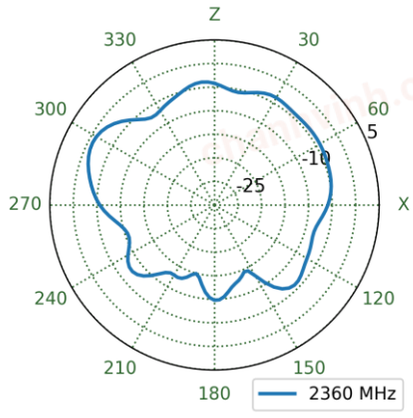


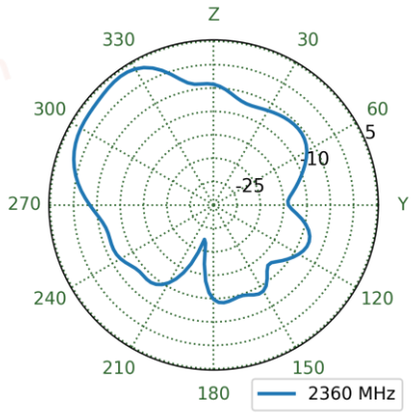

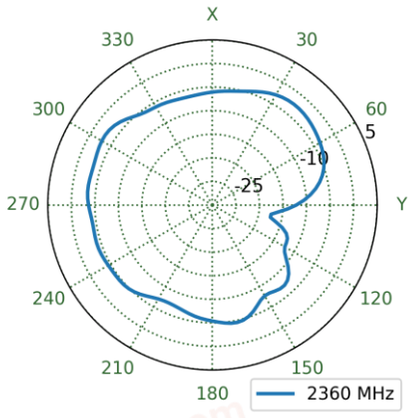



chanhvinh.com


8.36 5G/4G-1 Patterns at 2595 MHz

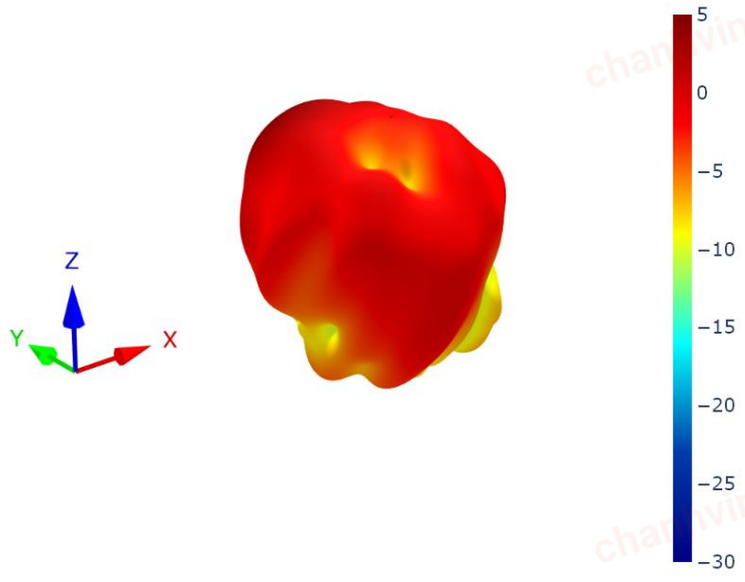

XZ Plane	YZ Plane	XY Plane

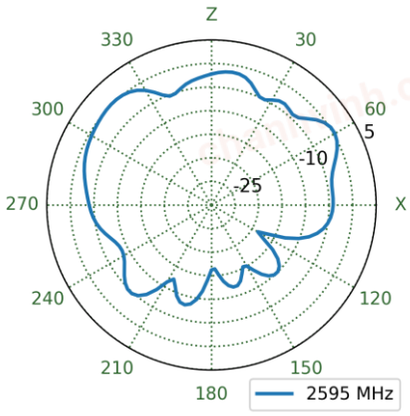


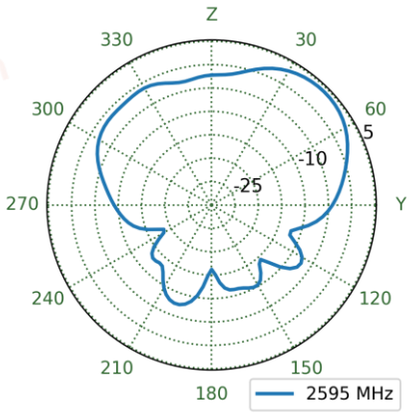

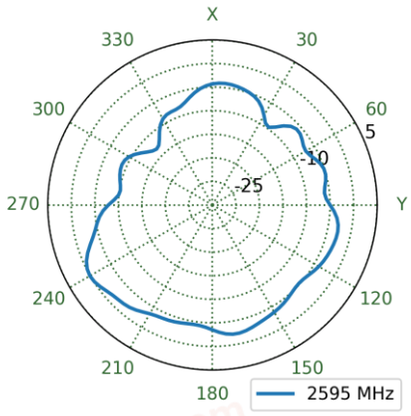



chanhvinh.com


8.37 5G/4G-2 Patterns at 2595 MHz

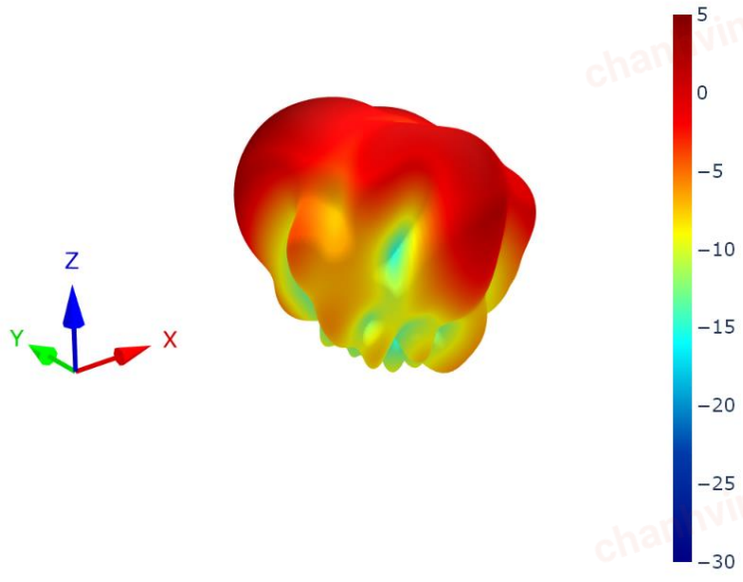

XZ Plane	YZ Plane	XY Plane

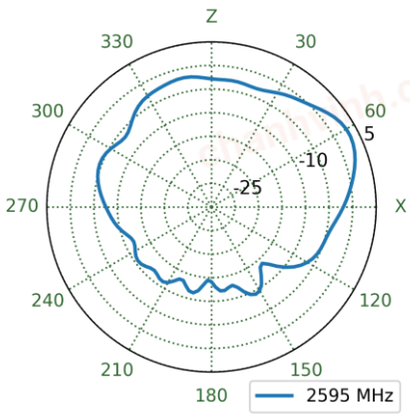


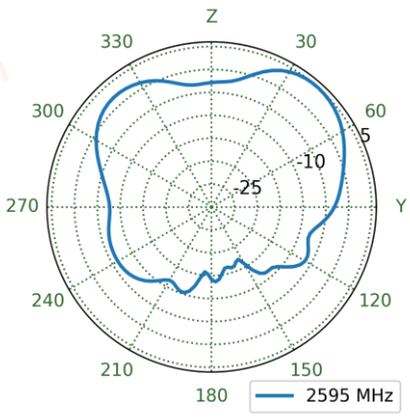

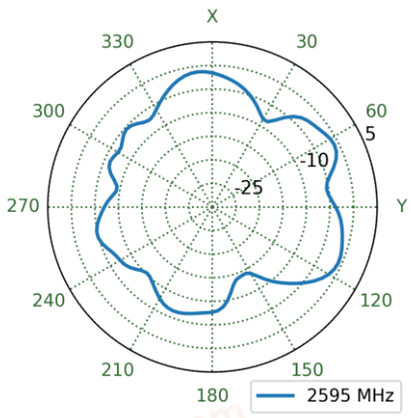



chanhvinh.com


8.38 5G/4G-3 Patterns at 2595 MHz

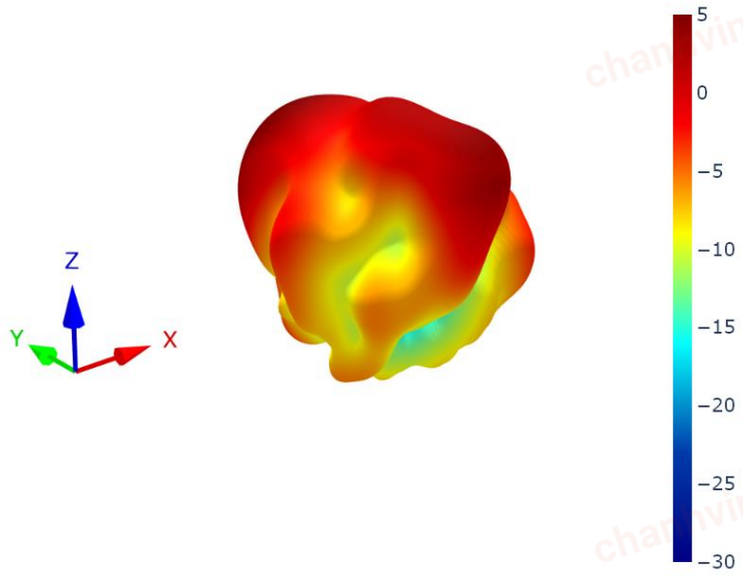

XZ Plane	YZ Plane	XY Plane

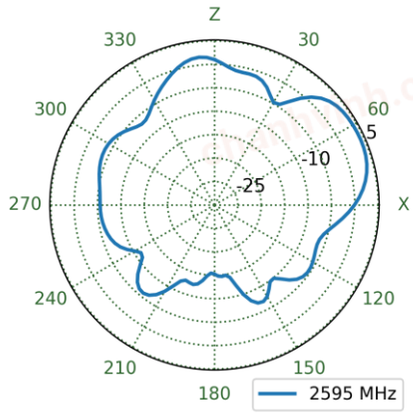


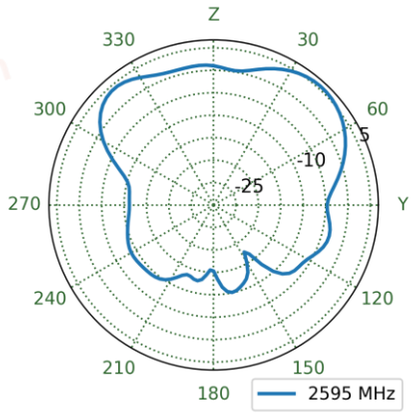

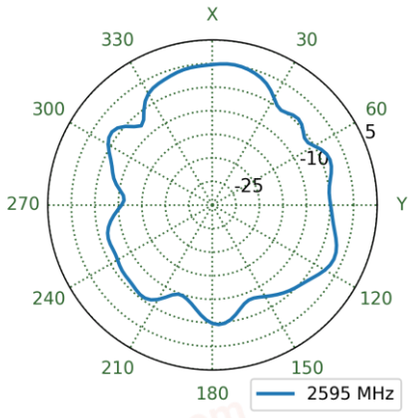



chanhvinh.com


8.39 5G/4G-4 Patterns at 2595 MHz

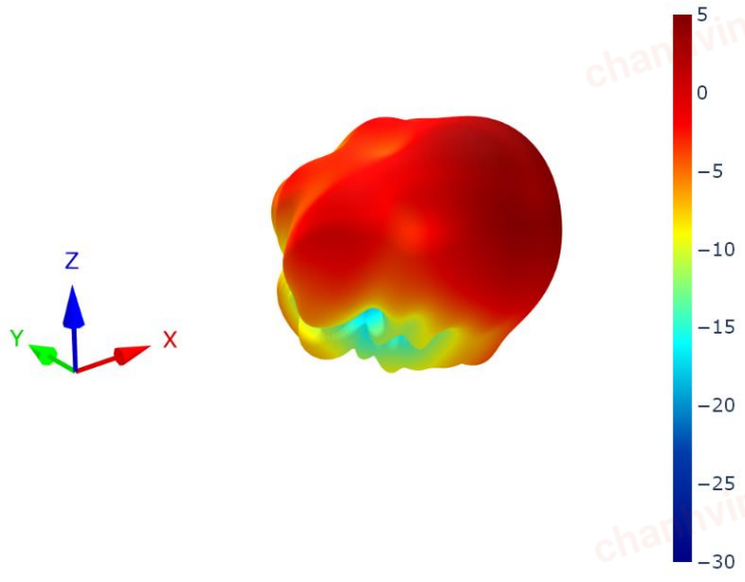


XZ Plane	YZ Plane	XY Plane

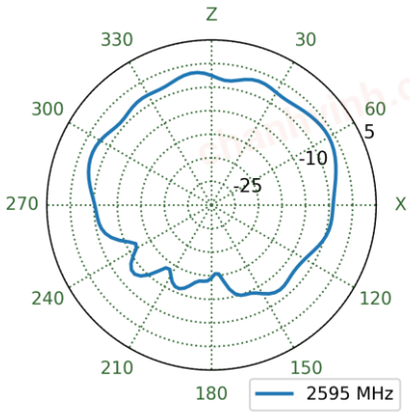

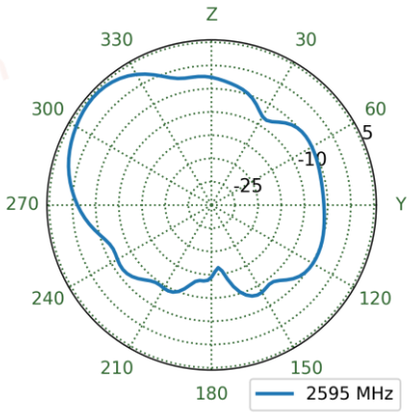


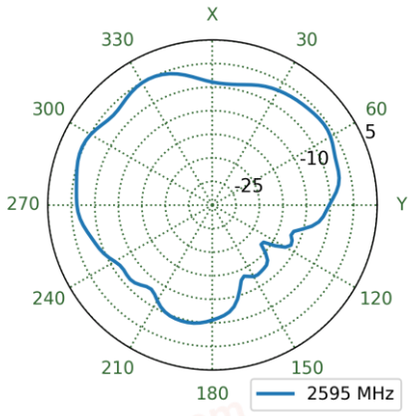



8.40 5G/4G-1 Patterns at 3550 MHz

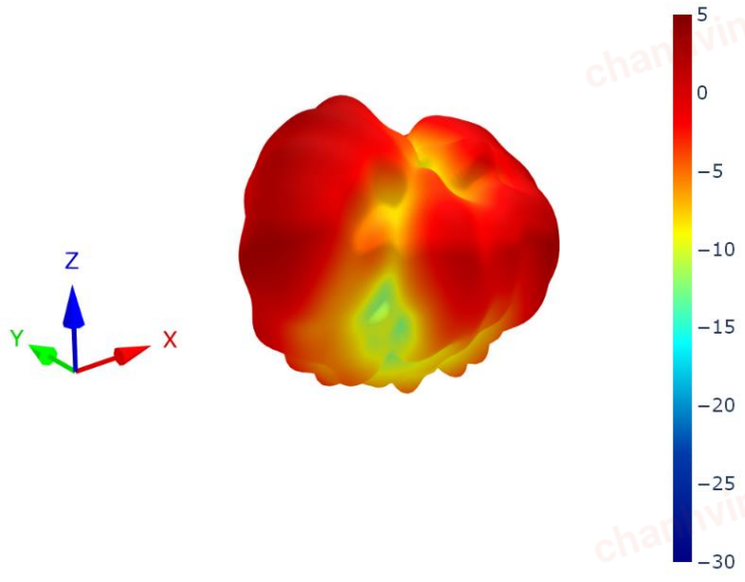

XZ Plane	YZ Plane	XY Plane

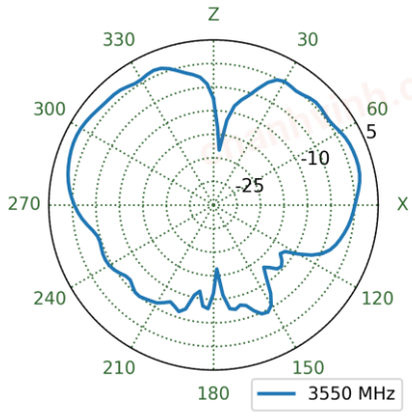


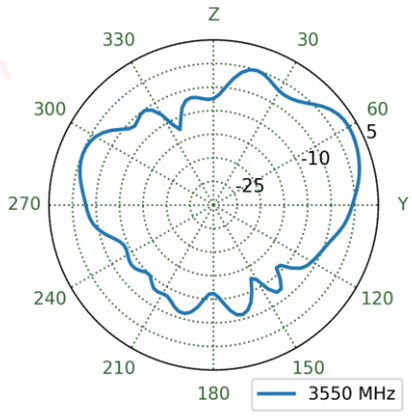

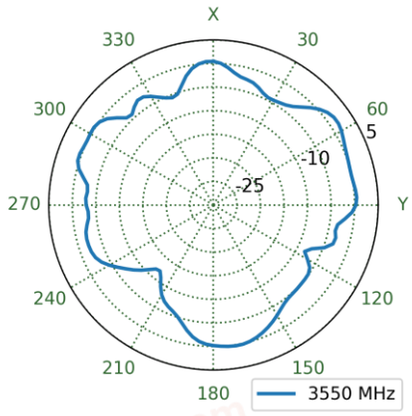



chanhvinh.com


8.41 5G/4G-2 Patterns at 3550 MHz

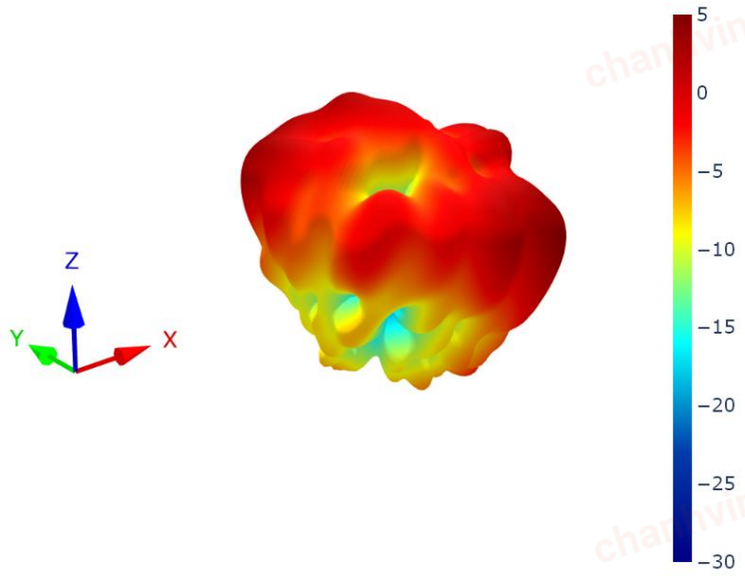

XZ Plane	YZ Plane	XY Plane

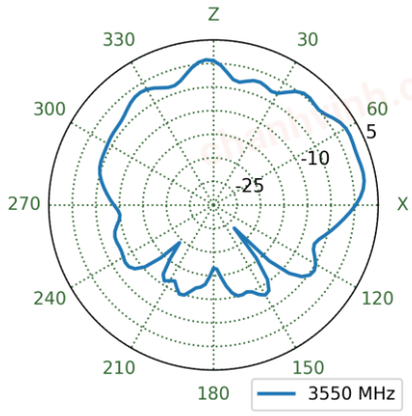


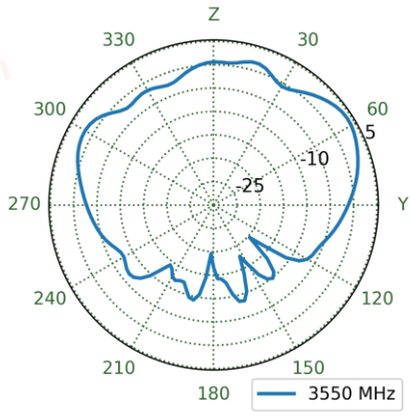

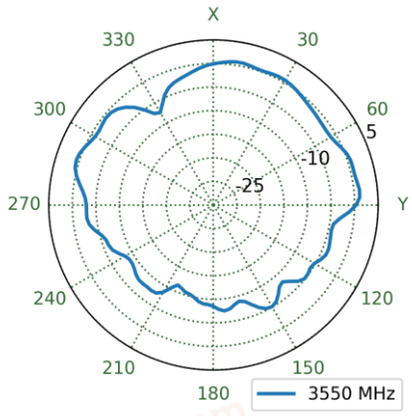



chanhvinh.com


8.42 5G/4G-3 Patterns at 3550 MHz

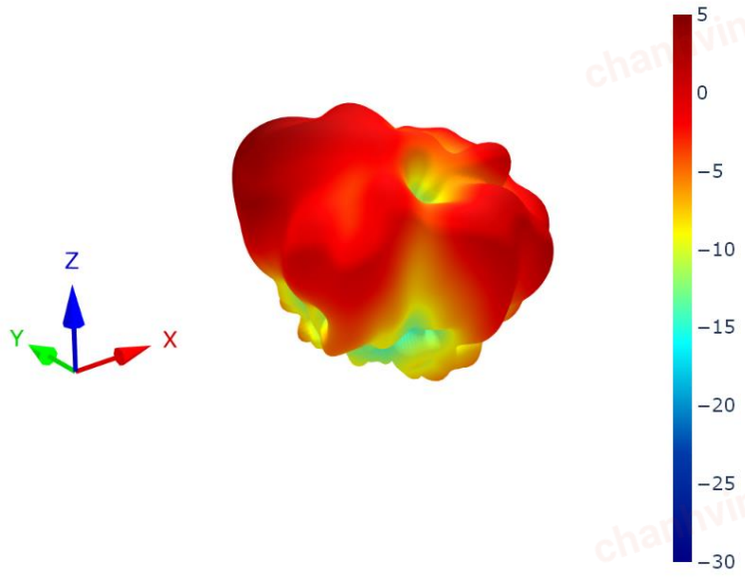


XZ Plane	YZ Plane	XY Plane

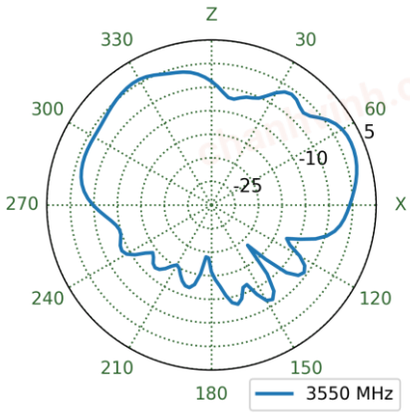

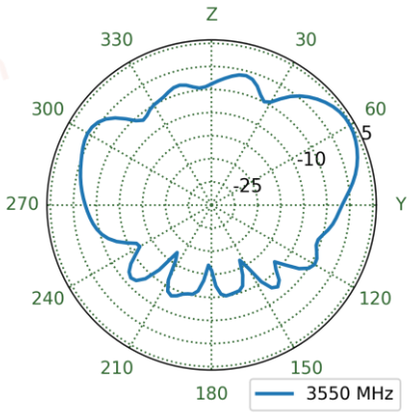


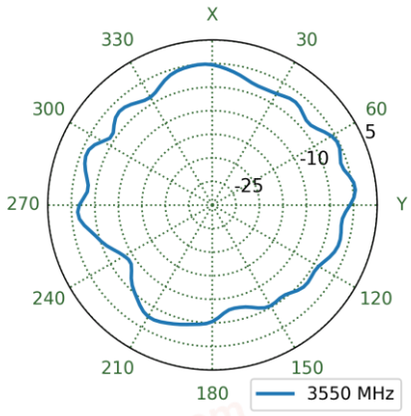



8.43 5G/4G-4 Patterns at 3550 MHz

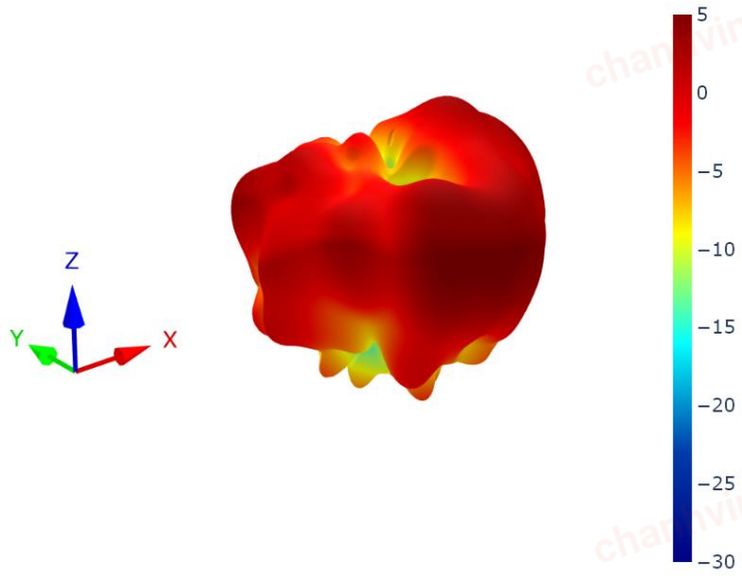

XZ Plane	YZ Plane	XY Plane

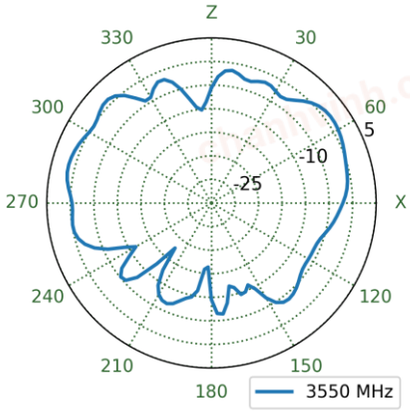


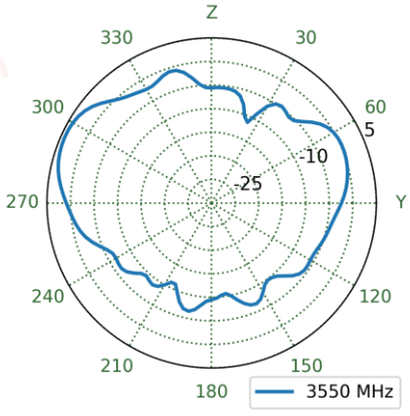

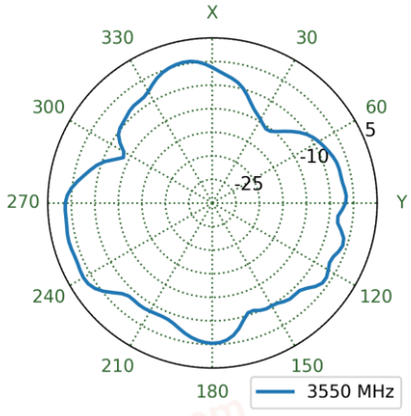



chanhvinh.com


8.44 5G/4G-1 Patterns at 4600 MHz

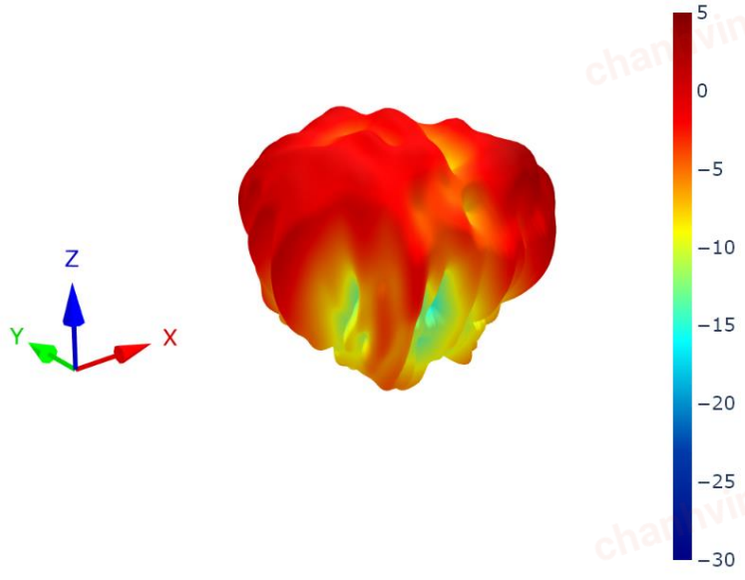


XZ Plane	YZ Plane	XY Plane

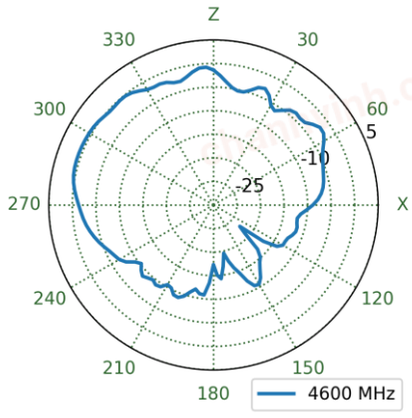

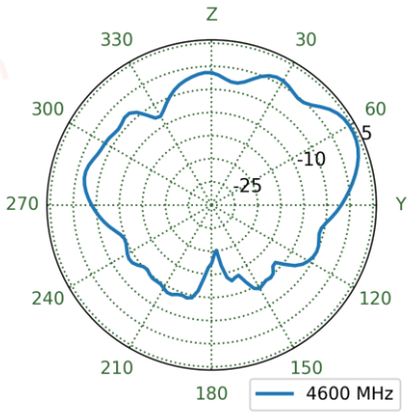


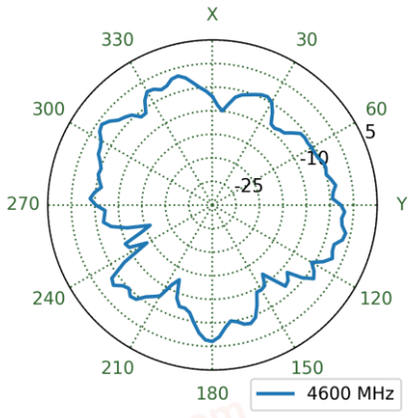



8.45 5G/4G-2 Patterns at 4600 MHz

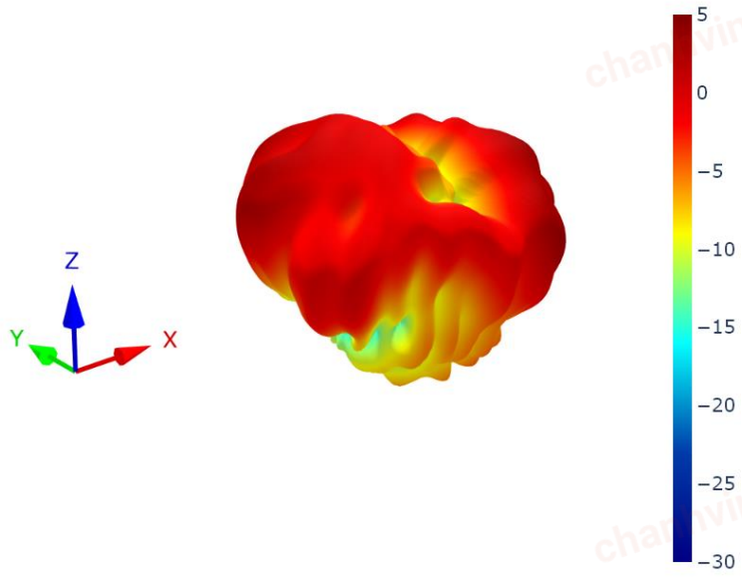


XZ Plane	YZ Plane	XY Plane

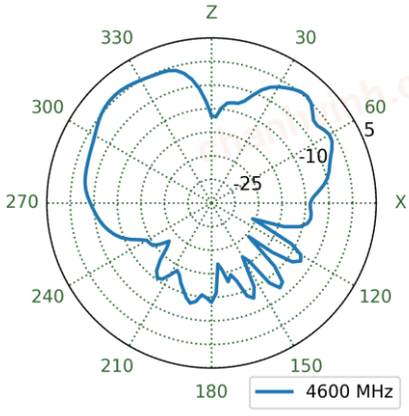

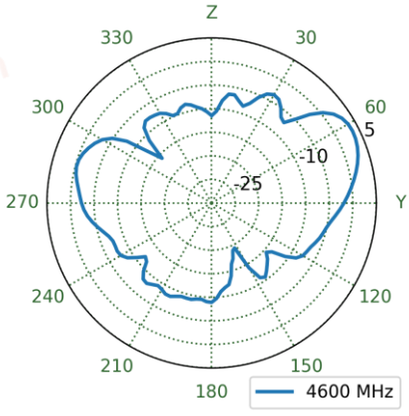


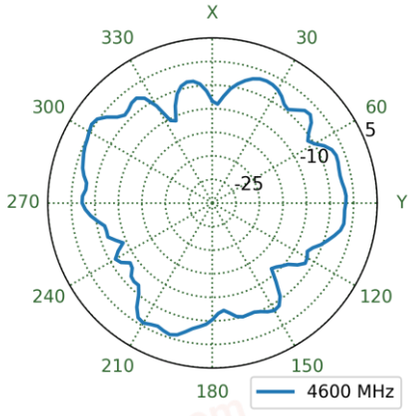



8.46 5G/4G-3 Patterns at 4600 MHz

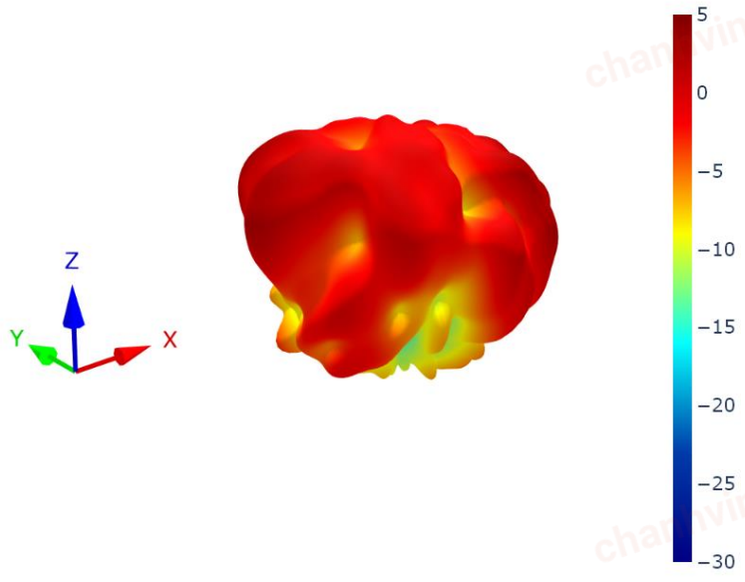

XZ Plane	YZ Plane	XY Plane

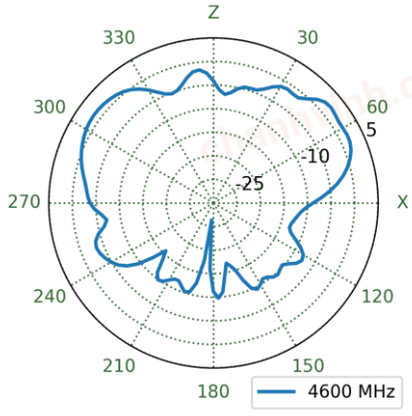


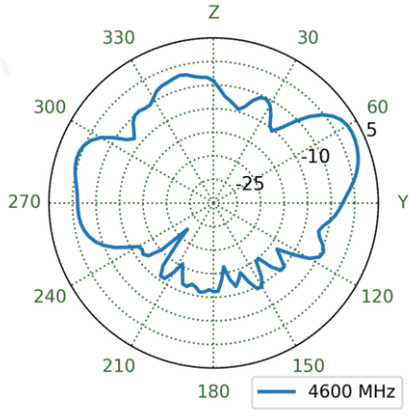

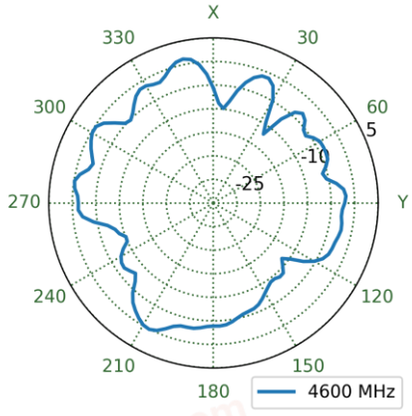



chanhvinh.com


8.47 5G/4G-4 Patterns at 4600 MHz

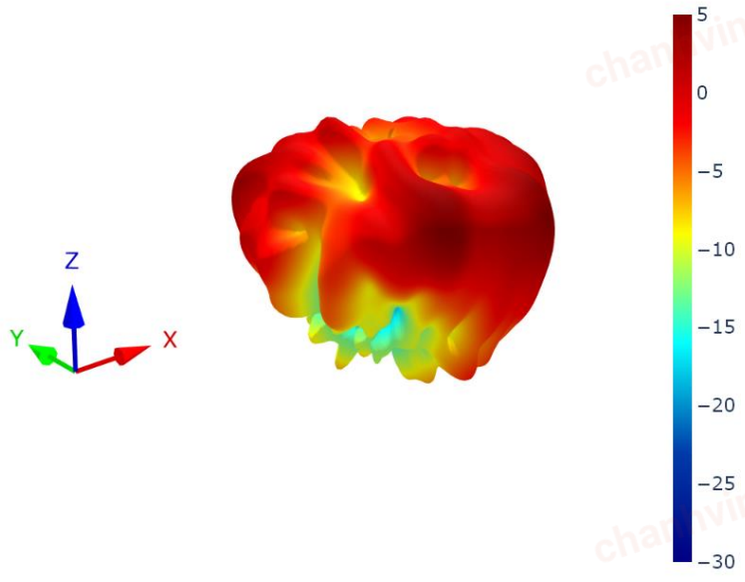

XZ Plane	YZ Plane	XY Plane

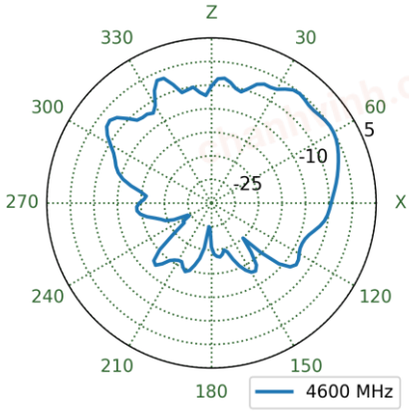


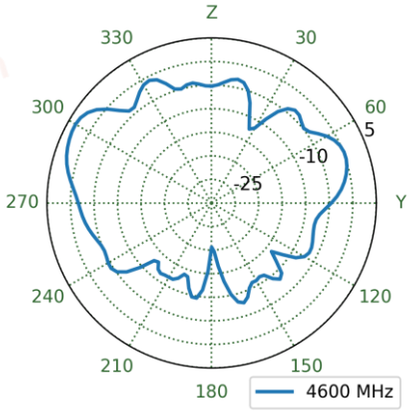

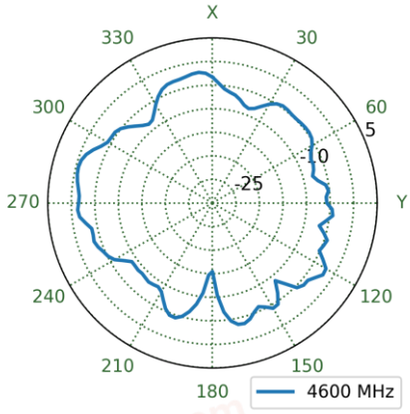



chanhvinh.com


8.48 5G/4G-1 Patterns at 4800 MHz

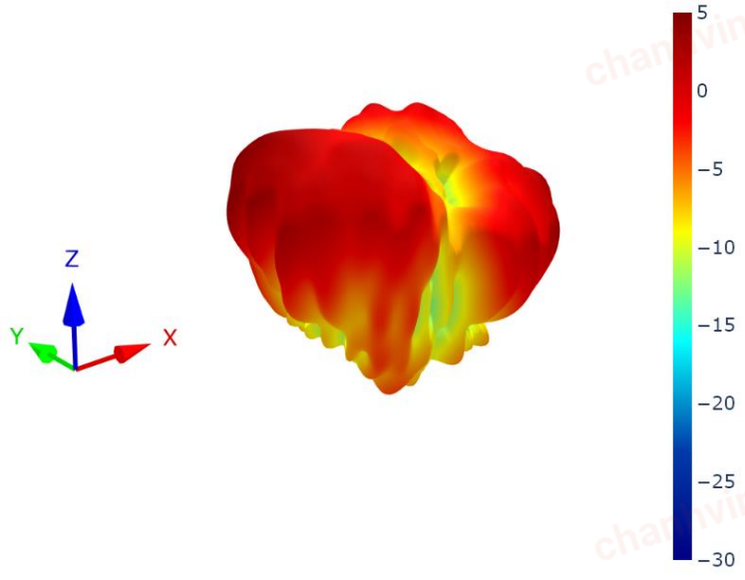

XZ Plane	YZ Plane	XY Plane

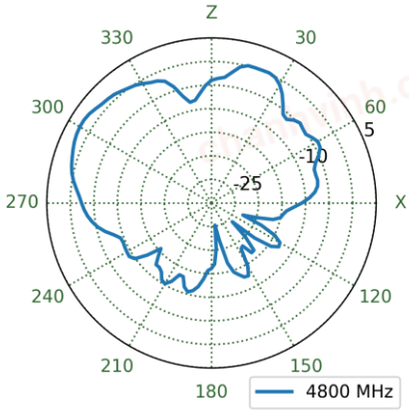


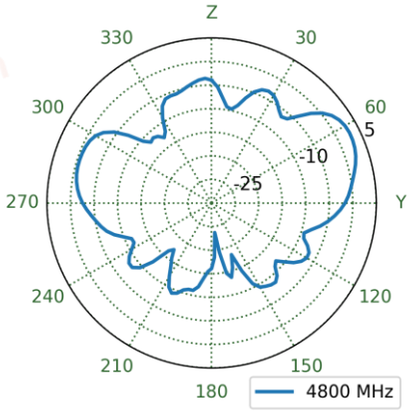

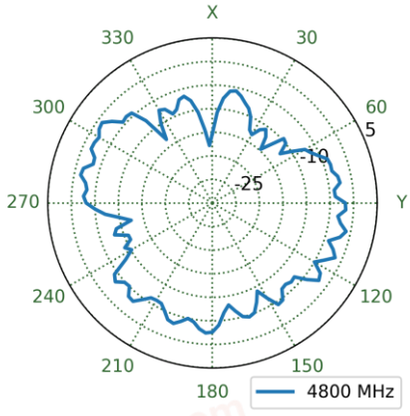



chanhvinh.com


8.49 5G/4G-2 Patterns at 4800 MHz

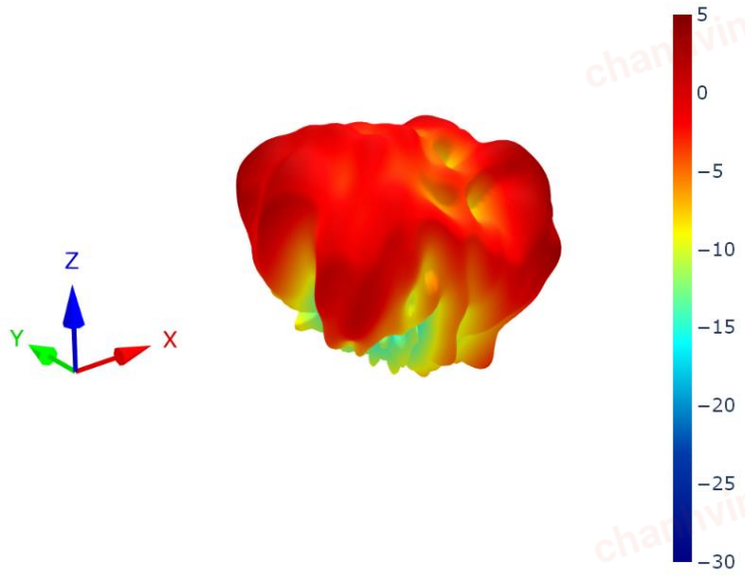

XZ Plane	YZ Plane	XY Plane

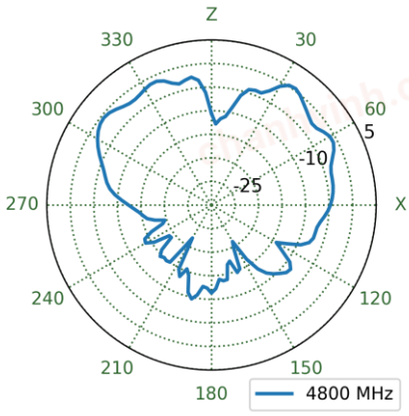


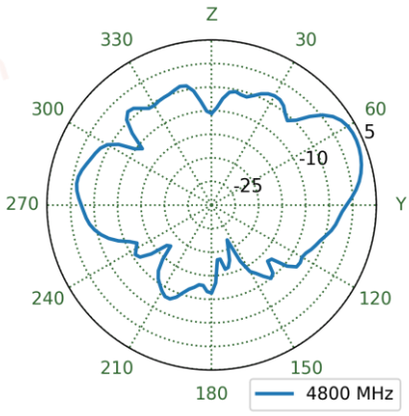

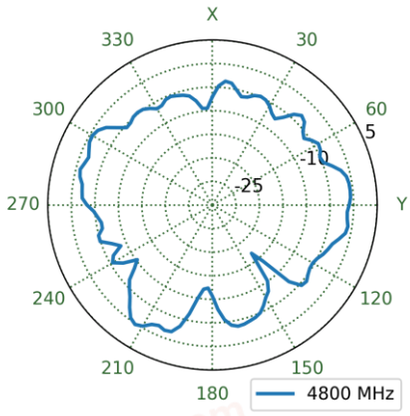



chanhvinh.com


8.50 5G/4G-3 Patterns at 4800 MHz

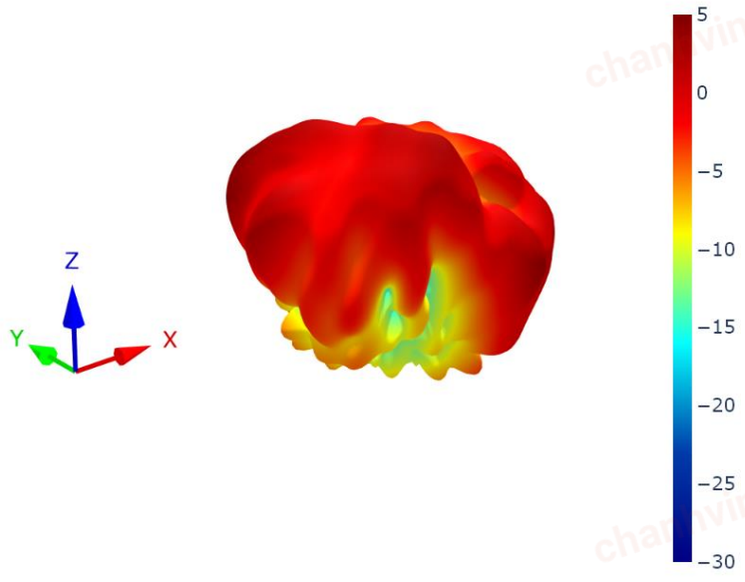

XZ Plane	YZ Plane	XY Plane

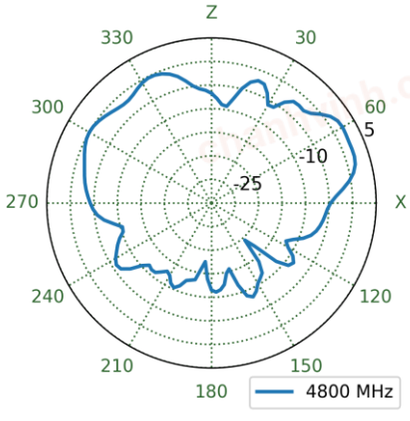


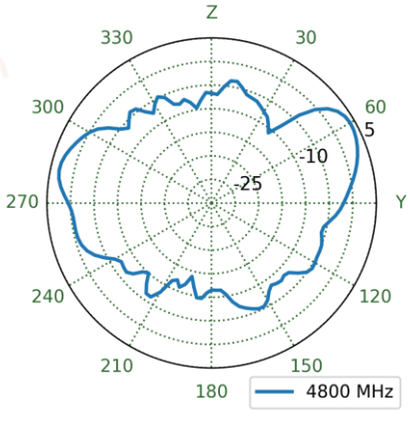

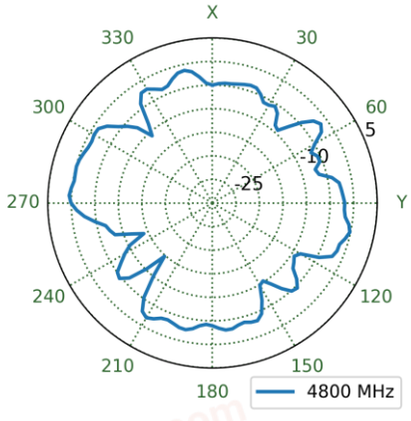



chanhvinh.com


8.51 5G/4G-4 Patterns at 4800 MHz

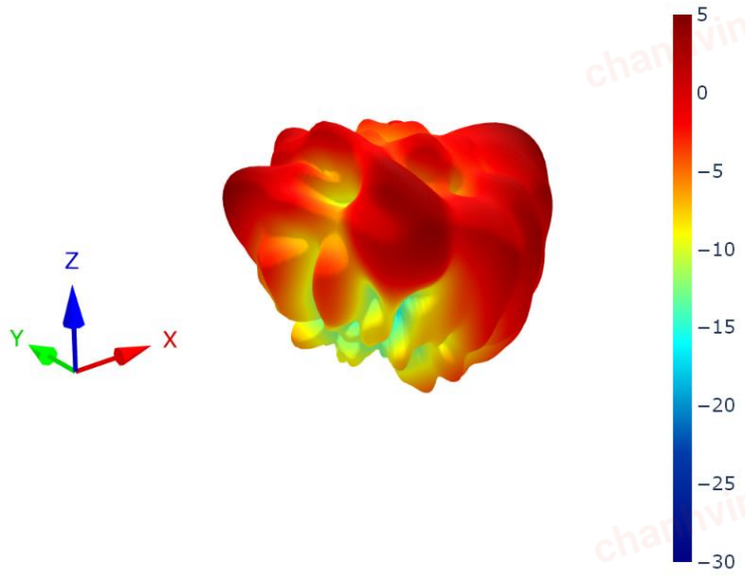


XZ Plane	YZ Plane	XY Plane

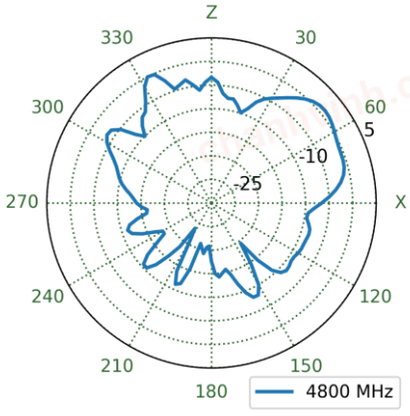

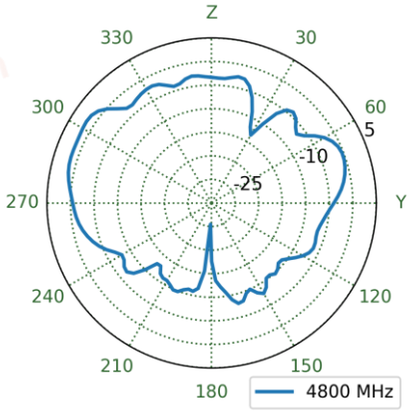


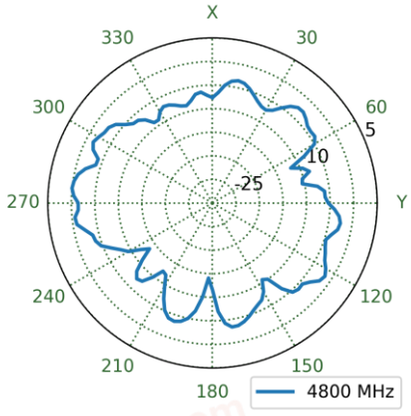



8.52 5G/4G-1 Patterns at 5530 MHz

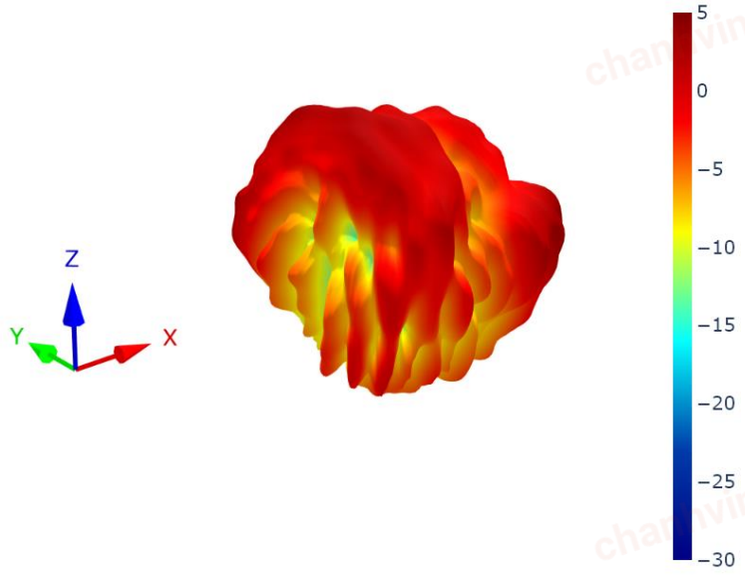


XZ Plane	YZ Plane	XY Plane

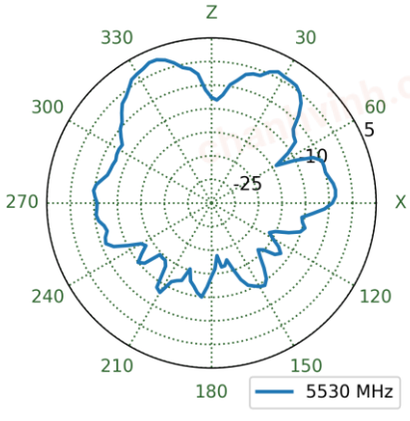

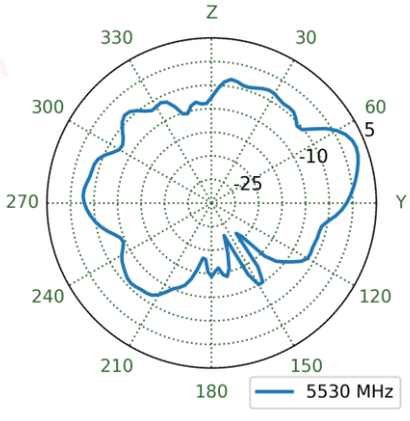


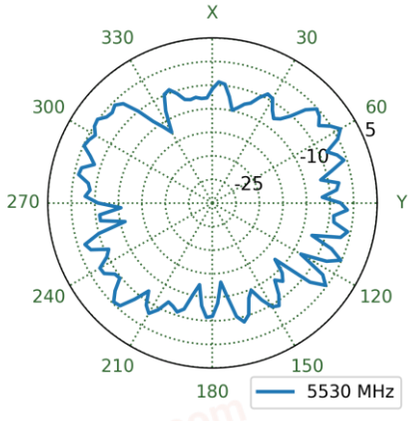



8.53 5G/4G-2 Patterns at 5530 MHz

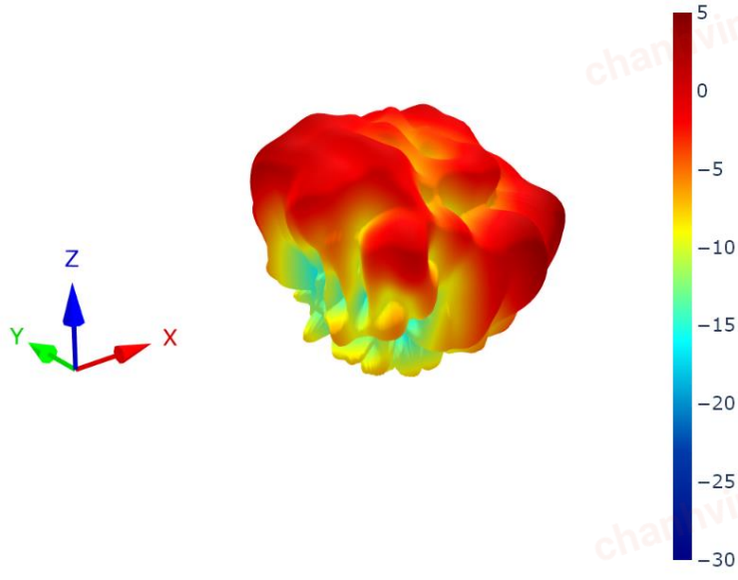

XZ Plane	YZ Plane	XY Plane

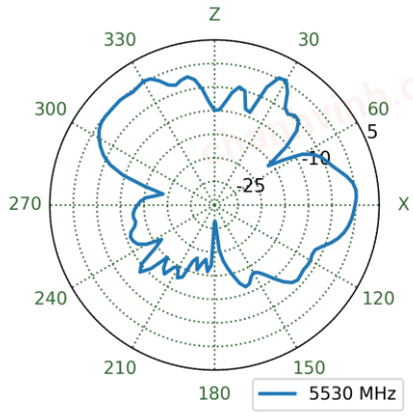


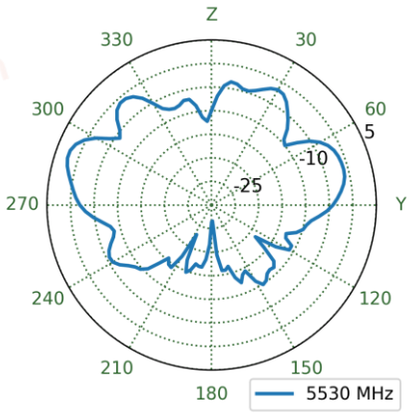

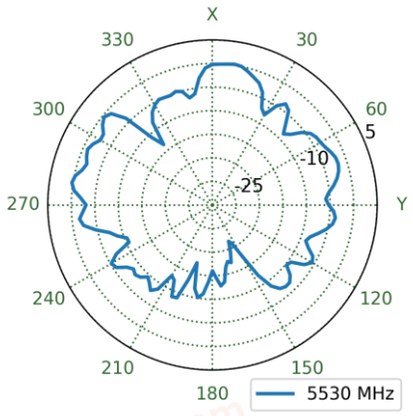



chanhvinh.com


8.54 5G/4G-3 Patterns at 5530 MHz

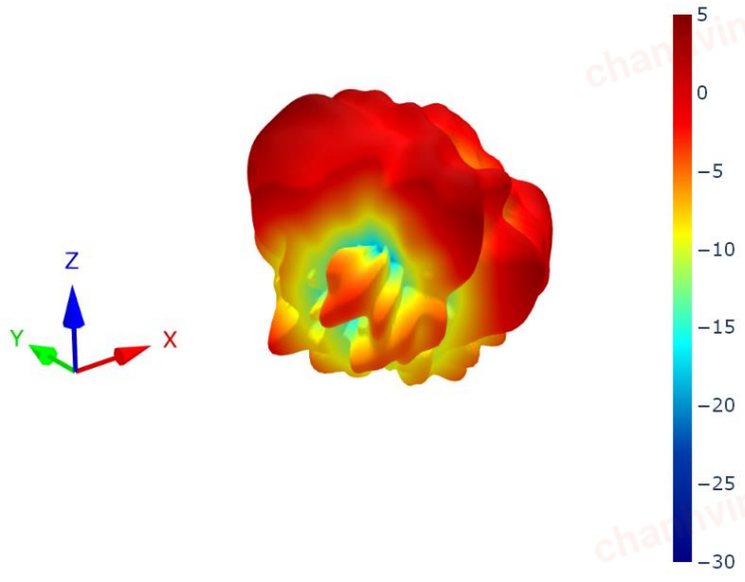


XZ Plane	YZ Plane	XY Plane

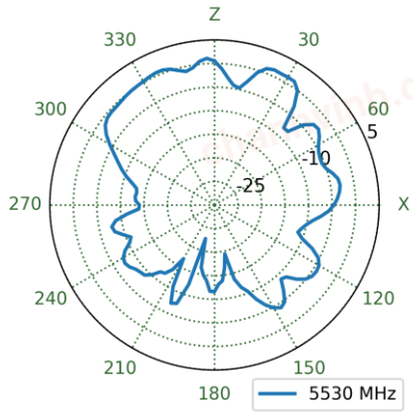

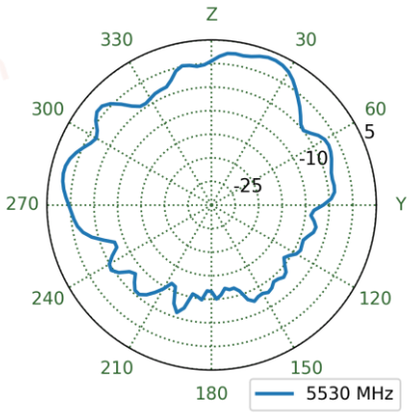


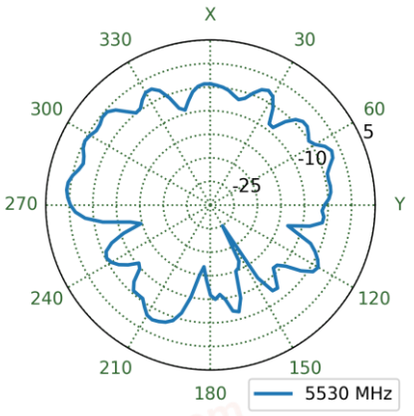



8.55 5G/4G-4 Patterns at 5530 MHz

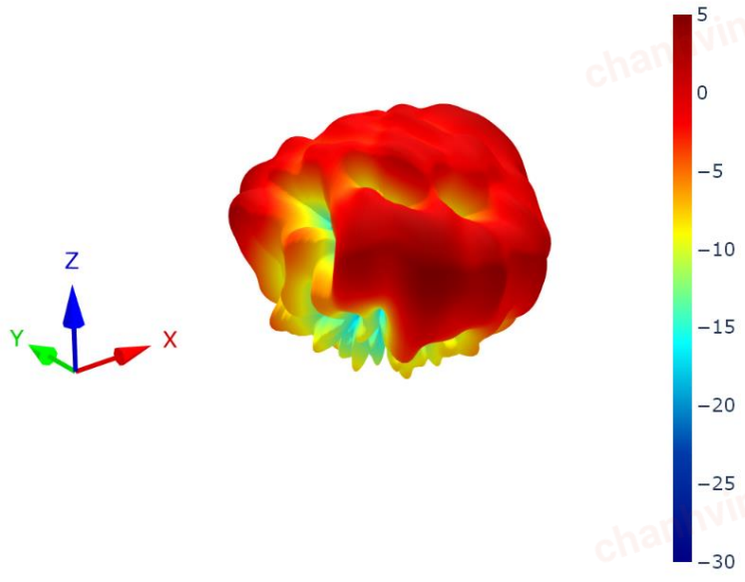

XZ Plane	YZ Plane	XY Plane

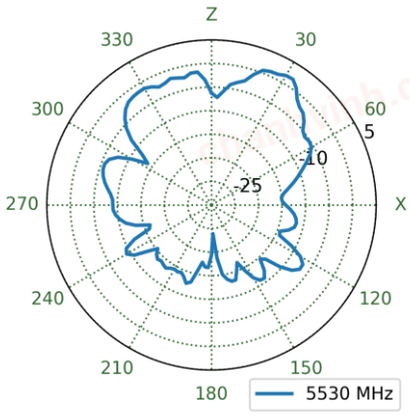


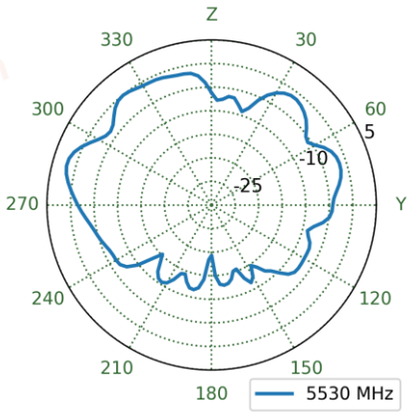

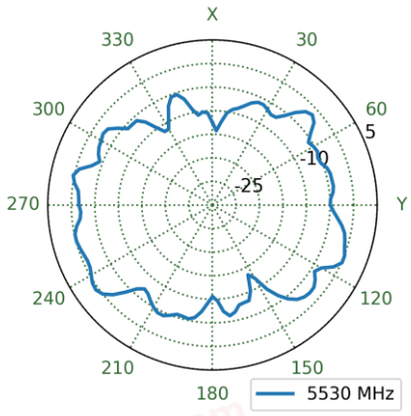



chanhvinh.com


8.56 Wi-Fi-1 Patterns at 2450 MHz

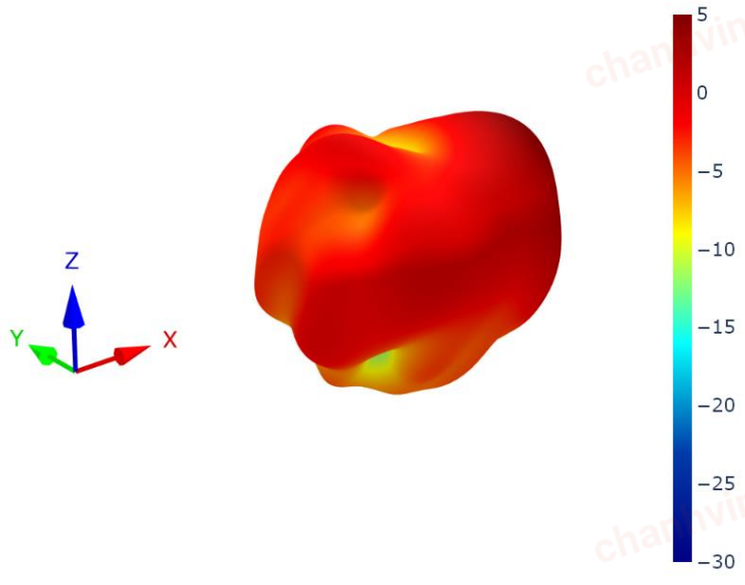

XZ Plane	YZ Plane	XY Plane

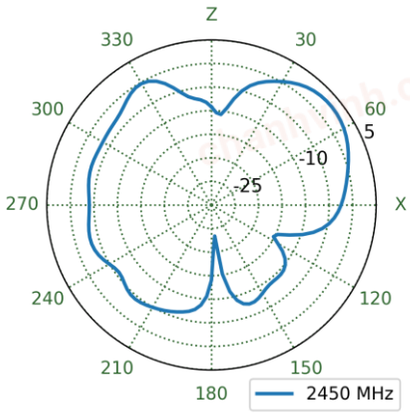


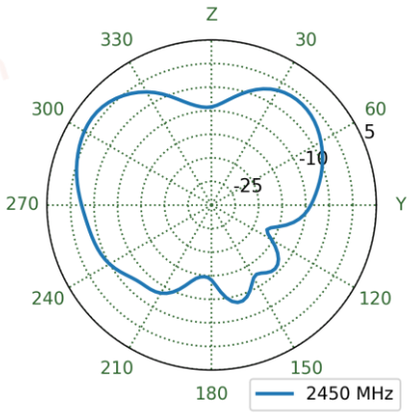

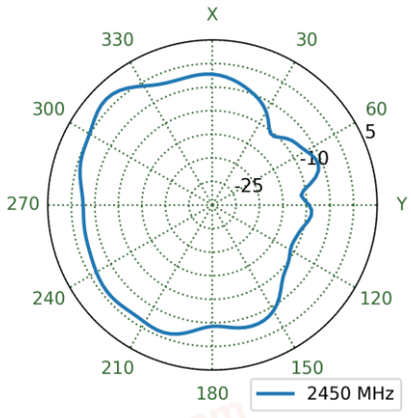



chanhvinh.com


8.57 Wi-Fi-2 Patterns at 2450 MHz

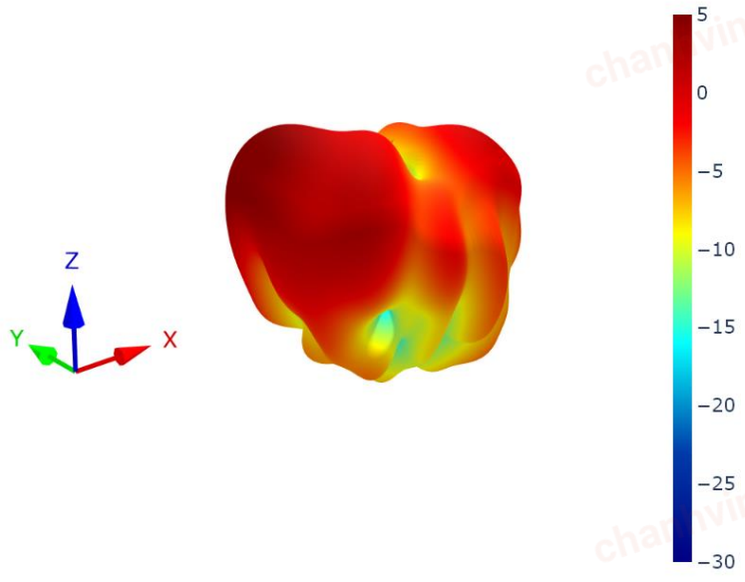


XZ Plane	YZ Plane	XY Plane

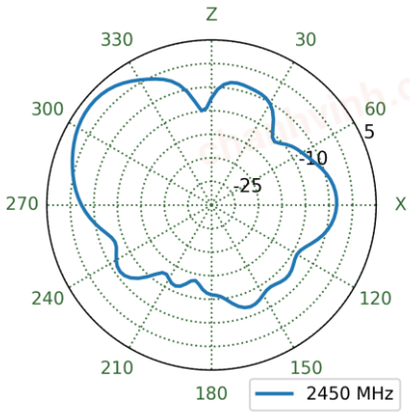

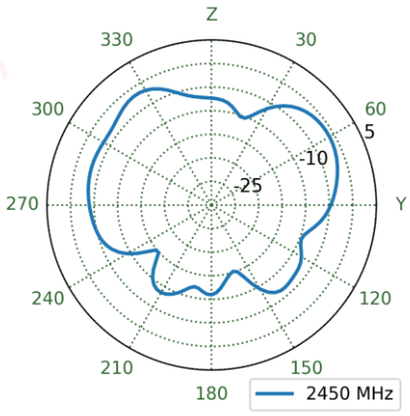


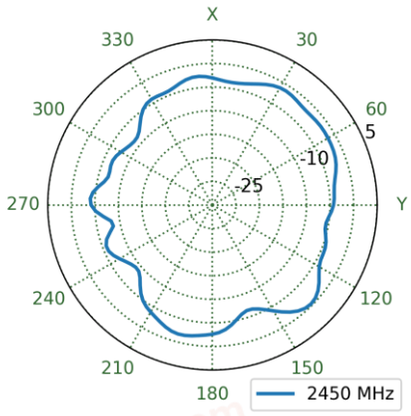



8.58 Wi-Fi-1 Patterns at 5550 MHz

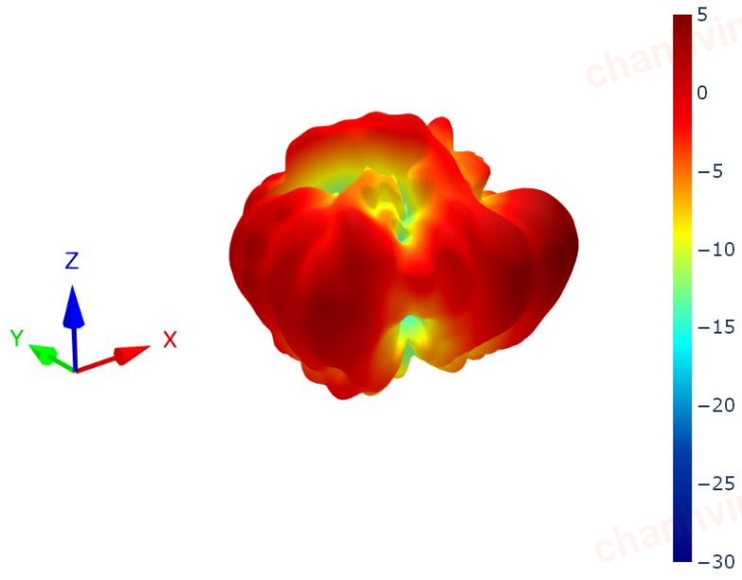

XZ Plane	YZ Plane	XY Plane

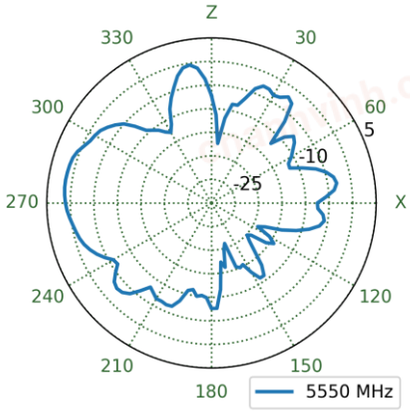


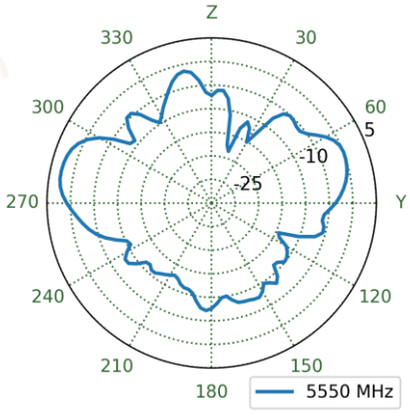

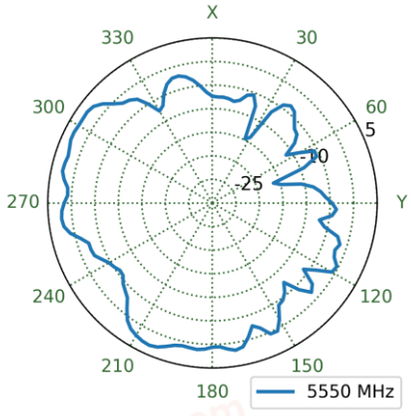



chanhvinh.com


8.59 Wi-Fi-2 Patterns at 5550 MHz

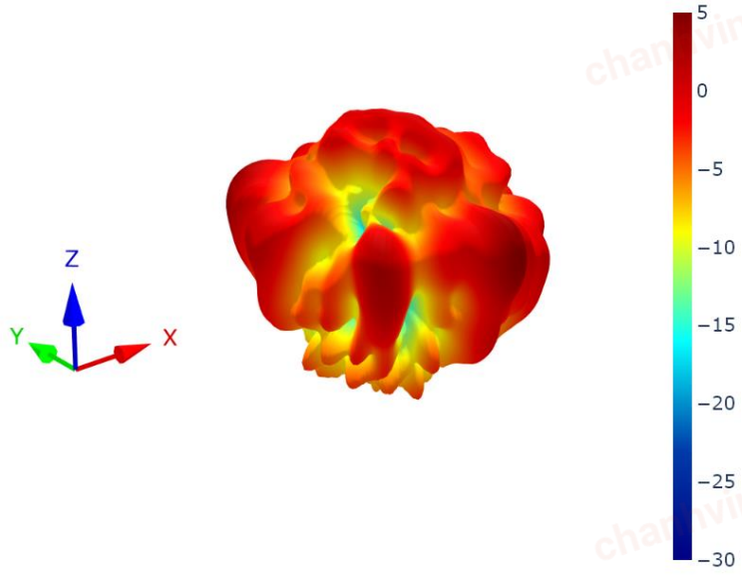

XZ Plane	YZ Plane	XY Plane

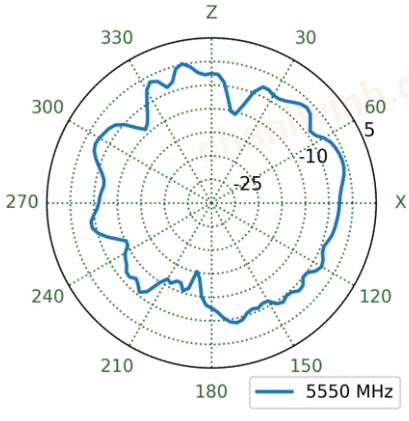

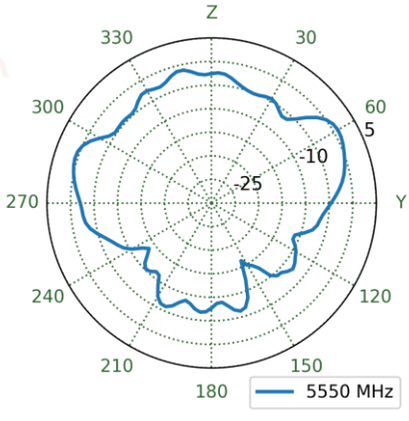

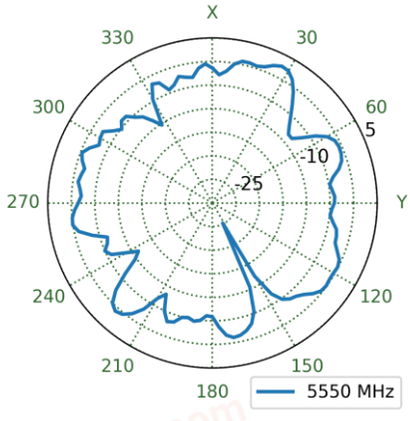

chanhvinh.com

Changelog for the datasheet

SPE-24-8-088 - MA8007.A.001

Revision: B (Current Version)	
Date:	2025-01-13
Notes:	Updated reference to IK10 rating, product descriptions, reference of PC material on the enclosure.
Author:	Conor McGrath

Previous Revisions

Revision: A (Original First Release)	
Date:	2024-05-02
Notes:	Initial Release
Author:	Gary West

chanhvinh.com

TAOGLAS

TAOGLAS®

www.taoglas.com