chanhvinh.com

TAOGLAS®



Datasheet

Guardian

Part No:
MA998.A.001

Description

8in1 Guardian - 1*GNSS, 4*5G/4G MIMO and 3*Wi-Fi MIMO

Features:

Low-profile Housing with Wall Mount
1* GNSS (L1/L5)
4* 5G/4G MIMO 600 – 6000 MHz
3* WI-FI MIMO 2.4GHz/5.8/7.125 GHz
Worldwide 4G Bands including 3G and 2G
IP67 Waterproof Enclosure
Dims: 146.05mm * 136.05mm * 20mm
Cables: 2m Low Loss TGC-302 and RG174
Connectors: GNSS and Cellular SMA(M) / Wi-Fi RP-SMA(M)
Custom Cables and Connectors Available
RoHS & Reach Compliant

chanhvinh.com

1.	Introduction	3
2.	Specification	5
3.	Mechanical Drawing	9
4.	Packaging	10
5.	Antenna Characteristics	13
6.	LNA Characteristics	22
7.	Radiation Patterns	25
	Changelog	89

Taoglas makes no warranties based on the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. Taoglas reserves all rights to this document and the information contained herein. Reproduction, use or disclosure to third parties without express permission is strictly prohibited.

chanhvinh.com

1. Introduction



The Taoglas MA998 Guardian Series has been designed to be the smallest, high-performance combination panel antenna in the world. The heavy-duty, IP67 rated, external enclosure combines all 8 antenna elements in a low profile, compact form. The Guardian combines 1x GNSS, 4x 5G/4G Cellular antennas and 3x Wi-Fi 6 antennas making it compatible with the next generation of modules and routers.

The MA998 has been designed as a low-profile solution for IoT and Automotive applications where space is at a premium allowing it to be installed in the headliners of vehicles or on the back window of a vehicle. The Guardian series is an ideal external combination antenna solution that can be used where drilling a hole through the roof of a vehicle or a metal panel for an external antenna is not feasible or desired.

Typical applications include:

- Passenger Bus and Rail Applications
- Automotive and Heavy Equipment
- Vehicle Tracking and Telematics
- First Responder and Emergency Services
- HPUE applications such as Public Safety Communications and Critical Infrastructure and Utilities

The Guardian can be adhesive, or wall mounted as standard. The adhesive pad and wall bracket are included in the product packaging. Pole and desk mount option are also available as separate kits.

Taoglas also provides services to ensure optimum overall performance for your entire system by working closely with the customer to design in the best antenna and potential additional components for your system. 5G/4G applications demand high-speed data uplink and downlink. High efficiency and high gain MIMO antennas are necessary to achieve the required signal to noise ratio and throughput required to solve these challenges.

chanhvinh.com


Taoglas also takes care to ensure high isolation between the MIMO antennas to prevent self-interference. Low loss cables are used to keep efficiency high over longer cable lengths. In contrast, smaller MIMO antennas with poor quality thin cables will have reduced efficiency and isolation, which would lead to a large drop in system throughput, increased incidences of signal drops, and may indeed not make a system connection at all.

Cable type and length, and connectors are fully customizable, and the Guardian can also be customized for other configurations. It is also available in white (MA998.W.001). Contact your regional Taoglas customer support team for more information.

chanhvinh.com

2. Specification

GNSS Frequency Bands					
GPS	L1 1575.42 MHz	L2 1227.6 MHz	L5 1176.45 MHz		
	■	□	■		
GLONASS	G1 1602 MHz	G2 1248 MHz	G3 1207 MHz		
	■	□	□		
Galileo	E1 1575.24 MHz	E5a 1176.45 MHz	E5b 1201.5 MHz	E6 1278.75 MHz	
	■	■	□	□	
BeiDou	B1C 1575.42 MHz	B1I 1561 MHz	B2a 1176.45 MHz	B2b 1207.14 MHz	B3 1268.52 MHz
	■	■	■	□	□
L-Band	L-Band 1542 MHz				
	□				
QZSS (Regional)	L1 1575.42 MHz	L2C 1227.6 MHz	L5 1176.45 MHz	L6 1278.75e6	
	■	□	■	□	
IRNSS (Regional)	L5 1176.45 MHz				
	■				
SBAS	L1/E1/B1 1575.42 MHz	L5/B2a/E5a 1176.45 MHz	G1 1602 MHz	G2 1248 MHz	G3 1207 MHz
	■	■	■	□	□

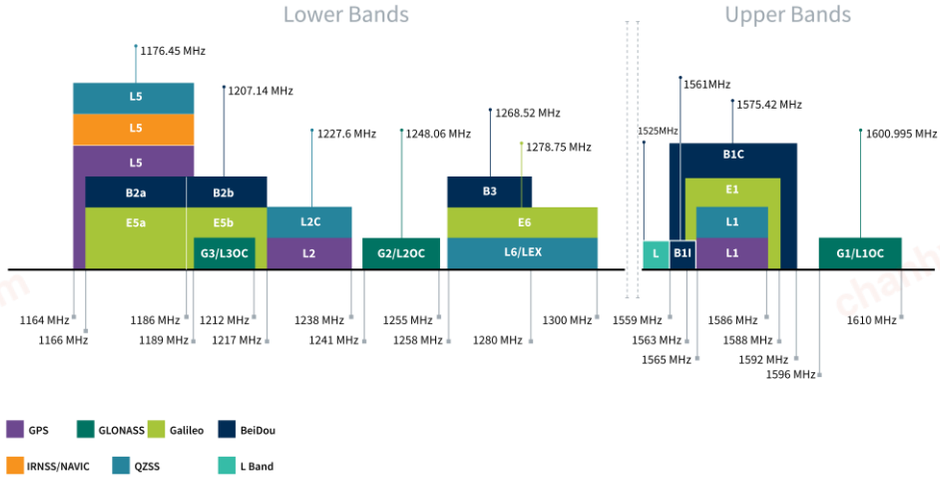

GNSS Bands and Constellations

chanhvinh.com

GNSS Electrical				
Frequency (MHz)	**1176.45**	**1561**	**1575.42**	**1603**
Passive Antenna Efficiency (%)	58.5	68.5	60.7	62.5
Average Gain (dB)	-2.33	-1.64	-2.17	-2.04
Peak Gain (dBi)	2.31	2.94	2.87	3.08
Group Delay Mean (ns)	46.51	29.7	31.48	19.62
Group Delay Variation (ns)	72	52	88	92
Impedance	50 Ω			
Polarization	Linear			
Radiation Pattern	Omni			
Max. input power	10W			

LNA and Filter Electrical Properties				
Frequency (MHz)	**1176.45**	**1561**	**1575.42**	**1603**
Gain(dB)	30.3	28.2	28.3	28.3
Nosie Figure(dB)	2.6	2.8	2.8	2.4
Return Loss (dB)	< -8			
Input Voltage (V)	+ 1.8 to 5.5			
Current consumption (mA)	10 ± 3			
Outer Band Attenuation (dB)	> 70dB @ 600-960MHz; > 65dB @ 1710-3000MHz			

chanhvinh.com

LTE Electrical									
Band	Frequency (MHz)	Measurement	Efficiency (%)	Average Gain (dB)	Peak Gain (dBi)	Impedance	Polarization	Radiation Pattern	Max. input power
5GNR/4G Band71	617-698	LTE1	41.0	-3.87	1.85	50 Ω	Linear	Omni	2W
		LTE2	43.0	-3.66	1.78				
		LTE3	47.5	-3.24	4.23				
		LTE4	39.5	-4.03	2.26				
4G/3G Band 12,13,14,17,28,29	698-824	LTE1	56.2	-2.50	3.06				
		LTE2	52.7	-2.78	3.76				
		LTE3	45.8	-3.39	2.94				
		LTE4	53.0	-2.76	3.81				
4G/3G/NB-IoT/Cat M Band 5,8,18,19,20,26,27	824-960	LTE1	62.6	-2.04	3.53				
		LTE2	64.5	-1.90	3.96				
		LTE3	53.2	-2.74	3.46				
		LTE4	59.0	-2.29	5.15				
5GNR/4G Band 21,32,74,75,76	1427-1518	LTE1	71.0	-1.49	3.95				
		LTE2	58.3	-2.34	2.63				
		LTE3	59.8	-2.23	2.49				
		LTE4	67.0	-1.74	3.66				
4G/3G Band 1,2,3,4,9,23,25,35,39, 66	1710-2200	LTE1	47.4	-3.24	2.61				
		LTE2	46.0	-3.37	2.49				
		LTE3	46.7	-3.30	3.18				
		LTE4	49.5	-3.05	3.32				
4G/3G Band 7,30,38,40,41	2300-2690	LTE1	52.6	-2.79	4.33				
		LTE2	50.4	-2.97	3.65				
		LTE3	51.7	-2.87	3.48				
		LTE4	52.9	-2.76	4.18				
5GNR/4G Band 22,42,48,77,78,79	3300-5000	LTE1	66.4	-1.78	7.26				
		LTE2	63.9	-1.95	6.95				
		LTE3	64.3	-1.92	6.21				
		LTE4	69.3	-1.59	7.42				
LTE5200/Wi-Fi5800	5150-5925	LTE1	54.5	-2.63	5.96				
		LTE2	58.9	-2.30	5.15				
		LTE3	56.1	-2.51	5.21				
		LTE4	52.1	-2.83	5.38				

chanhvinh.com


Wi-Fi Electrical									
Band	Frequency (MHz)	Measurement	Efficiency (%)	Average Gain (dB)	Peak Gain (dBi)	Impedance	Polarization	Radiation Pattern	Max. input power
Wi-Fi - 2GHz	2400-2500	Wi-Fi1	47.1	-3.27	2.45	50 Ω	Linear	Omni	2W
		Wi-Fi2	43.1	-3.66	2.74				
		Wi-Fi3	57.1	-2.43	6.94				
Wi-Fi - 5GHz	5150-5850	Wi-Fi1	61.0	-2.14	5.00				
		Wi-Fi2	58.5	-2.33	4.70				
		Wi-Fi3	60.1	-2.21	6.63				
Wi-Fi - 6GHz ~~Wi-Fi3~~	5925-7125	Wi-Fi1	54.7	-2.62	5.15				
		Wi-Fi2	54.7	-2.62	4.44				
		Wi-Fi3	57.4	-2.41	6.51				

Mechanical	
Dimensions	146.06 x 136.05 x 20mm
Weight	~~800g~~800g
Material	ASA
Connector	GNSS – SMA(M) Wi-Fi – SMA(M) – RP LTE – SMA(M)
Cable	GNSS – RG-174 Wi-Fi – TGC-302 LTE – TGC-302

Environmental	
Temperature Range	-40°C to 85°C
Relative Humidity	Non-condensing 65°C 95% RH
RoHs & REACH Compliant	Yes

chanhvinh.com

3. Mechanical Drawing

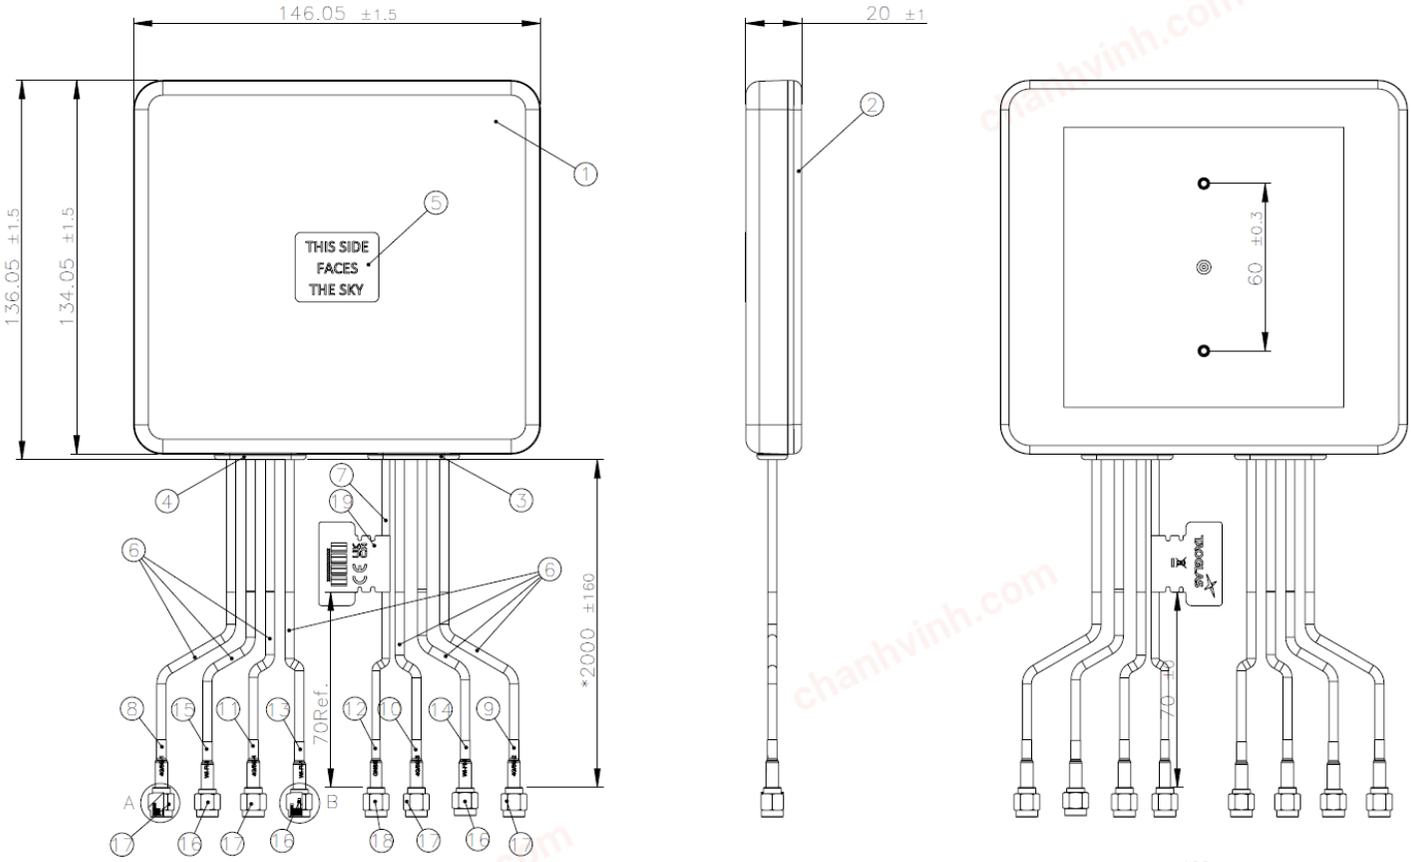

	Name	Material	Finish	Qty
1	Top Housing	ASA	SPI-A2	1
2	Bottom housing_Guardian_Black	ASA	Black	1
3	Grommet 1_Black	Silicone Rubber	Black	1
4	Grommet2_Black	Silicone Rubber	Black	1
5	Clear Label White Font (30x25)	PET	Clear Label White Font	1
6	TGC-302 low loss coaxial cable	PVC	Black	7
7	RG174 Coaxial Cable	PVC	Black	1
8	Heat Shrink Tube(4G/5G-1)	PE	Red Tube/White Text	1
9	Heat Shrink Tube(4G/5G-2)	PE	Red Tube/White Text	1
10	Heat Shrink Tube(4G/5G-3)	PE	Red Tube/White Text	1
11	Heat Shrink Tube(4G/5G-4)	PE	Red Tube/White Text	1
12	Heat Shrink Tube(GNSS)	PE	Blue Tube/White Text	1
13	Heat Shrink Tube (WIFI-1)	PE	Yellow tube/ Black text	1
14	Heat Shink Tube (WIFI-2)	PE	Yellow Tube/Black Text	1
15	Heat Shrink Tube (Wi-Fi-3)	PE	Yellow Tube /Black Text	1
16	SMA(M)ST_RP	Brass	AU PLATING	3
17	SMA(M)ST Plug for TGC-302	Brass	Au Plated	4
18	SMA(M)ST Plug _for RG-316/RG-174	Brass	Au Plated	1
19	CE,WEEE and UKCA mark logo Label	PEPA	White	1
20	Double Adhesive Foam(100x100x3.54t)	CR4305+3M9448HK 3.5t	Black	1
21	Tapping Screw_M3.5*25 countersunk flat	SUS304	N/A	2
22	Wall Mount Stud 6*24L	Nylon	White	2
23	Wall Mounting Bracket	ASA	Black	1

chanhvinh.com

4. Packaging


~~1 PCS / Zipper bag~~



~~1 PCS / PE bag~~




~~Box: 260 x 235 x 105mm~~
~~SPQ Label~~
~~Barcode Label~~
~~Weight: 820g~~

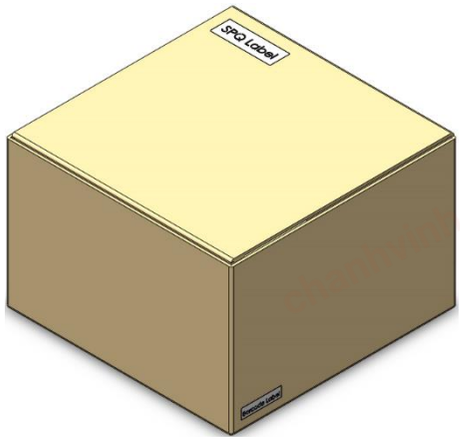

chanhvinh.com

~~6 PCS / Carton~~
~~Carton: 475 x 272 x 325mm~~
~~Carton Label~~
~~Weight: 5.69Kg~~

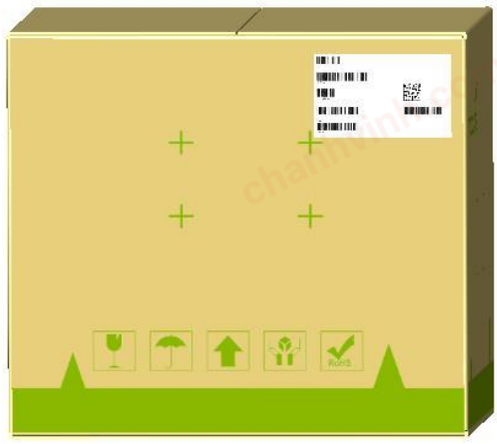

1 PCS / Zipper bag



1 PCS / PE bag



chanhvinh.com

Box: 260 x 235 x 105mm
SPQ Label
Barcode Label
Weight: 820g




6 PCS / Carton
Carton: 475 x 272 x 325mm
Carton Label
Weight: 5.69Kg




chanhvinh.com

5. Antenna Characteristics

5.1 Test Setup

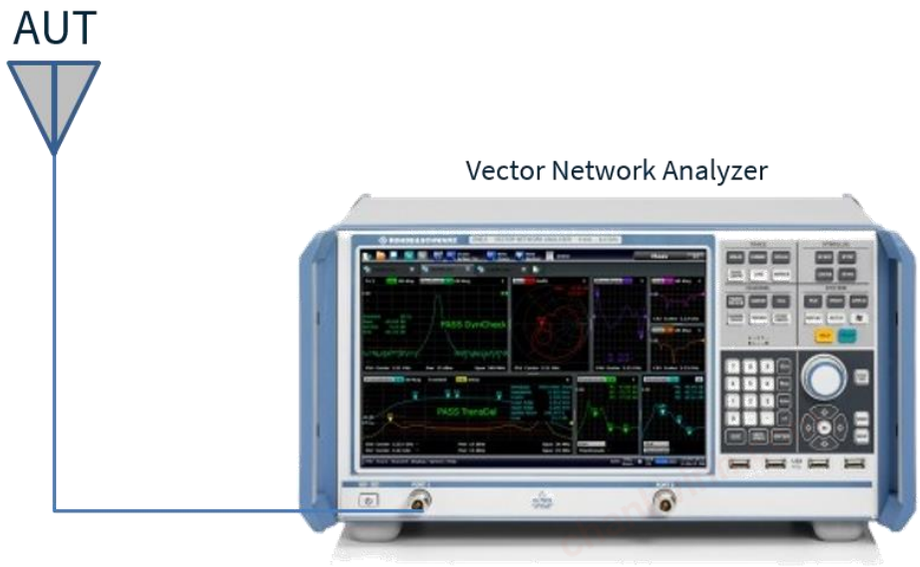


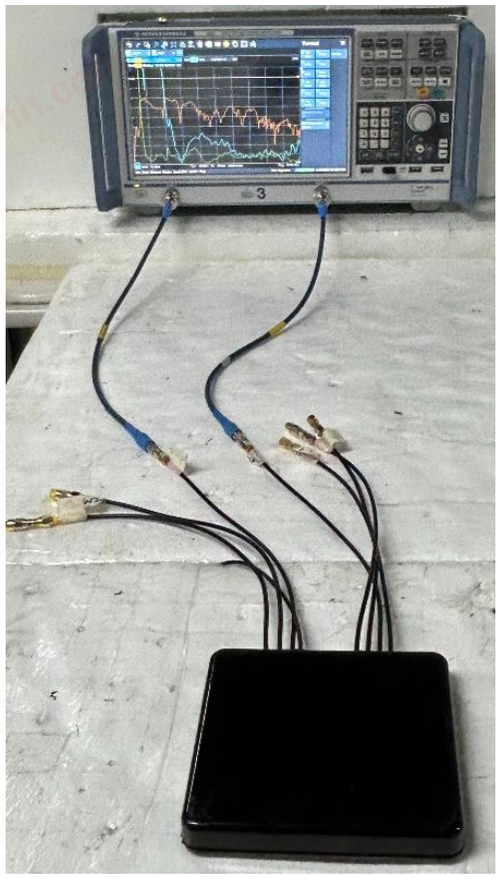


VNA Test Set-up

chanhvinh.com

5.2 GNSS – Return Loss

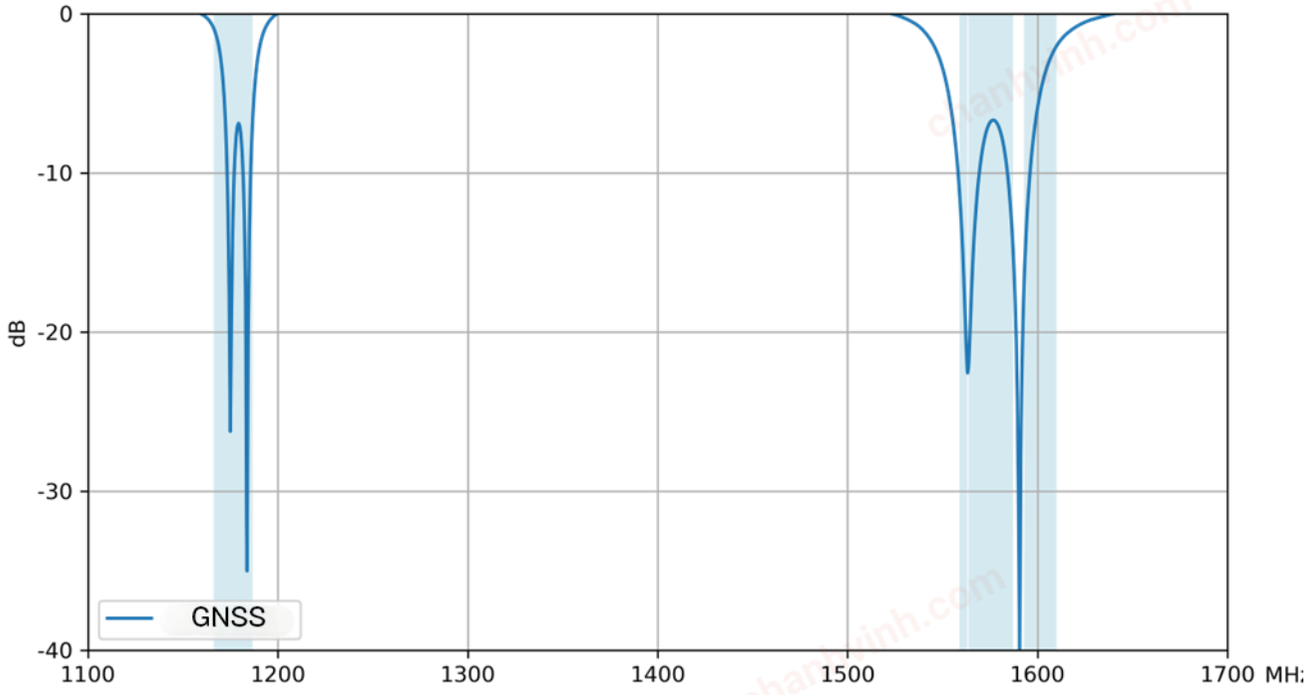


5.3 GNSS - Efficiency

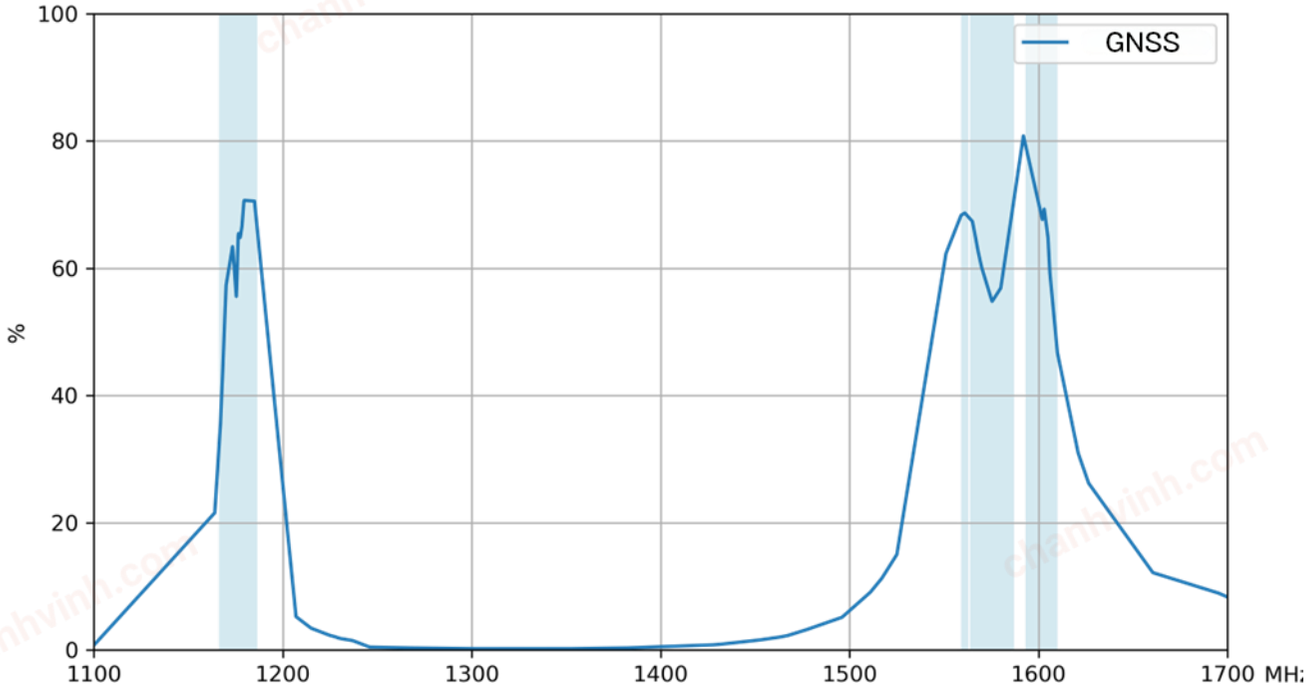


chanhvinh.com

5.4 GNSS - Average Gain

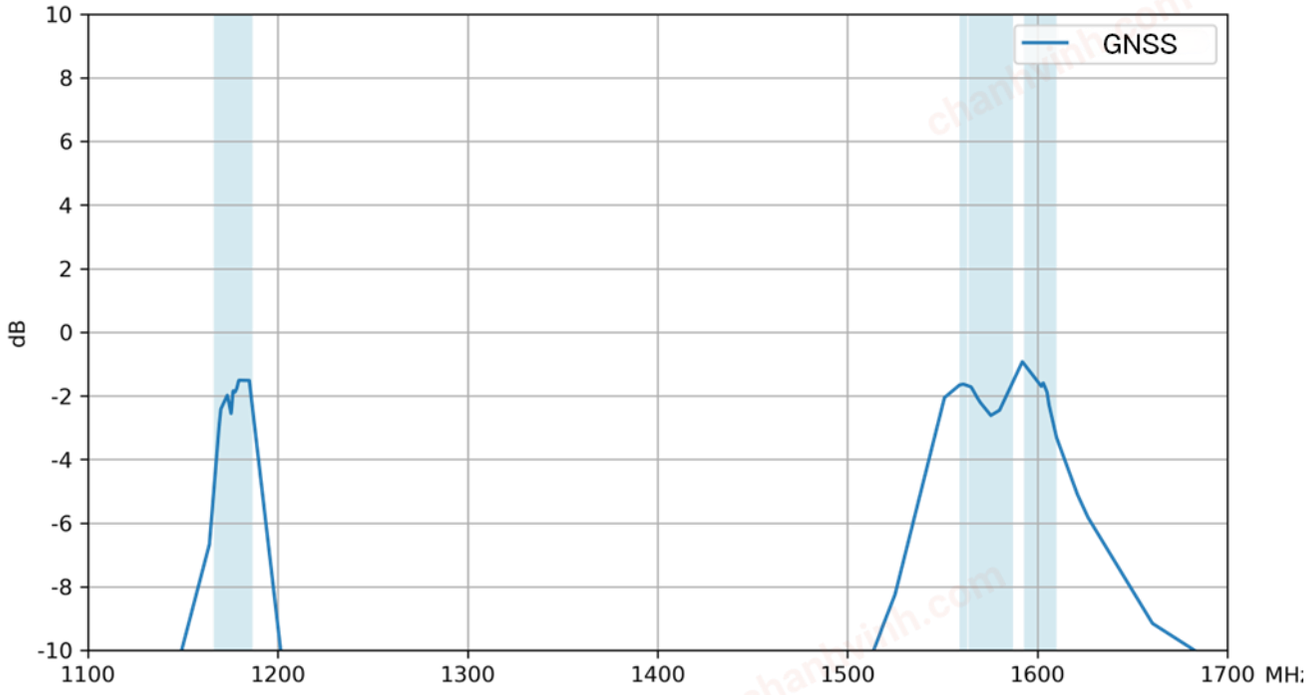


5.5 GNSS – Peak Gain

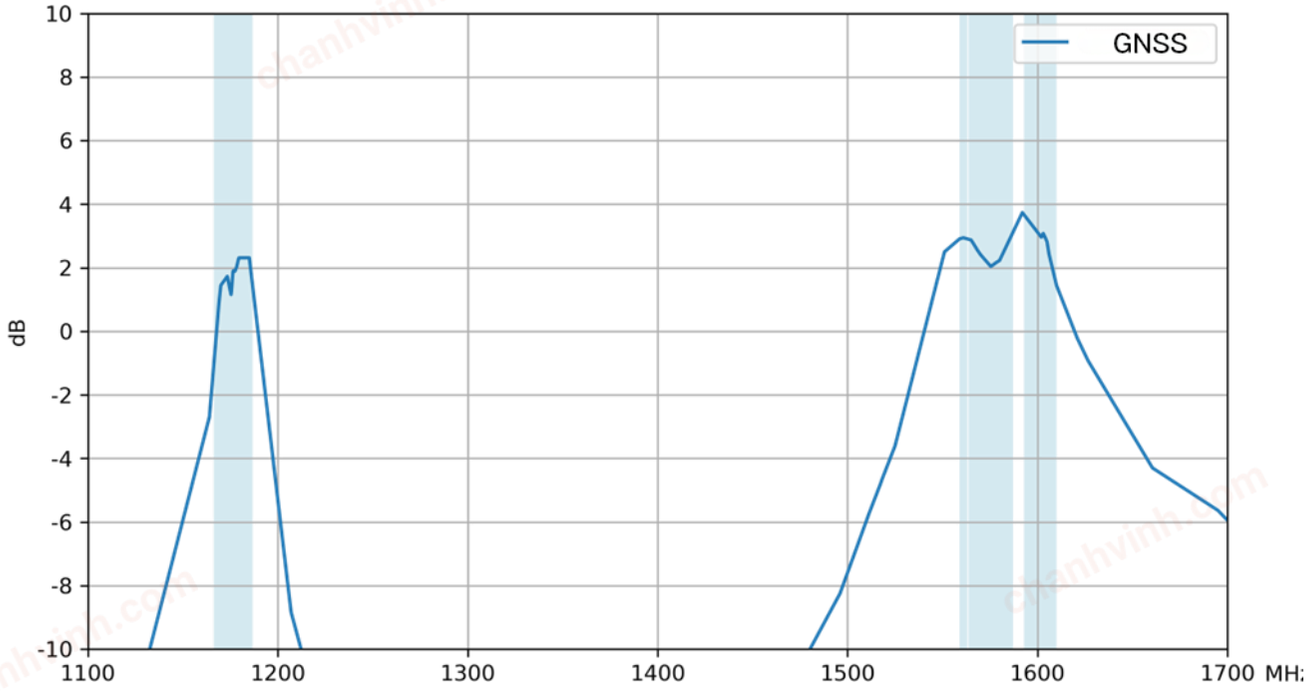


chanhvinh.com

5.6 LTE - Return Loss

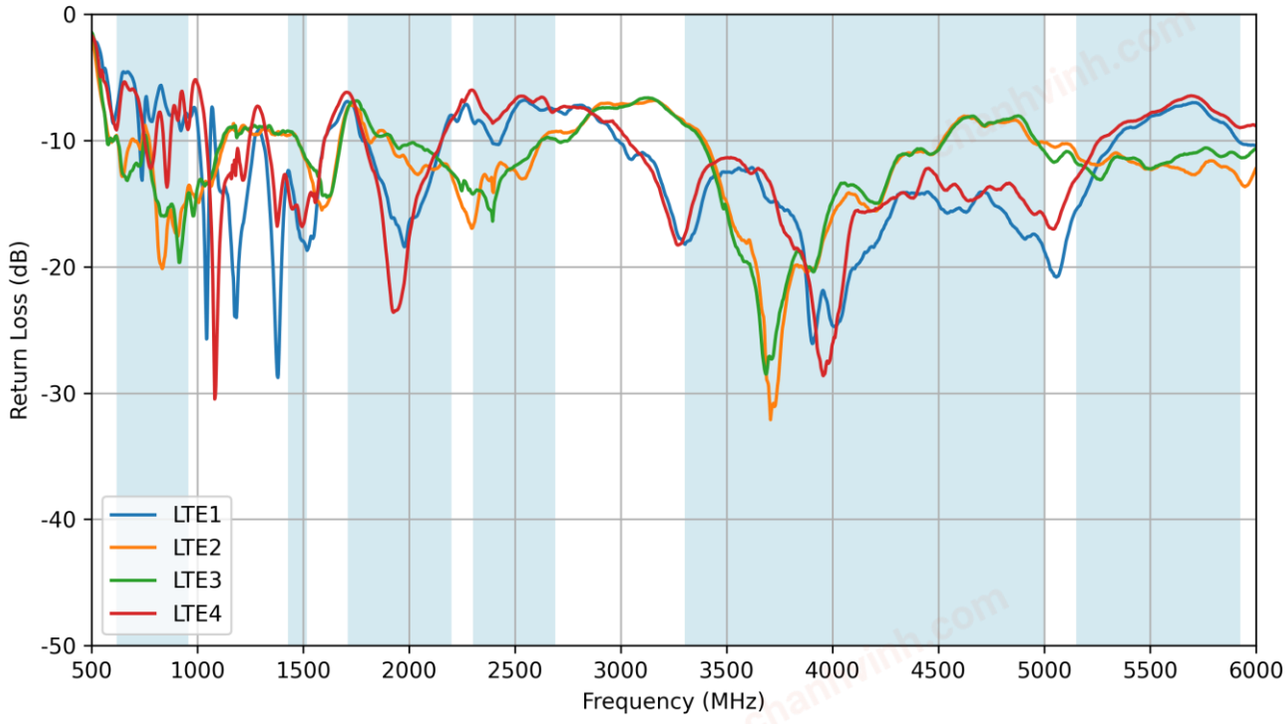


5.7 LTE - VSWR

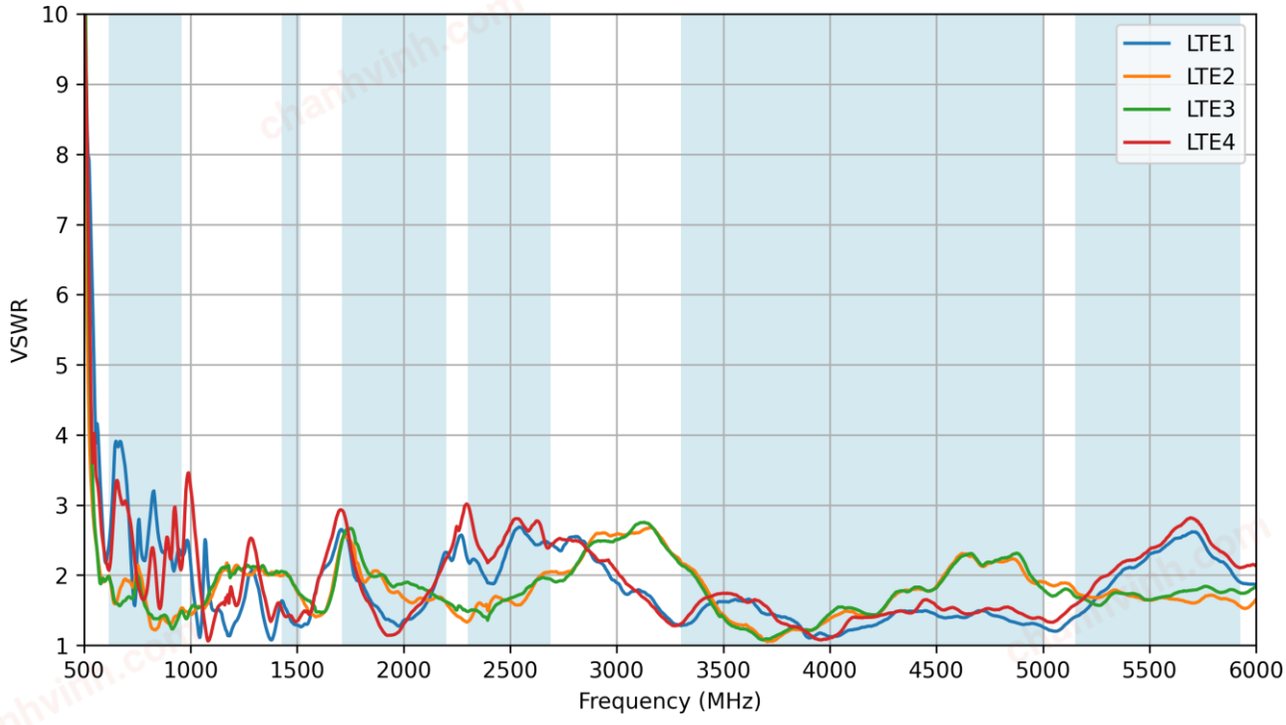


chanhvinh.com

5.8 LTE - Isolation

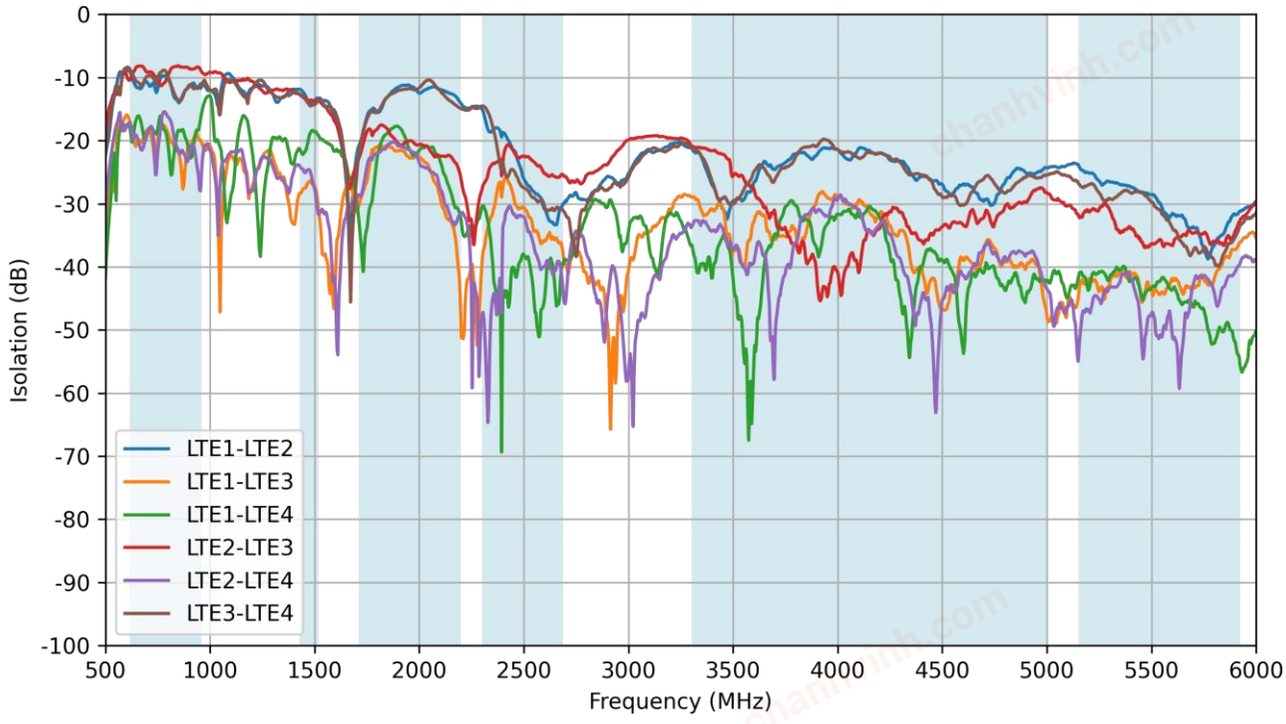


5.9 LTE - Efficiency

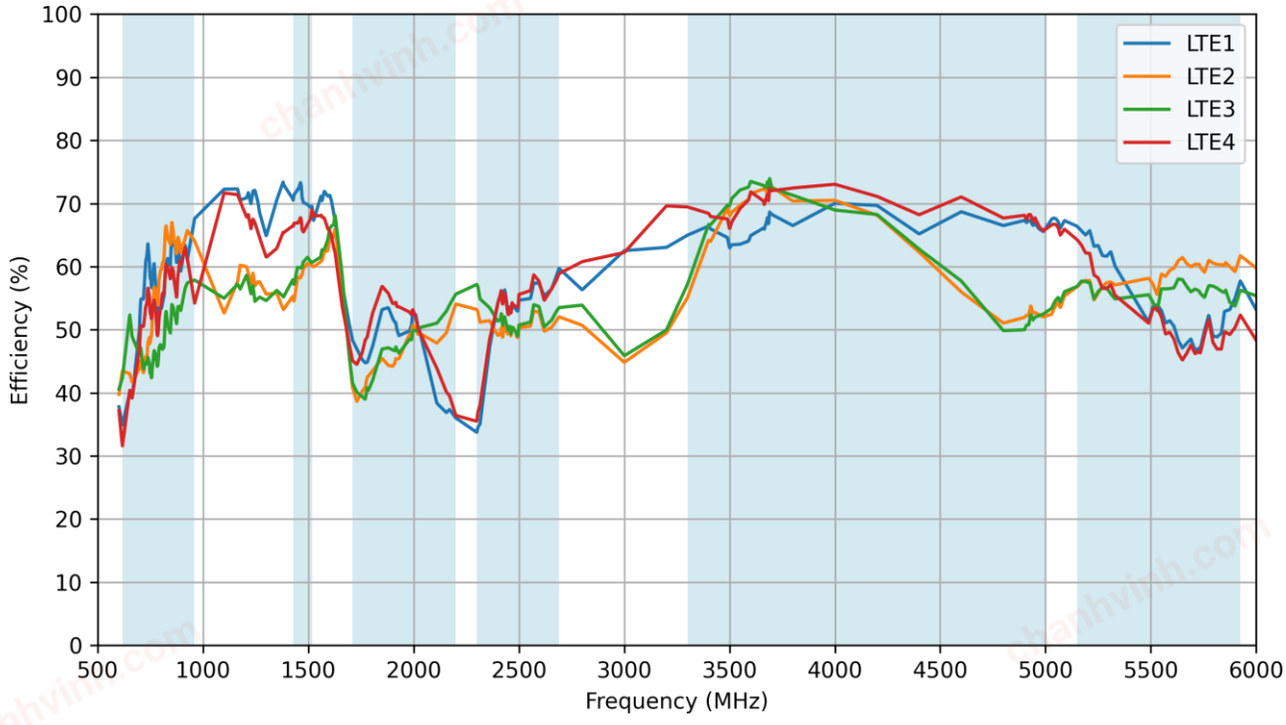


chanhvinh.com


5.10 LTE - Average Gain

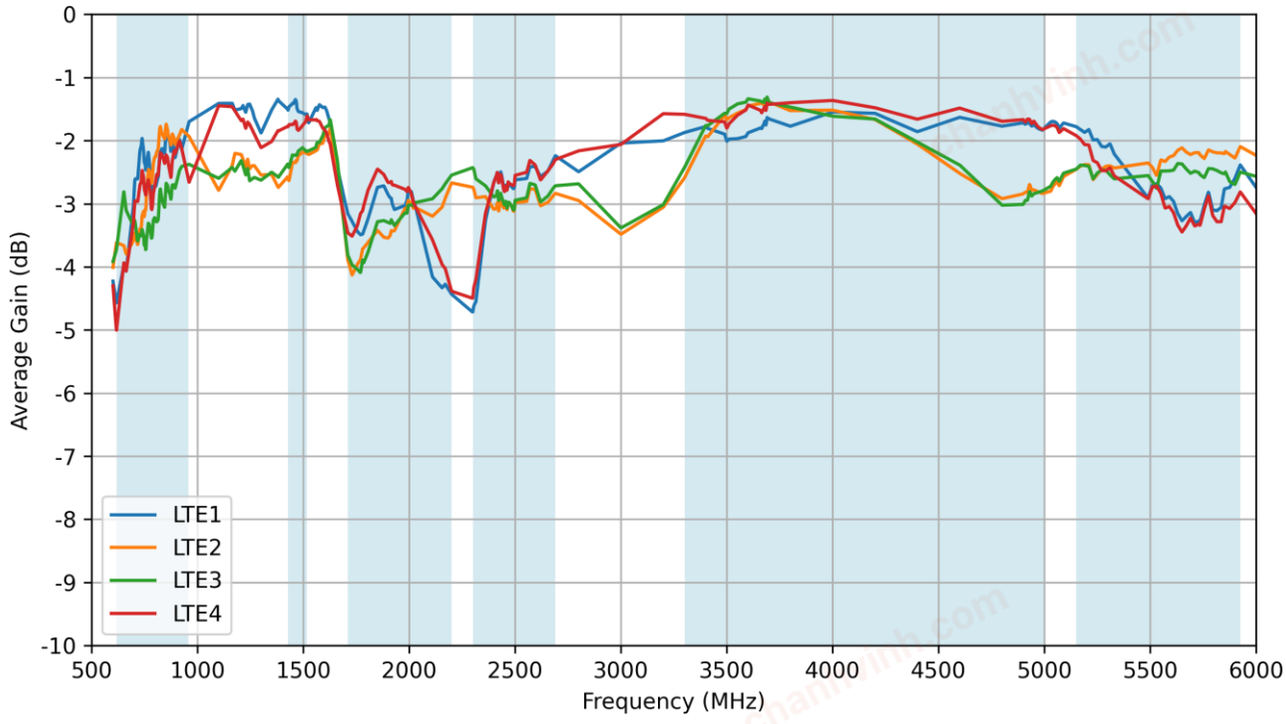


5.11 LTE - Peak Gain

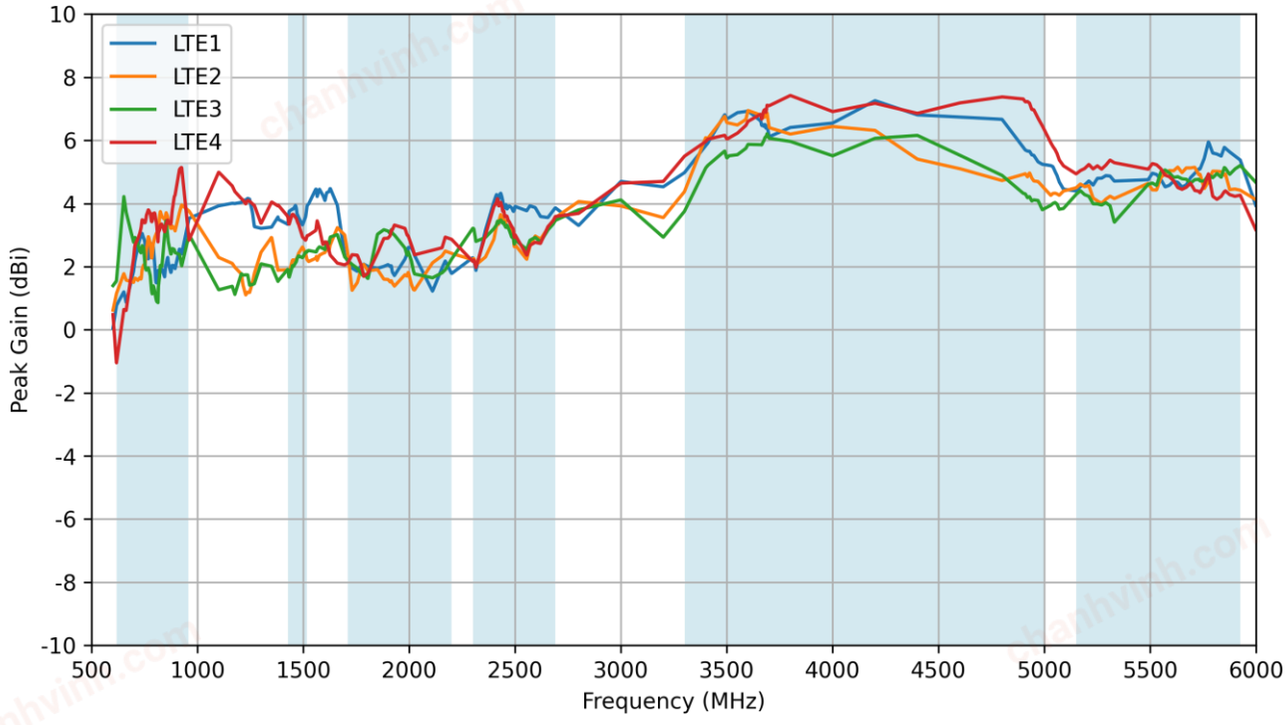

5.12 Wi-Fi - Return Loss

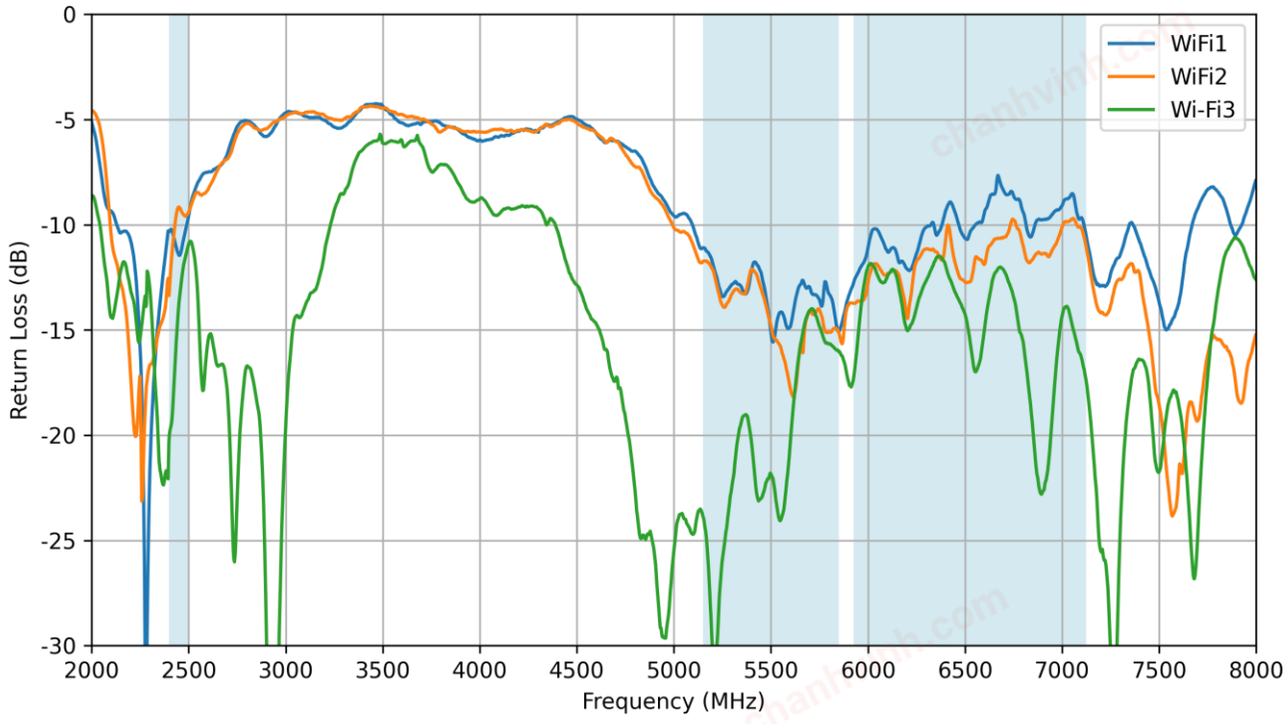


5.13 Wi-Fi - VSWR

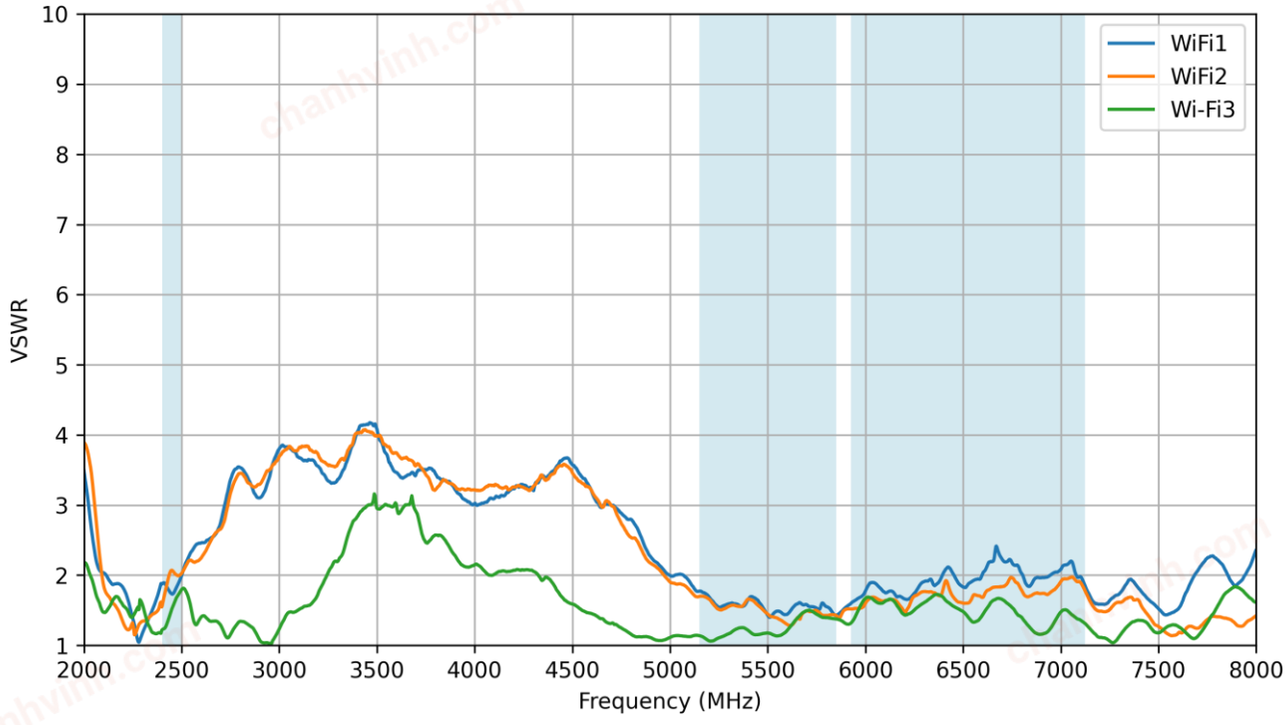


chanhvinh.com


5.14 Wi-Fi - Isolation

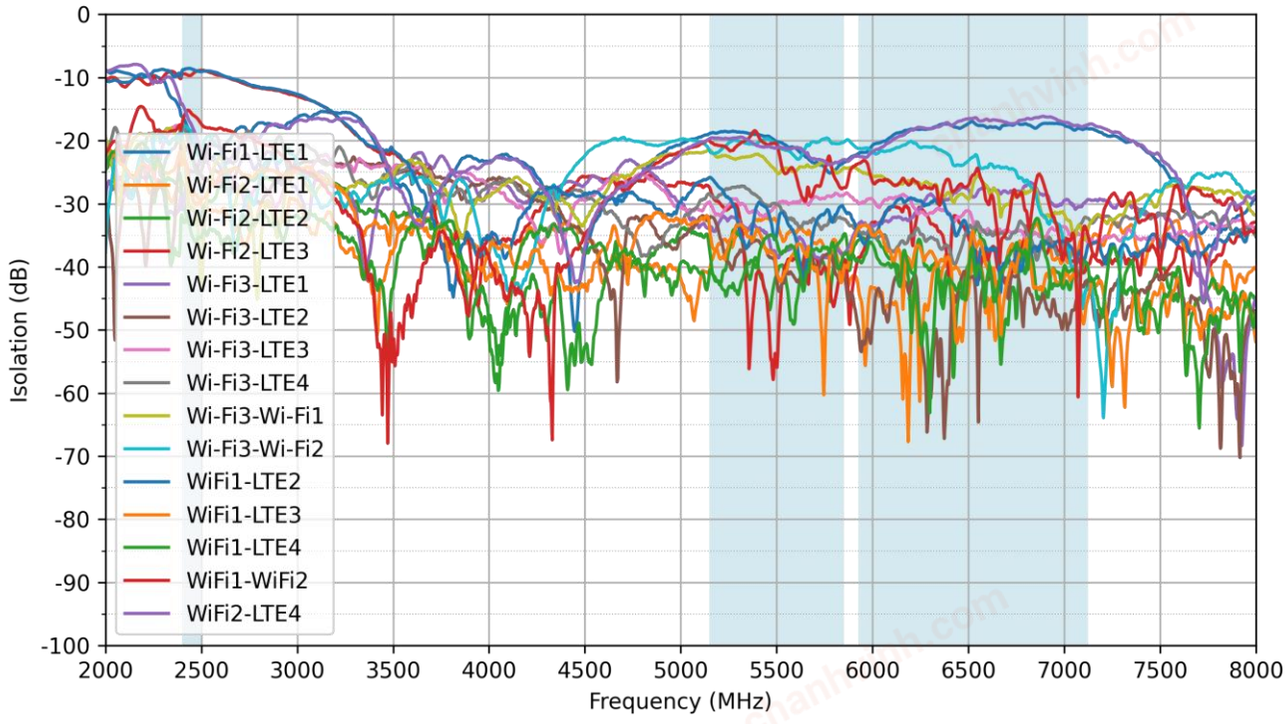


5.15 Wi-Fi - Efficiency

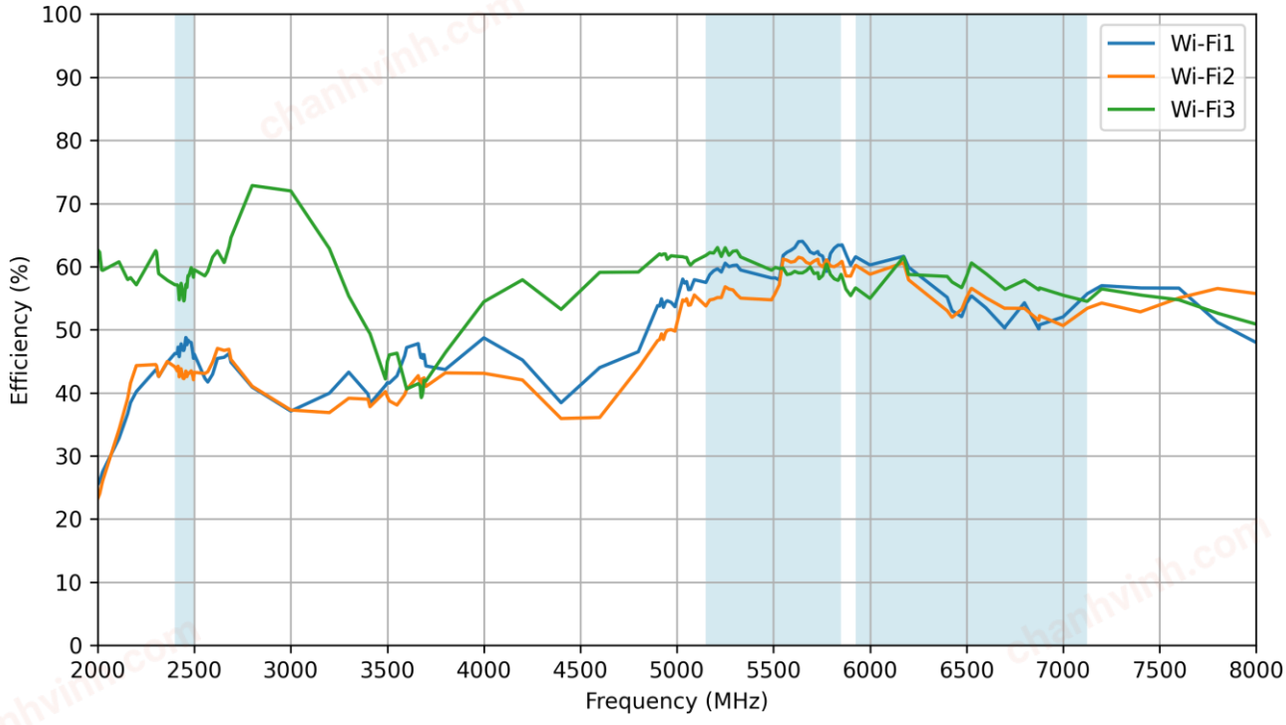

5.16 Wi-Fi - Average Gain

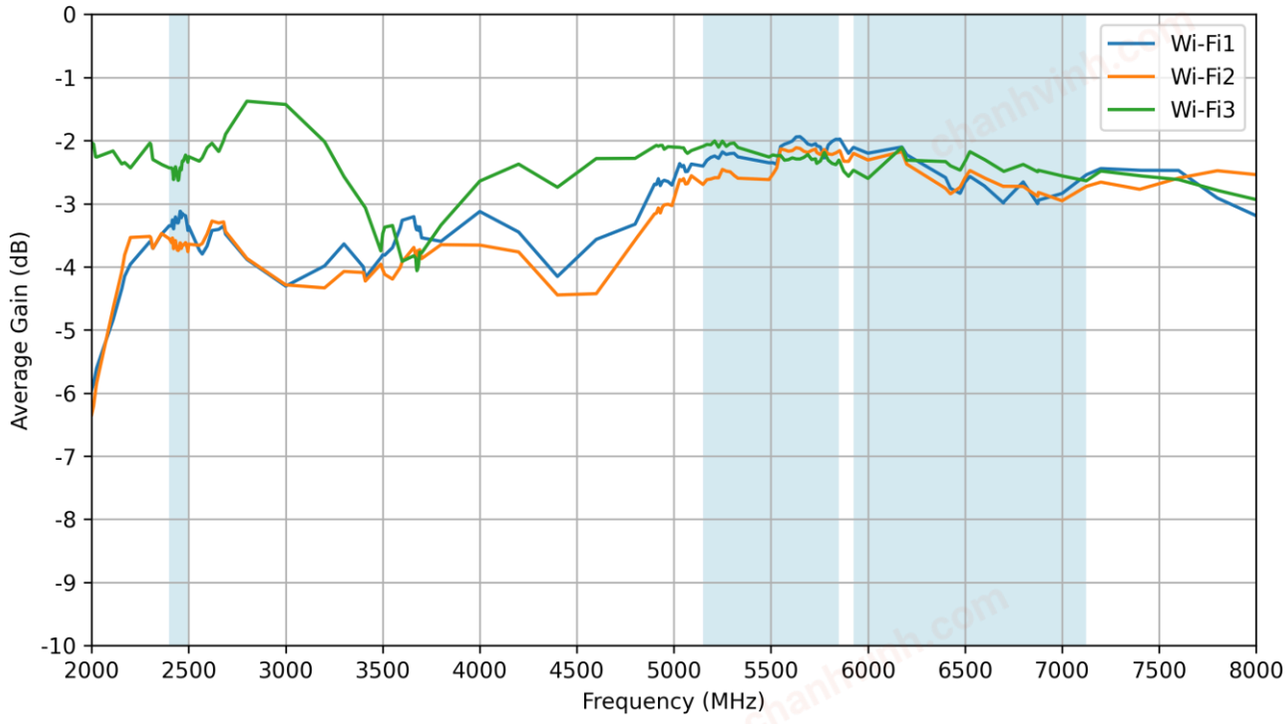


5.17 Wi-Fi - Peak Gain

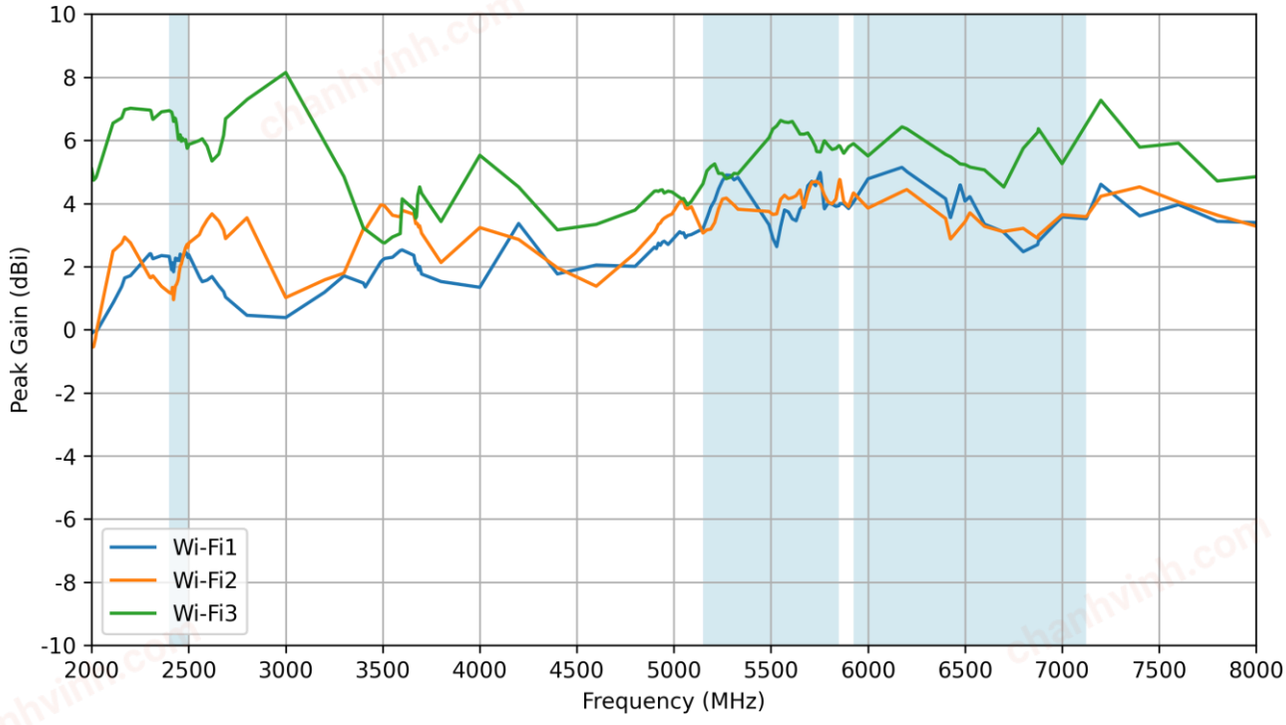


chanhvinh.com

6. LNA Characteristics

6.1 Block Diagram

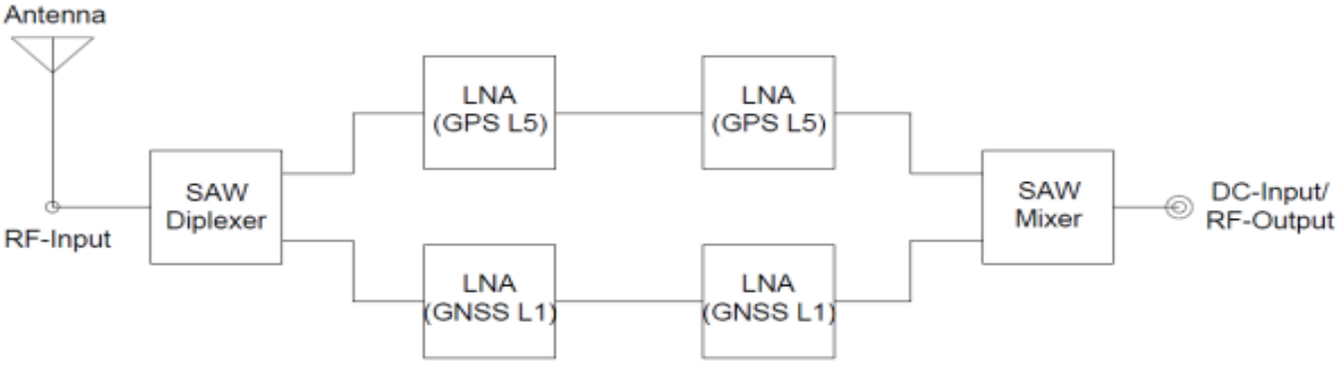


6.2 LNA Gain – Low-Band

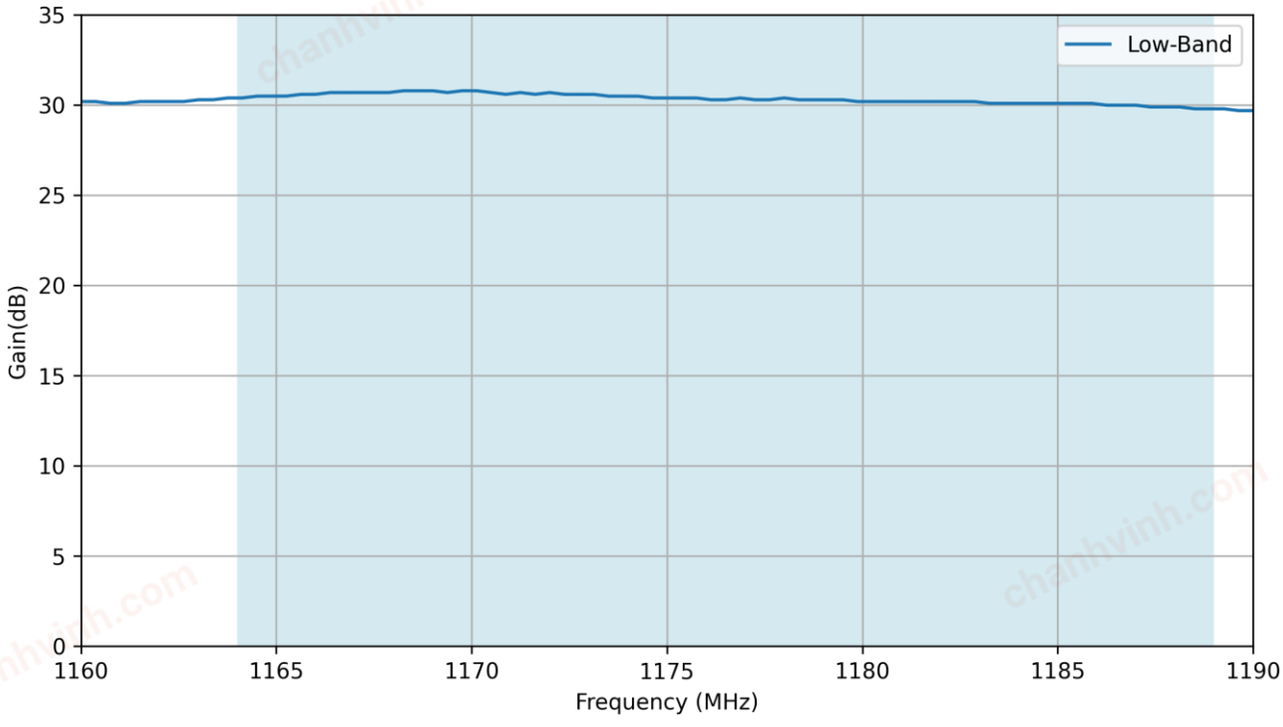


chanhvinh.com

6.3 LNA Gain – High-Band

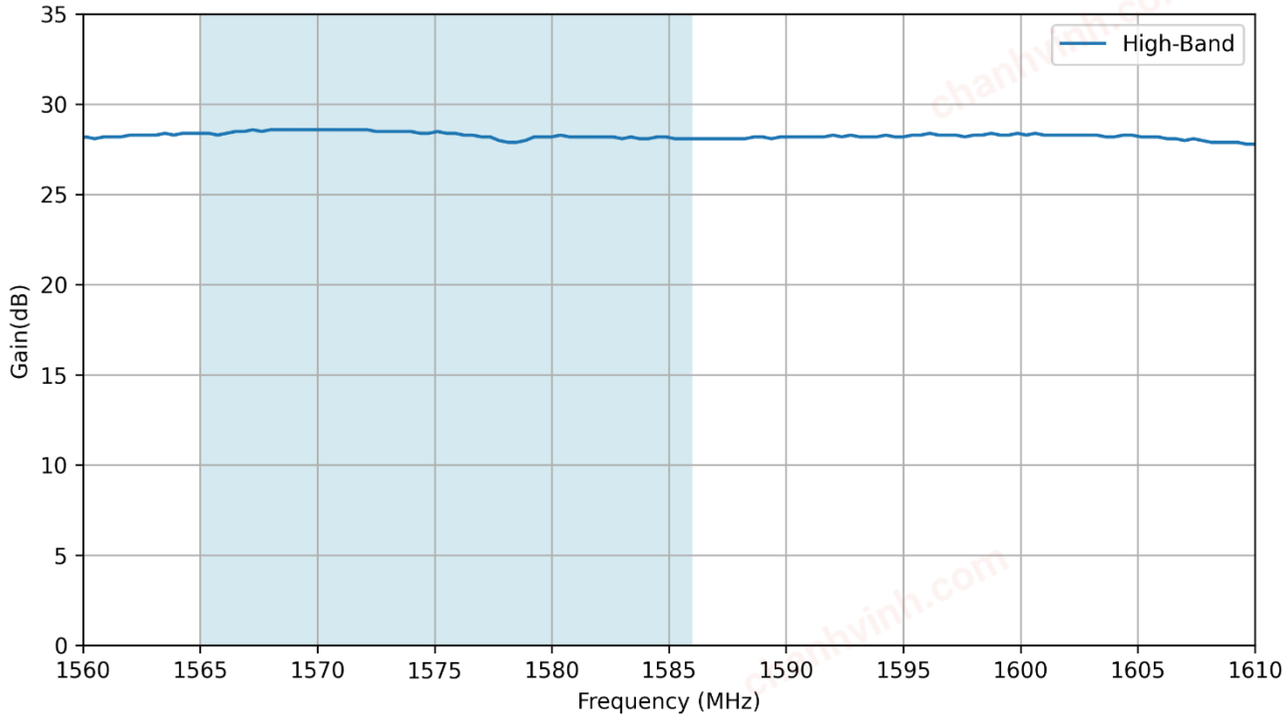


6.4 Noise Figure – Low-Band

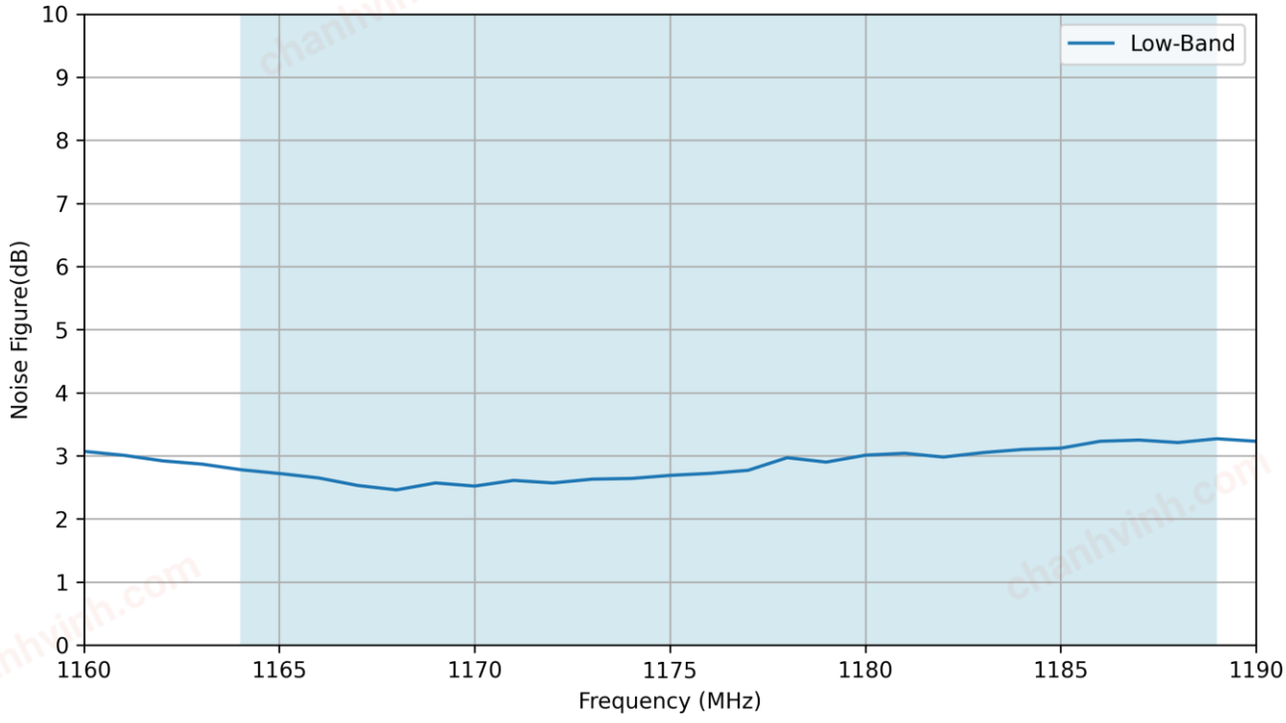


chanhvinh.com

6.5 Noise Figure – High-Band

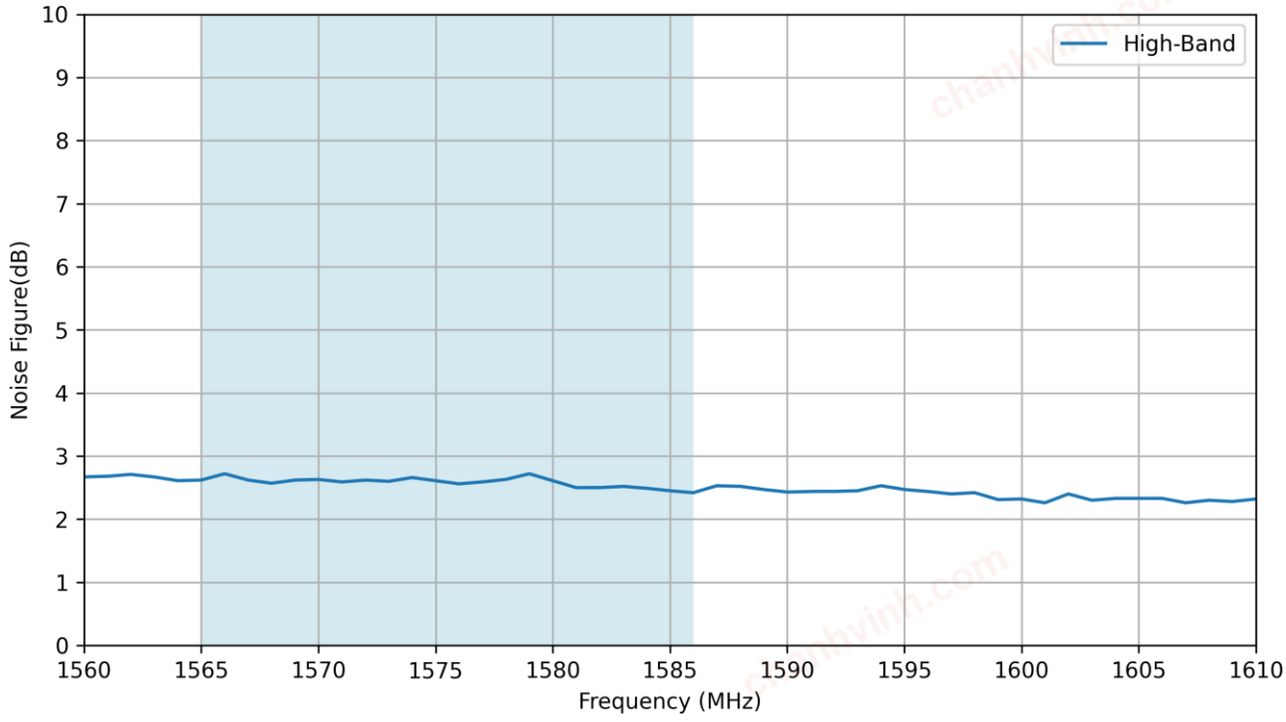


6.6 Out Of Band Rejection

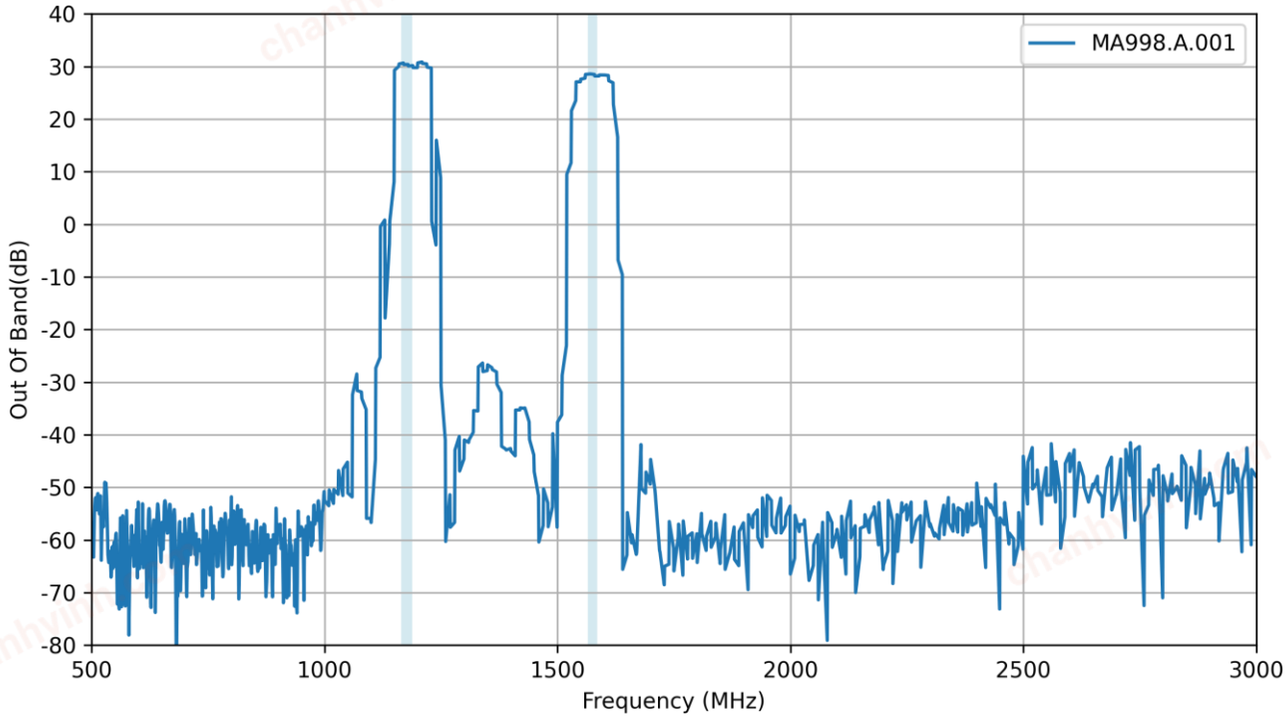


chanhvinh.com

7. Radiation Patterns

7.1 Test Setup

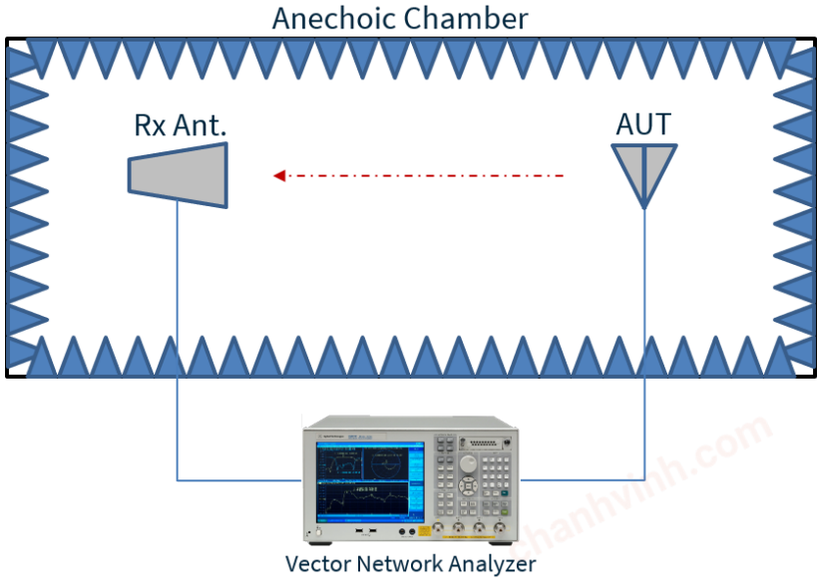




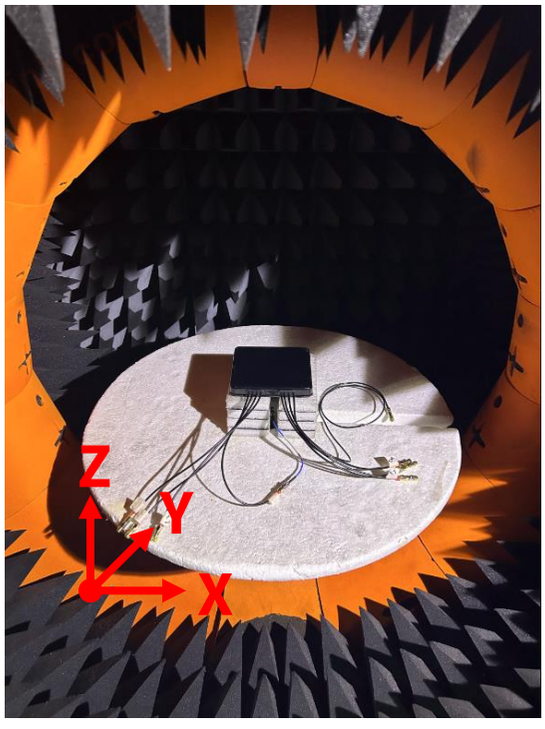


Chamber Test Set-up

chanhvinh.com


7.2 GNSS Patterns at 1176 MHz



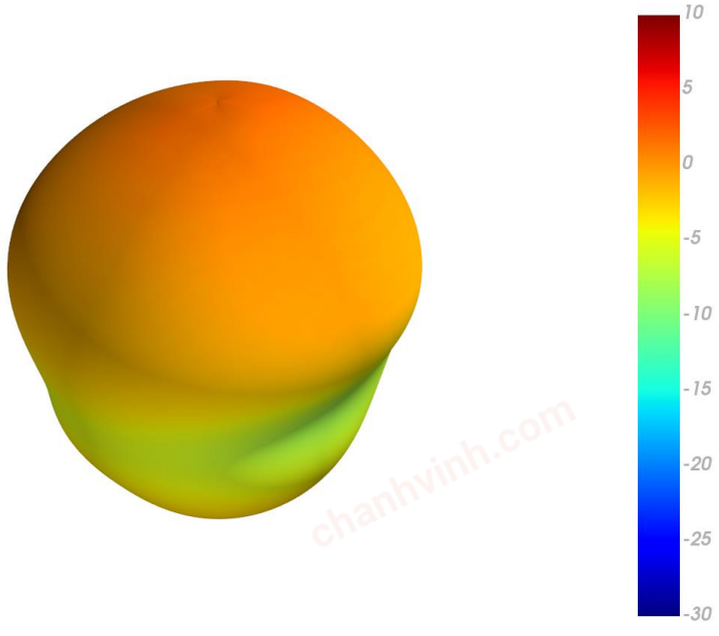


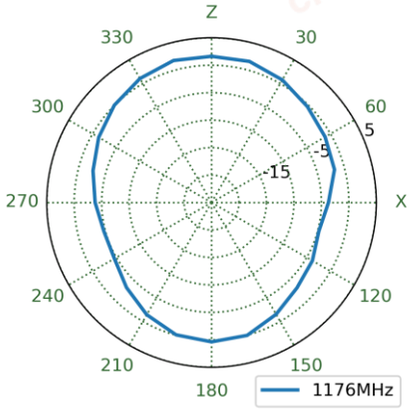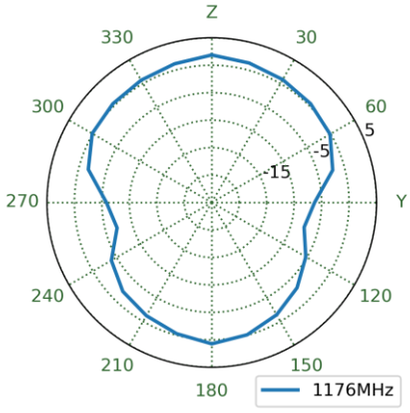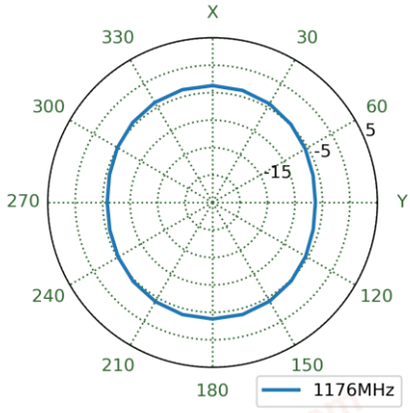XZ Plane	YZ Plane	XY Plane
		

chanhvinh.com


7.3 GNSS Patterns at 1561 MHz



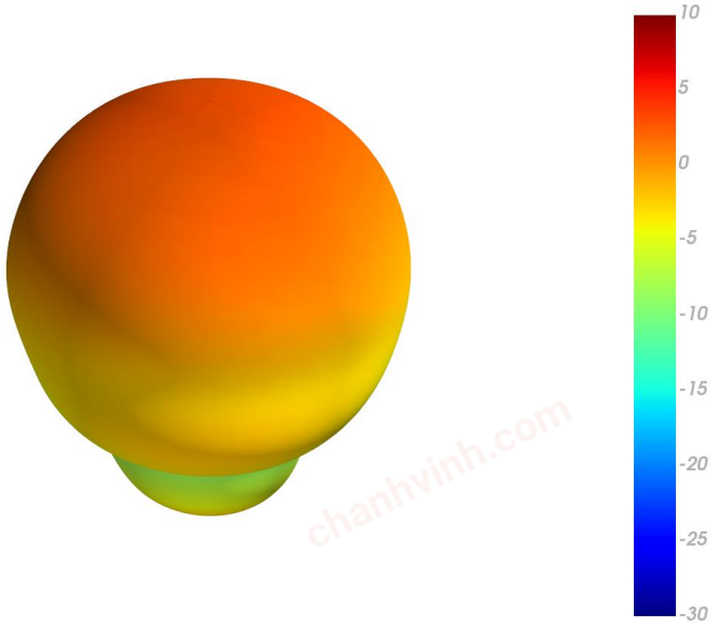


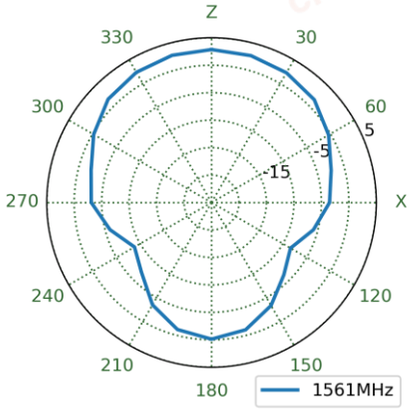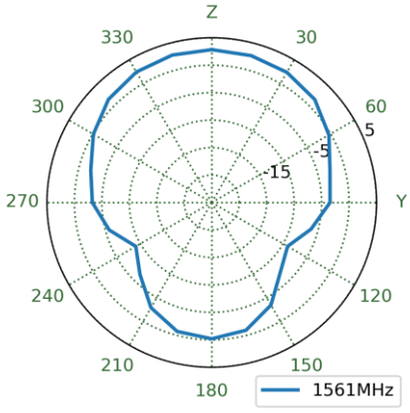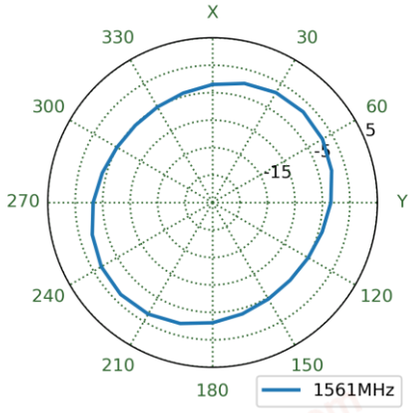XZ Plane	YZ Plane	XY Plane
		

chanhvinh.com


7.4 GNSS Patterns at 1575 MHz

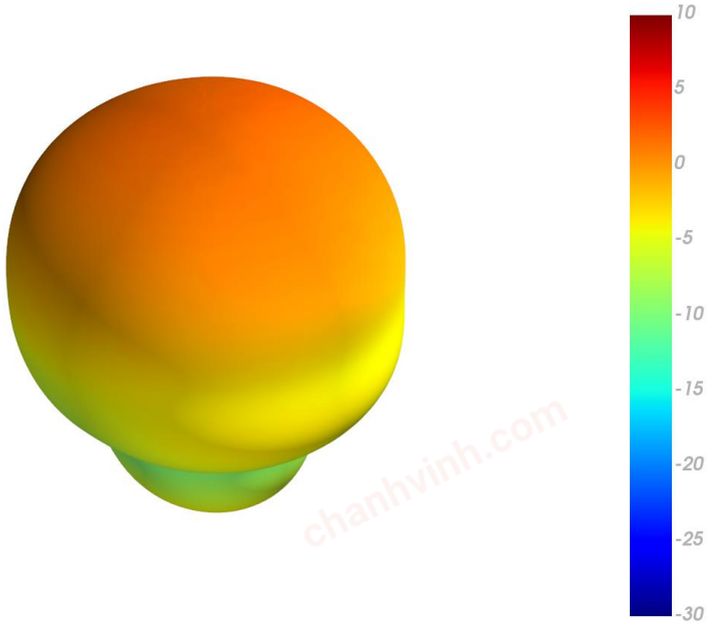

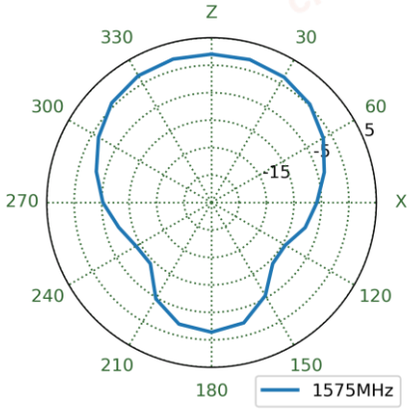
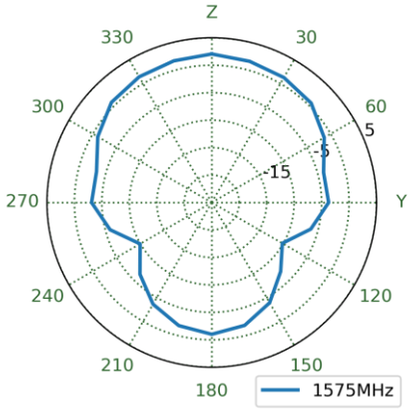
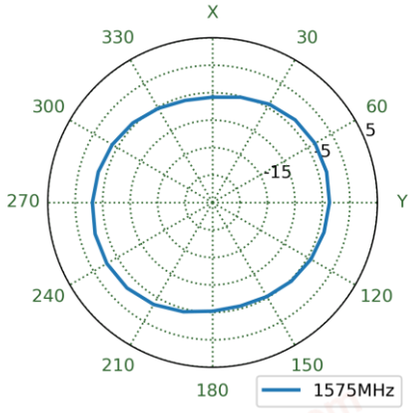
XZ Plane	YZ Plane	XY Plane
		

chanhvinh.com


7.5 GNSS Patterns at 1602 MHz



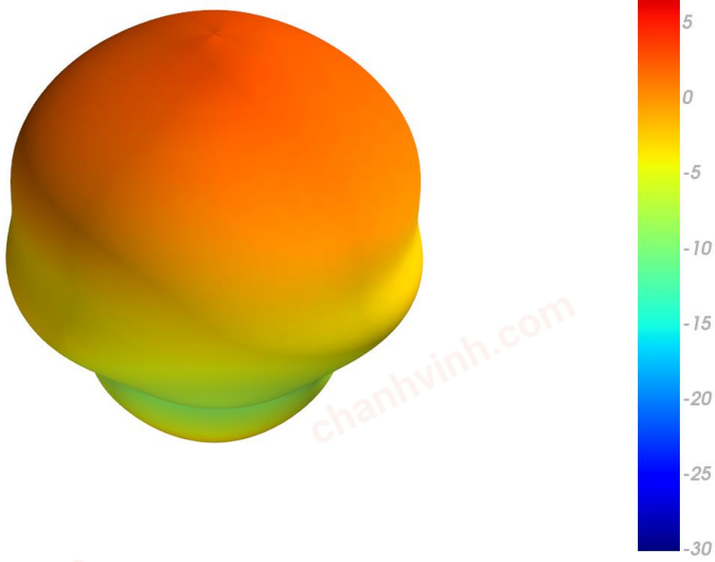


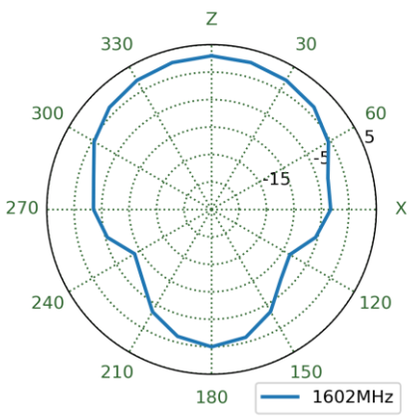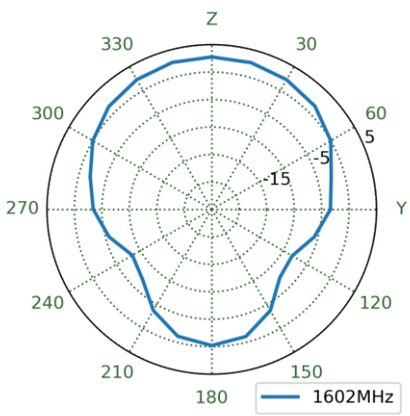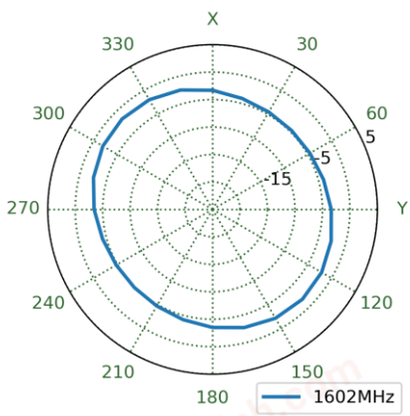

XZ Plane	YZ Plane	XY Plane
		


7.6 LTE1 Patterns at 650 MHz

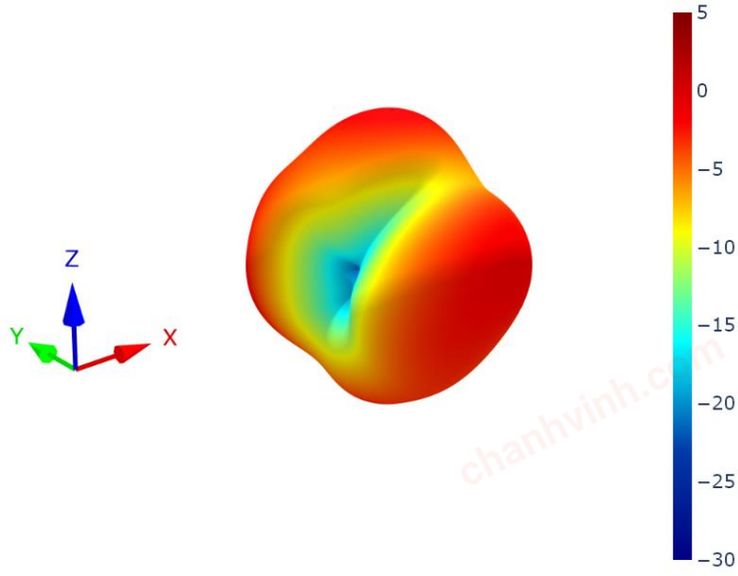

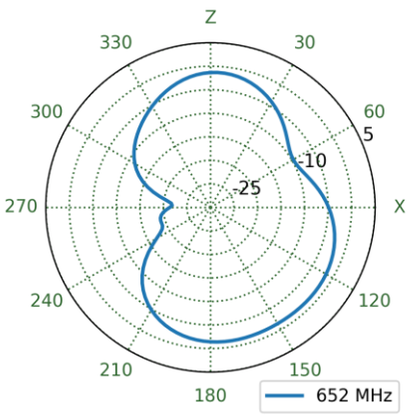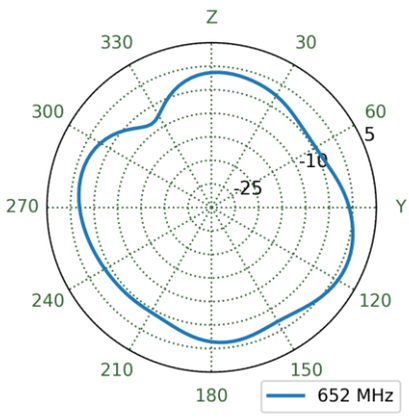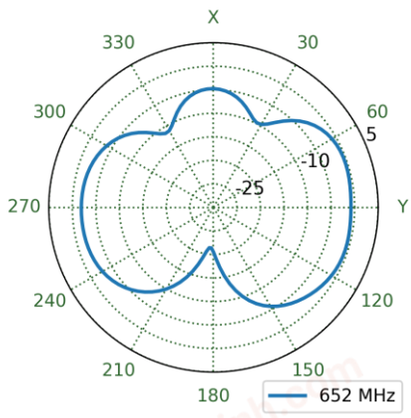
XZ Plane	YZ Plane	XY Plane
		


chanhvinh.com


7.7 LTE2 Patterns at 650 MHz

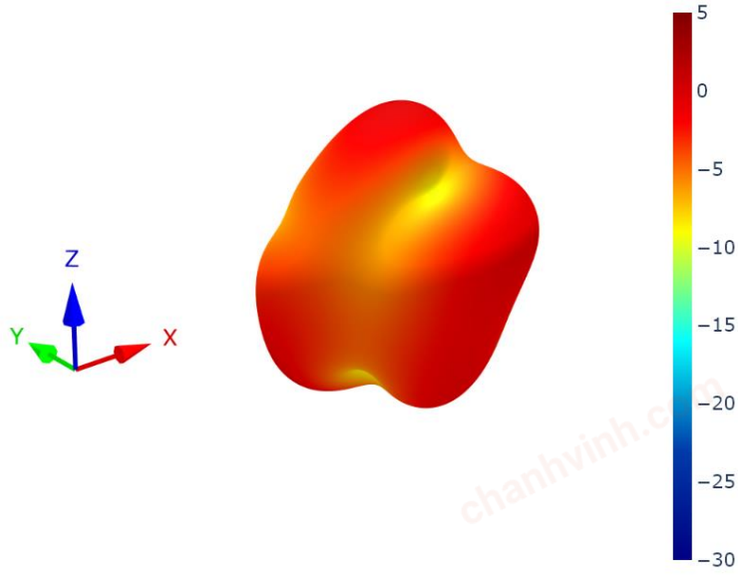


XZ Plane	YZ Plane	XY Plane



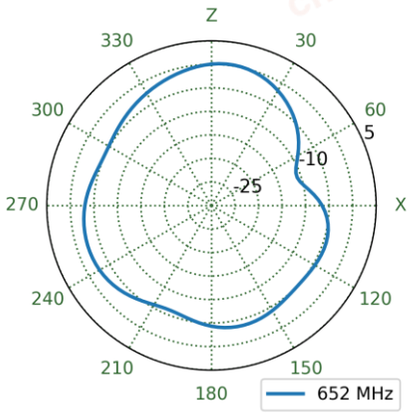


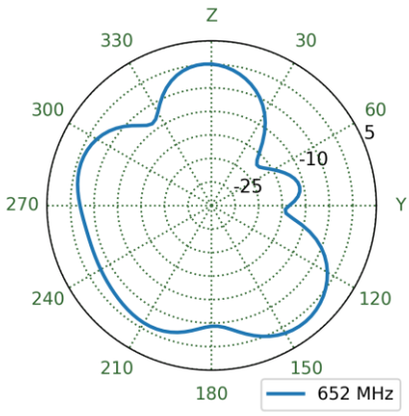

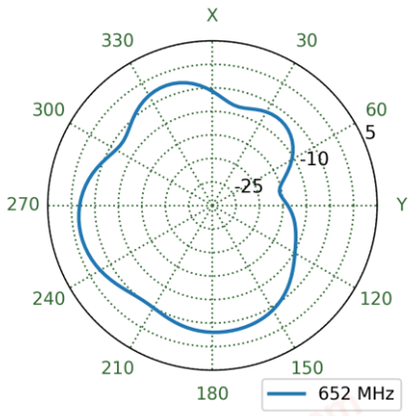


7.8 LTE3 Patterns at 650 MHz



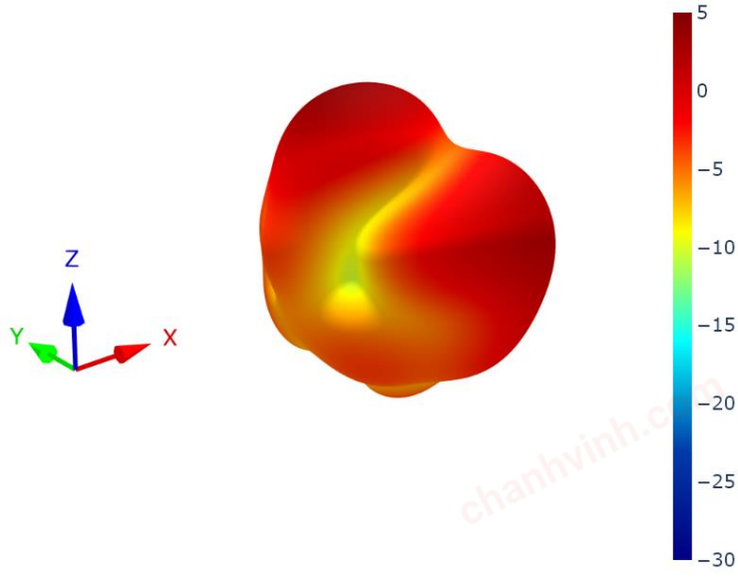


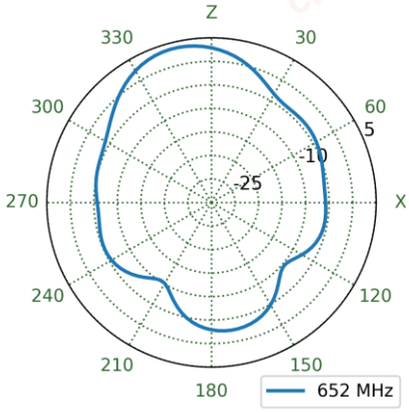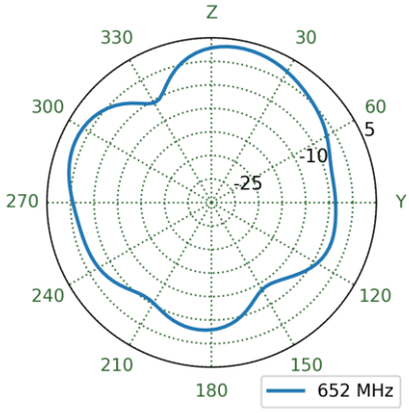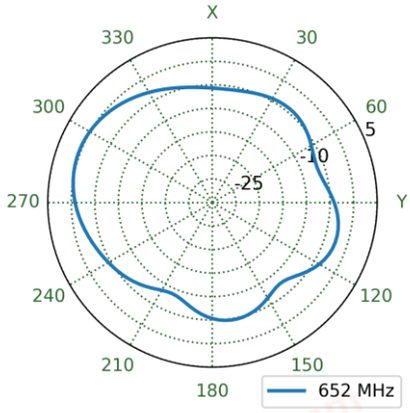XZ Plane	YZ Plane	XY Plane
		

chanhvinh.com


7.9 LTE4 Patterns at 650 MHz



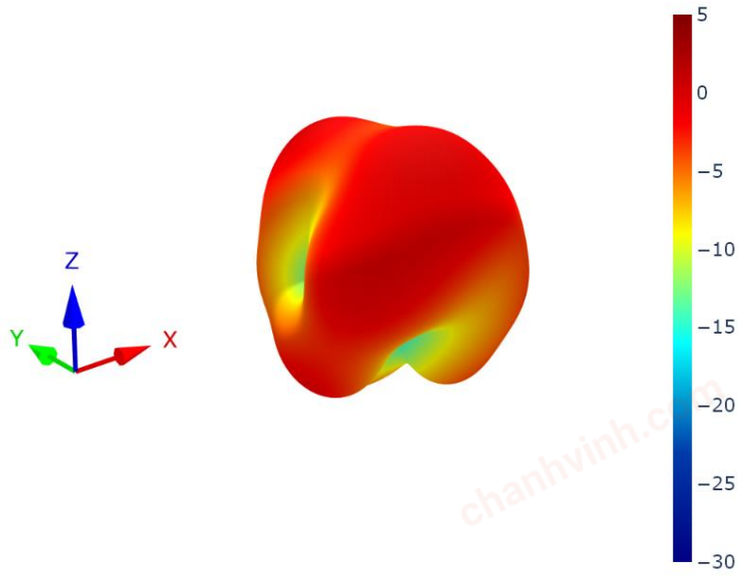


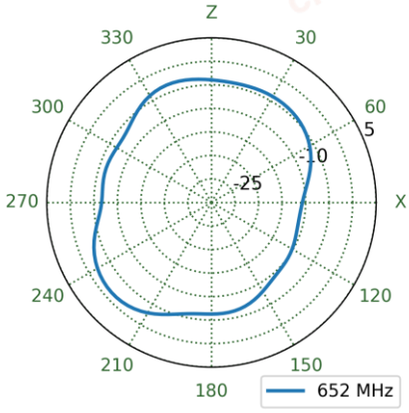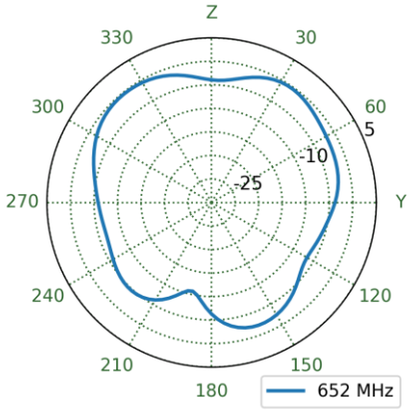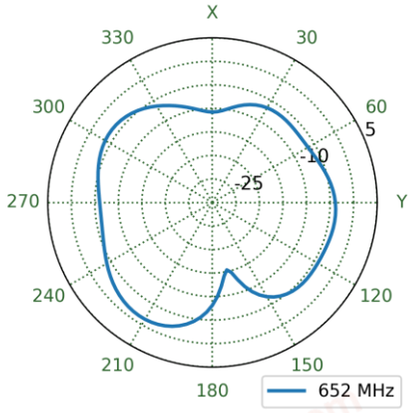XZ Plane	YZ Plane	XY Plane
		

chanhvinh.com


7.10 LTE1 Patterns at 750 MHz

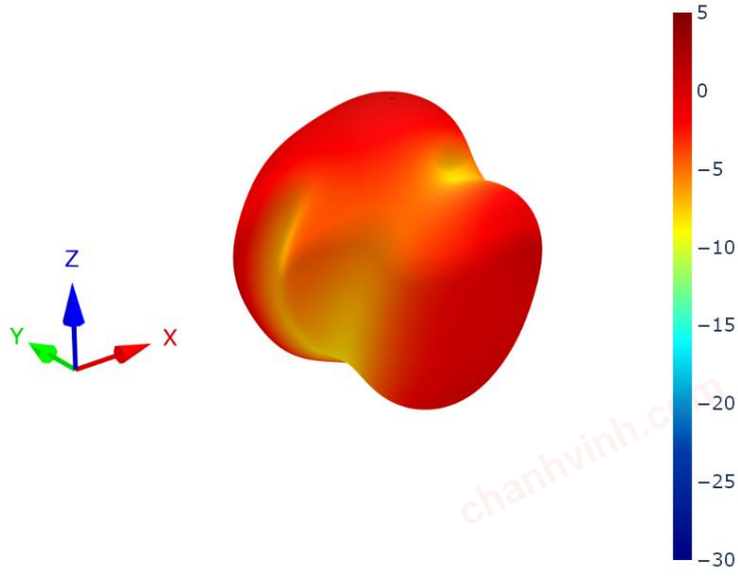

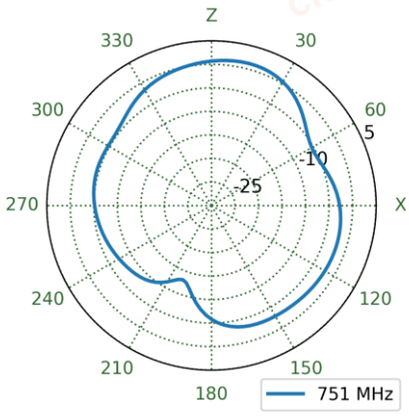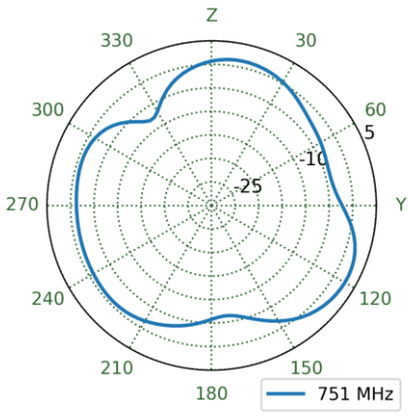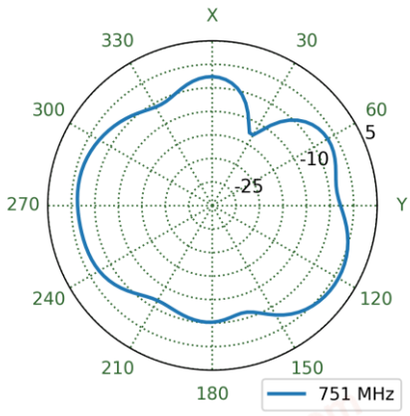
XZ Plane	YZ Plane	XY Plane
		


chanhvinh.com


7.11 LTE2 Patterns at 750 MHz

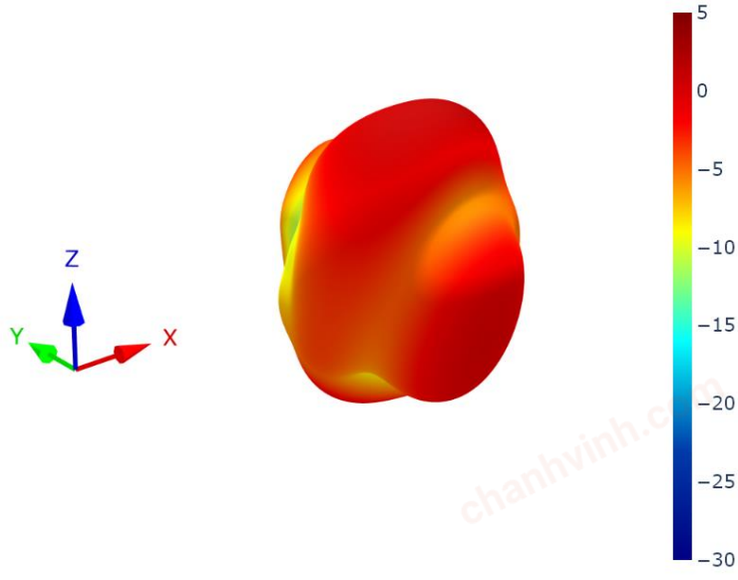

XZ Plane	YZ Plane	XY Plane

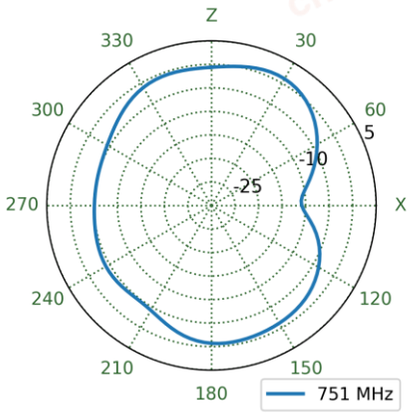


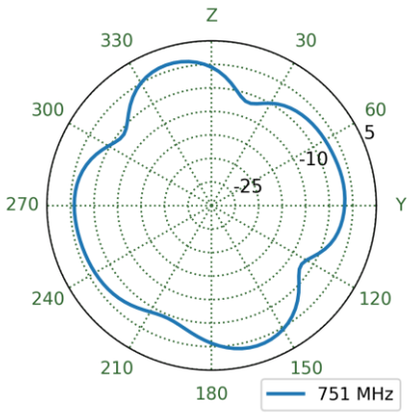

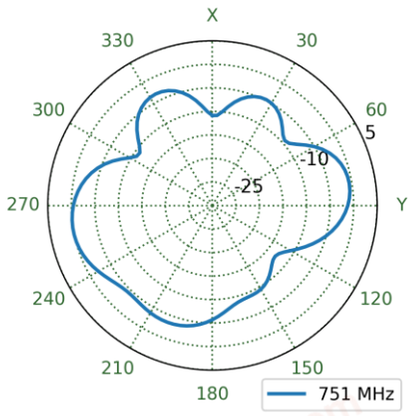



chanhvinh.com


7.12 LTE3 Patterns at 750 MHz

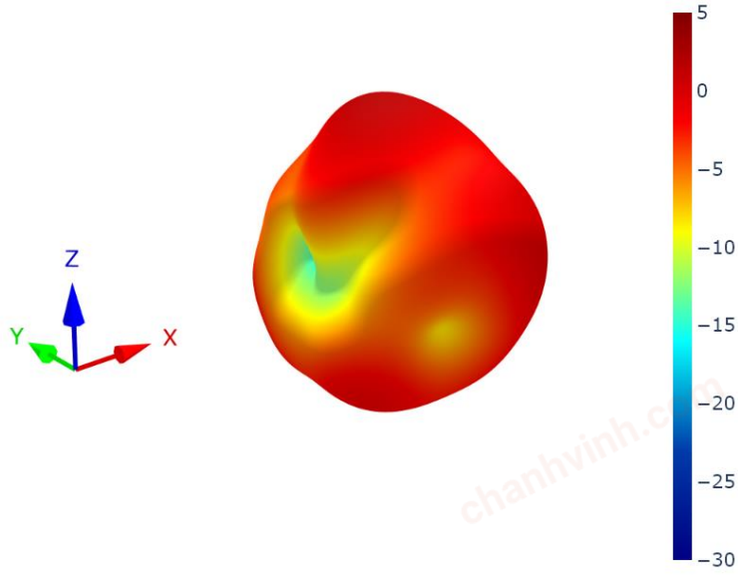


XZ Plane	YZ Plane	XY Plane

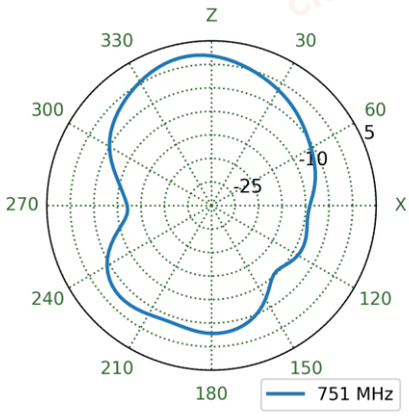

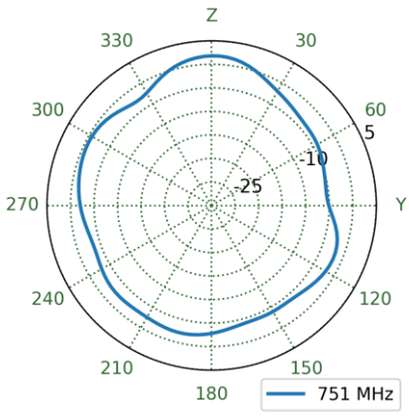


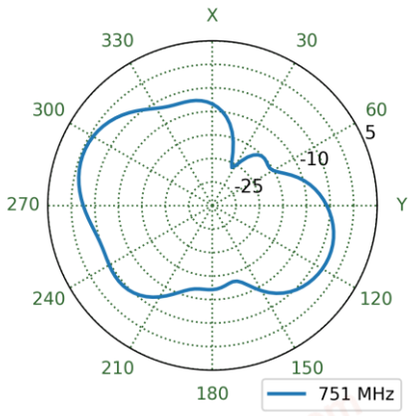



7.13 LTE4 Patterns at 750 MHz

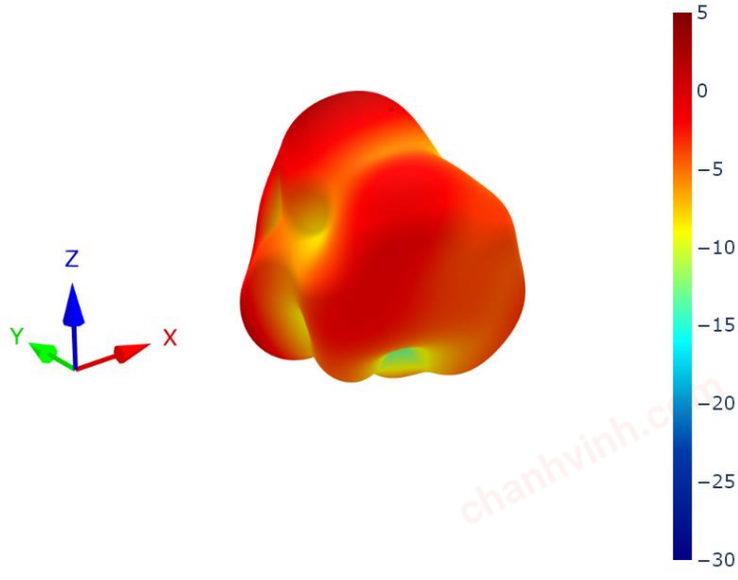

XZ Plane	YZ Plane	XY Plane

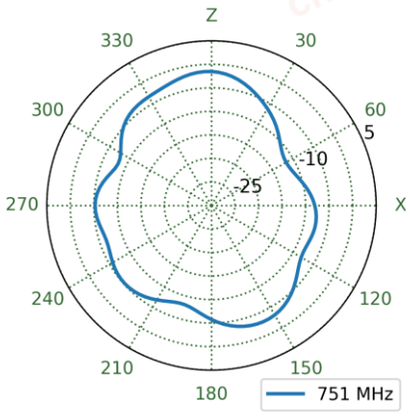


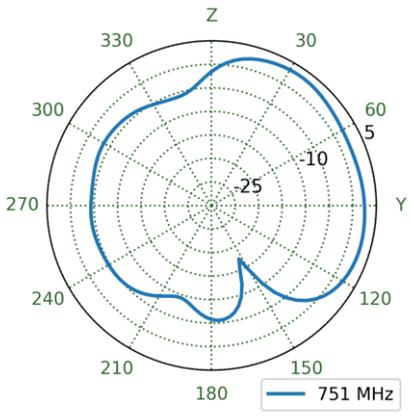

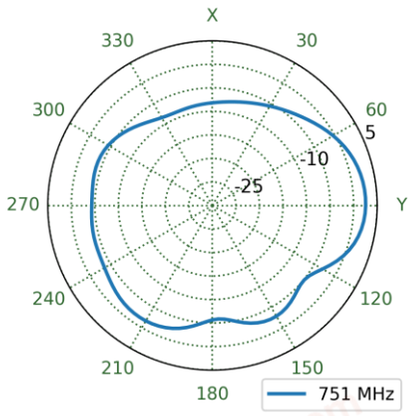



chanhvinh.com


7.14 LTE1 Patterns at 890 MHz

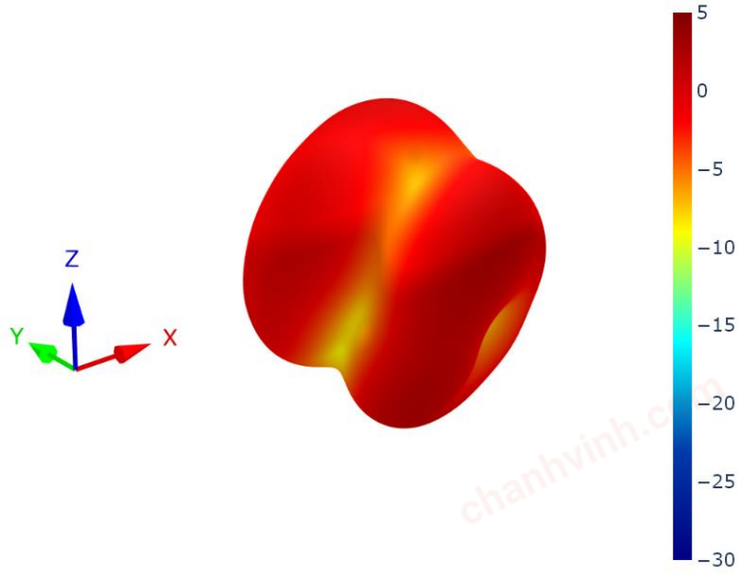

XZ Plane	YZ Plane	XY Plane

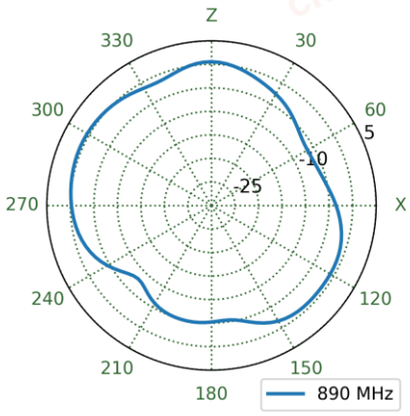


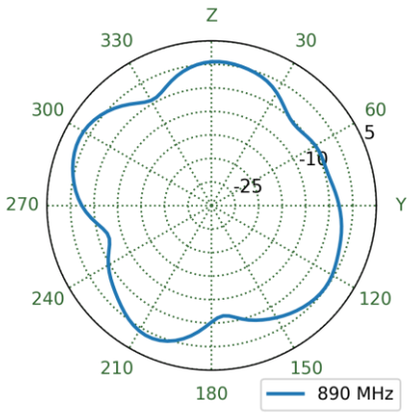

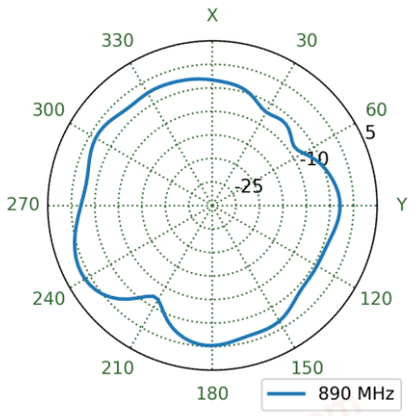



chanhvinh.com


7.15 LTE2 Patterns at 890 MHz

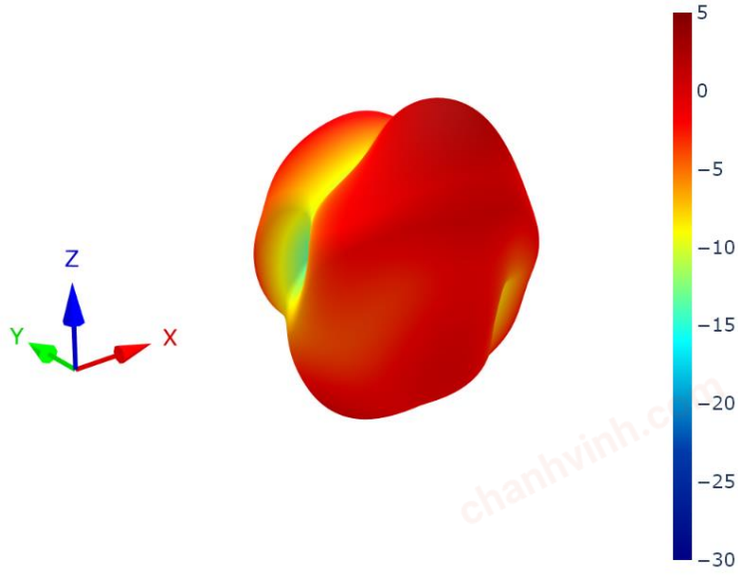


XZ Plane	YZ Plane	XY Plane

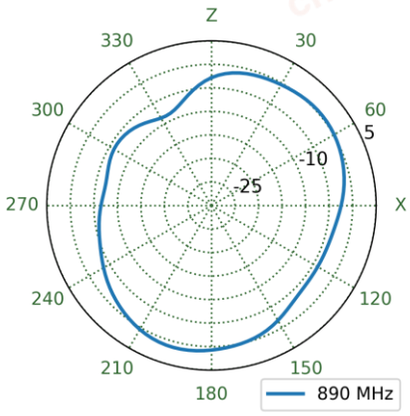

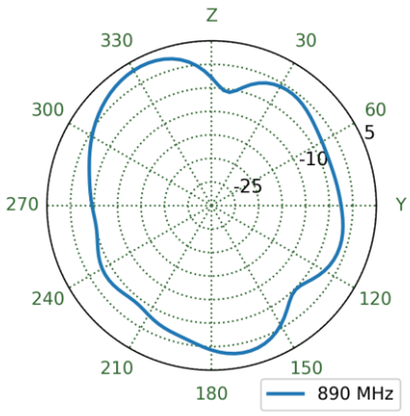


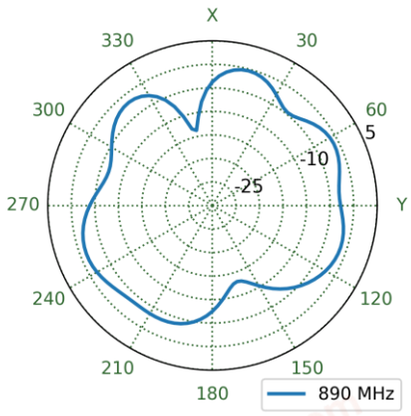



7.16 LTE3 Patterns at 890 MHz

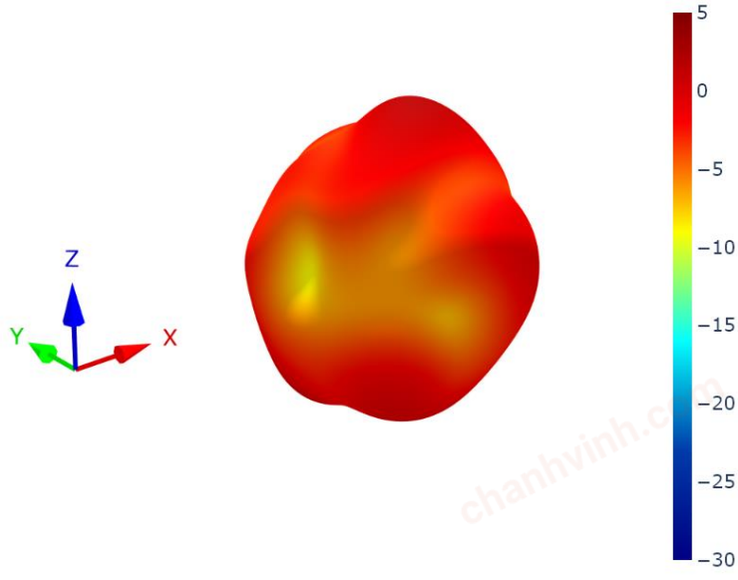

XZ Plane	YZ Plane	XY Plane

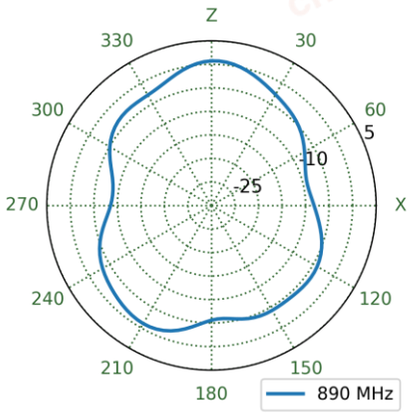


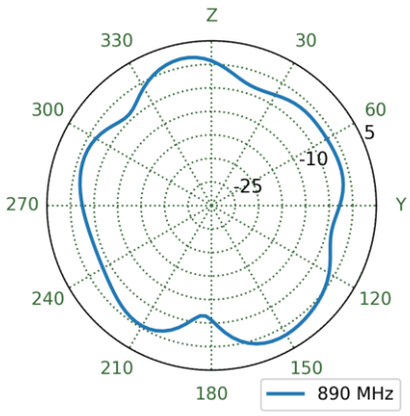

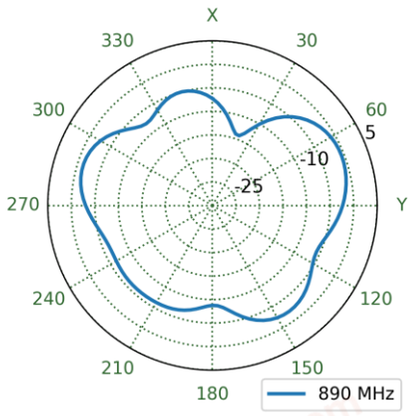



chanhvinh.com


7.17 LTE4 Patterns at 890 MHz

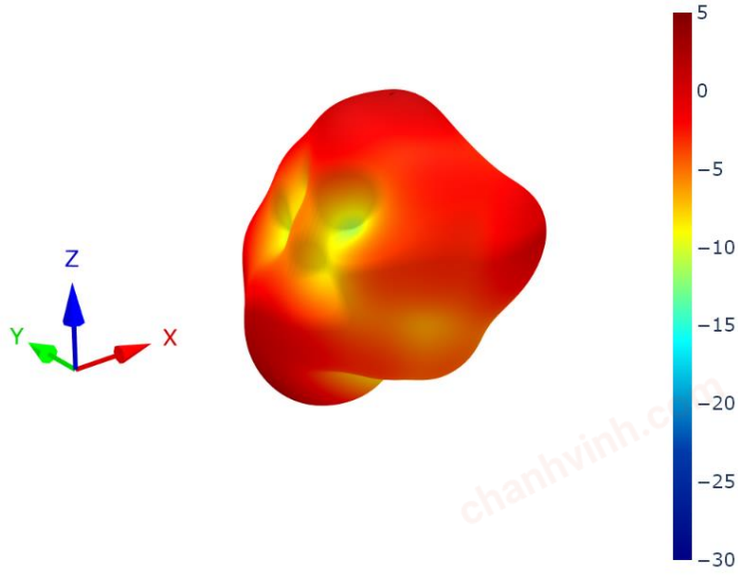

XZ Plane	YZ Plane	XY Plane

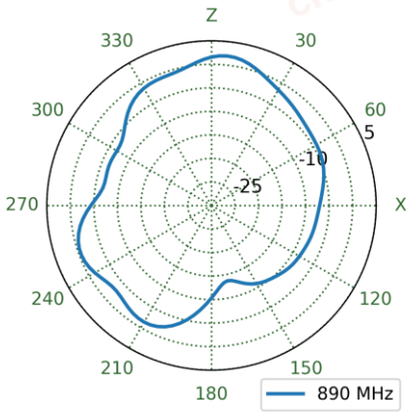


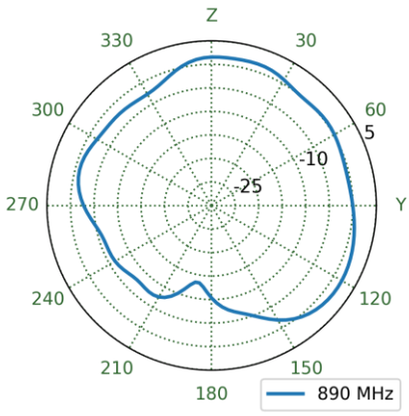

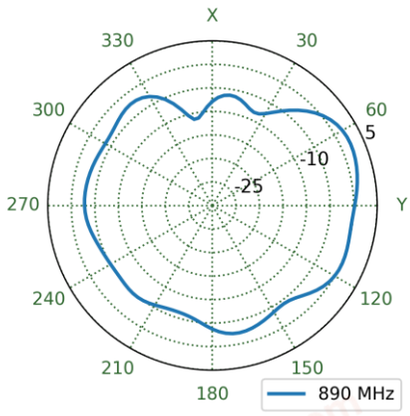



chanhvinh.com


7.18 LTE1 Patterns at 1470 MHz

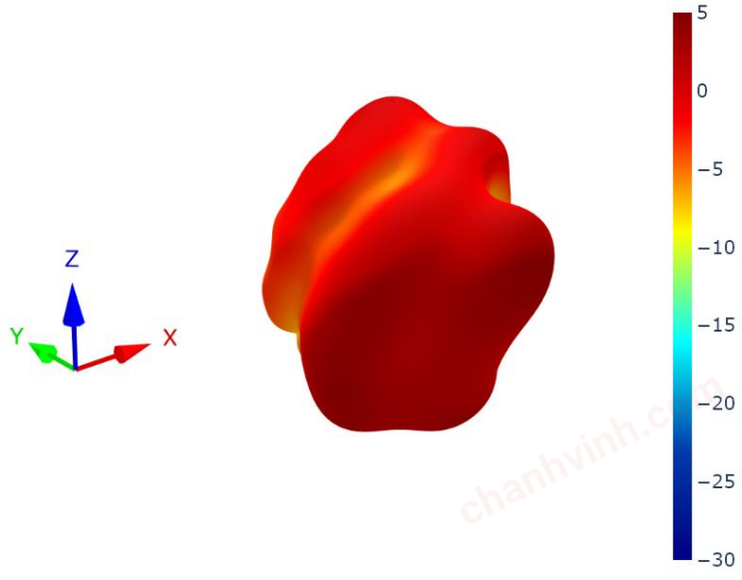

XZ Plane	YZ Plane	XY Plane

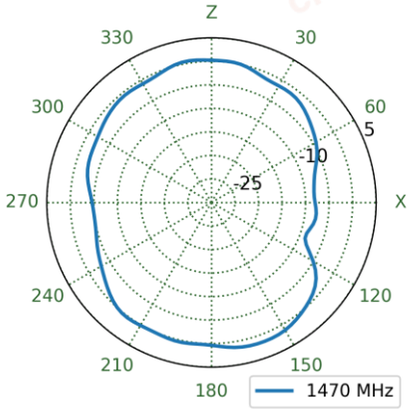




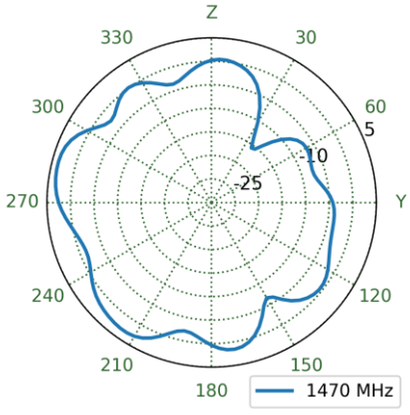


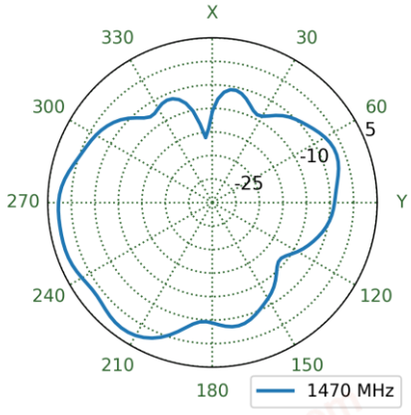


chanhvinh.com

7.19 LTE2 Patterns at 1470 MHz

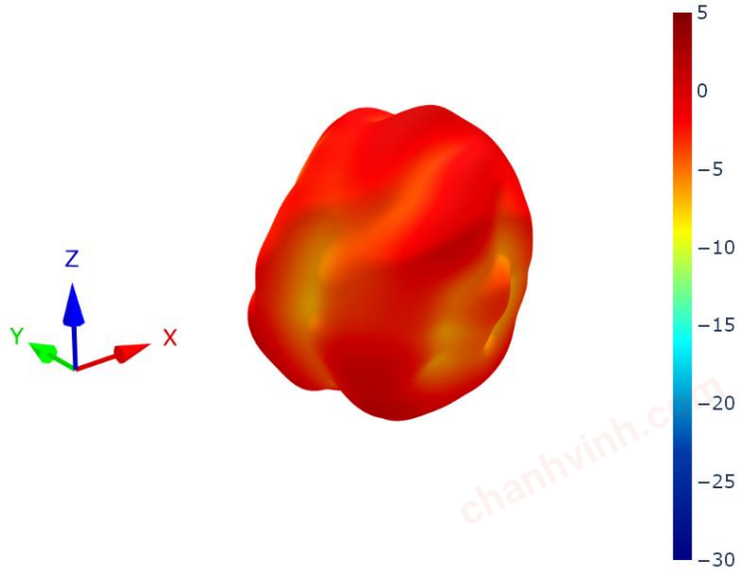


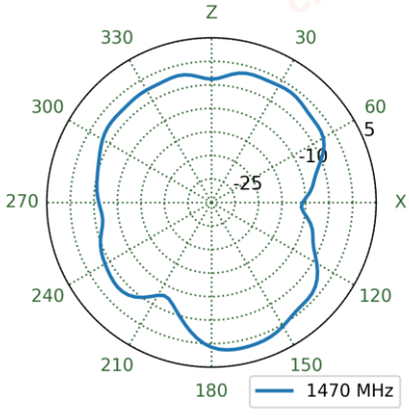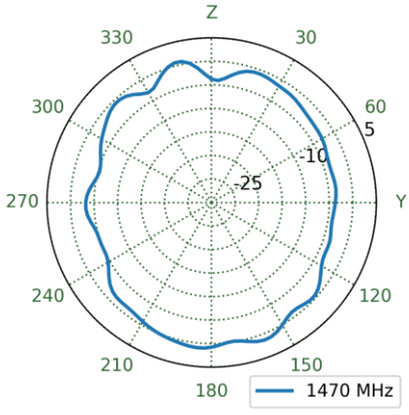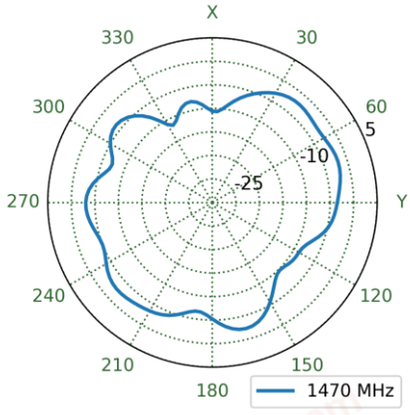
XZ Plane	YZ Plane	XY Plane
		


7.20 LTE3 Patterns at 1470 MHz

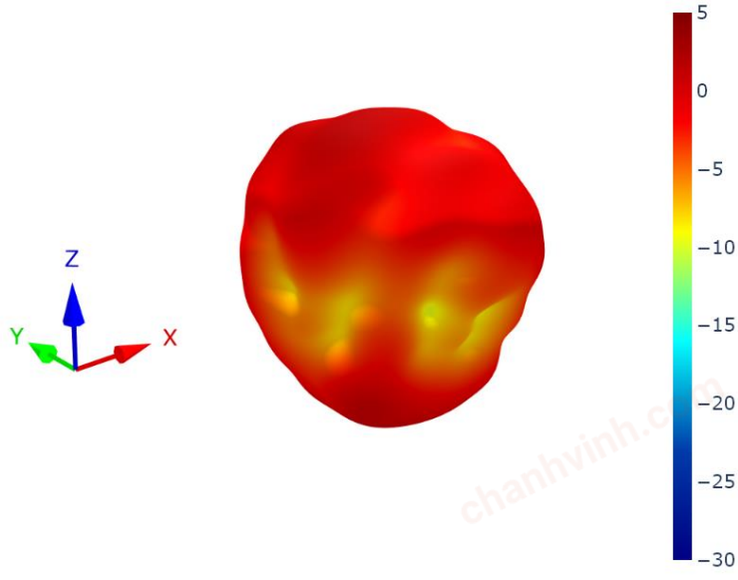


XZ Plane	YZ Plane	XY Plane

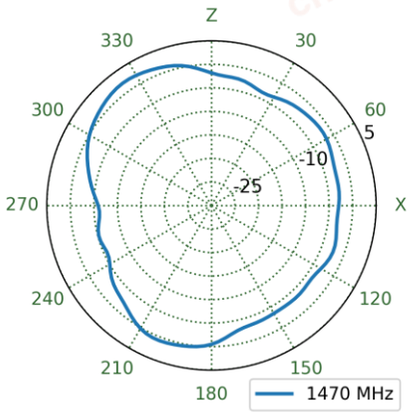

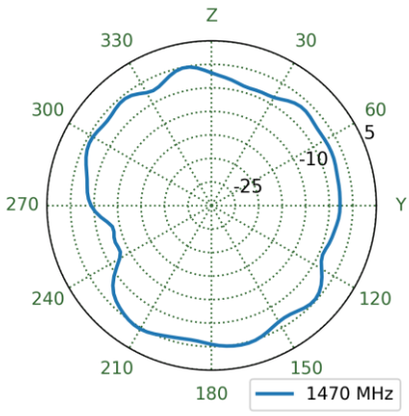


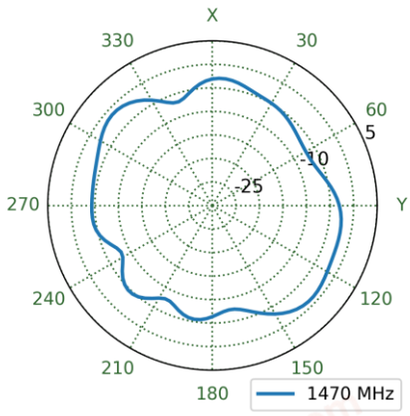



7.21 LTE4 Patterns at 1470 MHz

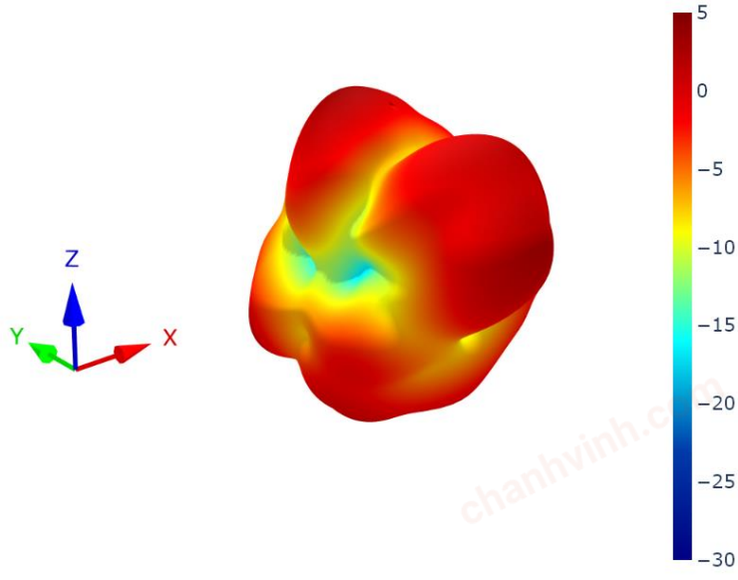

XZ Plane	YZ Plane	XY Plane

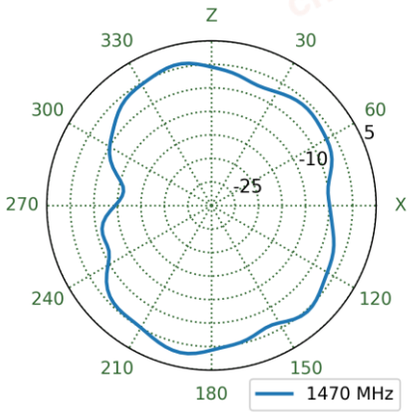




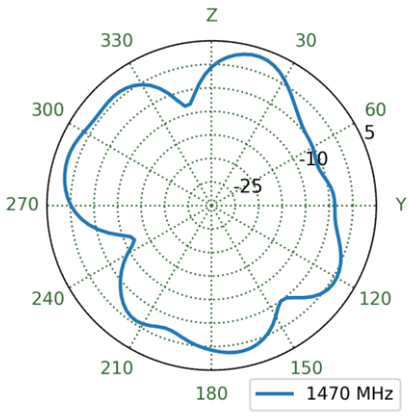


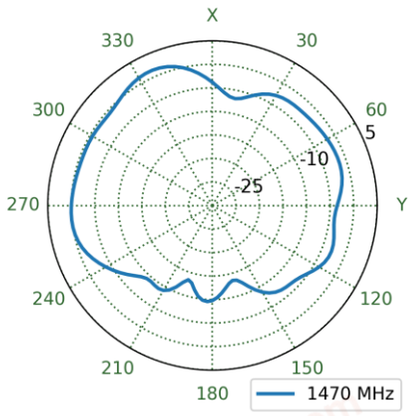


chanhvinh.com

7.22 LTE1 Patterns at 1805 MHz

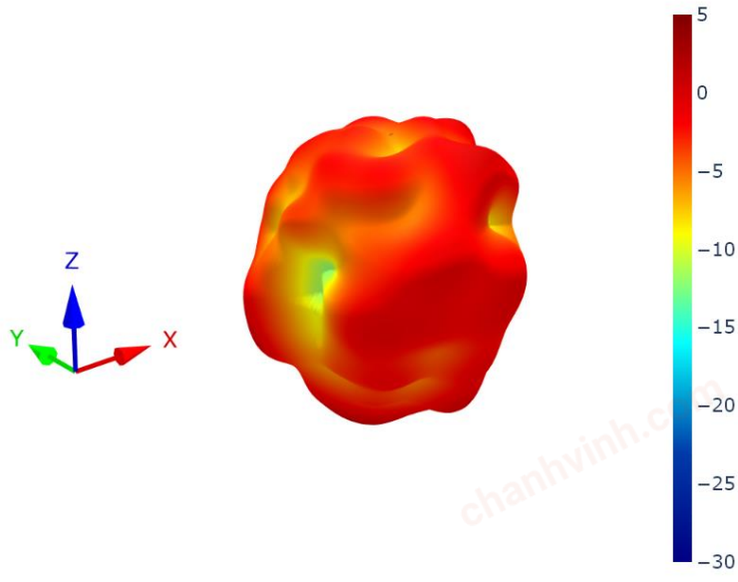


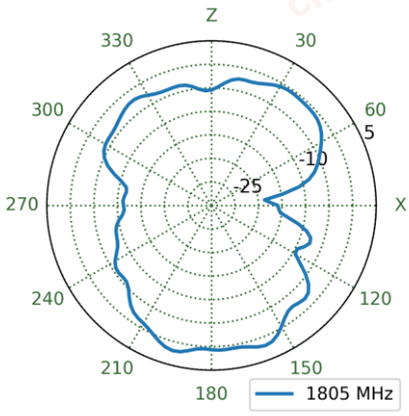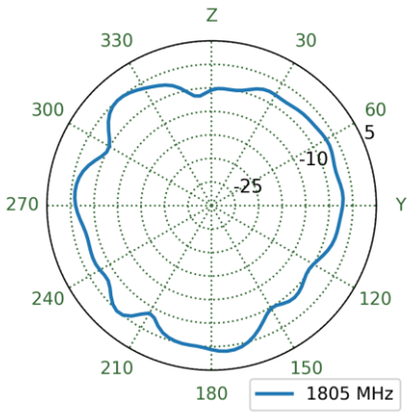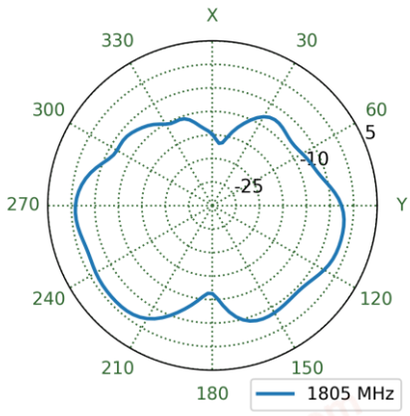
XZ Plane	YZ Plane	XY Plane
		


7.23 LTE2 Patterns at 1805 MHz

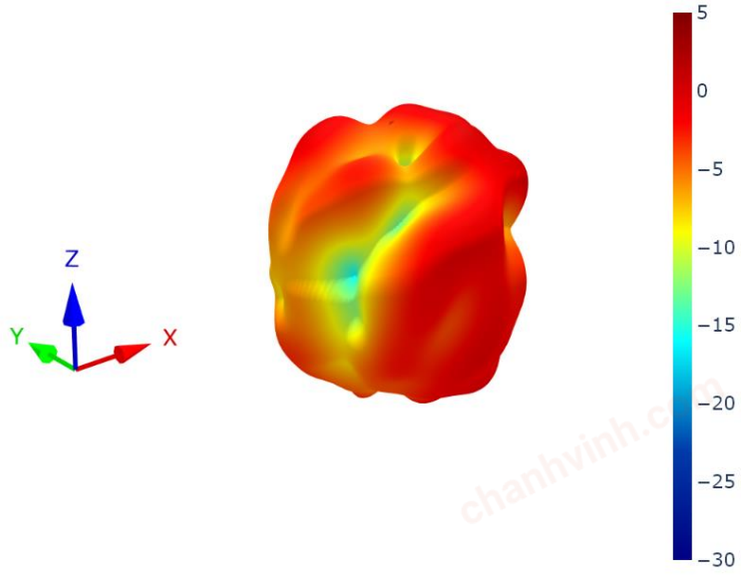

XZ Plane	YZ Plane	XY Plane

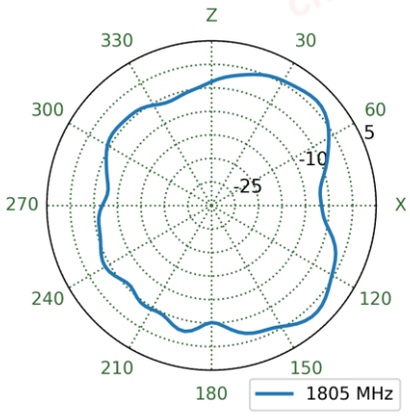




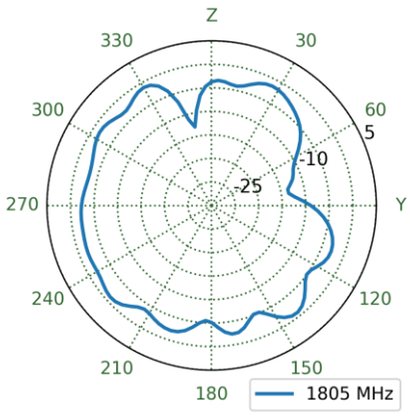


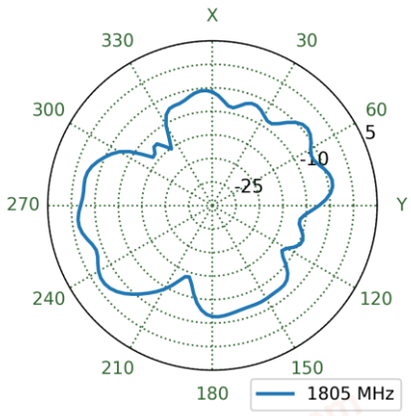


chanhvinh.com

7.24 LTE3 Patterns at 1805 MHz

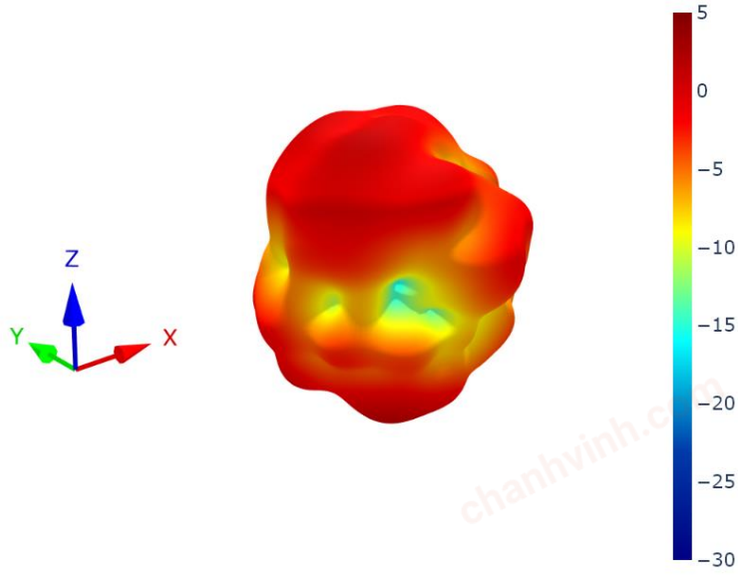


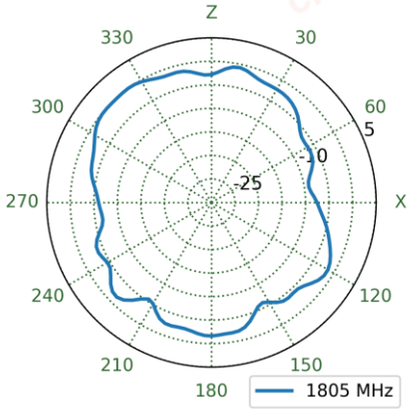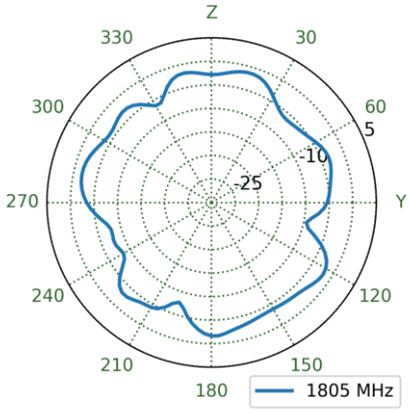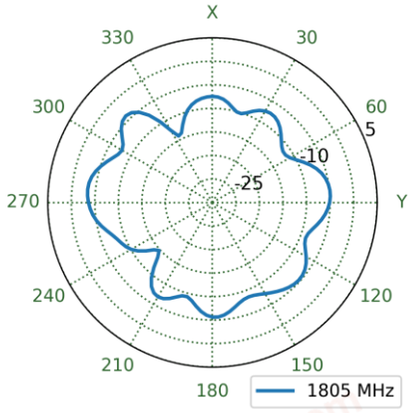
XZ Plane	YZ Plane	XY Plane
		


7.25 LTE4 Patterns at 1805 MHz

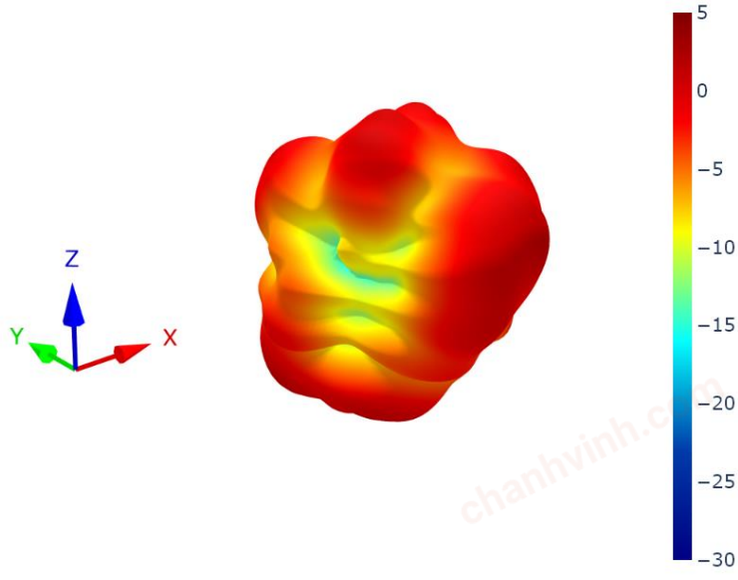

XZ Plane	YZ Plane	XY Plane

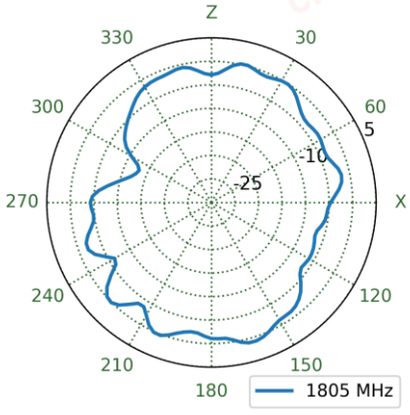


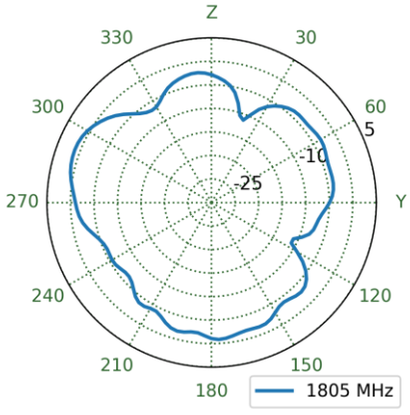

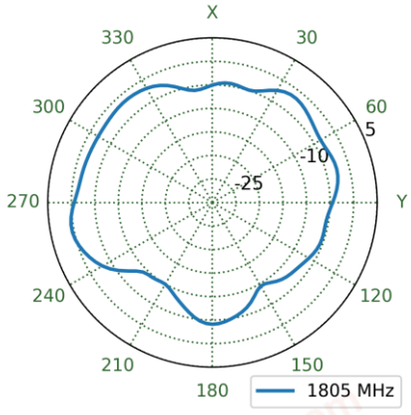



chanhvinh.com


7.26 LTE1 Patterns at 1920 MHz

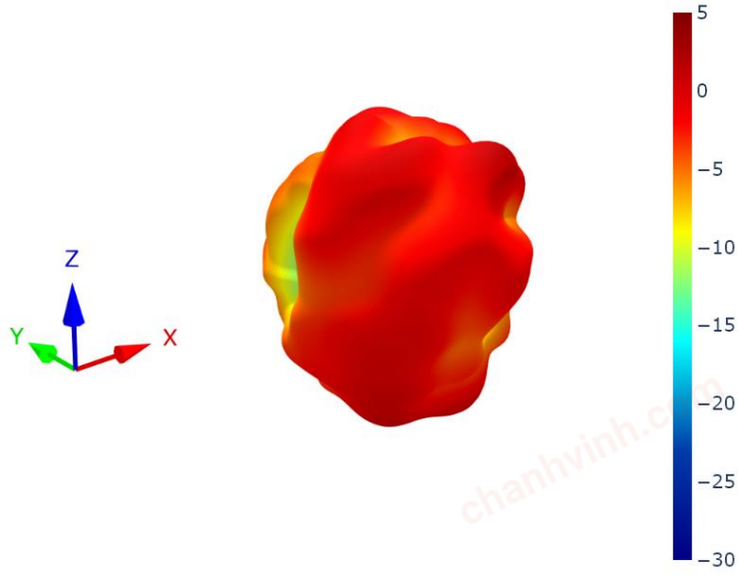


XZ Plane	YZ Plane	XY Plane

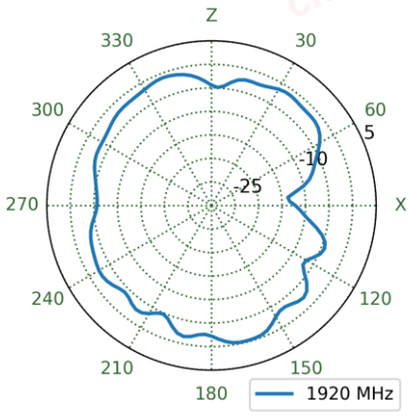

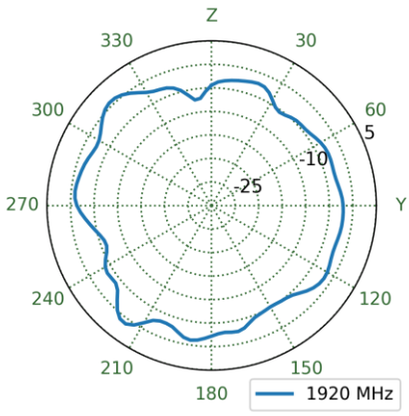


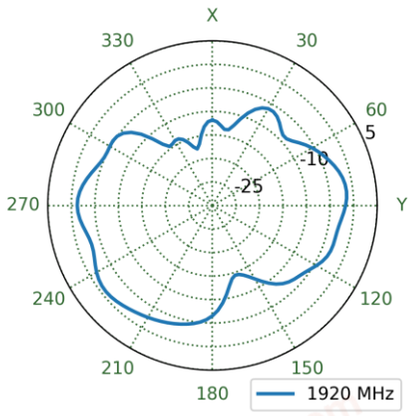



7.27 LTE2 Patterns at 1920 MHz

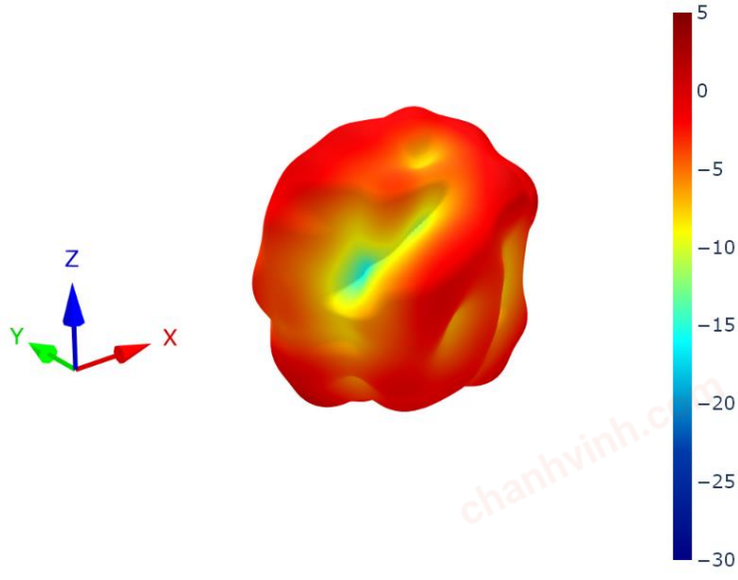


XZ Plane	YZ Plane	XY Plane

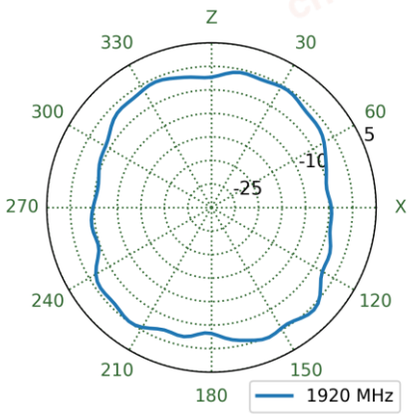

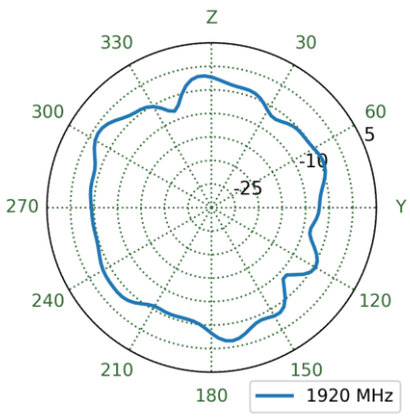


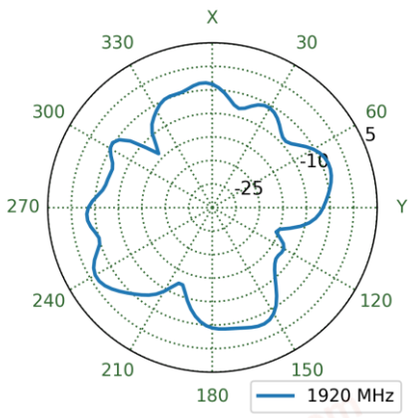



7.28 LTE3 Patterns at 1920 MHz

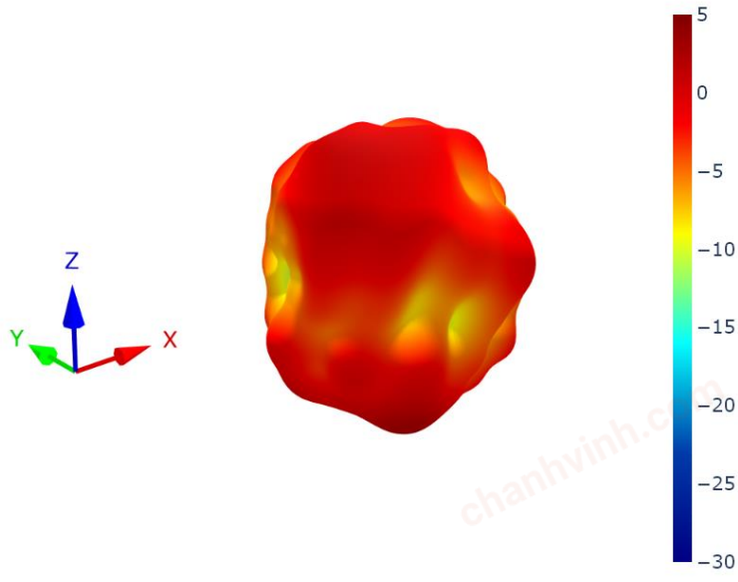


XZ Plane	YZ Plane	XY Plane

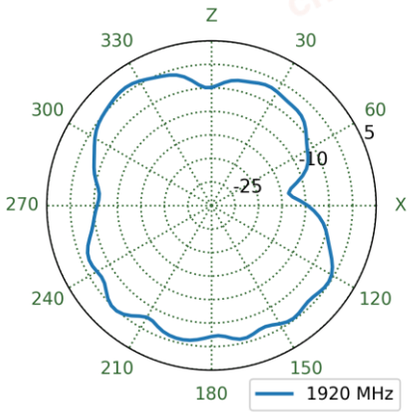

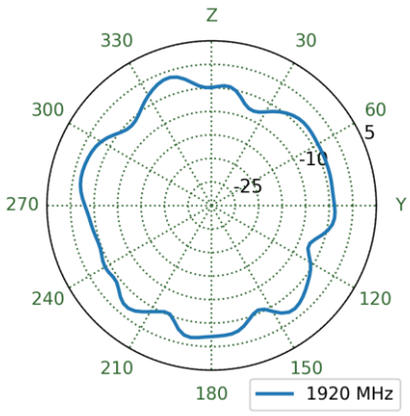


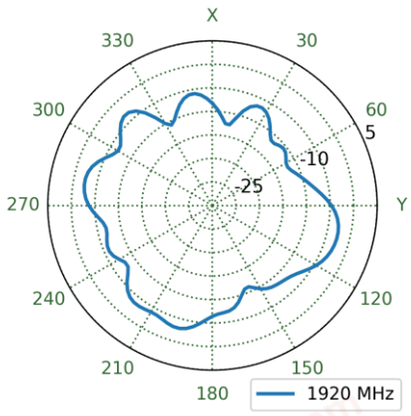



7.29 LTE4 Patterns at 1920 MHz

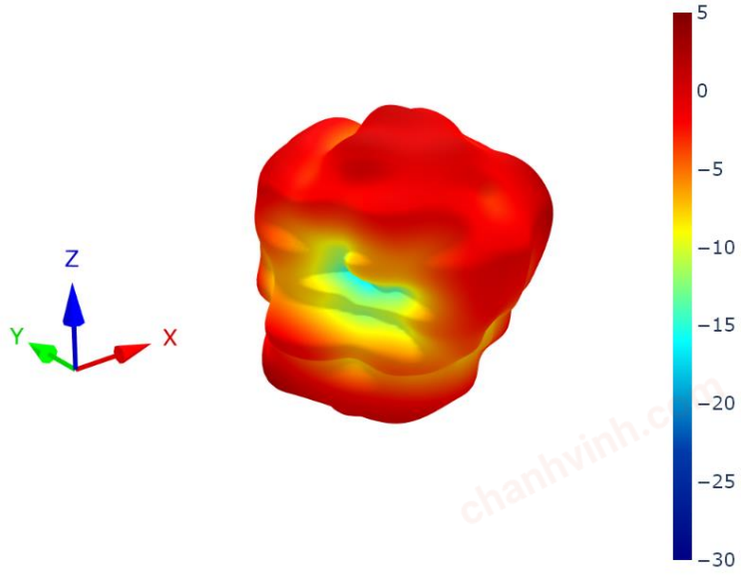

XZ Plane	YZ Plane	XY Plane

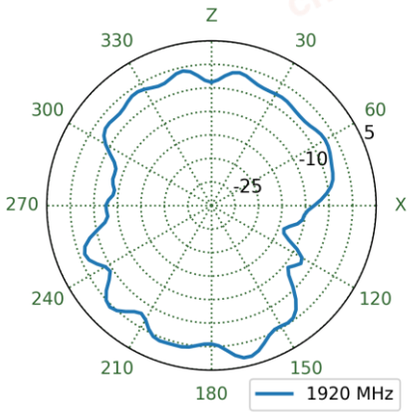


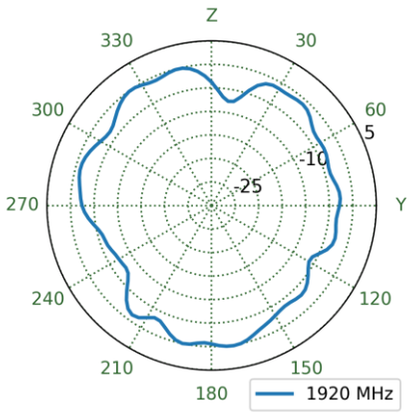

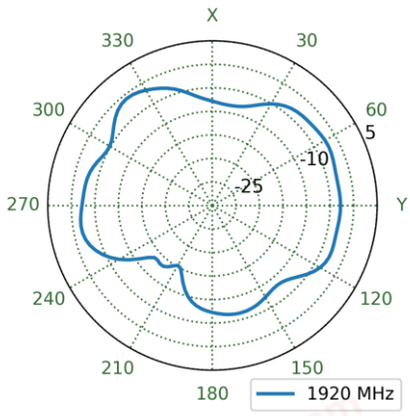



chanhvinh.com


7.30 LTE1 Patterns at 1990 MHz

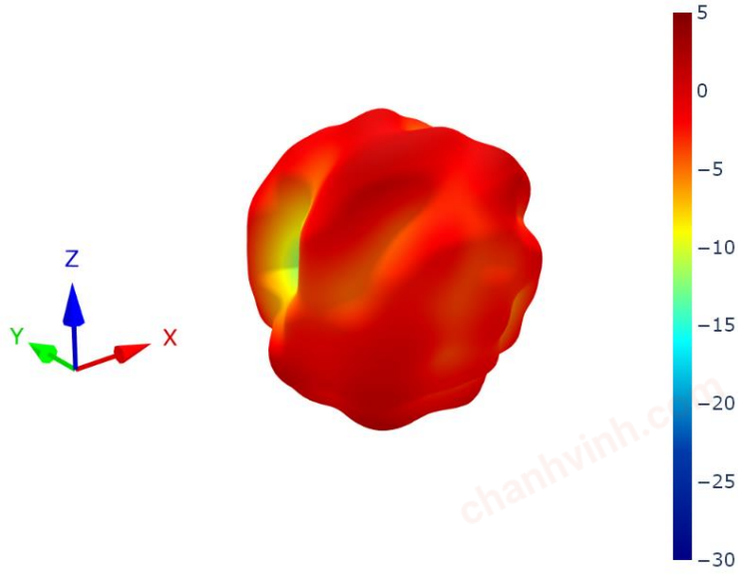


XZ Plane	YZ Plane	XY Plane

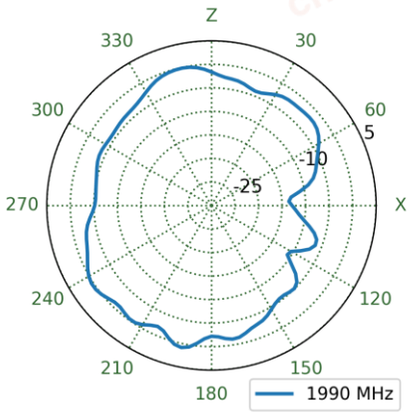

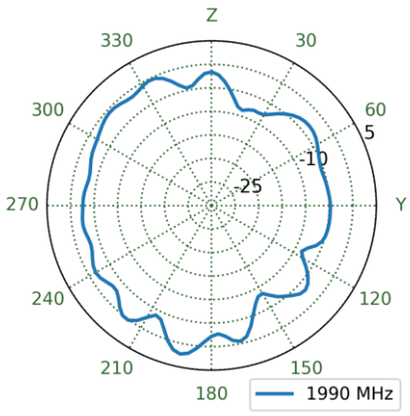


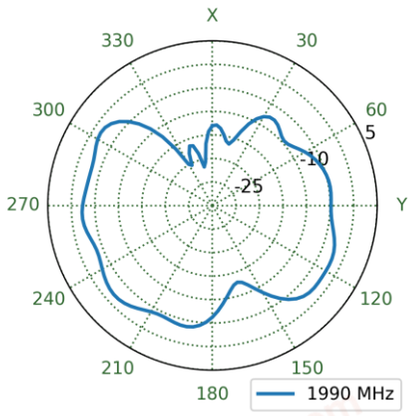



7.31 LTE2 Patterns at 1990 MHz

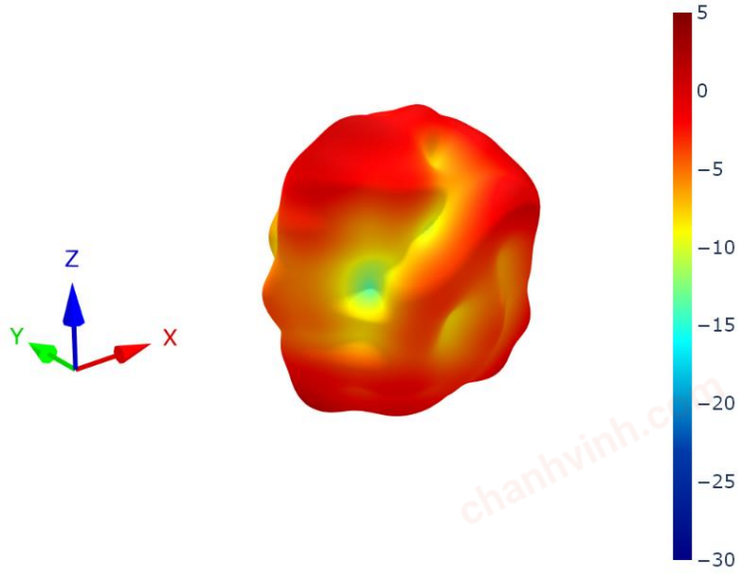

XZ Plane	YZ Plane	XY Plane

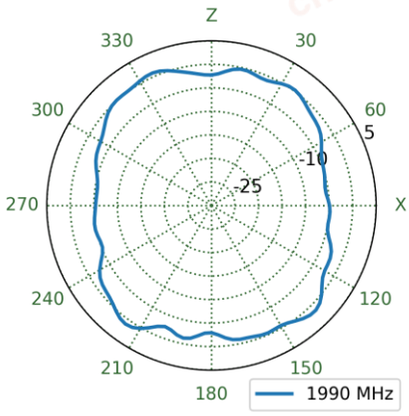


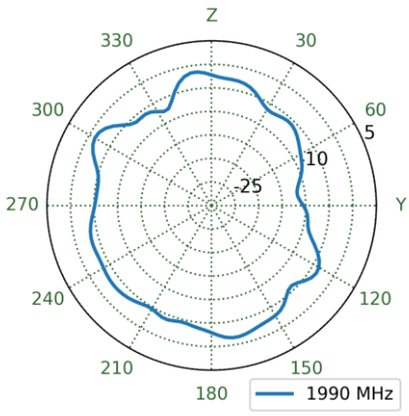

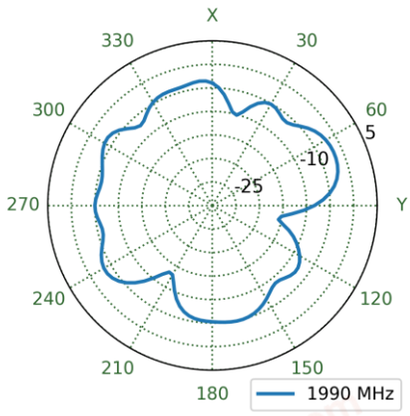



chanhvinh.com


7.32 LTE3 Patterns at 1990 MHz

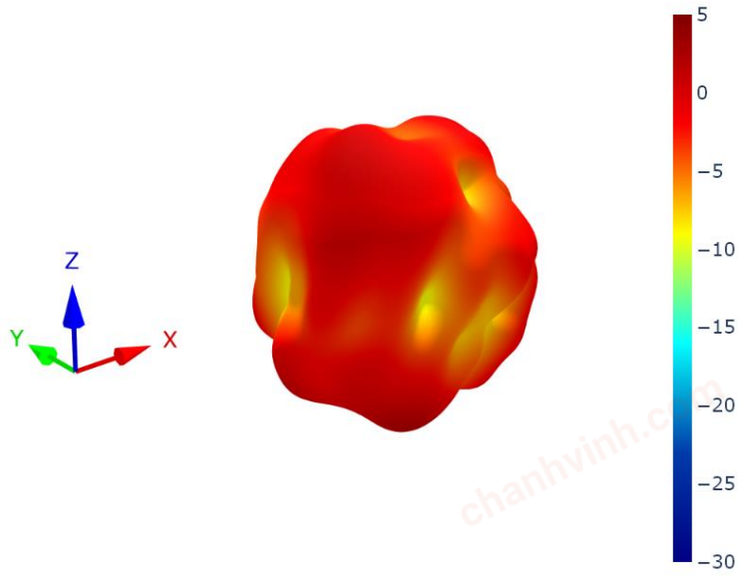


XZ Plane	YZ Plane	XY Plane



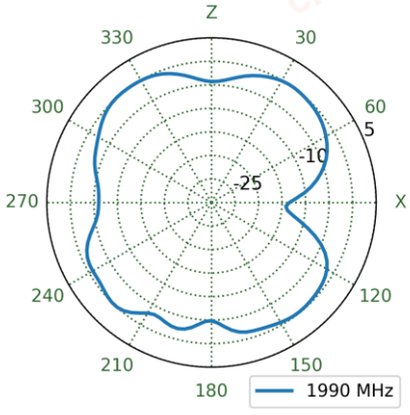


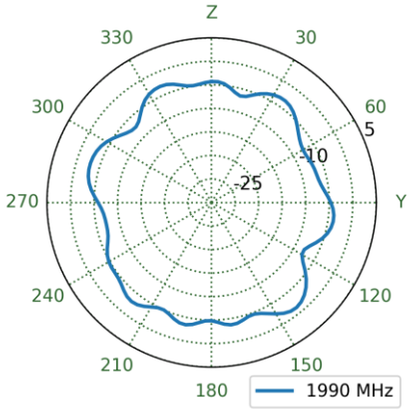

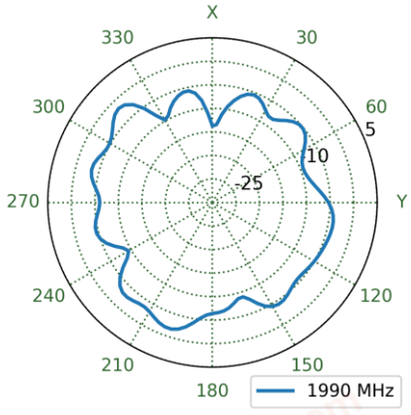


7.33 LTE4 Patterns at 1990 MHz



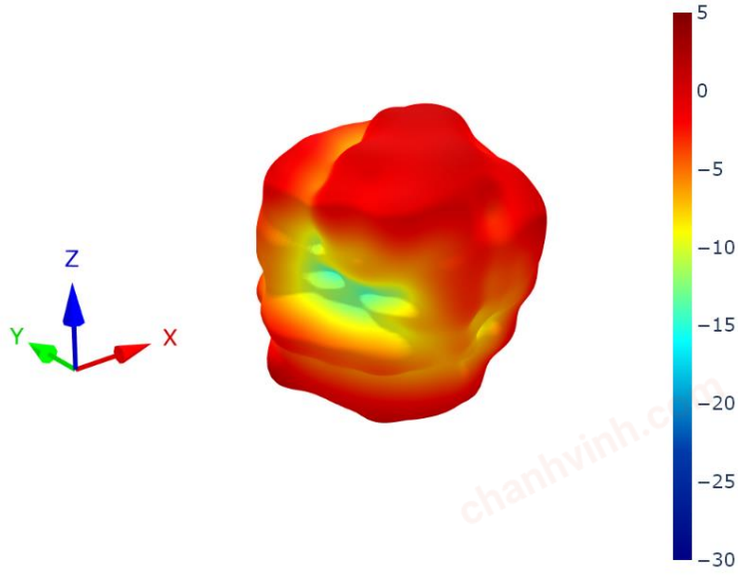


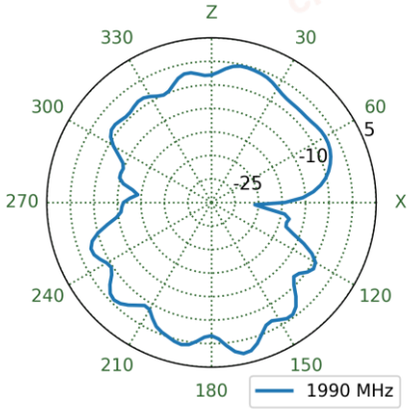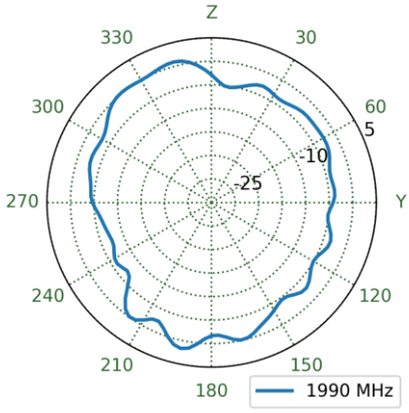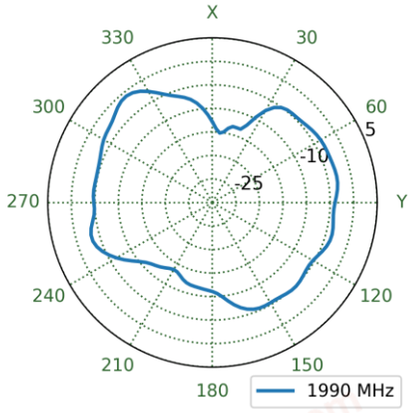XZ Plane	YZ Plane	XY Plane
		


chanhvinh.com

7.34 LTE1 Patterns at 2360 MHz

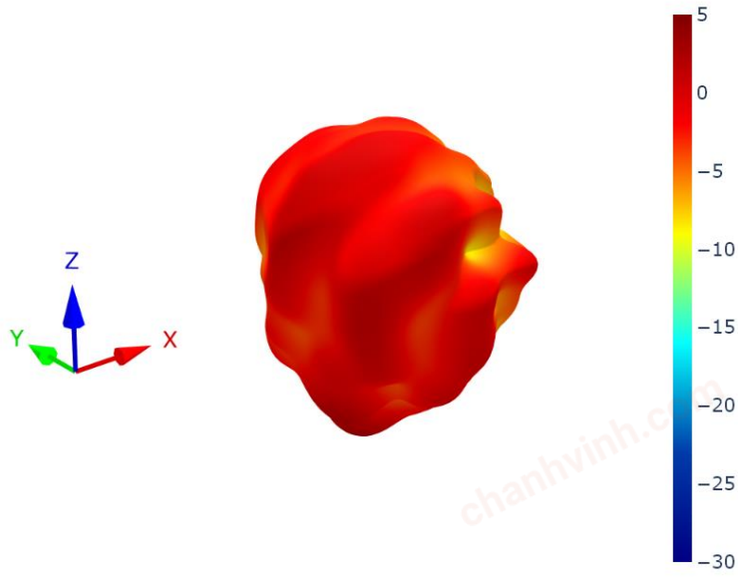


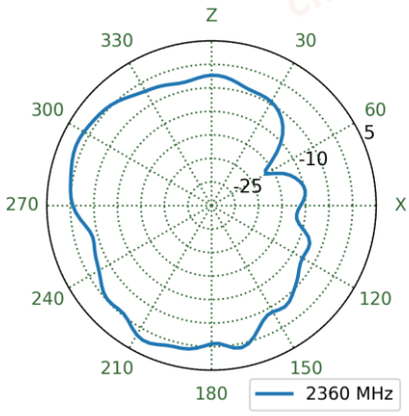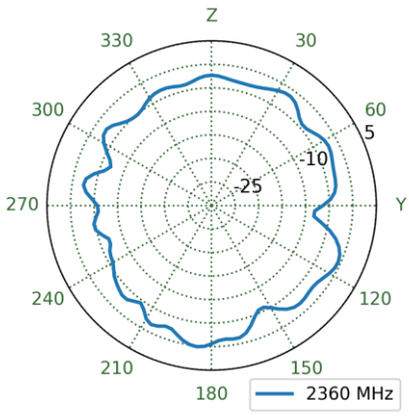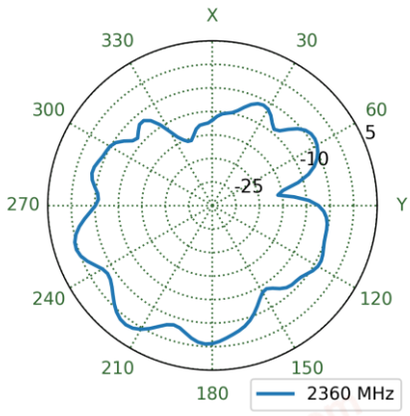
XZ Plane	YZ Plane	XY Plane
		


7.35 LTE2 Patterns at 2360 MHz

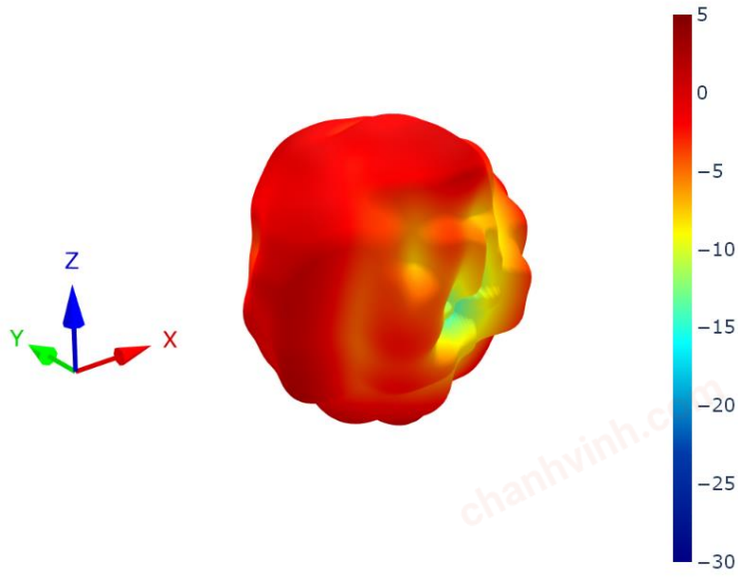


XZ Plane	YZ Plane	XY Plane

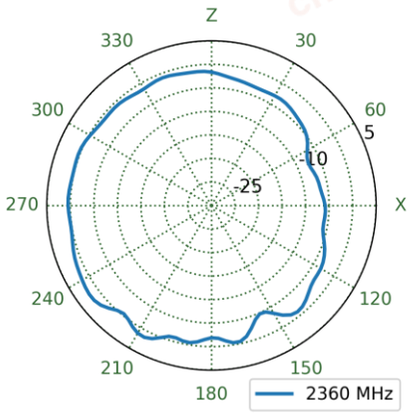

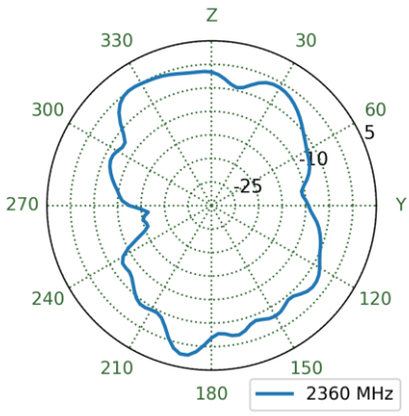


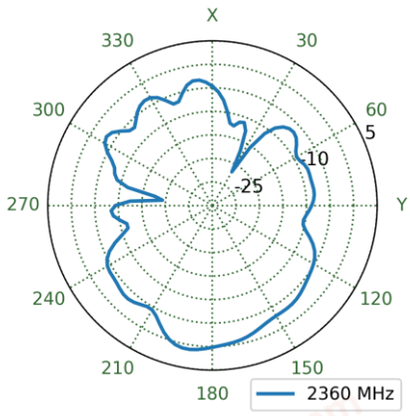



7.36 LTE3 Patterns at 2360 MHz

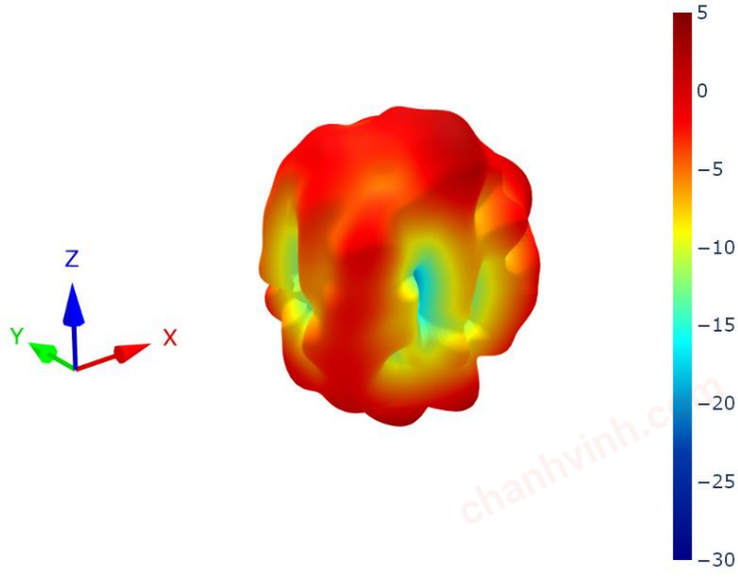


XZ Plane	YZ Plane	XY Plane

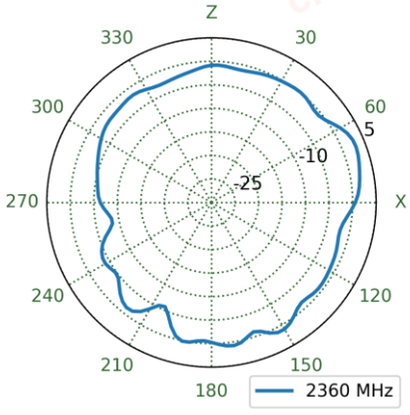

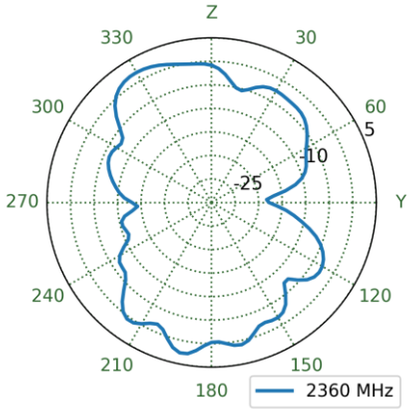


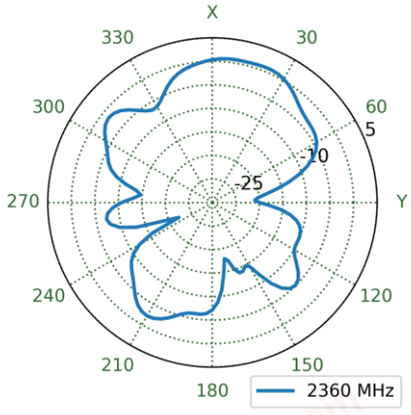



7.37 LTE4 Patterns at 2360 MHz

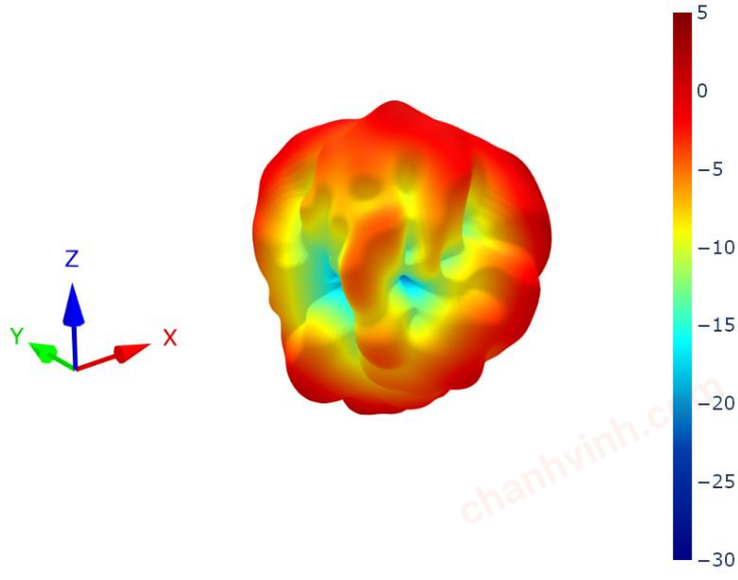

XZ Plane	YZ Plane	XY Plane

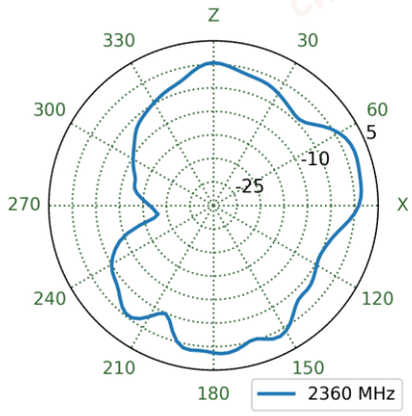




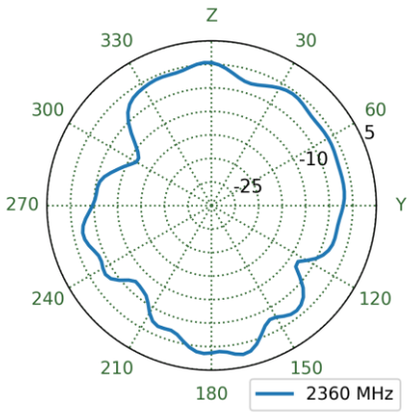


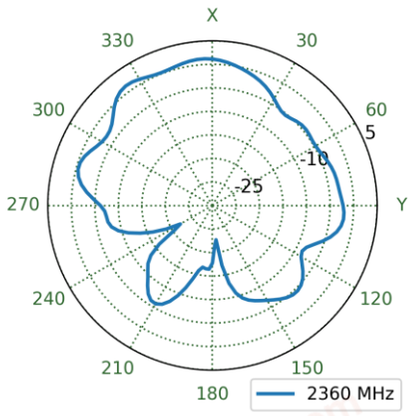


chanhvinh.com

7.38 LTE1 Patterns at 2595 MHz

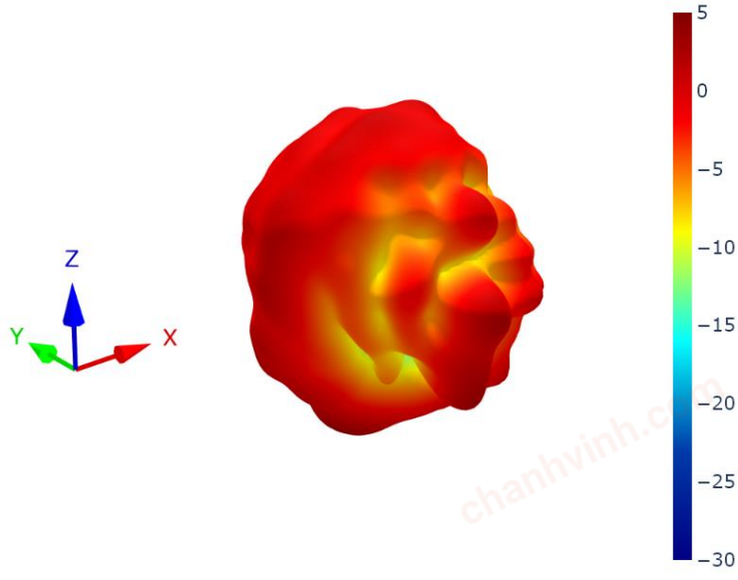


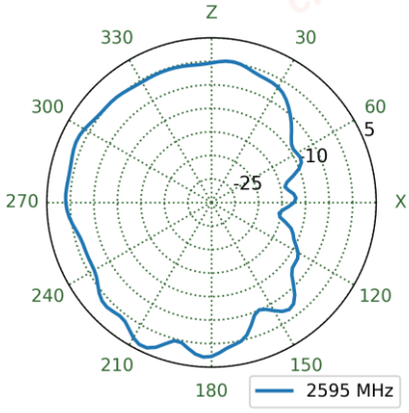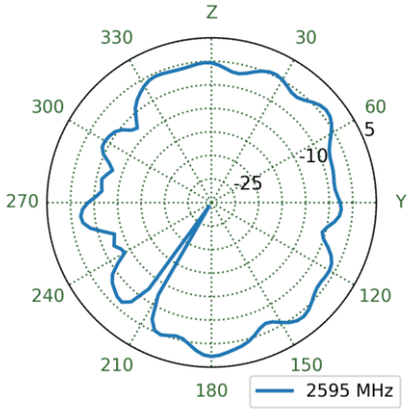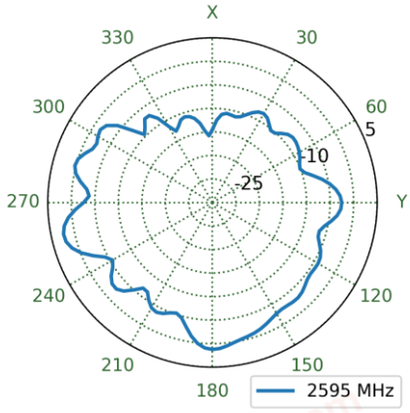
XZ Plane	YZ Plane	XY Plane
		


7.39 LTE2 Patterns at 2595 MHz

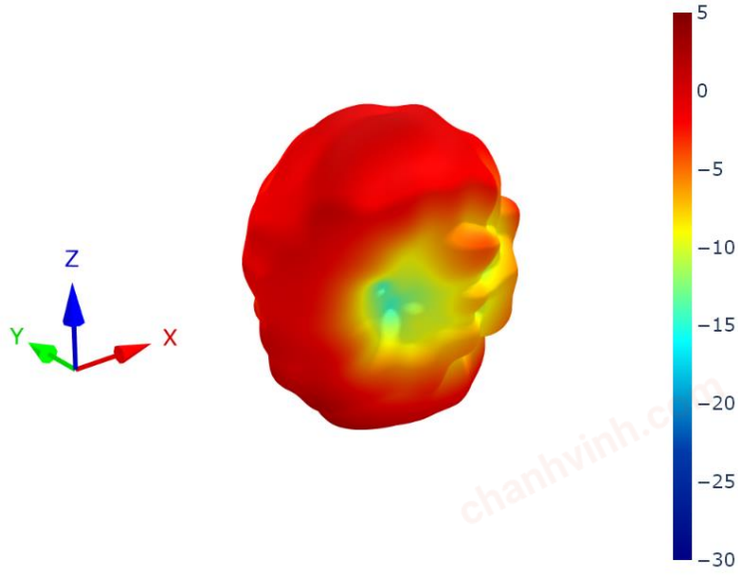

XZ Plane	YZ Plane	XY Plane

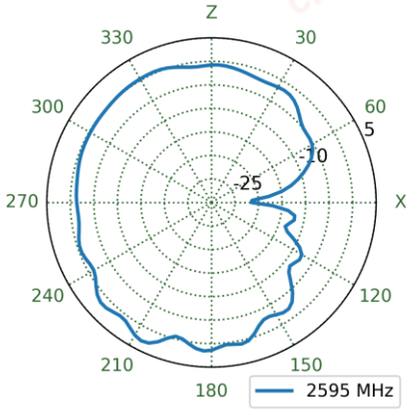


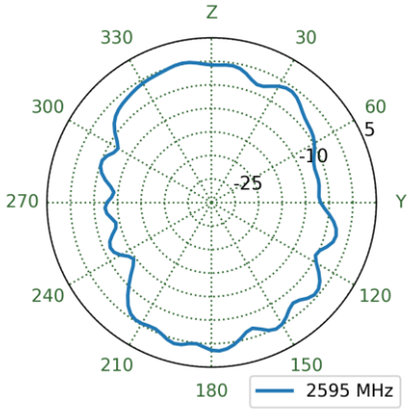

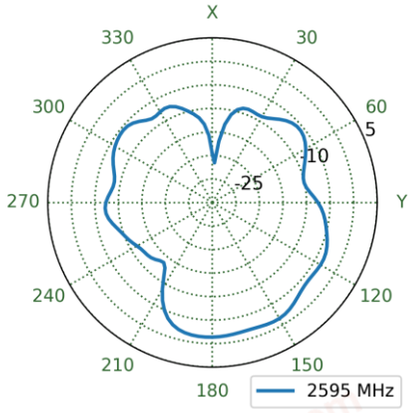



chanhvinh.com


7.40 LTE3 Patterns at 2595 MHz

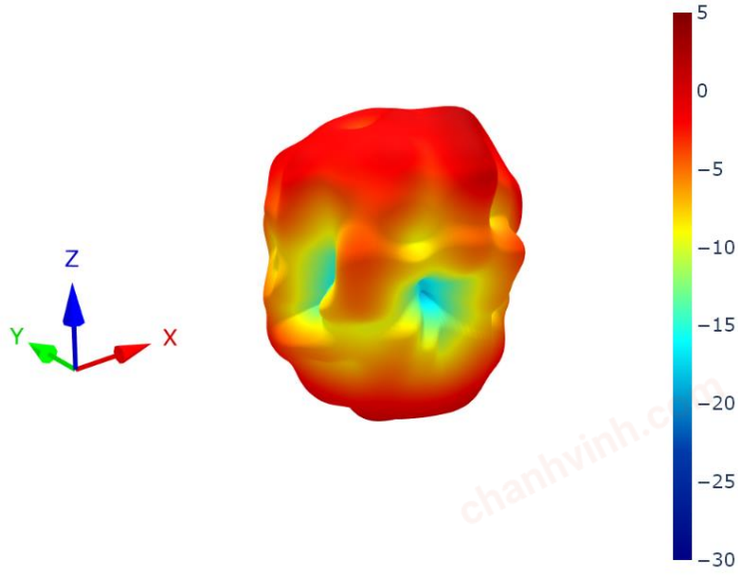


XZ Plane	YZ Plane	XY Plane

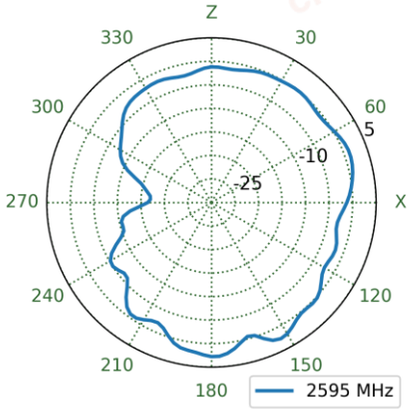

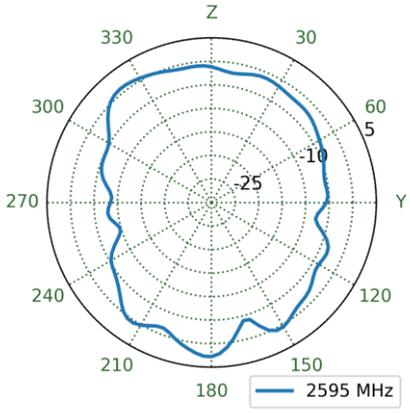


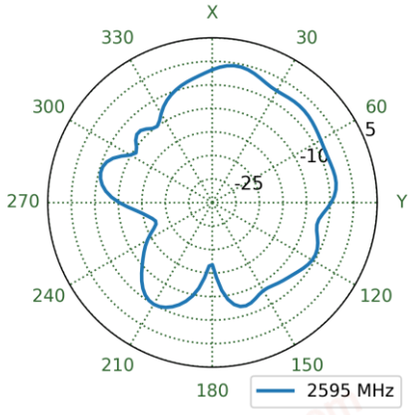



7.41 LTE4 Patterns at 2595 MHz

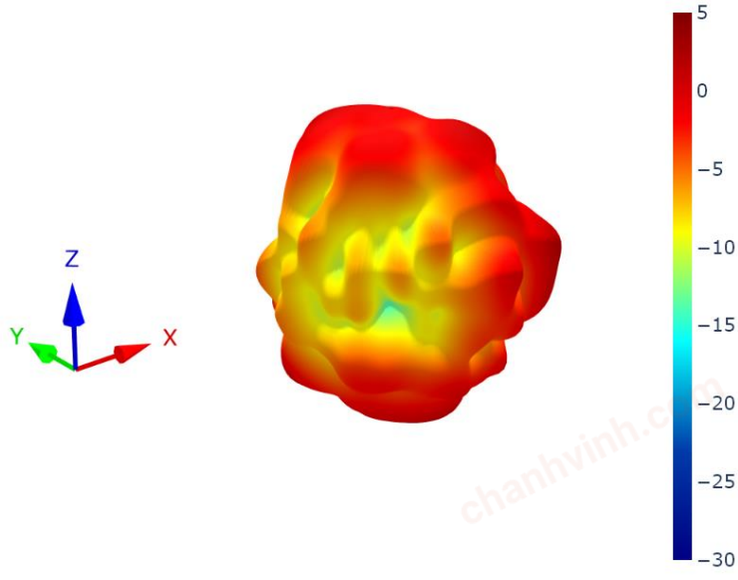


XZ Plane	YZ Plane	XY Plane

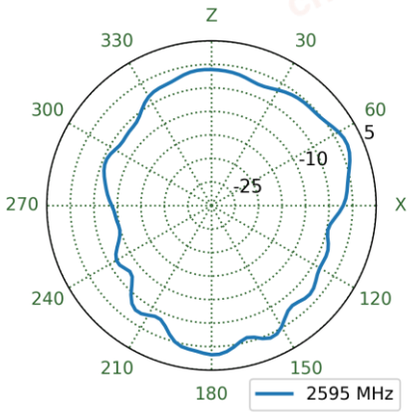

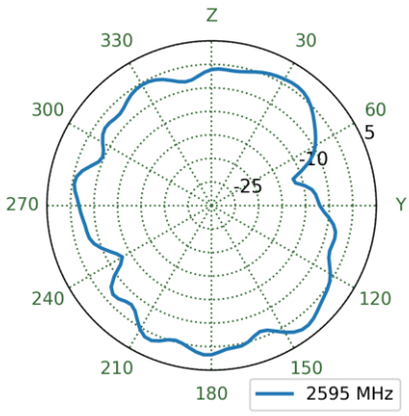


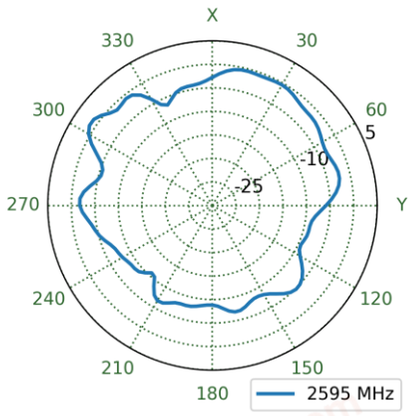



7.42 LTE1 Patterns at 3550 MHz

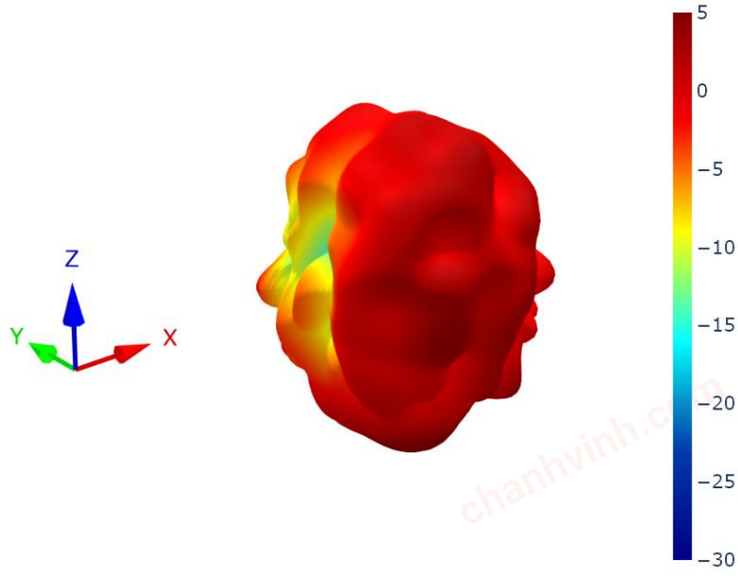


XZ Plane	YZ Plane	XY Plane

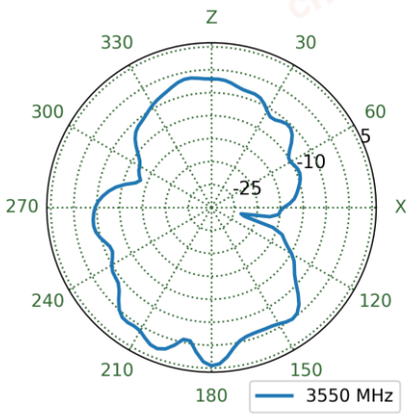

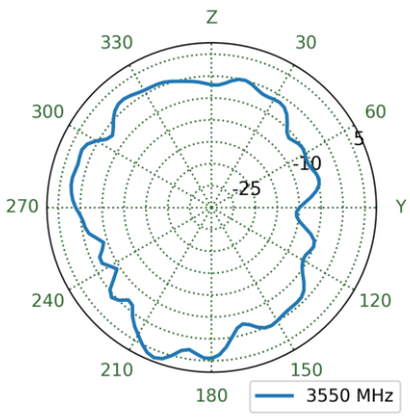


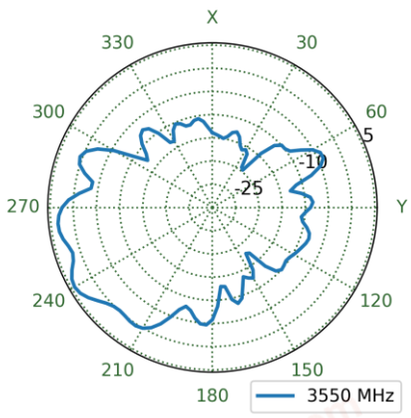



7.43 LTE2 Patterns at 3550 MHz

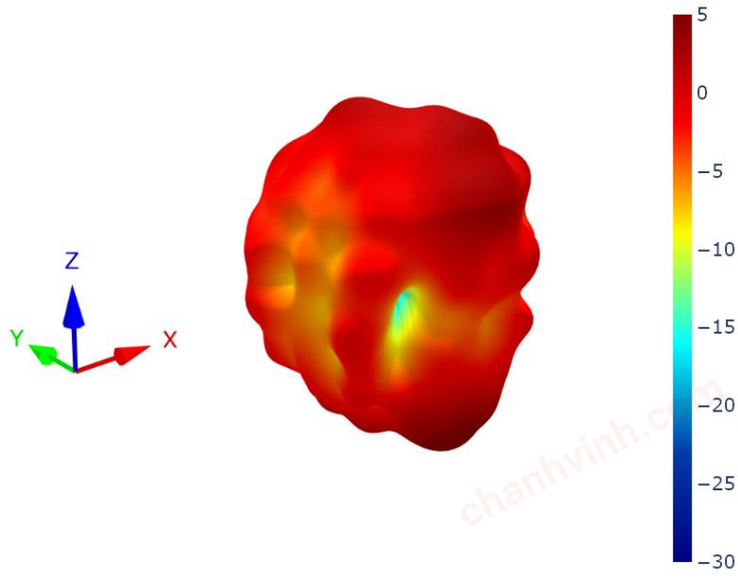


XZ Plane	YZ Plane	XY Plane

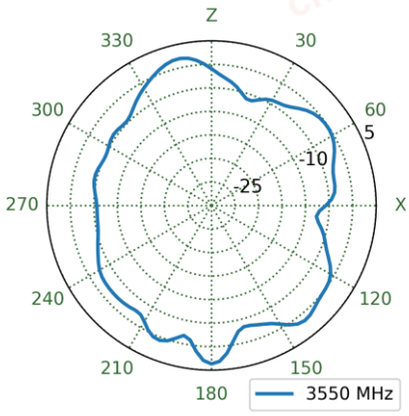

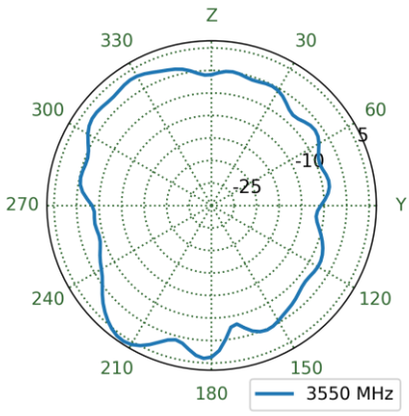


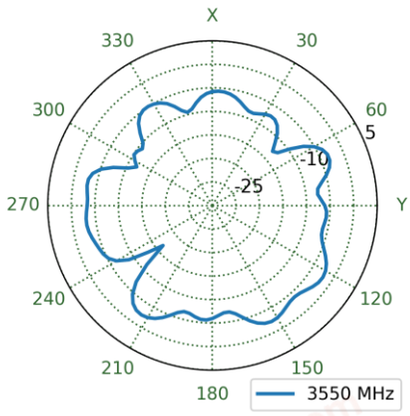



7.44 LTE3 Patterns at 3550 MHz

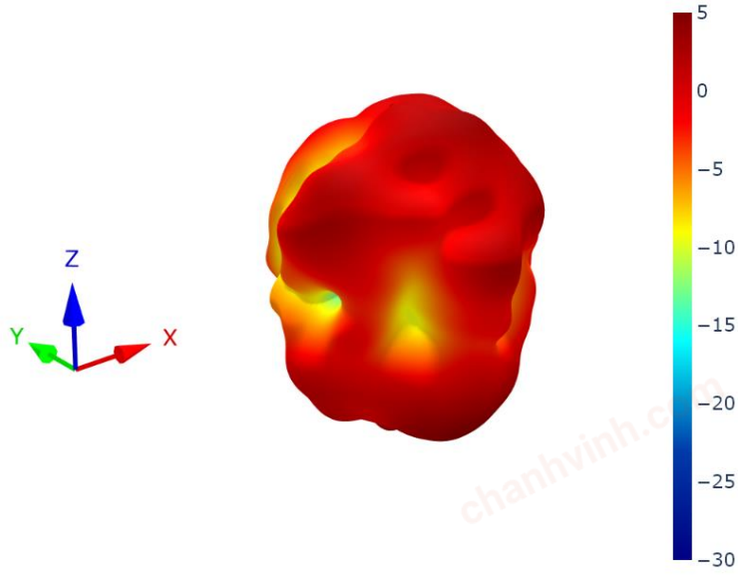


XZ Plane	YZ Plane	XY Plane

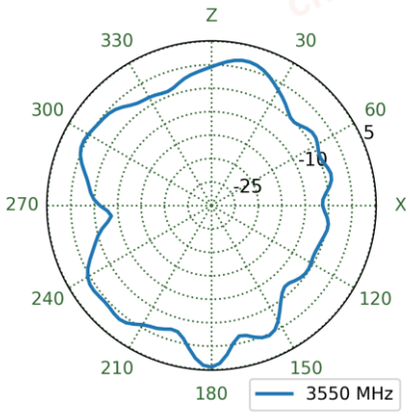

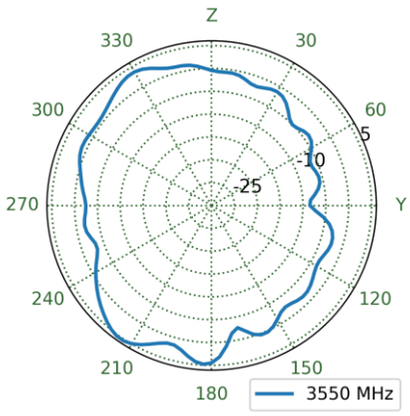


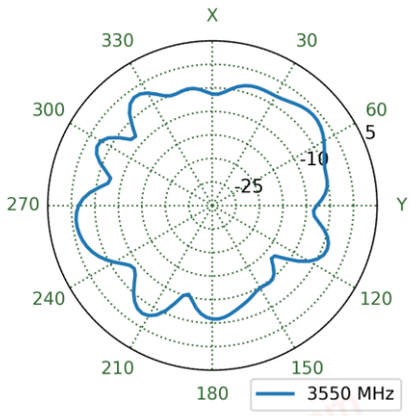



7.45 LTE4 Patterns at 3550 MHz

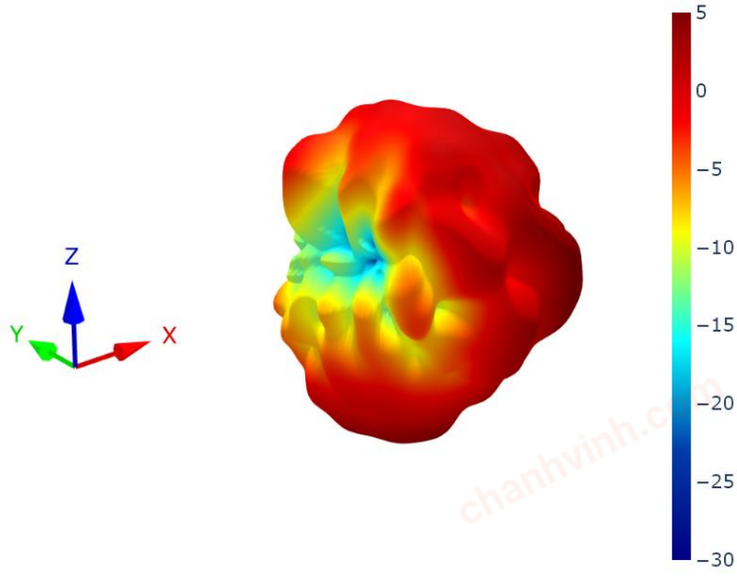


XZ Plane	YZ Plane	XY Plane

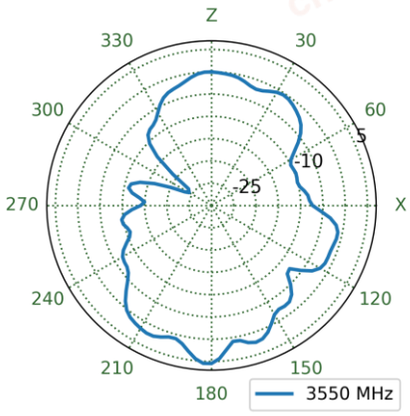

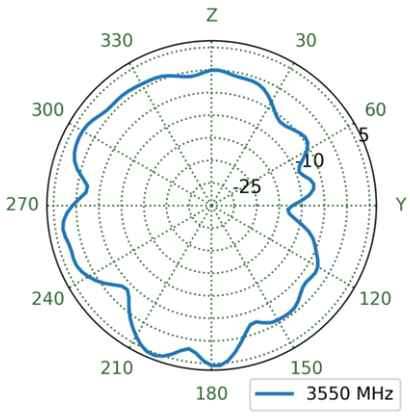


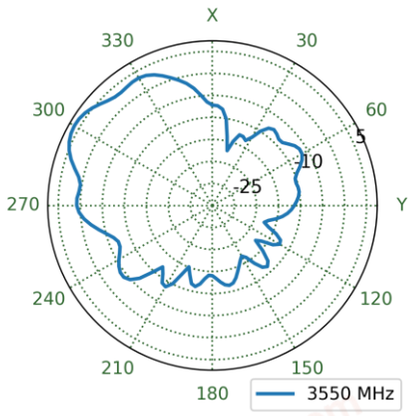



7.46 LTE1 Patterns at 4600 MHz

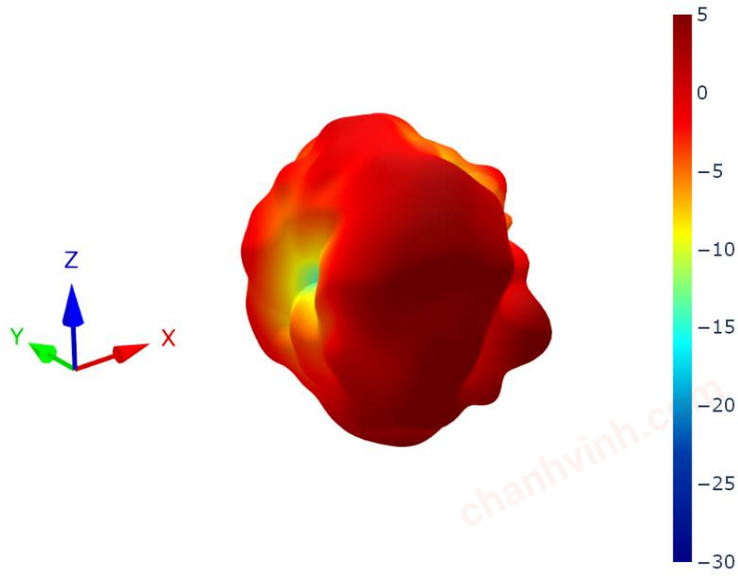


XZ Plane	YZ Plane	XY Plane

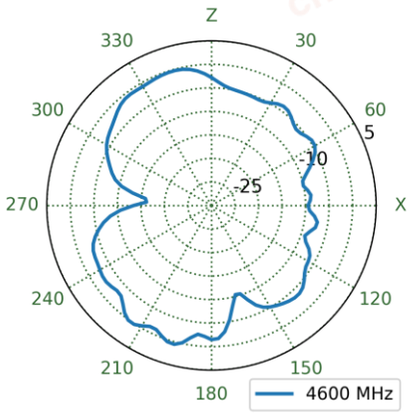

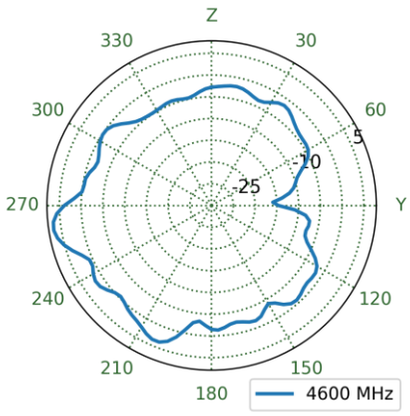


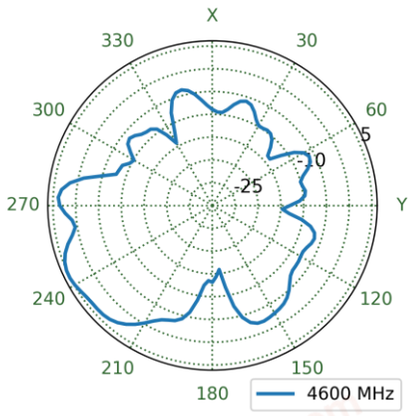



7.47 LTE2 Patterns at 4600 MHz

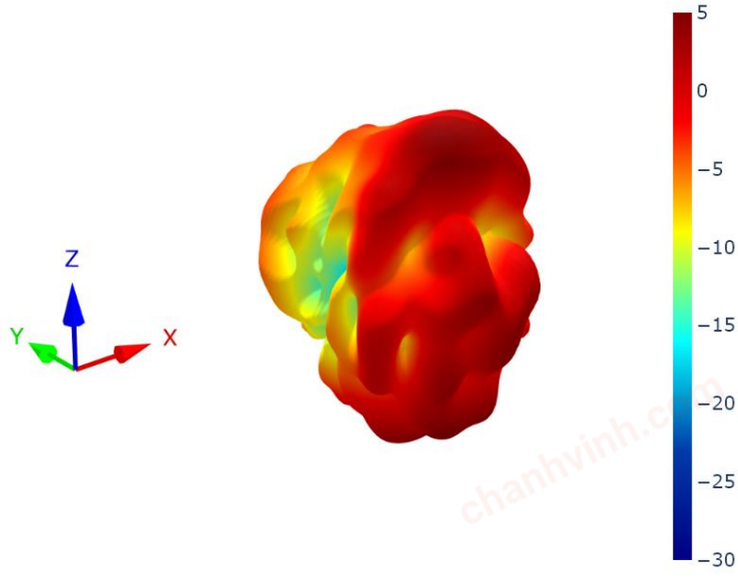


XZ Plane	YZ Plane	XY Plane

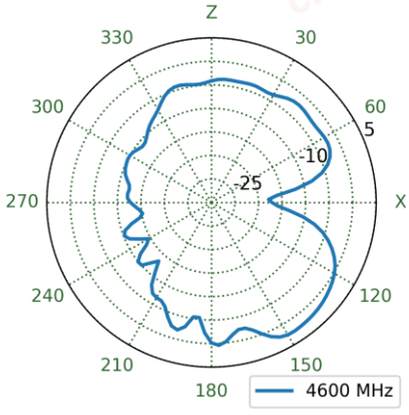

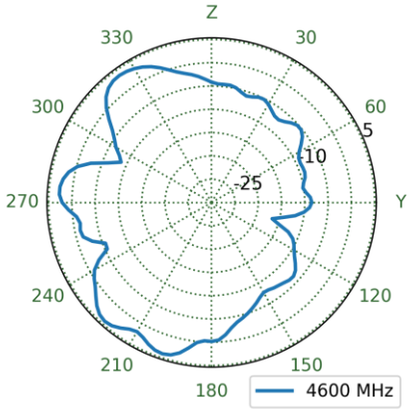


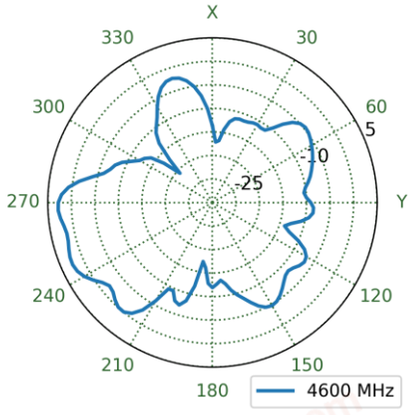



7.48 LTE3 Patterns at 4600 MHz

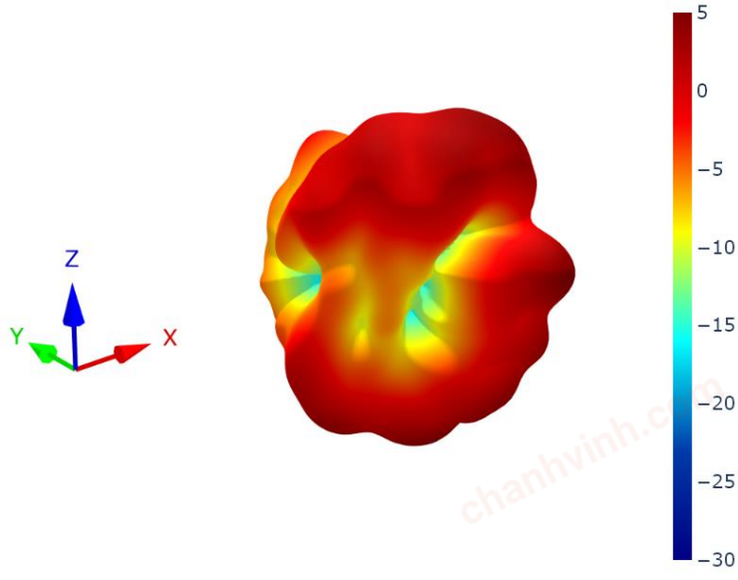


XZ Plane	YZ Plane	XY Plane

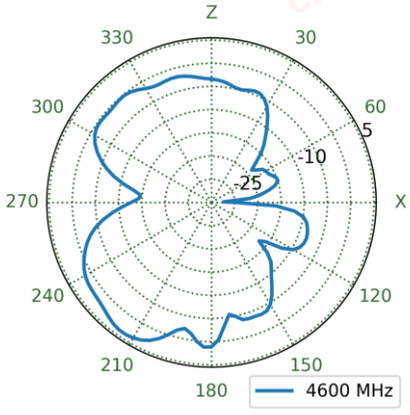

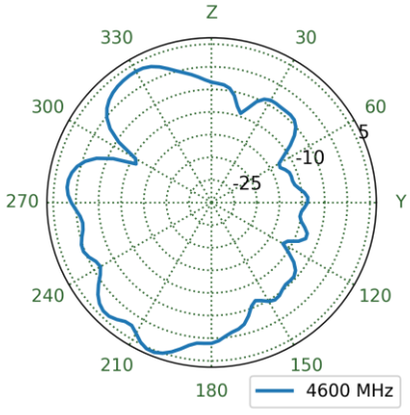


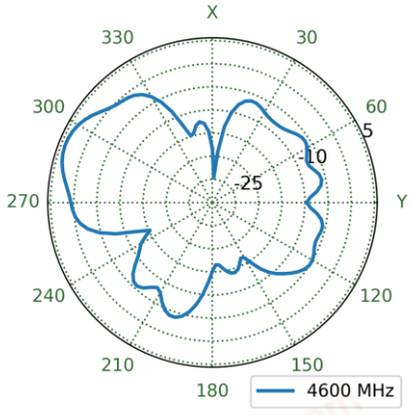



7.49 LTE4 Patterns at 4600 MHz

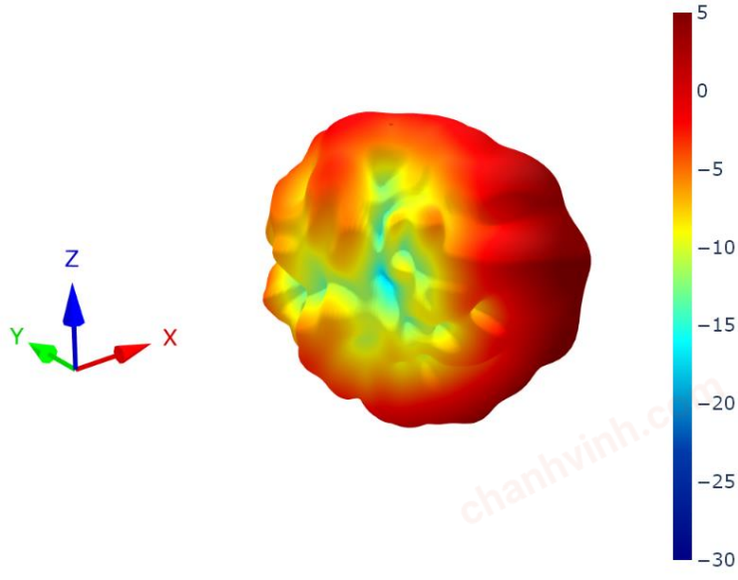


XZ Plane	YZ Plane	XY Plane

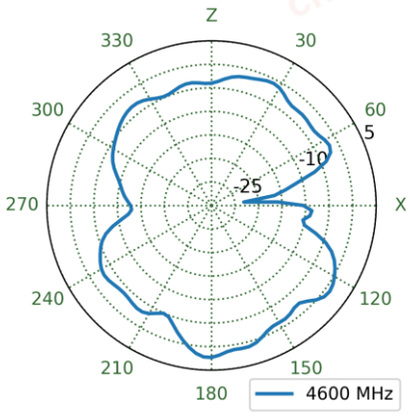

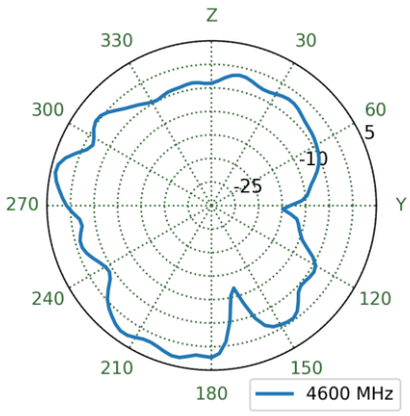


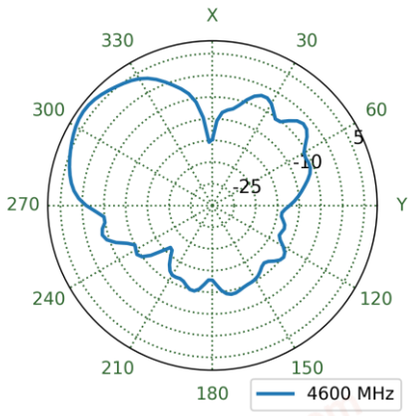



7.50 LTE1 Patterns at 4800 MHz

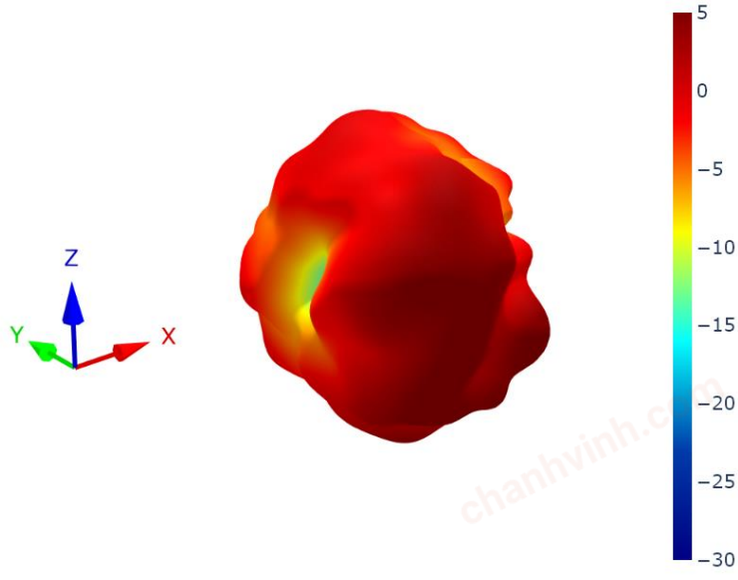


XZ Plane	YZ Plane	XY Plane

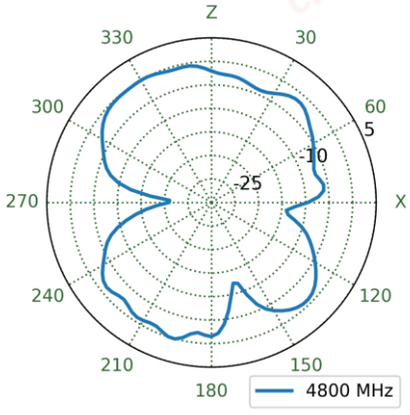

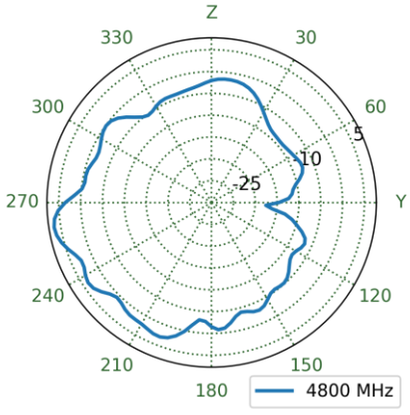


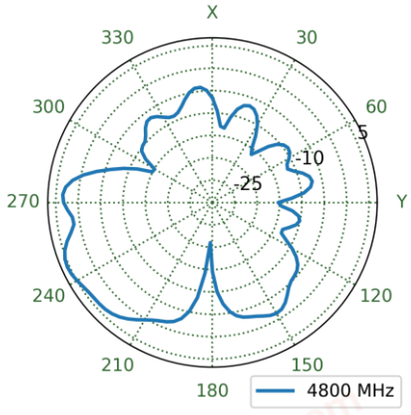



7.51 LTE2 Patterns at 4800 MHz

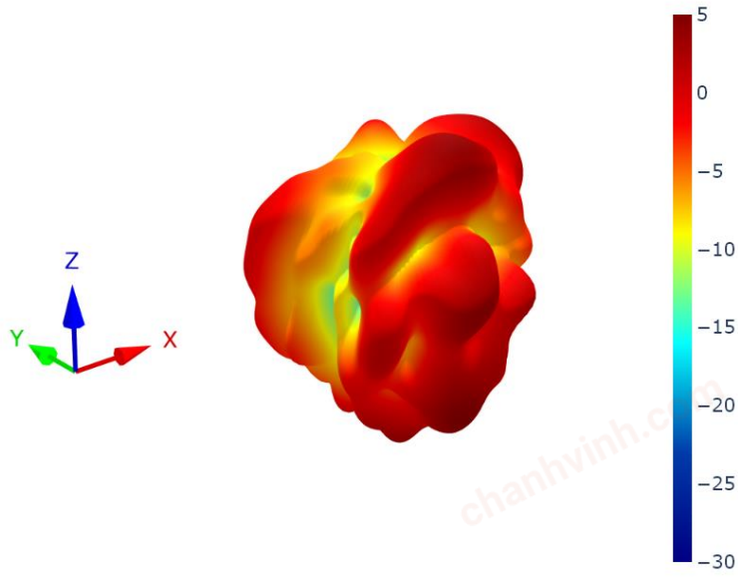


XZ Plane	YZ Plane	XY Plane

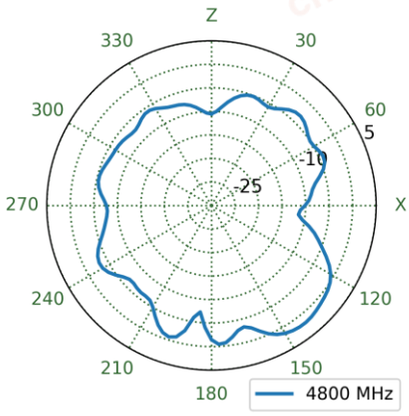

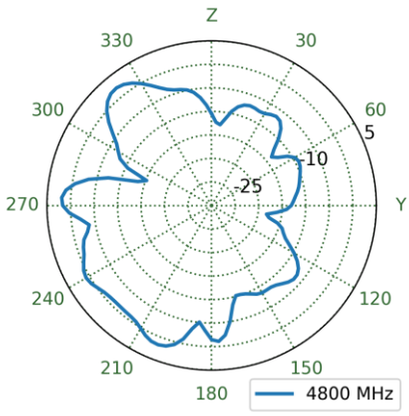


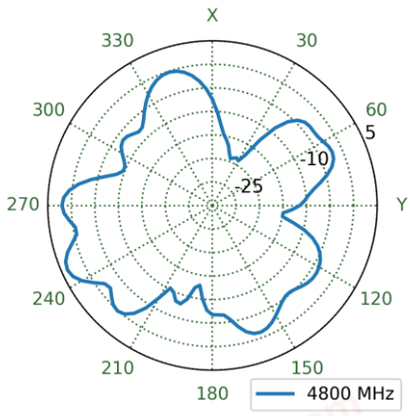



7.52 LTE3 Patterns at 4800 MHz

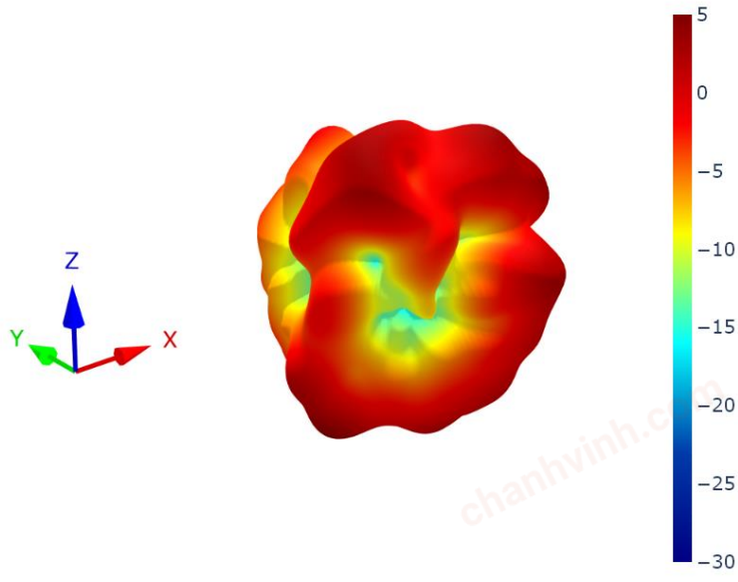


XZ Plane	YZ Plane	XY Plane



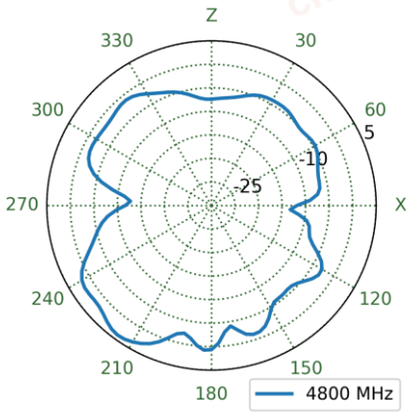


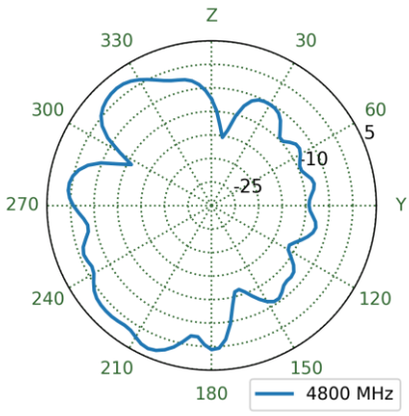

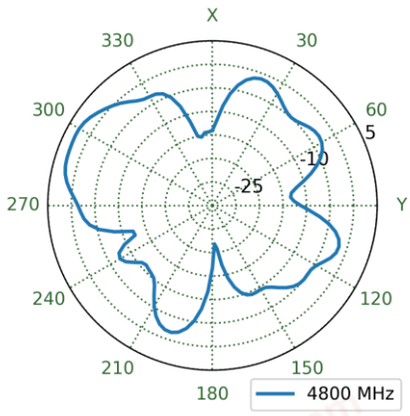


7.53 LTE4 Patterns at 4800 MHz

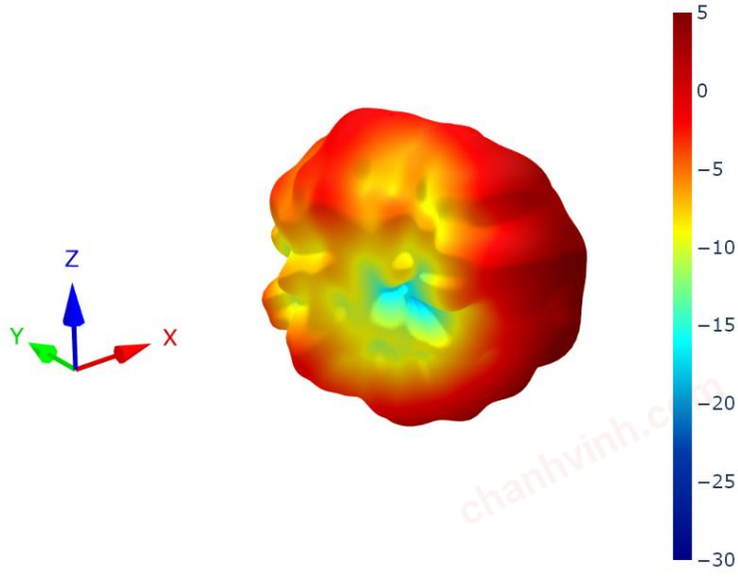

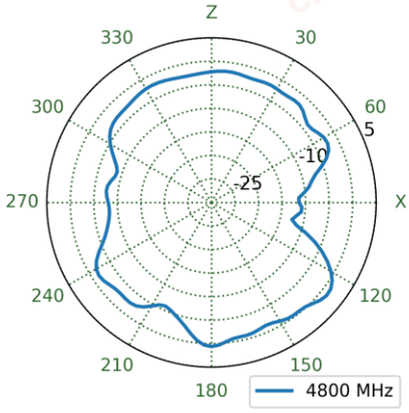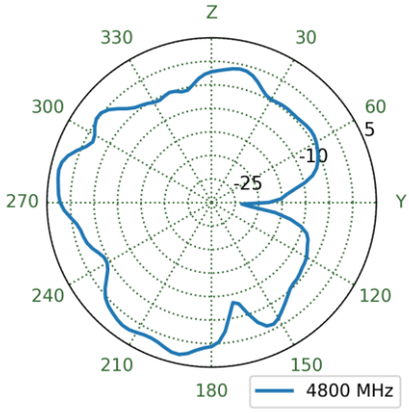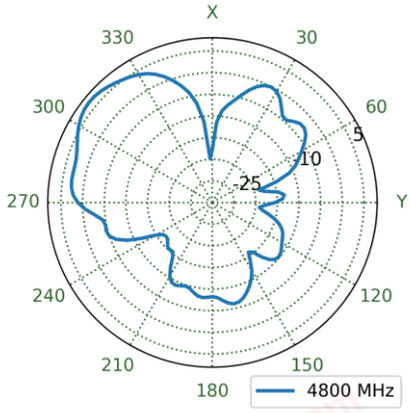
XZ Plane	YZ Plane	XY Plane
		


chanhvinh.com


7.54 LTE1 Patterns at 5530 MHz

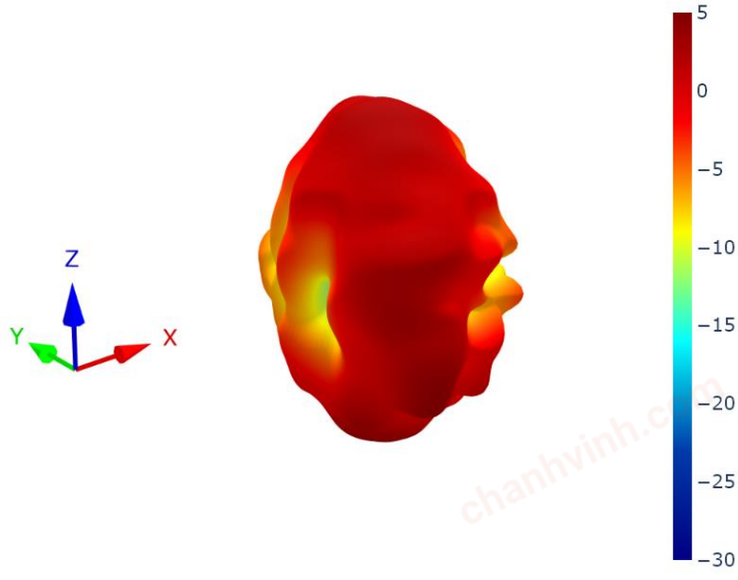


XZ Plane	YZ Plane	XY Plane

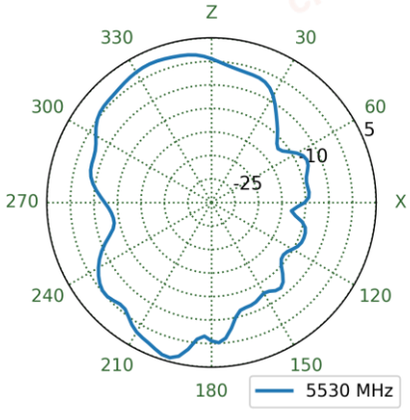

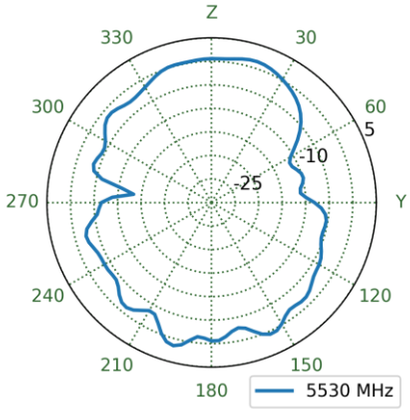


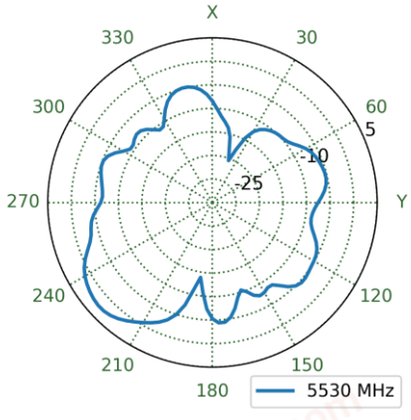



7.55 LTE2 Patterns at 5530 MHz

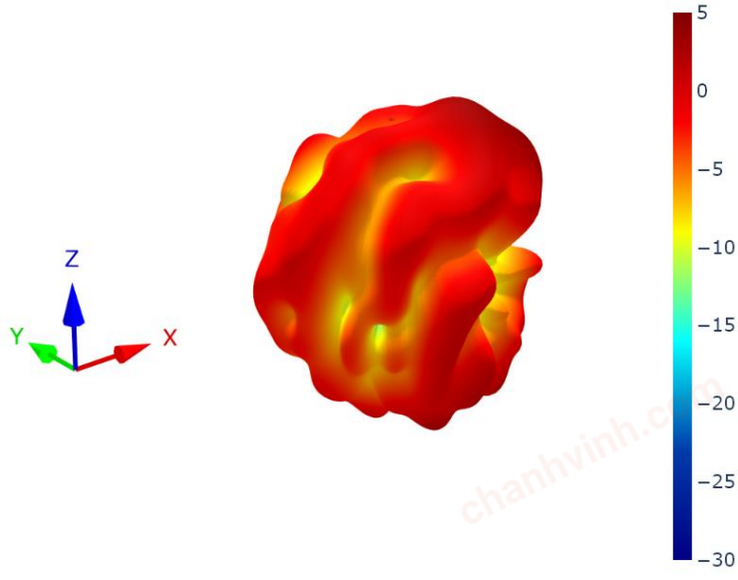


XZ Plane	YZ Plane	XY Plane

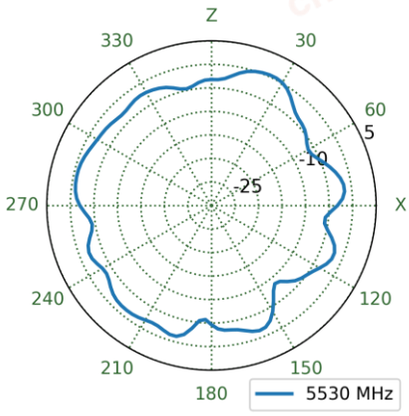

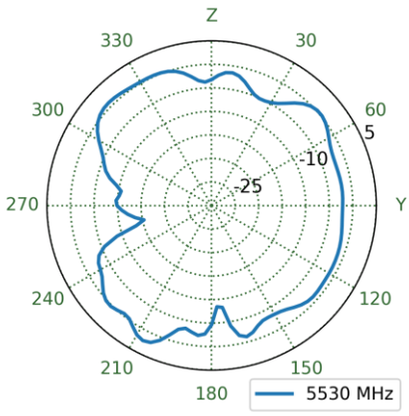


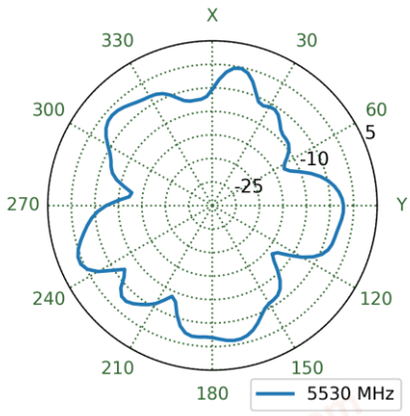



7.56 LTE3 Patterns at 5530 MHz

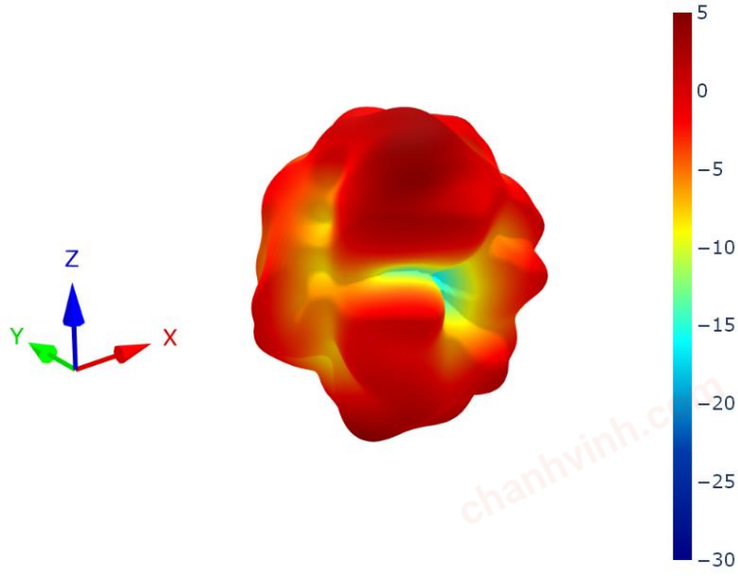


XZ Plane	YZ Plane	XY Plane

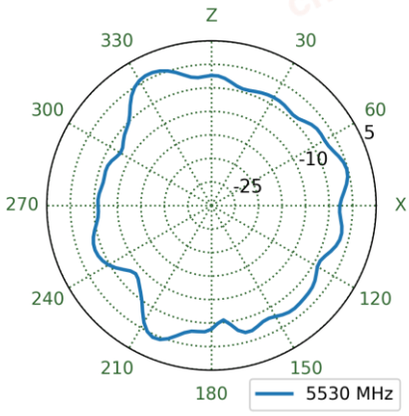

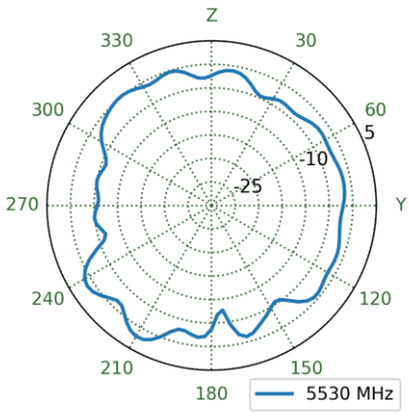


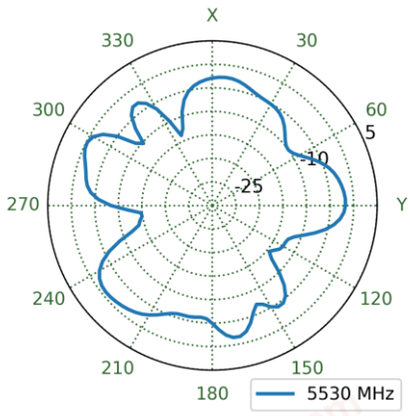



7.57 LTE4 Patterns at 5530 MHz

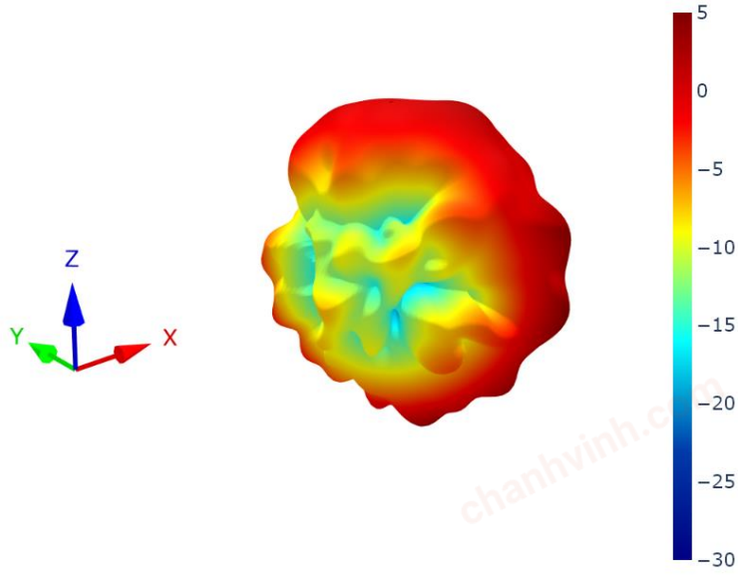

XZ Plane	YZ Plane	XY Plane

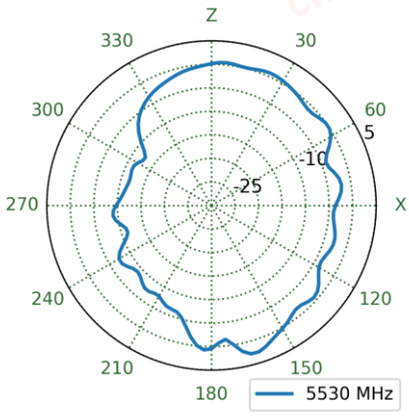


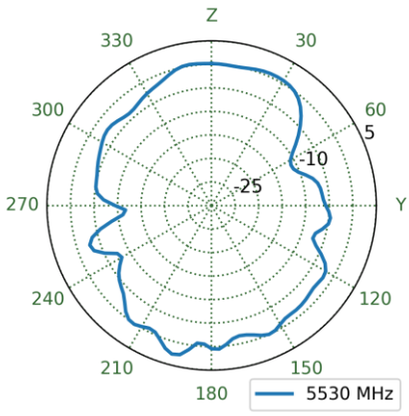

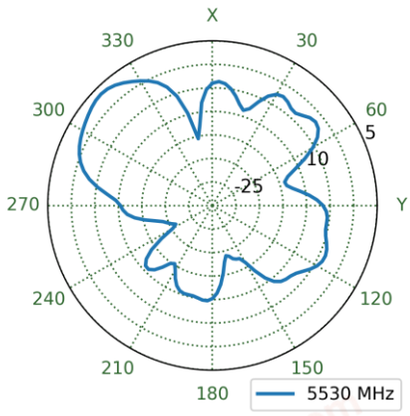



chanhvinh.com


7.58 Wi-Fi1 Patterns at 2450 MHz

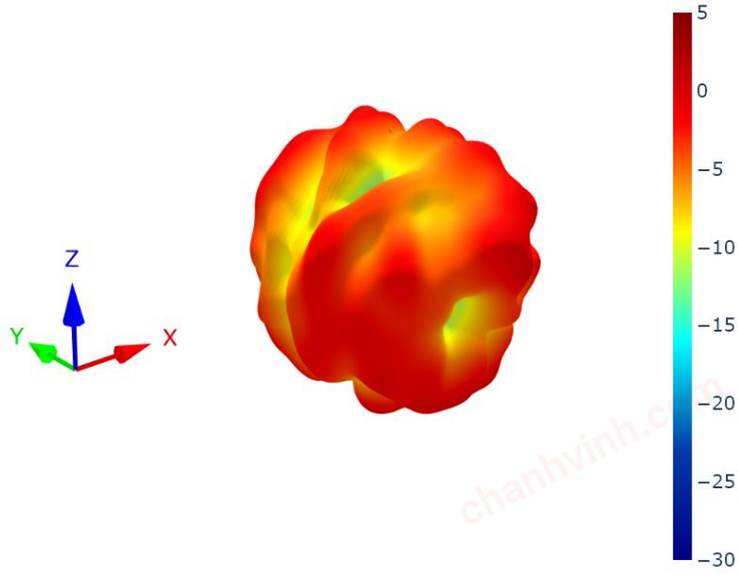


XZ Plane	YZ Plane	XY Plane

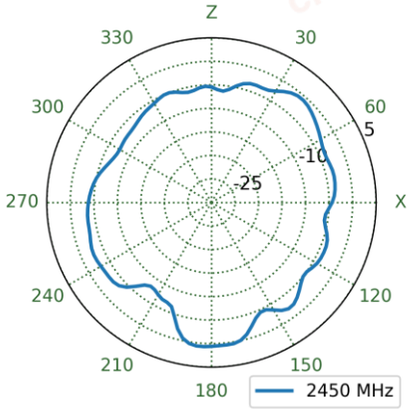

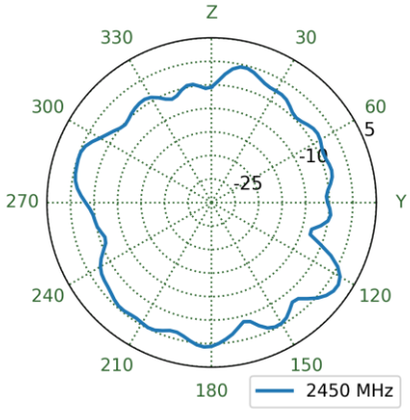


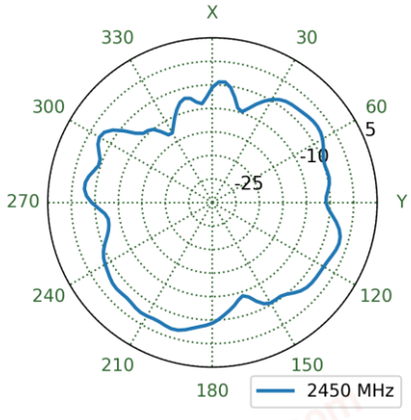



7.59 Wi-Fi2 Patterns at 2450 MHz

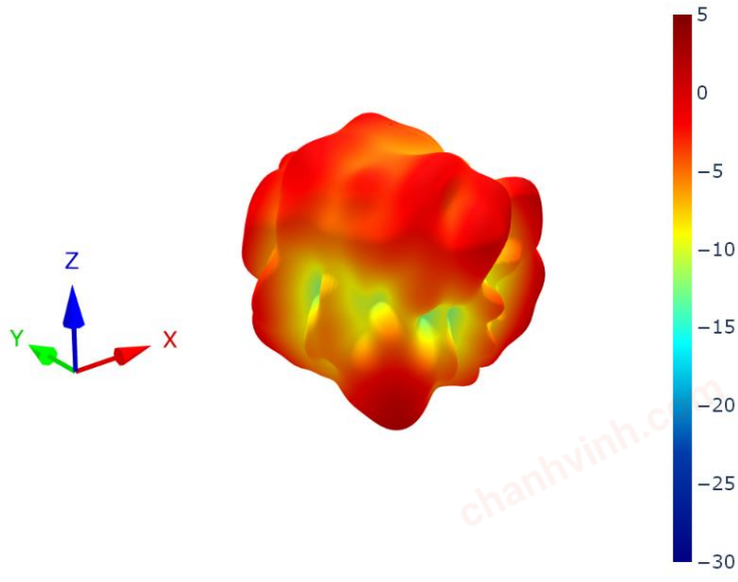

XZ Plane	YZ Plane	XY Plane

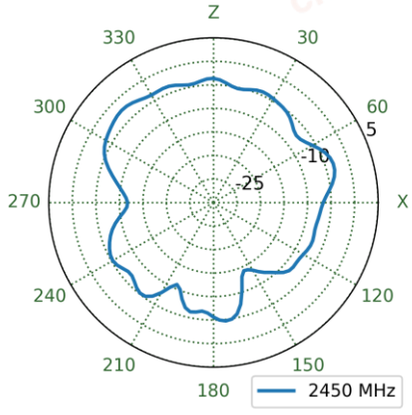


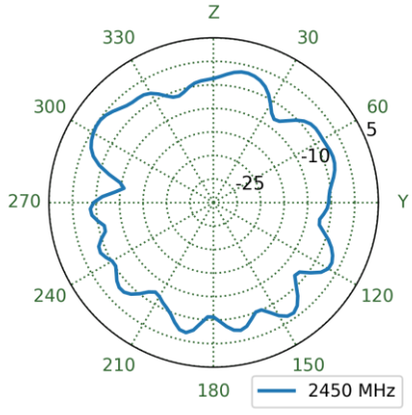

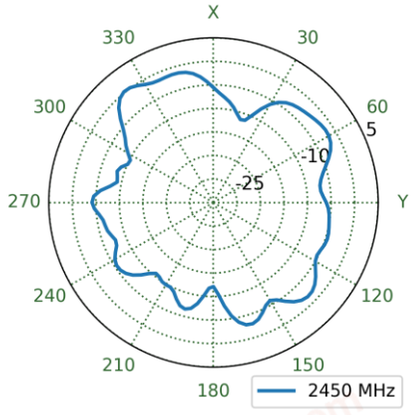



chanhvinh.com


7.60 Wi-Fi3 Patterns at 2450 MHz

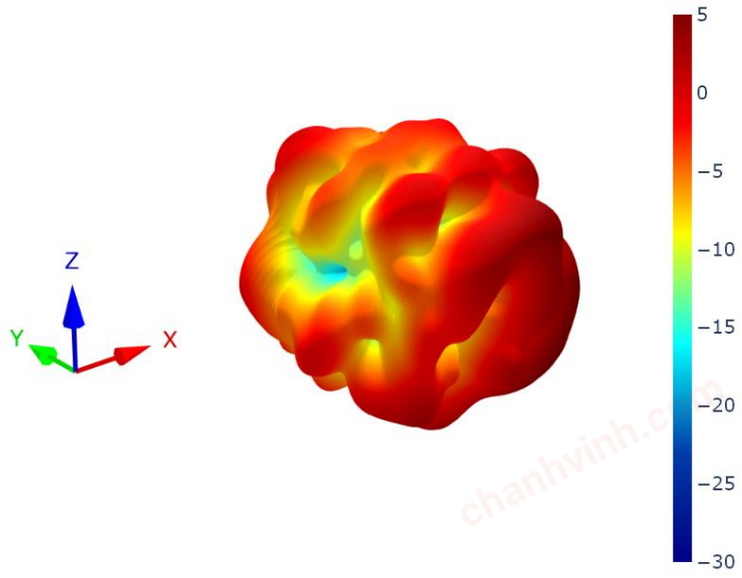


XZ Plane	YZ Plane	XY Plane

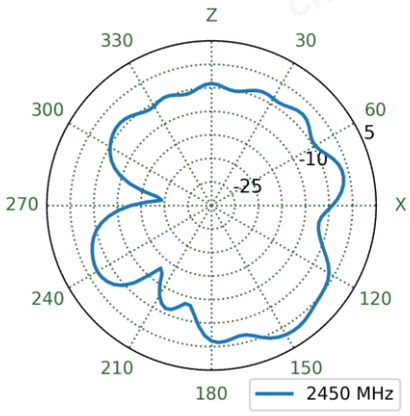

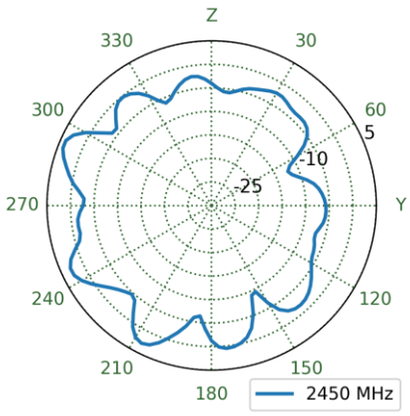


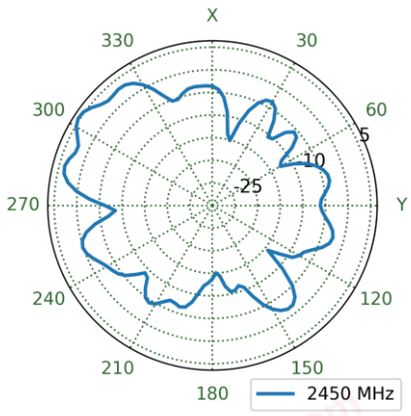



7.61 Wi-Fi1 Patterns at 5500 MHz

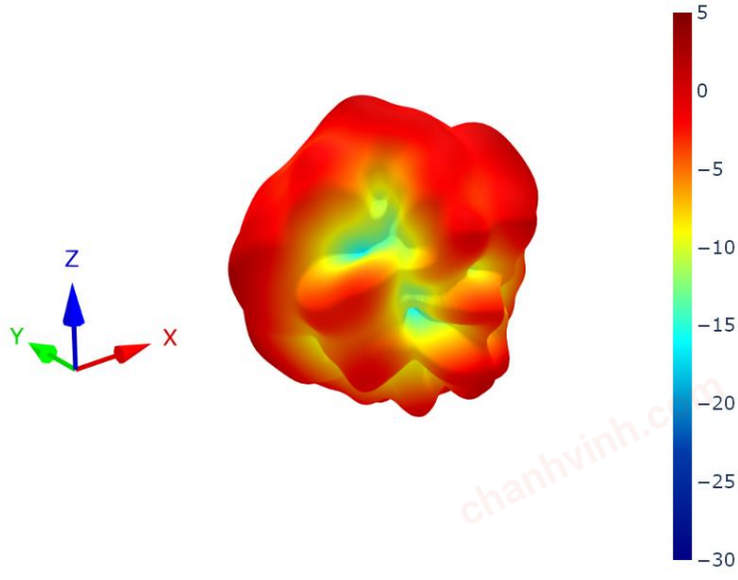

XZ Plane	YZ Plane	XY Plane

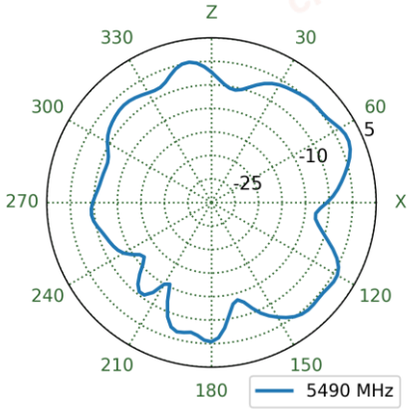


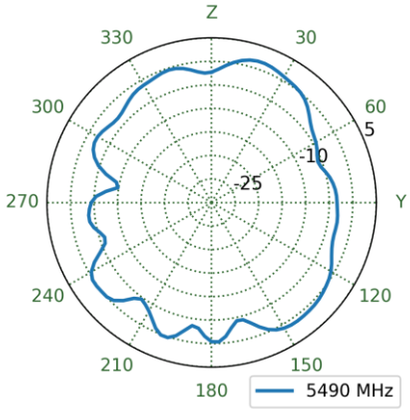

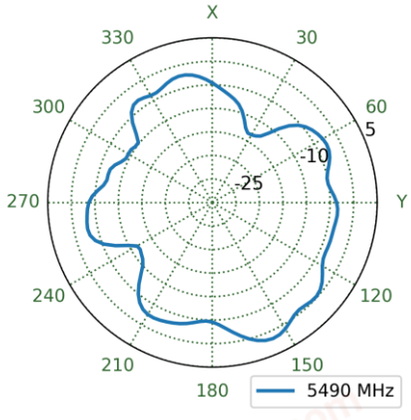



chanhvinh.com


7.62 Wi-Fi2 Patterns at 5500 MHz

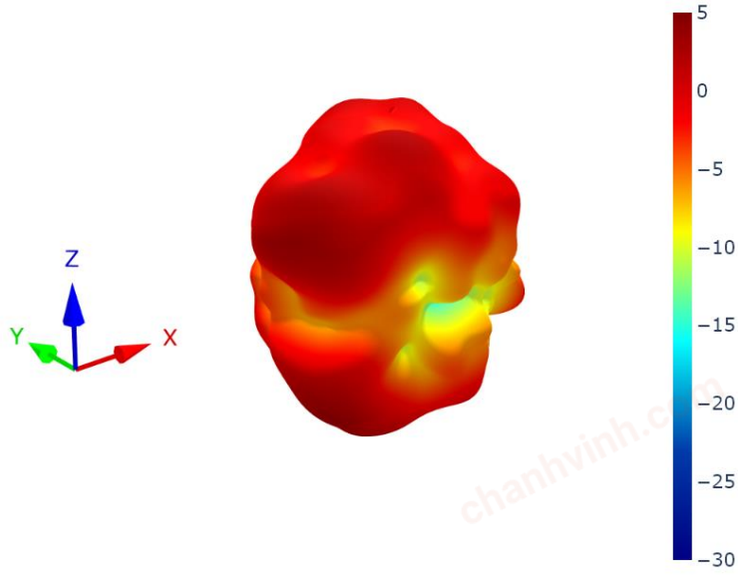

XZ Plane	YZ Plane	XY Plane

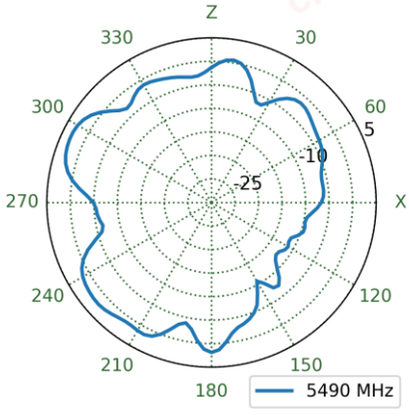


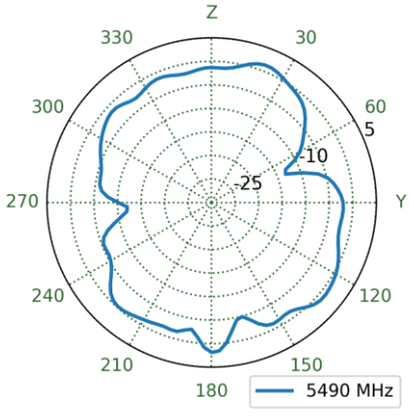

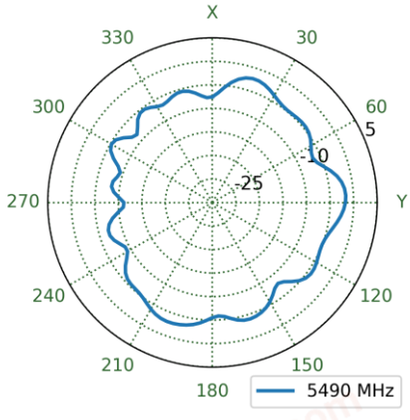



chanhvinh.com


7.63 Wi-Fi3 Patterns at 5500 MHz

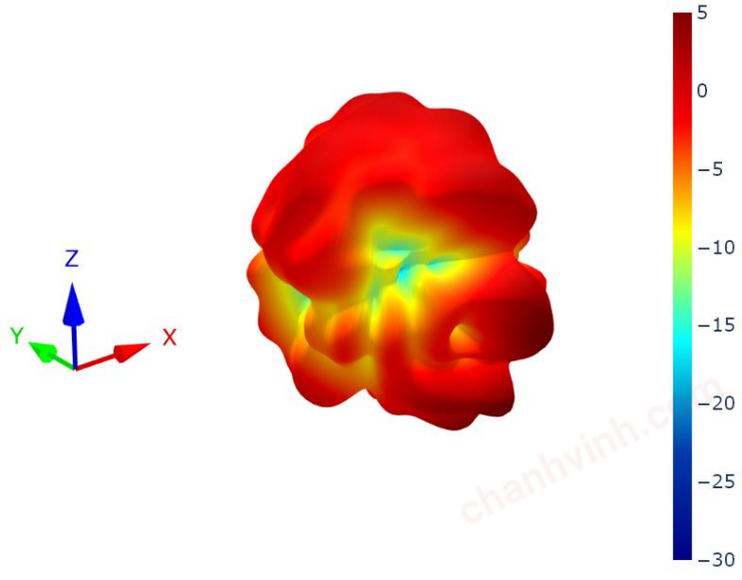


XZ Plane	YZ Plane	XY Plane

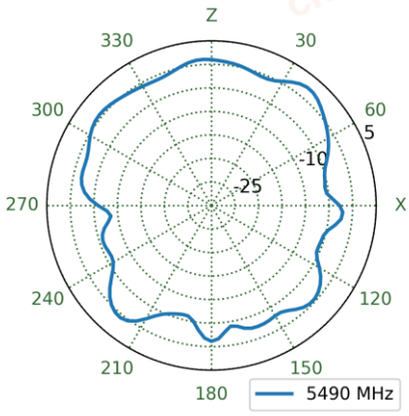

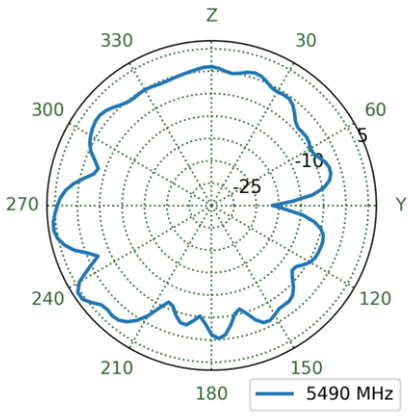


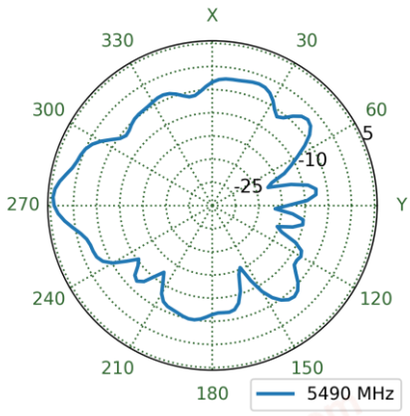



7.64 Wi-Fi1 Patterns at 6525 MHz

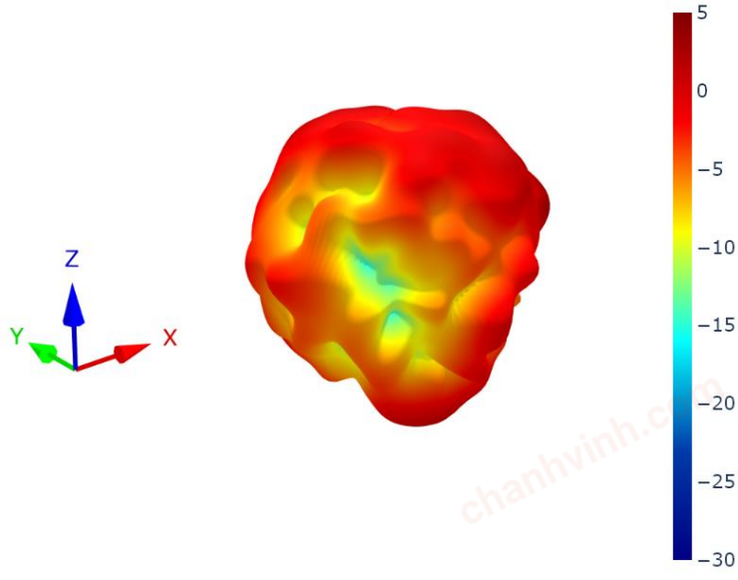

XZ Plane	YZ Plane	XY Plane

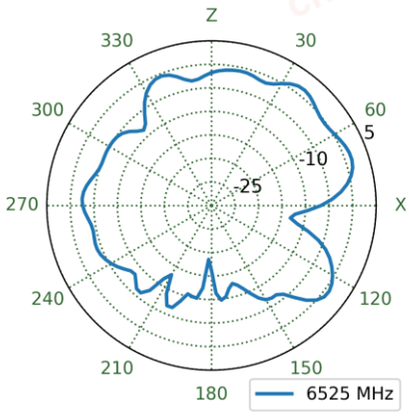


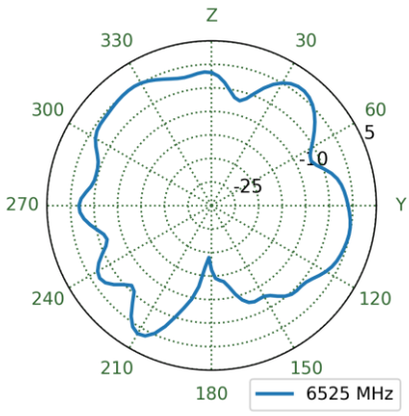

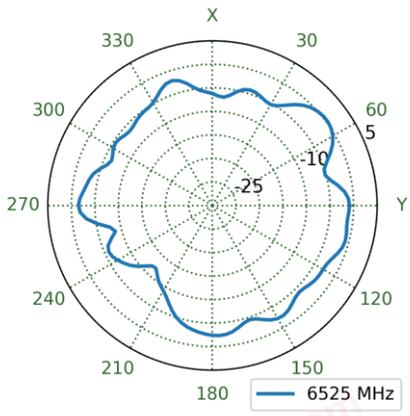



chanhvinh.com


7.65 Wi-Fi2 Patterns at 6525 MHz

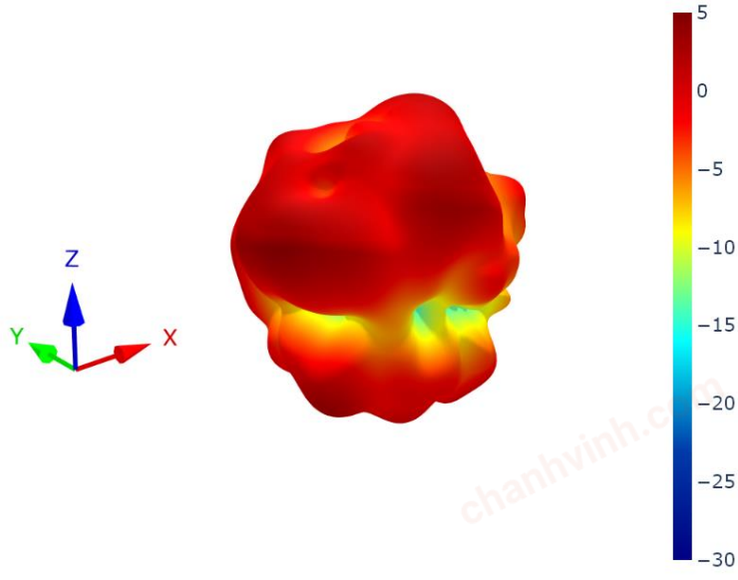

XZ Plane	YZ Plane	XY Plane

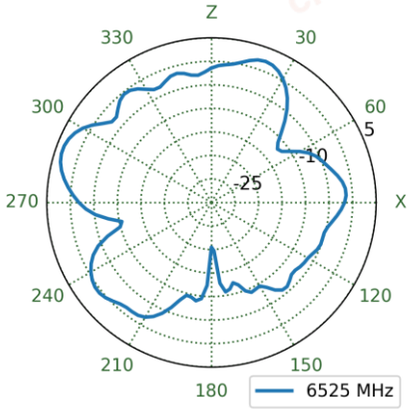


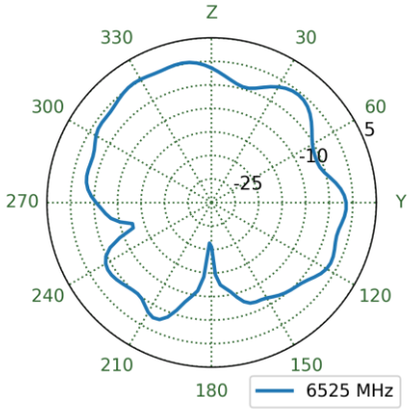

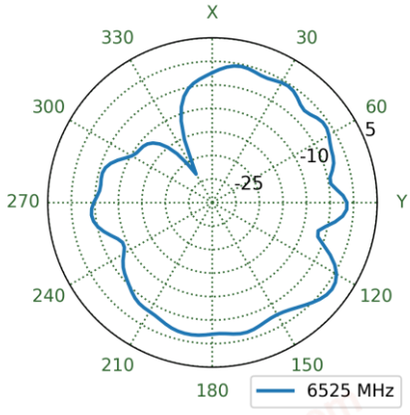



chanhvinh.com


7.66 Wi-Fi3 Patterns at 6525 MHz

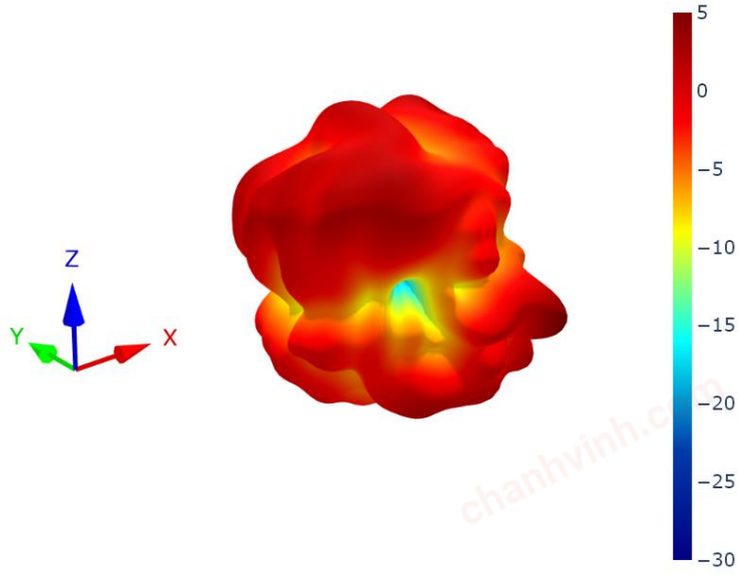

XZ Plane	YZ Plane	XY Plane

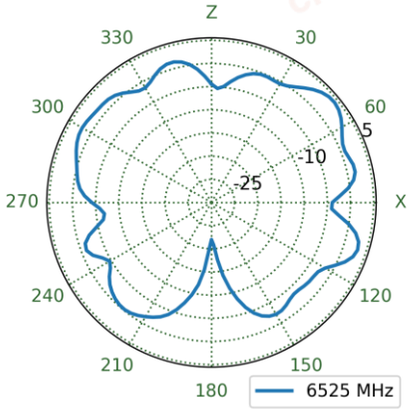

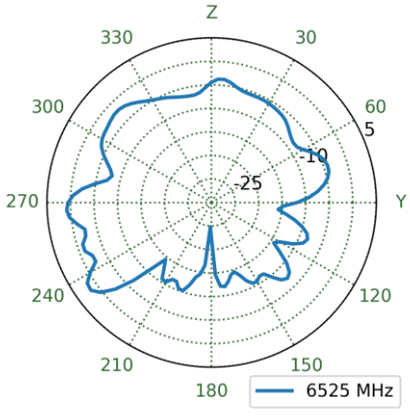

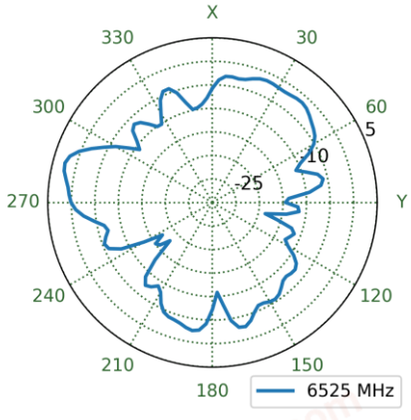

chanhvinh.com

Changelog for the datasheet

SPE-24-8-099 - MA998.A.001

Revision: A (Original First Release)	
Date:	2024-05-24
Notes:	Initial Release
Author:	Gary West

Previous Revisions

chanhvinh.com

TAOGLAS

TAOGLAS®

www.taoglas.com