chanhvinh.com

General purpose (dual digital transistors)

EMB11 / UMB11N / IMB11A

●Features


1) Two DTA114E chips in a EMT or UMT or SMT package.
2) Mounting possible with EMT3 or UMT3 or SMT3 automatic mounting machines.
3) Transistor elements are independent, eliminating interference.
4) Mounting cost and area can be cut in half.

●Structure

Epitaxial planar type
PNP silicon transistor (Built-in resistor type)

The following characteristics apply to both DTr_1 and DTr_2.

●Equivalent circuit

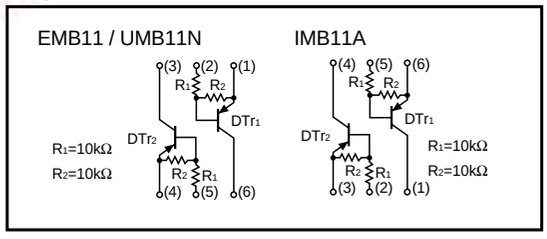


●Absolute maximum ratings (Ta = 25°C)

Parameter		Symbol	Limits	Unit
Supply voltage		V_{CC}	–50	V
Input voltage		V_{IN}	–40	V
			10	
Output current		I_O	–50	mA
		$I_{C\ (Max.)}$	–100	
Power dissipation	EMB11, UMB11N	Pd	150 (TOTAL)	mW ※1
	IMB11A		300 (TOTAL)	※2
Junction temperature		Tj	150	˚C
Storage temperature		Tstg	–55 to +150	˚C

※1 120mW per element must not be exceeded.
※2 200mW per element must not be exceeded.

●External dimensions (Unit : mm)

EMB11




Each lead has same dimensions

ROHM : EMT6

Abbreviated symbol : B11

UMB11N




Each lead has same dimensions

ROHM : UMT6
EIAJ : SC-88

Abbreviated symbol : B11

IMB11A



Each lead has same dimensions

ROHM : SMT6
EIAJ : SC-74

Abbreviated symbol : B11

chanhvinh.com

●Electrical characteristics (Ta = 25°C)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
Input voltage	$V_{I\,(off)}$	–	–	–0.5	V	V_{CC}= –5V, I_O= –100μA
	$V_{I\,(on)}$	–3.0	–	–		V_O= –0.3V, I_O= –10mA
Output voltage	$V_{O\,(on)}$	–	–0.1	–0.3	V	I_O/I_I= –10mA/ –0.5mA
Input current	I_I	–	–	–0.88	mA	V_I= –5V
Output current	$I_{O\,(off)}$	–	–	–0.5	μA	V_{CC}= –50V, V_I=0V
DC current gain	G_I	30	–	–	–	V_O= –5V, I_O= –5mA
Transition frequency	f_T	–	250	–	MHz	V_{CE}= –10V, I_E=5mA, f=100MHz *
Input resistance	R_1	7	10	13	kΩ	–
Resistance ratio	R_2 / R_1	0.8	1	1.2	–	–

* Transition frequency of the device

●Packaging specifications

Type	Package	Taping		
	Code	T2R	TN	T110
	Basic ordering unit (pieces)	8000	3000	3000
EMB11		○	—	—
UMB11N		—	○	—
IMB11A		—	—	○

●Electrical characteristic curves




Fig.1 Input voltage vs. output current (ON characteristics)




Fig.2 Output current vs. input voltage (OFF characteristics)

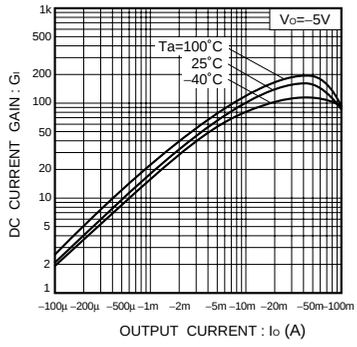


Fig.3 DC current gain vs. output current




Fig.4 Output voltage vs. output current

chanhvinh.com

Notes

- No technical content pages of this document may be reproduced in any form or transmitted by any means without prior permission of ROHM CO.,LTD.
- The contents described herein are subject to change without notice. The specifications for the product described in this document are for reference only. Upon actual use, therefore, please request that specifications to be separately delivered.
- Application circuit diagrams and circuit constants contained herein are shown as examples of standard use and operation. Please pay careful attention to the peripheral conditions when designing circuits and deciding upon circuit constants in the set.
- Any data, including, but not limited to application circuit diagrams information, described herein are intended only as illustrations of such devices and not as the specifications for such devices. ROHM CO.,LTD. disclaims any warranty that any use of such devices shall be free from infringement of any third party's intellectual property rights or other proprietary rights, and further, assumes no liability of whatsoever nature in the event of any such infringement, or arising from or connected with or related to the use of such devices.
- Upon the sale of any such devices, other than for buyer's right to use such devices itself, resell or otherwise dispose of the same, no express or implied right or license to practice or commercially exploit any intellectual property rights or other proprietary rights owned or controlled by
- ROHM CO., LTD. is granted to any such buyer.
- Products listed in this document are no antiradiation design.

The products listed in this document are designed to be used with ordinary electronic equipment or devices (such as audio visual equipment, office-automation equipment, communications devices, electrical appliances and electronic toys).
Should you intend to use these products with equipment or devices which require an extremely high level of reliability and the malfunction of with would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), please be sure to consult with our sales representative in advance.

About Export Control Order in Japan

Products described herein are the objects of controlled goods in Annex 1 (Item 16) of Export Trade Control Order in Japan.
In case of export from Japan, please confirm if it applies to "objective" criteria or an "informed" (by MITI clause) on the basis of "catch all controls for Non-Proliferation of Weapons of Mass Destruction.