
chanhvinh.com

PRODUCT DATA SHEET

Part Number: 1902X25X

Type	Size	Rating	Description
LED	M6	12VDC	LED Panel Indicator

Dimensions (mm)

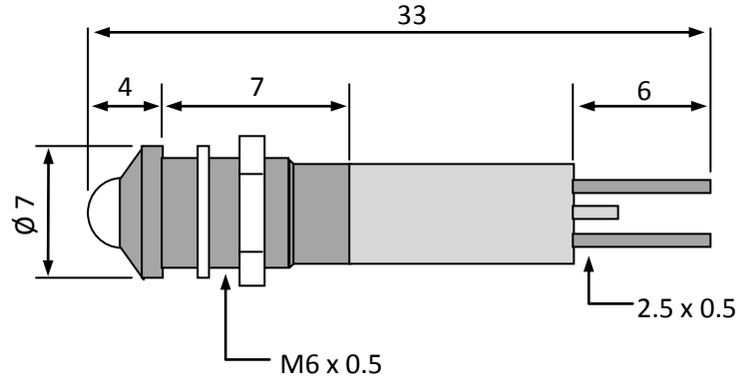

Part #	Colour	Current (mA)	Intensity (mcd)
1902X250	Red	20	6
1902X251	Green	20	40
1902X252	Yellow	20	30
1902X253	HE-Red	20	50
1902X257	Blue	20	60
1902X25W	White	7	1200

Bezel types - X=0 satin chrome / X=1 black chrome / X=2 matt chrome

Notes:

1 Electrical & optical data are measured at an ambient temperature of 25ºC
2 Luminous intensity at DC
3 Storage temperature -25 ºC to +80ºC
4 Application temperature -20 ºC to +60ºC
5 Due to component tolerances, colour temperature variations may be observed
6 The terminals are not qualified for soldering
7 Ingress rating IP40
8 The plastic(polycarbonate) has limited chemical resistance
9 RoHS & REACH SVHC compliant

CML Innovative Technologies Ltd • 69-70 Eastern Way • Bury St Edmunds • Suffolk • IP32 7AB • England
Tel: +44 (0) 1284 714700 • Fax: +44 (0) 1284 754406 • Email: bury@cml-it.com • www.cml-it.com
Registered Office: Eastern Way, Bury St Edmunds – Registration No. 265006 England