chanhvinh.com


CML INNOVATIVE TECHNOLOGIES
WHERE INNOVATION COMES TO LIGHT
A Grupo Antolin Company

PRODUCT DATA SHEET

Part Number: 1904XX0XWE

Type	Size	Description
LED	M8	LED Panel Mount Indicator Prominent with Leads

Dimensions in mm (Not to scale)

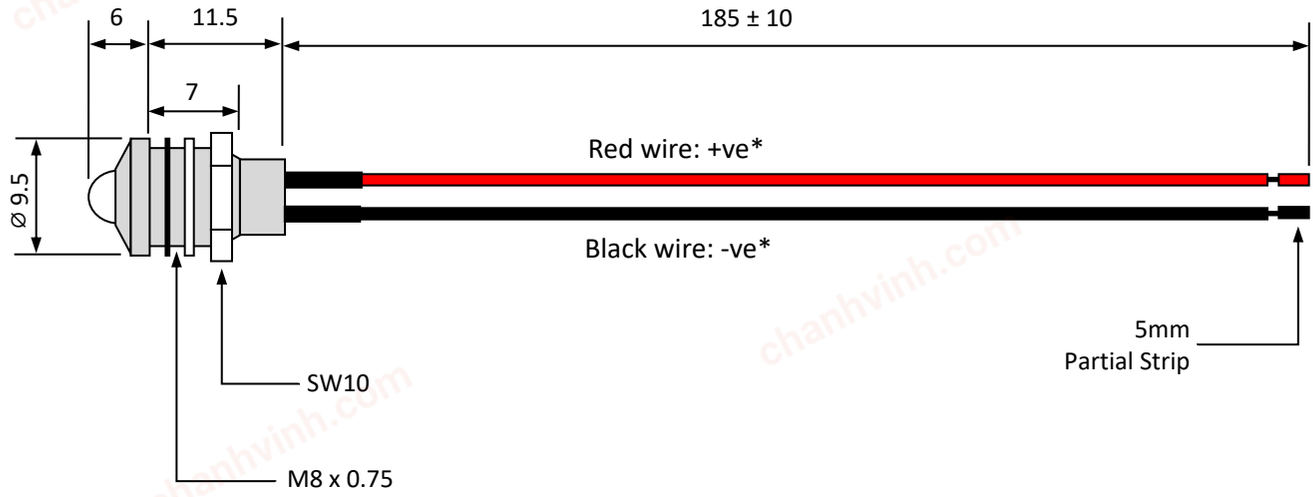

Part Number	Colour	Rating (V)	Typ Current (mA)	Typ Intensity (mcd)
1904x203WE	Red	12	16	40
1904x201WE	Green	12	16	32
1904x207WE	Blue	12	16	72
1904x204WE	Red/Green*	12	25/25	37/37
1904x303WE	Red	24	22	55
1904x301WE	Green	24	22	44
1904x307WE	Blue	24	20	90
1904x304WE	Red/Green*	24*	22/22	33/33

x = 0: Satin chrome bezel

Notes:

1 Electrical & optical data are measured at an ambient temperature of 25ºC
2 The stated luminous intensity is for dc operation
3 Due to component tolerances, colour temperature variations may be observed
4 Storage temperature range: -25 ºC to +80ºC
5 Operating temperature range: -20 ºC to +60ºC
6 The plastic (polycarbonate) has limited chemical resistance
7 Lead wires are externally soldered
8 Lead wires: 7/0.2 (24 AWG) stranded copper, tinned annealed copper wire, PVC insulation
9 REACH SVHC compliant
10 This product contains free-machining brass and is RoHS compliant via exemption clause Annex iii 6 (c) of EU Directive 2011/65/EU [Copper alloy containing lead up to 4% by weight]
11* The Red/Green variant illuminates Red when Red wire + Black wire – and Green when Red wire – Black wire +.

CML Innovative Technologies Ltd • 69-70 Eastern Way • Bury St Edmunds • Suffolk • IP32 7AB • England
Tel: +44 (0) 1284 714700 • Fax: +44 (0) 1284 754406 • Email: bury@cml-it.com • www.cml-it.com
Registered Office: Eastern Way, Bury St Edmunds – Registration No. 265006 England