
chanhvinh.com

PRODUCT DATA SHEET

Part Number: 1905X05X

Type	Size	Description
LED	M8	LED Recessed Panel Indicator with terminals

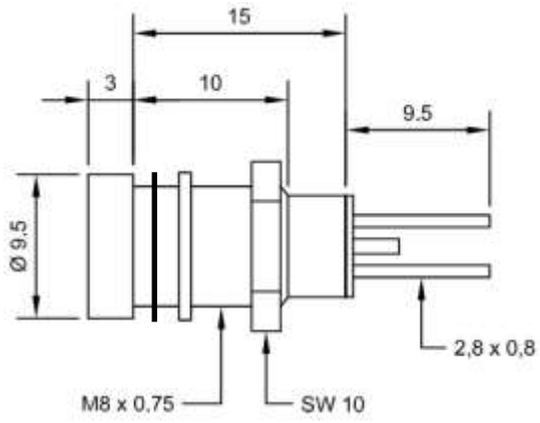

Part #	Colour	V_f	Current (mA)	Intensity (mcd)
1905X053	Red	2.0	20	50
1905X051	Green	2.0	20	40
1905X052	Yellow	2.1	20	40
1905X058	Orange	2.0	20	55

Notes:

1 X=bezel chrome finish, 0=Satin, 1=Black, 2=Matt
2 Electrical & optical data are measured at an ambient temperature of 25ºC
2 Storage temperature -25 ºC to +80ºC
3 Application temperature -20 ºC to +60ºC
4 Terminal polarity: brass positive
5 IP67 sealed with the fitted gasket
6 Due to component tolerances, colour temperature variations may be observed
7 The plastic (polycarbonate) has limited chemical resistance
8 RoHS & REACH SVHC compliant

CML Innovative Technologies Ltd • 69-70 Eastern Way • Bury St Edmunds • Suffolk • IP32 7AB • England
Tel: +44 (0) 1284 714700 • Fax: +44 (0) 1284 724850 • www.cml-it.com
Registered Office: Eastern Way, Bury St Edmunds – Registration No. 265006 England