chanhvinh.com


CML INNOVATIVE TECHNOLOGIES
WHERE INNOVATION COMES TO LIGHT

PRODUCT DATA SHEET

Part Number: 1905X36X

Type	Size	Rating	Description
LED	M8	24Vac	LED Recessed Panel Indicator

Dimensions (mm)

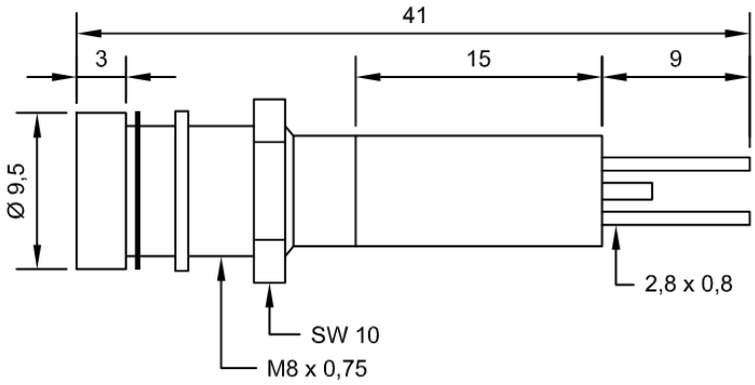

Part #	Colour	Current (mA)	Intensity (mcd @ 12Vdc)
1905X360	Red	13	6
1905X363	Bright Red	13	32
1905X361	Green	13	26
1905X362	Yellow	13	26
1905X367	Blue	10	45

Bezel types - X=0 satin chrome / X=1 black chrome / X=2 matt chrome

Notes:

1 Electrical & optical data are measured at an ambient temperature of 25ºC
2 Luminous intensity at DC
3 Storage temperature -25 ºC to +80ºC
4 Application temperature -20 ºC to +60ºC
5 Due to component tolerances, colour temperature variations may be observed
6 The terminals are not qualified for soldering
7 Sealed to IP67 above panel when supplied gasket used
8 The plastic(polycarbonate) has limited chemical resistance
9 RoHS & REACH SVHC compliant

Issue 3 : 20Feb19
CML Innovative Technologies Ltd • 69-70 Eastern Way • Bury St Edmunds • Suffolk • IP32 7AB • England
Tel: +44 (0) 1284 714700 • Fax: +44 (0) 1284 754406 • Email: bury@cml-it.com • www.cml-it.com
Registered Office: Eastern Way, Bury St Edmunds – Registration No. 265006 England