chanhvinh.com

CML INNOVATIVE TECHNOLOGIES
WHERE INNOVATION COMES TO LIGHT

# PRODUCT DATA SHEET

Part Number: 1905X35X

| Type | Size | Rating | Description |
|---|---|---|---|
| LED | M8 | 24VDC | Recessed Bezel Panel Indicator |

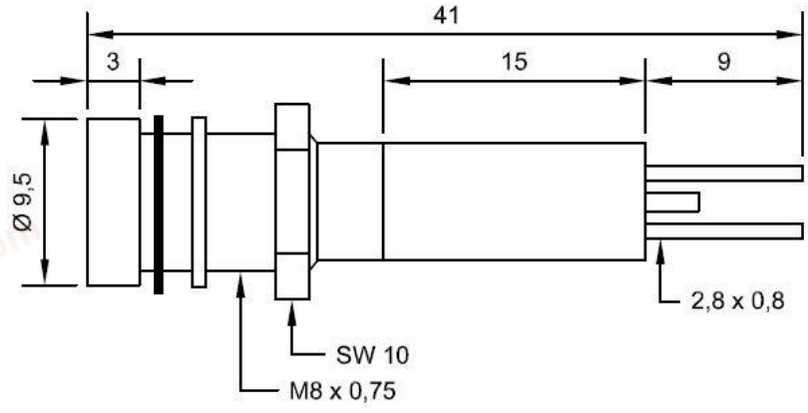


| Part # | Colour | Voltage(V) | Current(mA) | Intensity(mcd) |
|---|---|---|---|---|
| 1905X353 | Red | 24Vdc | 20 | 80 |
| 1905X351 | Green | 24Vdc | 20 | 32 |
| 1905X352 | Yellow | 24Vdc | 20 | 32 |
| 1905X357 | Blue | 24Vdc | 20 | 60 |

Notes:

1 X = Chrome Bezel finish. 0 = Satin, 1 = Black, 2 = Matt
2 Electrical & optical data are measured at an ambient temperature of 25ºC
3 Luminous intensity at DC
4 Storage temperature -25 ºC to +80ºC
5 Application temperature -20 ºC to +60ºC
6 Voltage tolerance ±10%
7 Due to component tolerances, colour temperature variations may be observed
8 The terminals are not qualified for soldering
9 Degree of protection IP67 when used with the supplied gasket
10 The plastic(polycarbonate) has limited chemical resistance
11 RoHS & REACH SVHC compliant


Issue 1 : 24Feb14
CML Innovative Technologies Ltd • 69-70 Eastern Way • Bury St Edmunds • Suffolk • IP32 7AB • England
Tel: +44 (0) 1284 714700 • Fax: +44 (0) 1284 724850 • www.cml-it.com
Registered Office: Eastern Way, Bury St Edmunds – Registration No. 265006 England