chanhvinh.com


CML INNOVATIVE TECHNOLOGIES
WHERE INNOVATION COMES TO LIGHT

PRODUCT DATA SHEET

Part Number: 190AX35X

Type	Size	Rating	Description
LED	M8	24Vac/dc	LED Prominent Panel Indicator

Dimensions (mm)

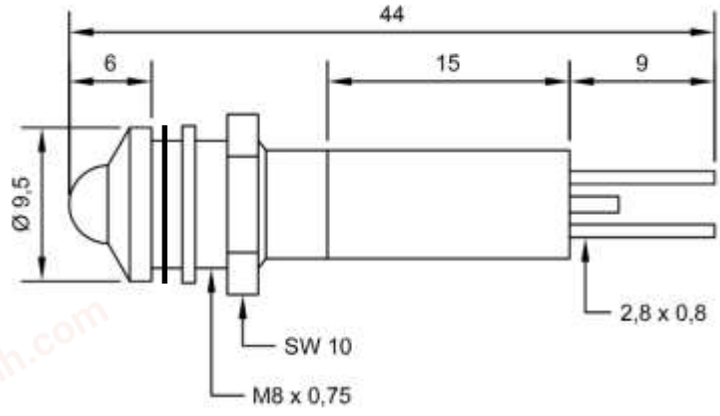

Part #	Colour	Current (mA)	Intensity (mcd)
190AX350	Red	9/17	60
190AX351	Green	9/17	40
190AX352	Yellow	9/17	40

Bezel types - X=0 satin chrome / X=1 black chrome / X=2 matt chrome

Notes:

1 Electrical & optical data are measured at an ambient temperature of 25ºC
2 Storage temperature -25 ºC to +80ºC
3 Application temperature -20 ºC to +60ºC
4 Due to component tolerances, colour temperature variations may be observed
5 The terminals are not qualified for soldering
6 Sealed to IP67 above panel when supplied gasket used
7 The plastic(polycarbonate) has limited chemical resistance
8 RoHS & REACH SVHC compliant

Issue 2 : 17Dec15

CML Innovative Technologies Ltd • 69-70 Eastern Way • Bury St Edmunds • Suffolk • IP32 7AB • England
Tel: +44 (0) 1284 714700 • Fax: +44 (0) 1284 754406 • Email: bury@cml-it.com • www.cml-it.com
Registered Office: Eastern Way, Bury St Edmunds – Registration No. 265006 England