
chanhvinh.com

CML INNOVATIVE TECHNOLOGIES
WHERE INNOVATION COMES TO LIGHT

PRODUCT DATA SHEET

Part Number: 1927X35X

Type	Size	Rating	Description
LED	M14	24Vac/dc	Standard Bezel Panel Indicator

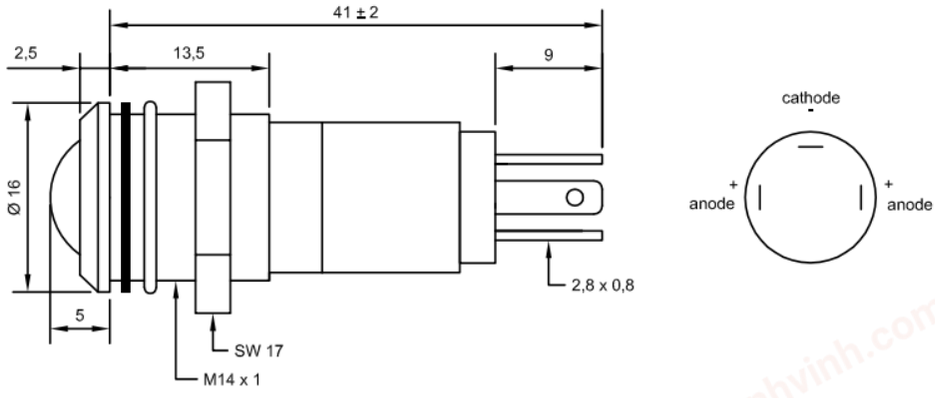

Part #	Colour	Current (mA)	Intensity (mcd)
1927X350	Red	9/18	100
1927X351	Green	9/18	60
1927X352	Yellow	9/18	50
1927X357	Blue	9/17	1000
1927X35WA	White	9/17	3000

Notes:

1 X = Chrome Bezel finish. 0 = Satin, 1 = Black, 2 = Matt
2 Electrical & optical data are measured at an ambient temperature of 25ºC
3 Storage temperature -25 ºC to +80ºC
4 Application temperature -20 ºC to +60ºC
5 Voltage tolerance ±10%
6 Due to component tolerances, colour temperature variations may be observed
7 The terminals are not qualified for soldering
8 It does not matter which of the terminals (+) are used for the lamp test
9 Degree of protection IP67 when used with the supplied gasket
10 The plastic (polycarbonate) has limited chemical resistance
11 RoHS & REACH SVHC compliant

Issue 3 : 20Jul17
CML Innovative Technologies Ltd • 69-70 Eastern Way • Bury St Edmunds • Suffolk • IP32 7AB • England
Tel: +44 (0) 1284 714700 • Fax: +44 (0) 1284 724850 • www.cml-it.com
Registered Office: Eastern Way, Bury St Edmunds – Registration No. 265006 England