
chanhvinh.com

PRODUCT DATA SHEET

Part Number: 1904XXIP

Type	Size	Rating	Description
LED	M8	DC	LED Wire-ended Panel Indicator

Dimensions (mm)

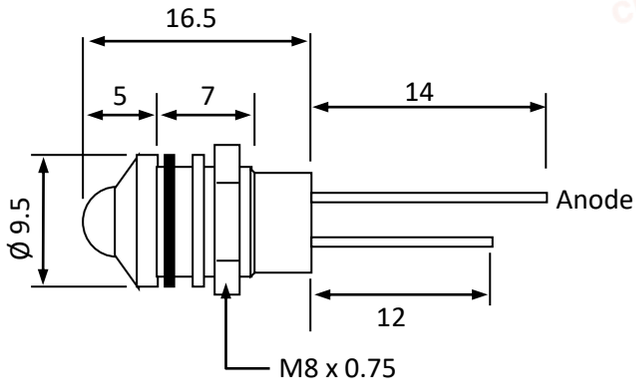

Part #	Colour	Vf @ 20mA	Intensity(@10mcd)
1904X1IP	Green	2.2	20
1904X2IP	Yellow	2.1	20
1904X3IP	Red	2.0	25
1904X7IP	Blue	4.5	50
1904X8IP	Orange	2.0	30

Bezel types: X=0 satin chrome / X=1 black chrome / X=2 matt chrome

Notes:

1 Electrical & optical data are measured at an ambient temperature of 25ºC
2 Luminous intensity at DC
3 Storage temperature -25 ºC to +80ºC
4 Application temperature -20 ºC to +60ºC
5 Voltage tolerance ±10%
6 Due to component tolerances, colour temperature variations may be observed
7 Degree of protection IP67 when used with the supplied gasket
8 The plastic(polycarbonate) has limited chemical resistance
9 RoHS & REACH SVHC compliant

Issue 3: 27Apr21
CML Innovative Technologies Ltd • 69-70 Eastern Way • Bury St Edmunds • Suffolk • IP32 7AB • England
Tel: +44 (0) 1284 714700 • Fax: +44 (0) 1284 724850 • www.cml-it.com
Registered Office: Eastern Way, Bury St Edmunds – Registration No. 265006 England
Classified as Public