
chanhvinh.com

Dialight

657 Series - Right Angle LED Watertight - 11/16" Mounting Hole Panel Mount Indicators

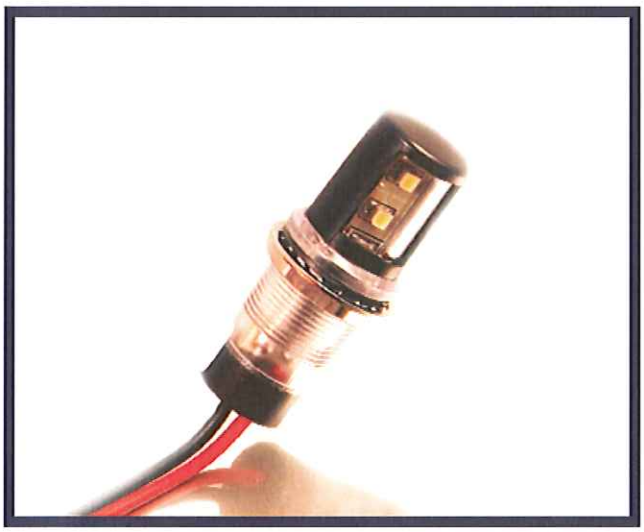


FEATURES / BENEFITS

- Cool-to-the-touch white light
- IP67 / NEMA 4X
- Wide viewing angle – 110°
- Variable input voltage
- No light spill
- Non-polarized
- Resistant to shock and vibration
- RoHS compliant

APPLICATIONS

- Instrument panels
- Gauges
- Dash boards
- Storage compartments
- Control panels

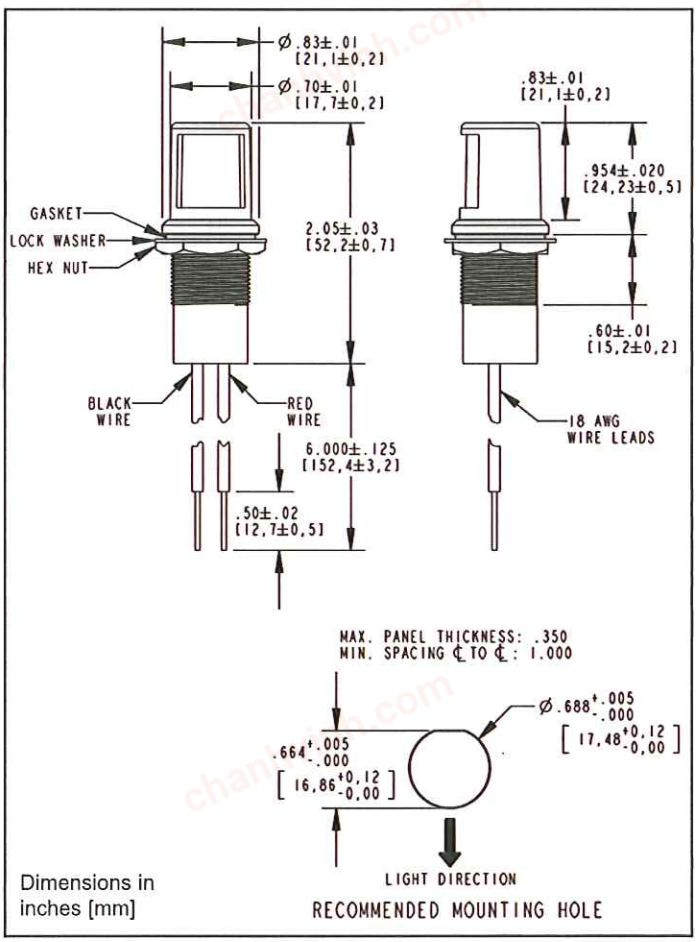

Dimensions in inches [mm]

SPECIFICATIONS

- Operating Voltage - 12 to 32 VDC
- Operating temperature -35° C to + 65° C
- Storage temperature -40° C to +100° C
- Front Mounting in 11/16" clearance hole
- IP67 / NEMA 4X
- Lead wire – 18 AWG anti-capillary
- Available in Cool White (For other colors, consult factory)
- Horizontal Viewing Angle 110°
- Vertical Viewing Angle 80°

PART NUMBERS

Part Number	Color	Voltage	Forward Current (typ)	Intensity (typ)
657-3009-213F	Cool White	12-32 VDC	24mA	2000 mcd

Dialight reserves the right to make changes at any time in order to supply the best product possible.

Dialight Corporation
1501 Route 34 South • Farmingdale, NJ 07727 USA
Tel: (1) 732-919-3119 • Fax: (1) 732-751-5778 • www.dialight.com

A4703 UL REGISTERED FIRM ISO 9001 Dialight Corporation
RoHS COMPLIANT