chanhvinh.com

Your Expert Partner for **Human Machine Interfaces**

Single-LED

Distribution by
Rs-online

10-
2412.1089P



https://rs-online.eao.com/component/10-2412.1...

chanhvinh.com

Your product:



10-2412.1089P
Single-LED

OPERATING-/INDICATION PART

Illumination colour:	White

ELECTRICAL CHARACTERISTICS

Operating voltage:	24 V AC/DC -30% / +25%
Operation current:	7,5 mA -30%/+25%
Lumi. Intensity:	700 mcd

MECHANICAL CHARACTERISTICS

Weight:	0.001 kg

CERTIFICATE


REACH:	REACH compliant
RoHS:	RoHS compliant

OTHER

Short Description:	Single-LED, BA9s, White, 24 V AC/DC -30% / +25%
Kind of illlumination:	Multi-LED EN 50155
Hints:	A suitable LED remover Part No. 700.006.0 The luminous intensity stated is for when used with DC Electrical and optical data are measured at 25 °C The specified 24 VAC/VDC versions are built with a protection diode Specified 24 VAC/VDC versions are built with a bridge rectifier The new, white BA9s LED operates within a range of 16VDC to 34VDC. It conforms to the norms EN 50155 and IEEE 1476 Luminosity and wave length variations caused by LED manufacturing processes may cause slight differences regarding the illumination. The customer has to decide what resistor shall be used to the LED

chanhvinh.com

Wiring diagrams:

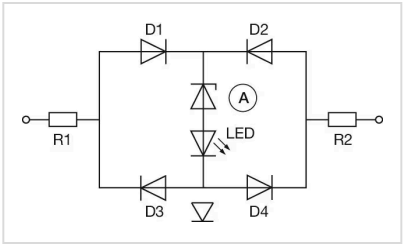

Dimension drawings:

