chanhvinh.com

Your Expert Partner for **Human Machine Interfaces**

Bi-colour LED

Distribution by
Rs-online

10-2H12.314C



https://rs-online.eao.com/component/10-2H12.3...

chanhvinh.com

Your product:



10-2H12.314C
Bi-colour LED

OPERATING-/INDICATION PART

Illumination colour:	Green / Yellow

ELECTRICAL CHARACTERISTICS

Operating voltage:	24 V DC +10%
Operation current:	15 mA ±15 %
Lumi. Intensity:	900/550 mcd

MECHANICAL CHARACTERISTICS

Weight:	0.002 kg


CERTIFICATE

REACH:	REACH compliant
RoHS:	RoHS compliant


OTHER

Short Description:	Bi-colour LED, BA9s, Green / Yellow, 24 V DC +10%
Kind of illlumination:	Bi-colour-LED
Product attributes:	X2: + = Yellow / X1: + = Green
Hints:	The max. overall length of the lamp may not exeed 25mm Electrical and optical data are measured at 25 °C The specified 6 V DC, 24 V DC Bi-colour; 130 V AC, 130 V DC and 230 V AC versions are built with a protection diode Luminosity and wave length variations caused by LED manufacturing processes may cause slight differences regarding the illumination. The customer has to decide what resistor shall be used to the LED
Wiring diagrams:	

chanhvinh.com

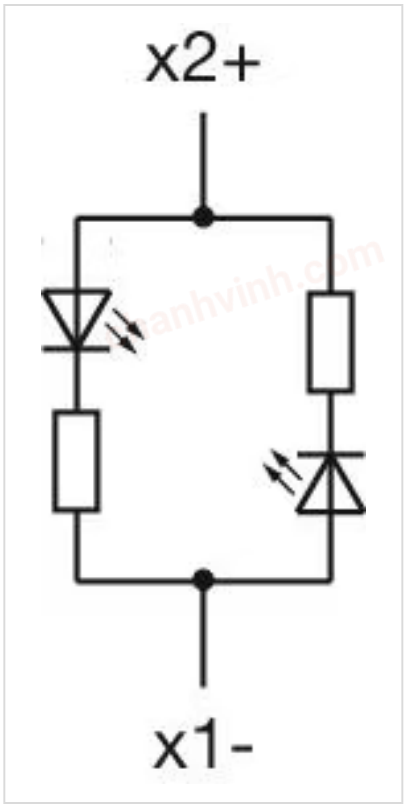

Dimension drawings:

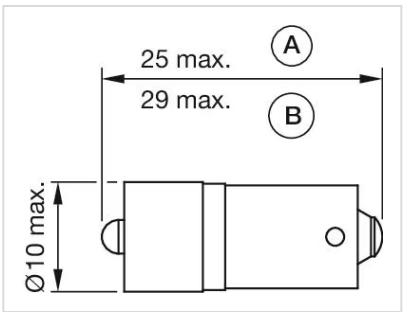

A = (standard)
B = (super bright)