chanhvinh.com

Your Expert Partner for **Human Machine Interfaces**

Single-LED

Distribution by
Rs-online

10-2H25.2042



https://rs-online.eao.com/component/10-2H25.2...

chanhvinh.com

chanhvinh.com

Your product:



10-2H25.2042
Single-LED

OPERATING-/INDICATION PART

Illumination colour:	Red

ELECTRICAL CHARACTERISTICS

Operating voltage:	230 V AC +10%
Operation current:	3 mA ±15 %
Lumi. Intensity:	120 mcd

MECHANICAL CHARACTERISTICS

Weight:	0.002 kg

CERTIFICATE

REACH:	REACH compliant
RoHS:	RoHS compliant


OTHER

Short Description:	Single-LED, BA9s, Red, 230 V AC +10%
Kind of illlumination:	Single-LED
Product attributes:	The max. overall length of the lamp may not exeed 25mm
Hints:	The specified 6 V DC, 24 V DC Bi-colour; 130 V AC, 130 V DC and 230 V AC versions are built with a protection diode The specified 130 VAC types are developed to run on a supply voltage of 130 VAC only An operation at a higher supply voltage using commercial lampholders with integrated resistors, is not approved If the 24VDC Bi-colour lamp is driven with normal polarity (plus on middle contact of the lamp) the first mentioned colour will light up, with inverted polarity the second colour will ligth up


chanhvinh.com

The luminous intensity stated is for when used with DC
Electrical and optical data are measured at 25 °C
Luminosity and wave length variations caused by LED manufacturing processes may cause slight differences regarding the illumination. The customer has to decide what resistor shall be used to the LED

Wiring diagrams:

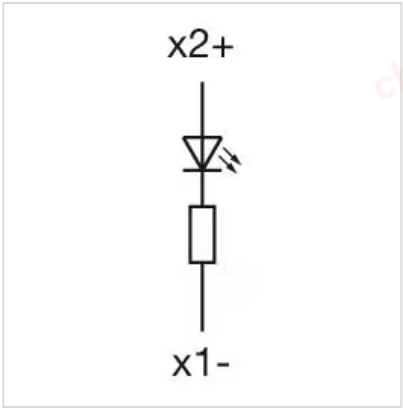

Dimension drawings:

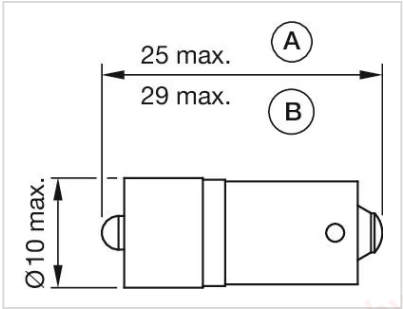

A = (standard)
B = (super bright)