chanhvinh.com

eao

Your Expert Partner for **Human Machine Interfaces**

Illumination element

Distribution by
Rs-online

45-320.1E11



https://rs-online.eao.com/component/45-320.1E...

chanhvinh.com

Your product:



45-320.1E11
Illumination element

MOUNTING

Component mounting type:	Front mounting

OPERATING-/INDICATION PART

Illumination colour:	Red

ELECTRICAL CHARACTERISTICS

Operating voltage:	6 - 24 V AC/DC
Operation current:	6 mA
Surge voltage resistance:	4 kV
Lumi. Intensity:	450 - 1120 mcd

MECHANICAL CHARACTERISTICS

Terminal:	Screw terminal
Terminal details 1:	Solid 2 x (1.0 … 1.5mm^2) – With end sleeves 2 x (0.5 … 0.75 mm^2)
Terminal details 2:	Finely stranded – Without end sleeves 2 x (0.5 … 0.75 mm^2) – Without end sleeves 2 x (0.5 … 1.5 mm^2) – For AWG cables for auxiliary contacts 2 x (18 … 14)
Weight:	0.008 kg


CERTIFICATE

REACH:	REACH compliant
RoHS:	RoHS compliant


OTHER

Short Description: Illumination element, Screw terminal, Red, 6 - 24 V AC/DC, Front mounting

Wiring diagrams:

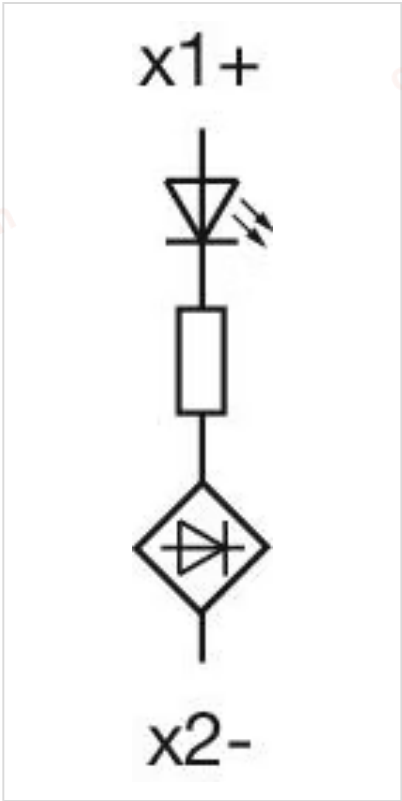

Dimension drawings:

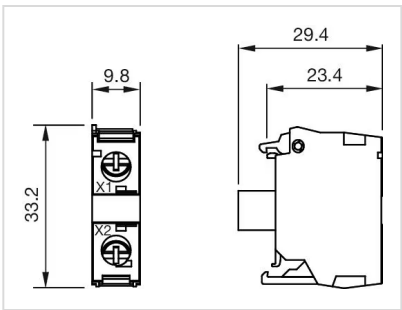

chanhvinh.com