chanhvinh.com


e a o

Your Expert Partner for **Human Machine Interfaces**

Switching element

Distribution by
Rs-online


70-220.5S

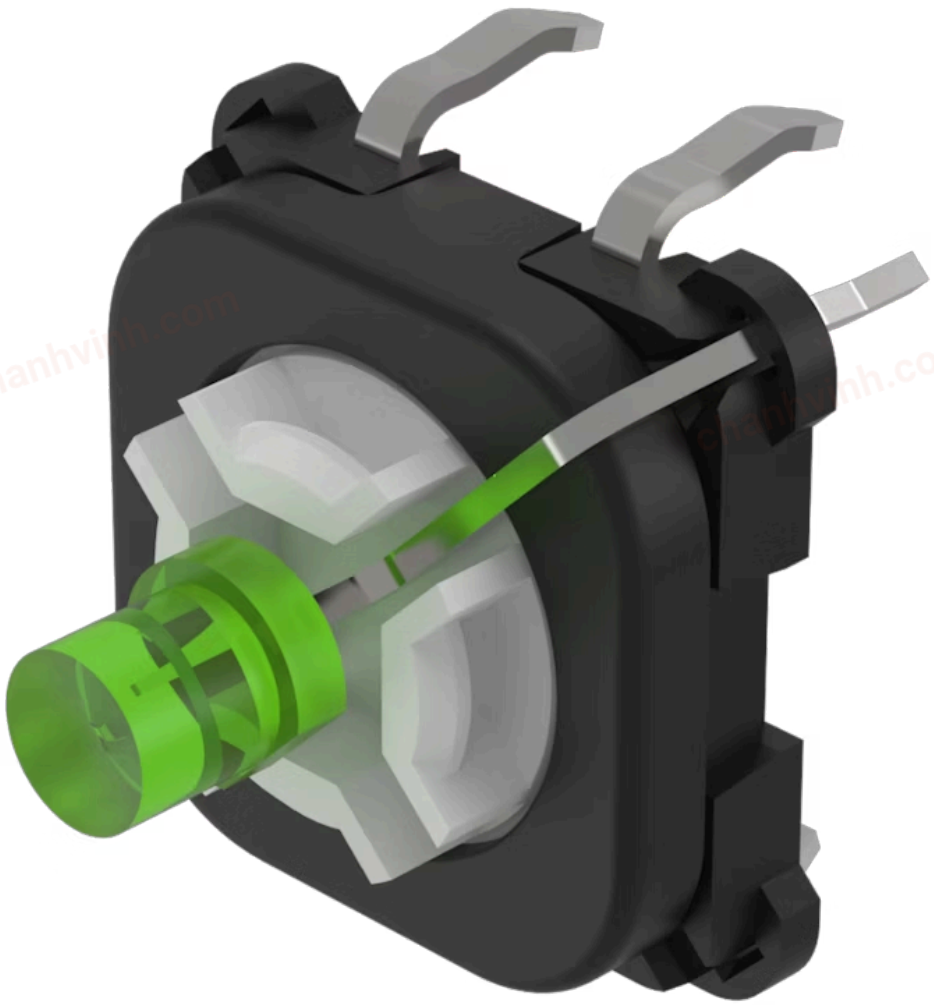

https://rs-online.eao.com/component/70-220.5S...

chanhvinh.com

Your product:



70-220.5S
Switching element

Loading . . .

OPERATING-/INDICATION PART

Illumination colour:	Green

ELECTRICAL CHARACTERISTICS

Contacts:	1 NO
Switching rating:	42 V DC @ 0,1 A
Lumi. Intensity:	650 mcd

MECHANICAL CHARACTERISTICS

Terminal:	PCB terminal
Contact material:	Gold
Switching action:	Momentary
Switching system:	Short-travel element
Weight:	0.001 kg


CERTIFICATE

REACH:	REACH compliant
RoHS:	RoHS compliant


OTHER

Short Description:	Switching element, Short-travel element, 42 V DC @ 0,1 A, Gold, 1 NO, PCB terminal
Hints:	The customer has to decide what series resistor shall be used to the LED
Wiring diagrams:	

chanhvinh.com

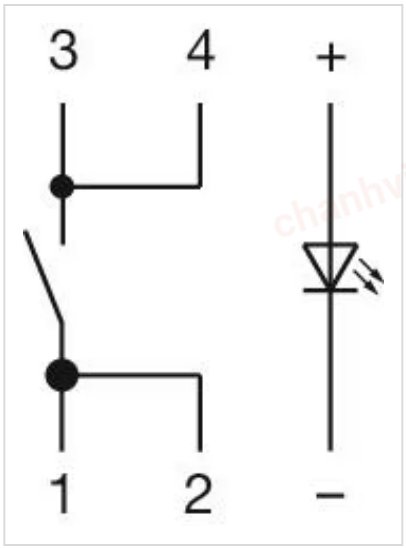

Component layouts:

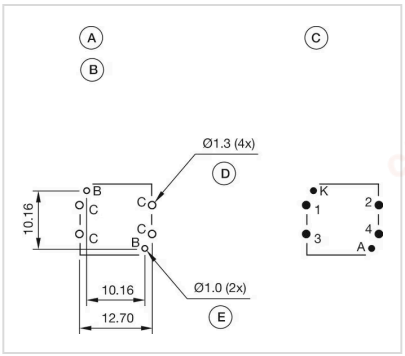

A = Switching element with illumination
B = Single LED
C = Drilling plan (component side)
D = Hole for switching element, pad max. Ø 2.5 mm
E = Hole for LED

Dimension drawings:

