
chanhvinh.com

Your Expert Partner for **Human Machine Interfaces**

Actuator

Distribution by
Rs-online

704.342.0

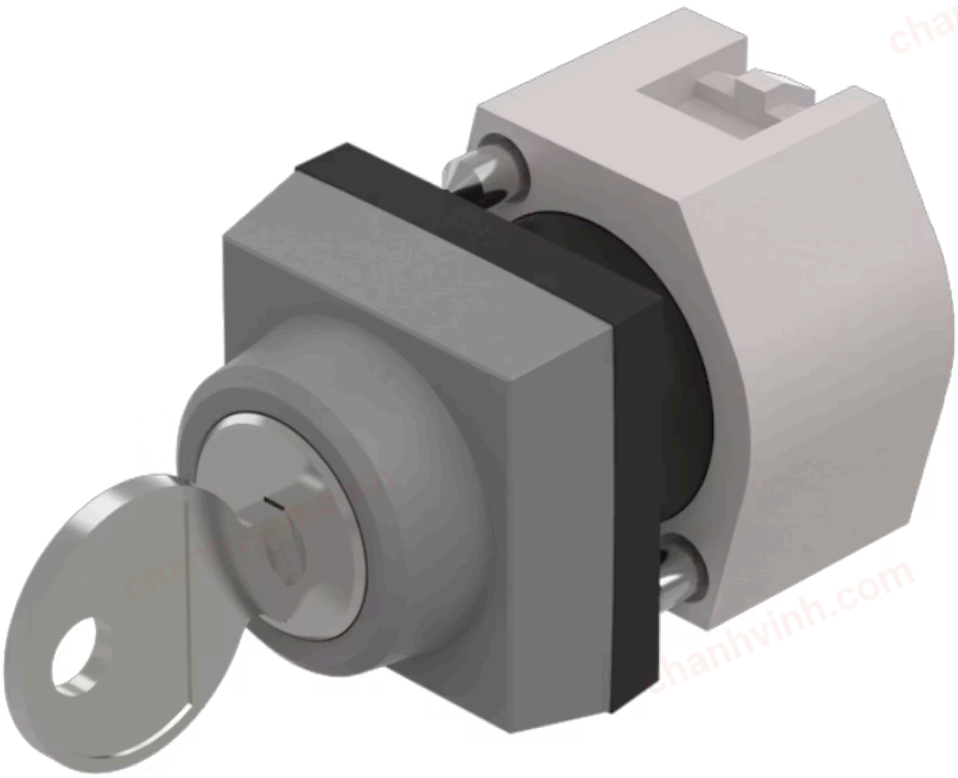

https://rs-online.eao.com/component/704.342.0...

chanhvinh.com

Your product:



704.342.0
Actuator

FRONT

Front dimension:	30 mm x 30 mm
Front form:	Square
Front bezel colour:	Grey
Front bezel material:	Plastic

MOUNTING

Design:	Raised
Mounting type:	Panel mounting

ELECTRICAL CHARACTERISTICS

Standards:	The switches comply with the “Standards for low-voltage switching devices” DIN EN 60947-1

MECHANICAL CHARACTERISTICS

Switching action:	Rest (a) - Maintained (a)
Switching positions:	2 positions
Switching angle:	90° right / -45° … +45°
Mechanical lifetime:	≤50 000 cycles of operation
Weight:	0.064 kg

AMBIENT CONDITION


IP Protection:	IP65 front side
Operating temperature:	– 40 °C … + 55 °C

Storage temperature:	– 40 °C ... + 85 °C

CERTIFICATE


REACH:	REACH compliant
RoHS:	RoHS compliant

OTHER

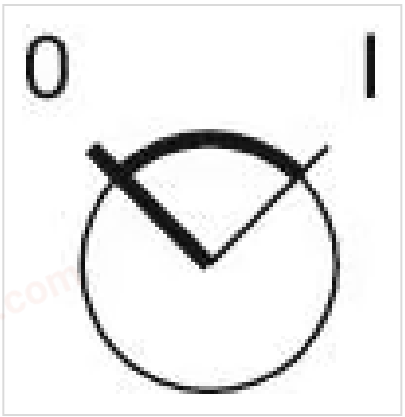Short Description:	Actuator, 30 mm x 30 mm, Square, Grey, Plastic, Rest (a) - Maintained (a)
Hints:	The standard lock Ronis 251 Further lock numbers on request Max. 3 switching elements can be clipped on
max. number of switching elements:	3
Switching positions:	
Wiring diagrams:	
Mounting cut-outs:	


chanhvinh.com

chanhvinh.com

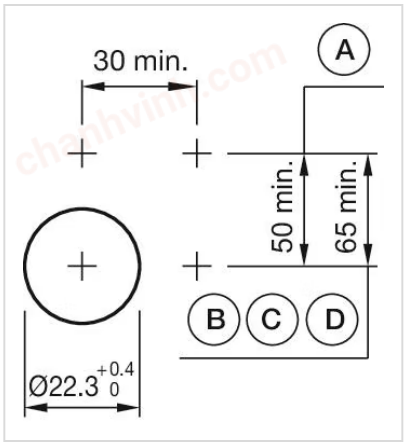

A = Screw terminal
B = Push-in terminal (PIT)
C = Plug-in terminal 6.3 mm x 0.8 mm
D = Double plug-in terminal 6.3 mm x 0.8 mm

Dimension drawings:

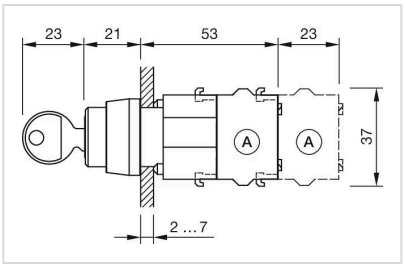

A = Screw terminal