chanhvinh.com

Your Expert Partner for **Human Machine Interfaces**

# Illuminated push button, Ø 22 mm, stainless steel 316L, cable 200 mm, 180°

Distribution by
Rs-online

82-6655.2114



https://rs-online.eao.com/component/82-6655.2...

chanhvinh.com

chanhvinh.com

Your product:



# 82-6655.2114
# Illuminated push button, Ø 22 mm, stainless steel 316L, cable 200 mm, 180°

## FRONT

| | |
|---|---|
| **Front dimension:** | Ø 25 mm |
| **Front form:** | Round |
| **Front bezel material:** | Stainless steel 316L |
| **Front bezel shape:** | Flush |

## MOUNTING

| | |
|---|---|
| **Mounting cut-out:** | Ø 22 mm |
| **Mounting type:** | Panel mounting |

## OPERATING-/INDICATION PART

| | |
|---|---|
| **Lens colour:** | Silver |
| **Lens material:** | Stainless steel 316L |
| **Lens illumination:** | Illuminated |
| **Lens shape:** | Flush |
| **Lens optics:** | opaque |
| **Illumination colour:** | Red |
| **Shape of illumination:** | Ring (Tritan) |

## ELECTRICAL CHARACTERISTICS

**Switching voltage and switching current:**

according to UL 508 (Silver contacts)
cosφ 0,75 … 0,8

| Voltage | Current |
|---|---|
| 120 VAC | 5 A |
| 240 VAC | 3 A |
| 24 VAC | 1 A |

chanhvinh.com

according to IEC 60947-5-1 (Silver contacts)
Service categorie AC-15

| Voltage | Current |
|---|---|
| 24 VAC | 1 A |
| 35 VAC | 1 A (M12 version) |
| 110 VAC | 1 A |
| 220 VAC | 0.5 A |

Switch rating DC service categorie DC-13 (Silver contacts)

| Voltage | Current |
|---|---|
| 24 VDC | 0.7 A |
| 35 VDC | 0.5 A (M12 version) |
| 110 VDC | 0.2 A |
| 220 VDC | 0.1 A |

**Operating voltage:** 24 V DC (LED)

**Rated Operational Voltage Ue:** 250 VAC

**Rated insulation voltage Ui:** 250 V

**Switching rating:** 35 V AC/DC @ 0,6 A

**Electrical lifetime:** 50 000 cycles of operation

**Electric strength:** 1500 VAC, 50 Hz 1 minute between life terminals and ground

**Pollution degree:** 2, according to EN IEC 60947-1

**Thermal current Ith:** 5 A

## MECHANICAL CHARACTERISTICS

**Terminal:** Cable 200 mm, 180°

**Switching action:** Maintained

**Switching system:** Snap-action switching element

**Mechanical lifetime:** 500 000 cycles of operation

**Operating force:** 4 N ... 7 N

**Operating Travel:** ca. 3 mm

**Tightening torque:** 0.5 ... 0.6 Nm

**Weight:** 0.04 kg

## AMBIENT CONDITION

**IP front protection:** IP65, IP67

**Operating temperature:** – 30 °C ... + 70 °C

**Storage temperature:** – 40 °C ... + 80 °C

**Shock resistance:** Max. 500 m / $s^2$ as per IEC 60068-2-27

**Vibration resistance:** 10 ... 500 Hz, amplitude 1.5 mm p-p according to IEC 60068-2-6

chanhvinh.com

**Climate resistance:** Damp heat, 21 days according to IEC 60512-11

## CERTIFICATE

**Conformities:** CE, 2011 / 65 / EC (RoHS), 2014 / 35 / EU (LVD)

**REACH:** REACH compliant

**RoHS:** RoHS compliant

## OTHER


**Short Description:** Illuminated push button, Ø 22 mm, stainless steel 316L, cable 200 mm, 180°, Maintained, 35 V AC/DC @ 0,6 A, 24 V DC (LED), Cable 200 mm, 180°, Round, Stainless steel 316L, Red, Silver

**Kind of illlumination:** Single-LED


**Housing size:** 19 mm

**Hints:** Cable with certification ECE-R118

**Wiring diagrams:**

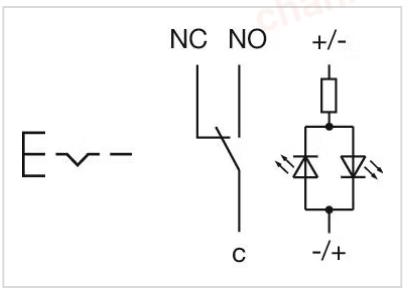



**Component layouts:**

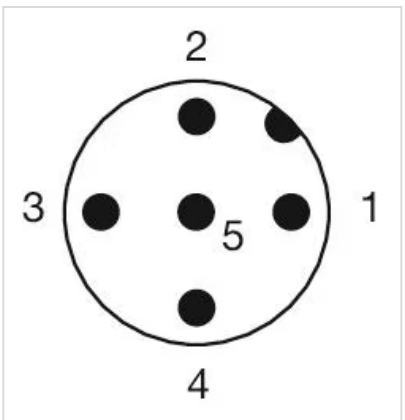


1 = NC
2 = LED+
3 = Common
4 = LED-
5 = NO
A-Coded

**Mounting cut-outs:**

chanhvinh.com

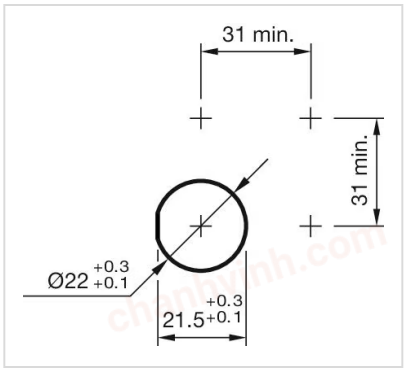


**Dimension drawings:**

