
chanhvinh.com

Specifications

Eaton 215642

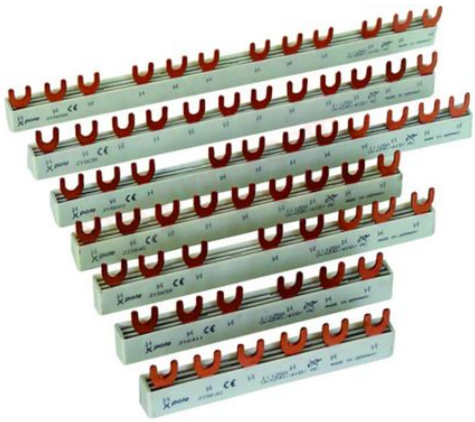

Catalog Number: 215642

Eaton Moeller series xPole - Busbar. EV busbars 2Ph., 6HP, 63A for PLS. CLS. PKN., PFIM, PFHM, PFNM

General specifications

Product Name	**Catalog Number**
Eaton Moeller series busbar	215642
EAN	**Product Length/Depth**
4015082156428	104 mm
Product Height	**Product Width**
30 mm	7 mm
Product Weight	**Compliances**
0.025 kg	RoHS conform

Certifications

CE

chanhvinh.com

Powering Business Worldwide

chanhvinh.com

Product specifications

Used with

PLS. CLS. PKN., PFIM, PFHM, PFNM

EVG

Busbar

Type

Busbar

EVG

Features

Insulated

Accessory/spare part type

Busbar for residual current circuit breakers

Busbar for miniature circuit breaker

Busbar for combined residual current/power circuit breaker

Electric connection type

Fork

Rated surge voltage

4 KV

Rated uninterrupted current (Iu)

63 A

Suitable for number of devices

3

Number of poles

Two-pole

Color

Other

Rated short-time withstand current (Icw)

0 kA

Cross section

10 mm²

Number of modular spacings

6

Number of phases

2

Pitch dimensions

0 mm

Resources

Declarations of conformity

DA-DC-03_EVG

Drawings

eaton-busbar-3d-drawing.jpg

Specifications and datasheets

Eaton Specification Sheet - 215642

chanhvinh.com

Rated operational voltage (Ue) - max

500 V

Rated conditional short-circuit current (Iq)

25 kA

Functions

Busbar

Suitable for

3 devices

Eaton Corporation plc
Eaton House
30 Pembroke Road
Dublin 4, Ireland
Eaton.com

© 2024 Eaton. All Rights Reserved.

Eaton is a registered trademark.

All other trademarks are property of their respective owners.

Eaton.com/socialmedia