
chanhvinh.com

Specifications

Eaton 291464

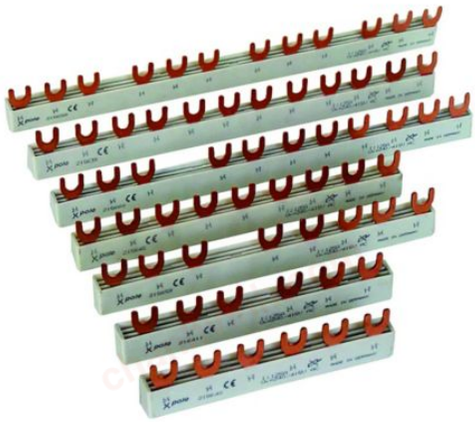

Catalog Number: 291464

Eaton Moeller series xPole - Busbar. EV busbars 1Ph., 2HP, 80A for PLS. CLS. PKN., PFIM, PFHM, PFNM

General specifications

Product Name	**Catalog Number**
Eaton Moeller series busbar	291464
EAN	**Product Length/Depth**
4015082914646	29 mm
Product Height	**Product Width**
4.5 mm	33 mm
Product Weight	**Compliances**
0.013 kg	RoHS conform
Certifications	**Catalog Notes**
UL Listed CSA Certified	No end caps required, do not shorten

Powering Business Worldwide

chanhvinh.com

chanhvinh.com

Product specifications

Used with

FAZ or FI breakers

Busbar

EVG

Type

Busbar

EVG

Features

Insulated

Accessory/spare part type

Busbar for miniature circuit breaker

Busbar for residual current circuit breakers

Busbar for combined residual current/power circuit breaker

Electric connection type

Fork

Rated surge voltage

4 KV

Rated uninterrupted current (Iu)

80 A

Suitable for number of devices

2

Number of poles

Single-pole

Color

Other

Rated short-time withstand current (Icw)

0 kA

Cross section

16 mm²

Number of modular spacings

2

Number of phases

1

Pitch dimensions

0 mm

Resources

Declarations of conformity

DA-DC-03_EVG

Drawings

eaton-mcb-busbar-dimensions.eps

eaton-busbar-3d-drawing.jpg

eaton-mcb-busbar-3d-drawing-003.eps

chanhvinh.com

Rated operational voltage (Ue) - max

415 V

Rated conditional short-circuit current (Iq)

25 kA

Functions

Busbar

Suitable for

2 devices

Eaton Corporation plc
Eaton House
30 Pembroke Road
Dublin 4, Ireland
Eaton.com

© 2024 Eaton. All Rights Reserved.

Eaton is a registered trademark.

All other trademarks are property of their respective owners.

Eaton.com/socialmedia